

## I

(Besluiten op grond van het EG- en het Euratom-Verdrag waarvan publicatie verplicht is)

## VERORDENINGEN

## VERORDENING (EG) Nr. 1272/2008 VAN HET EUROPEES PARLEMENT EN DE RAAD

van 16 december 2008

**betreffende de indeling, etikettering en verpakking van stoffen en mengsels tot wijziging en intrekking van de Richtlijnen 67/548/EEG en 1999/45/EG en tot wijziging van Verordening (EG) nr. 1907/2006**

(Voor de EER relevante tekst)

HET EUROPEES PARLEMENT EN DE RAAD VAN DE EUROPESE UNIE,

Gelet op het Verdrag tot oprichting van de Europese Gemeenschap, en met name op artikel 95,

Gezien het voorstel van de Commissie,

Gezien het advies van het Europees Economisch en Sociaal Comité <sup>(1)</sup>,

Handelend volgens de procedure van artikel 251 van het Verdrag <sup>(2)</sup>,

Overwegende hetgeen volgt:

- (1) Deze verordening dient een hoog niveau van bescherming van de gezondheid van de mens en het milieu alsmede het vrije verkeer van chemische stoffen, mengsels en bepaalde specifieke voorwerpen te waarborgen en tegelijkertijd het concurrentievermogen en de innovatie te bevorderen.
- (2) De interne markt voor stoffen, mengsels en bepaalde specifieke voorwerpen kan alleen efficiënt werken als de daarop toepasselijke eisen tussen de lidstaten niet wezenlijk verschillen.
- (3) Om een duurzame ontwikkeling te bereiken moet bij de harmonisatie van de wetgeving inzake de criteria voor de indeling en etikettering van stoffen en mengsels voor een hoog beschermingsniveau voor de gezondheid van de mens en het milieu worden gezorgd.
- (4) De handel in stoffen en mengsels beperkt zich niet tot de interne markt, maar is een wereldwijde handelsmarkt. Het bedrijfsleven zou daarom baat hebben bij een wereldwijde harmonisatie van de voorschriften voor de indeling en etikettering en bij consistentie tussen enerzijds de voorschriften voor indeling en etikettering met het oog op de

levering en het gebruik en anderzijds de vervoersvoorschriften.

- (5) Om de wereldwijde handel te vergemakkelijken en tevens de gezondheid van de mens en het milieu te beschermen is in de context van de Verenigde Naties gedurende twaalf jaar met grote zorg gewerkt aan de opstelling van geharmoniseerde criteria voor de indeling en etikettering, wat heeft geleid tot de totstandkoming van het wereldwijd geharmoniseerd systeem voor de indeling en etikettering van chemische stoffen, Globally Harmonised System of Classification and Labelling of Chemicals (hierna „GHS” genoemd).
- (6) Deze verordening sluit aan bij verscheidene verklaringen waarin de Gemeenschap haar voornemen heeft bevestigd om bij te dragen aan de wereldwijde harmonisatie van de criteria voor de indeling en etikettering, niet alleen op VN-niveau, maar ook door de opnemng van de internationaal overeengekomen GHS-criteria in het Gemeenschapsrecht.
- (7) De voordelen voor het bedrijfsleven zullen groter worden naarmate meer landen de GHS-criteria in hun wetgeving overnemen. De Gemeenschap moet hierbij koploper zijn om andere landen ertoe aan te zetten haar voorbeeld te volgen en met als doel de industrie in de Gemeenschap een concurrentievoordeel te geven.
- (8) Daarom is het van het grootste belang dat de bepalingen en criteria voor de indeling en etikettering van stoffen, mengsels en bepaalde specifieke voorwerpen in de Gemeenschap geharmoniseerd worden, met inachtneming van de indelingscriteria en etiketteringsvoorschriften van het GHS, maar daarbij voortbouwend op de veertig jaar ervaring die is opgedaan met de uitvoering van de bestaande communautaire wetgeving inzake chemische

<sup>(1)</sup> PB C 204 van 9.8.2008, blz. 47.

<sup>(2)</sup> Advies van het Europees Parlement van 3 september 2008 (nog niet bekendgemaakt in het Publicatieblad).

stoffen, waarbij het gerealiseerde niveau van bescherming in stand wordt gehouden door harmonisatie van het systeem van indeling en etikettering, door toepassing van communautaire gevaarclassen die nog geen deel uitmaken van het GHS en door gebruik te maken van de huidige etiketterings- en verpakkingsvoorschriften.

- (9) Deze verordening laat de volledige toepassing van de communautaire mededingingsregels onverlet.
- (10) Deze verordening heeft tot doel te bepalen op grond van welke eigenschappen stoffen en mengsels als gevaarlijk ingedeeld moeten worden, zodat de gevaren van stoffen en mengsels correct kunnen worden geïdentificeerd en bekendgemaakt. Dit dient zowel fysische gevaren als gevaren voor de gezondheid van de mens en het milieu te omvatten, met inbegrip van gevaren voor de ozonlaag.
- (11) Deze verordening moet als algemene regel van toepassing zijn op alle stoffen en mengsels die in de Gemeenschap worden geleverd, behalve als in andere communautaire wetgeving specifiekere indelings- en etiketteringsvoorschriften zijn vastgelegd, zoals in Richtlijn 76/768/EEG van de Raad van 27 juli 1976 betreffende de onderlinge aanpassing van de wetgevingen der lidstaten inzake cosmetische producten <sup>(1)</sup>, Richtlijn 82/471/EEG van de Raad van 30 juni 1982 betreffende bepaalde in diervoeding gebruikte producten <sup>(2)</sup>, Richtlijn 88/388/EEG van de Raad van 22 juni 1988 betreffende de onderlinge aanpassing van de wetgevingen der lidstaten inzake aroma's voor gebruik in levensmiddelen en de uitgangsmaterialen voor de bereiding van die aroma's <sup>(3)</sup>, Richtlijn 89/107/EEG van de Raad van 21 december 1988 betreffende de onderlinge aanpassing van de wetgevingen der lidstaten inzake levensmiddelenadditieven die in voor menselijke voeding bestemde waren mogen worden gebruikt <sup>(4)</sup>, Richtlijn 90/385/EEG van de Raad van 20 juni 1990 betreffende de onderlinge aanpassing van de wetgevingen van de lidstaten inzake actieve implanteerbare medische hulpmiddelen <sup>(5)</sup>, Richtlijn 93/42/EEG van de Raad van 14 juni 1993 betreffende medische hulpmiddelen <sup>(6)</sup>, Richtlijn 98/79/EG van het Europees Parlement en de Raad van 27 oktober 1998 betreffende medische hulpmiddelen voor in-vitrodiagnostiek <sup>(7)</sup>, Beschikking 1999/217/EG van de Commissie van 23 februari 1999 tot vaststelling van een repertorium van in levensmiddelen gebruikte aromastoffen, dat is samengesteld in toepassing van Verordening (EG) nr. 2232/96 van het Europees Parlement en de Raad <sup>(8)</sup>, Richtlijn 2001/82/EG van het Europees Parlement en de Raad van 6 november 2001 tot vaststelling van een communautair wetboek betreffende geneesmiddelen voor diergeneeskundig gebruik <sup>(9)</sup>, Richtlijn 2001/83/EG van het Europees Parlement en de Raad van 6 november 2001 tot vaststelling van een communautair wetboek betreffende geneesmiddelen voor menselijk gebruik <sup>(10)</sup>, Verordening (EG) nr. 178/2002 van het Europees Parlement en de Raad van 28 januari 2002 tot

vaststelling van de algemene beginselen en voorschriften van de levensmiddelenwetgeving, tot oprichting van een Europese Autoriteit voor voedselveiligheid en tot vaststelling van procedures voor voedselveiligheidsaangelegenheden <sup>(11)</sup> en Verordening (EG) nr. 1831/2003 van het Europees Parlement en de Raad van 22 september 2003 betreffende toevoegingsmiddelen voor diervoeding <sup>(12)</sup> of bij het vervoer van stoffen en mengsels door de lucht, over zee, over de weg, per spoor of over de binnenwateren.

- (12) De in deze verordening gebruikte terminologie en definities moeten in overeenstemming zijn met de terminologie en definities van Verordening (EG) nr. 1907/2006 van het Europees Parlement en de Raad van 18 december 2006 inzake de registratie en beoordeling van en de autorisatie en beperkingen ten aanzien van chemische stoffen (Reach) <sup>(13)</sup>, met de terminologie en definities van de vervoersreggeving en met de op VN-niveau in het GHS gegeven definities, om maximale consistentie te garanderen bij de toepassing van de wetgeving inzake chemische stoffen in de Gemeenschap in de context van de wereldwijde handel. Om dezelfde reden moeten de in het GHS vastgestelde gevaarclassen in deze verordening worden opgenomen.
- (13) Met name moeten de gevaarclassen van het GHS worden overgenomen waarin er specifiek rekening mee gehouden wordt dat de potentiële fysische gevaren van stoffen of mengsels tot op zekere hoogte afhangen van de manier waarop deze vrijkomen.
- (14) Onder de term „mengsel”, als gedefinieerd in deze verordening, moet hetzelfde worden verstaan als onder de voorheen in de Gemeenschapswetgeving gebruikte term „preparaat”.
- (15) Deze verordening moet in de plaats komen van Richtlijn 67/548/EEG van de Raad van 27 juni 1967 betreffende de aanpassing van de wettelijke en bestuursrechtelijke bepalingen inzake de indeling, de verpakking en het kenmerken van gevaarlijke stoffen <sup>(14)</sup> en Richtlijn 1999/45/EG van het Europees Parlement en de Raad van 31 mei 1999 betreffende de onderlinge aanpassing van de wettelijke en bestuursrechtelijke bepalingen van de lidstaten inzake de indeling, de verpakking en het kenmerken van gevaarlijke preparaten <sup>(15)</sup>. Het algehele beschermingsniveau voor de gezondheid van de mens en het milieu dat die richtlijnen bieden, moet in deze verordening worden gehandhaafd. Daarom moeten een aantal gevaarclassen die in die richtlijnen voorkomen maar nog niet in het GHS zijn opgenomen, in deze verordening worden gehandhaafd.
- (16) De verantwoordelijkheid voor het identificeren van de gevaren van stoffen en mengsels en voor het bepalen van de indeling ervan dient hoofdzakelijk bij de fabrikanten, importeurs en downstreamgebruikers van die stoffen en mengsels te liggen, ongeacht of zij onder de voorschriften

<sup>(1)</sup> PB L 262 van 27.9.1976, blz. 169.

<sup>(2)</sup> PB L 213 van 21.7.1982, blz. 8.

<sup>(3)</sup> PB L 184 van 15.7.1988, blz. 61.

<sup>(4)</sup> PB L 40 van 11.2.1989, blz. 27.

<sup>(5)</sup> PB L 189 van 20.7.1990, blz. 17.

<sup>(6)</sup> PB L 169 van 12.7.1993, blz. 1.

<sup>(7)</sup> PB L 331 van 7.12.1998, blz. 1.

<sup>(8)</sup> PB L 84 van 27.3.1999, blz. 1.

<sup>(9)</sup> PB L 311 van 28.11.2001, blz. 1.

<sup>(10)</sup> PB L 311 van 28.11.2001, blz. 67.

<sup>(11)</sup> PB L 31 van 1.2.2002, blz. 1.

<sup>(12)</sup> PB L 268 van 18.10.2003, blz. 29.

<sup>(13)</sup> PB L 396 van 30.12.2006, blz. 1; gerecificeerd in PB L 136 van 29.5.2007, blz. 3.

<sup>(14)</sup> PB 196 van 16.8.1967, blz. 1.

<sup>(15)</sup> PB L 200 van 30.7.1999, blz. 1.

van Verordening (EG) nr. 1907/2006 vallen. Bij het vervullen van hun verantwoordelijkheden inzake indeling, moet het downstreamgebruikers worden toegestaan de indeling van een stof of mengsel te gebruiken zoals die overeenkomstig deze verordening door een actor in de toeleveringsketen is bepaald, mits zij de samenstelling van de stof of het mengsel niet wijzigen. De verantwoordelijkheid voor het indelen van niet in de handel verkrijgbare stoffen die onder de registratie- of aanmeldingsplicht van Verordening (EG) nr. 1907/2006 vallen, dient hoofdzakelijk bij de fabrikanten, producenten van voorwerpen en importeurs te liggen. Wel moet het mogelijk zijn om geharmoniseerde indelingen te geven van stoffen voor de meest zorgwekkende gevarenklassen en van andere stoffen op een ad-hocbasis, die dan door alle fabrikanten, importeurs en downstreamgebruikers van die stoffen en van mengsels waarin die stoffen voorkomen, moeten worden toegepast.

- (17) Indien besloten wordt de indeling van een stof voor een bepaalde gevarenklasse of een bepaalde onderverdeling van een gevarenklasse te harmoniseren door in bijlage VI, deel 3, een desbetreffende vermelding op te nemen of te herzien, moet de fabrikant, importeur of downstreamgebruiker die geharmoniseerde indeling gebruiken en mag hij de stof alleen ten aanzien van de overige, niet-geharmoniseerde gevarenklassen of onderverdelingen daarvan zelf indelen.
- (18) Om te waarborgen dat de afnemers informatie ontvangen over gevaren, moeten de leveranciers van stoffen en mengsels ervoor zorgen dat deze, voorafgaand aan het in de handel brengen, overeenkomstig deze verordening worden geëtiketteerd en verpakt volgens de desbetreffende indeling. Bij het vervullen van hun verantwoordelijkheden, moet het downstreamgebruikers worden toegestaan de indeling van een stof of mengsel te gebruiken zoals die overeenkomstig deze verordening door een actor in de toeleveringsketen is bepaald, mits zij de samenstelling van de stof of het mengsel niet wijzigen, en moet het distributeurs worden toegestaan de indeling van een stof of mengsel te gebruiken zoals die overeenkomstig deze verordening door een actor in de toeleveringsketen is bepaald.
- (19) Om te waarborgen dat informatie beschikbaar is over gevaarlijke stoffen in mengsels die ten minste één stof bevatten die als gevaarlijk is ingedeeld, moet aanvullende informatie op het etiket worden verstrekt, indien van toepassing.
- (20) De fabrikant, importeur of downstreamgebruiker van een stof of mengsel mag niet worden verplicht om voor de indeling nieuwe toxicologische of ecotoxicologische gegevens te genereren, maar moet wel alle voor hem beschikbare informatie over de gevaren van de stof of het mengsel zoeken en de kwaliteit daarvan beoordelen. De fabrikant, importeur of downstreamgebruiker moet ook rekening houden met historische gegevens over de mens, zoals epidemiologisch onderzoek bij blootgestelde populaties, over de blootstelling bij ongevallen of tijdens de beroepsuitoefening alsmede gegevens over de effecten en klinisch onderzoek. Die informatie moet worden vergeleken met de criteria voor de verschillende gevarenklassen en onderverdelingen daarvan om die fabrikant, importeur of downstreamgebruiker toe te laten uit te maken of de stof of het mengsel al dan niet als gevaarlijk moet worden ingedeeld.
- (21) Voor het indelen van een stof of mengsel mag dus de beschikbare informatie worden gebruikt, maar de voor de toepassing van deze verordening gebruikte informatie moet bij voorkeur zijn verkregen volgens de testmethoden bedoeld in Verordening (EG) nr. 1907/2006, de vervoersvoorschriften of internationale beginselen voor de validatie van informatie, zodat de kwaliteit en vergelijkbaarheid van de resultaten en de samenhang met andere vereisten op internationaal of Gemeenschapsniveau gegarandeerd zijn. Ingeval de fabrikant, importeur of downstreamgebruiker ervoor kiest nieuwe informatie te genereren, moeten dezelfde testmethoden, voorschriften, beginselen en procedures worden gevolgd.
- (22) Om de identificatie van de gevaren van mengsels te vergemakkelijken, moeten de fabrikanten, importeurs en downstreamgebruikers daarbij uitgaan van gegevens over het mengsel zelf, indien die bestaan, behalve voor mengsels met kankerverwekkende, in geslachtsellen mutagene of voor de voortplanting giftige stoffen, of bij de beoordeling van de eventuele biologische afbraak of bioaccumulatie in de gevarenklasse „gevaarlijk voor het aquatisch milieu”. Aangezien in die gevallen de gevaren van het mengsel niet voldoende op grond van het mengsel zelf kunnen worden beoordeeld, moeten zij in de regel worden geïdentificeerd aan de hand van de gegevens voor de afzonderlijke stoffen in het mengsel.
- (23) Als er voldoende gegevens beschikbaar zijn over soortgelijke mengsels die al getest zijn en over de belangrijkste ingrediënten van het mengsel, kunnen de gevaarlijke eigenschappen van een niet-getest mengsel worden bepaald aan de hand van zogenaamde „extrapolatieprincipes”. Dit zijn regels waarmee de gevaren van het mengsel gekarakteriseerd kunnen worden door gebruik te maken van gegevens over soortgelijke, wel geteste mengsels zonder met het mengsel zelf tests te doen. Indien voor het mengsel zelf geen of ontoereikende testgegevens beschikbaar zijn, moeten de fabrikanten, importeurs of downstreamgebruikers dus de extrapolatieprincipes hanteren om te waarborgen dat de indeling van dergelijke mengsels tot vergelijkbare resultaten leidt.
- (24) Specifieke industriesectoren kunnen netwerken opzetten om het uitwisselen van informatie te vergemakkelijken en de expertise op het gebied van informatiebeoordeling, testgegevens, bewijskrachtbepaling en extrapolatieprincipes te bundelen. Deze netwerken kunnen de fabrikanten, importeurs en downstreamgebruikers binnen die industrie-sector, en met name het midden- en kleinbedrijf (MKB), ondersteunen bij het vervullen van hun verplichtingen uit hoofde van deze verordening. Die netwerken kunnen ook worden gebruikt om informatie en beste praktijken uit te wisselen, zodat de verplichtingen inzake kennisgeving eenvoudiger kunnen worden vervuld. De leveranciers die een beroep doen op deze ondersteuning, dienen volledig verantwoordelijk te blijven voor het vervullen van hun verplichtingen inzake de indeling, de verpakking en het kenmerken uit hoofde van deze verordening.

- (25) De bescherming van dieren overeenkomstig Richtlijn 86/609/EEG van de Raad van 24 november 1986 inzake de onderlinge aanpassing van de wettelijke en bestuursrechtelijke bepalingen van de lidstaten betreffende de bescherming van dieren die voor experimentele en andere wetenschappelijke doeleinden worden gebruikt<sup>(1)</sup>, heeft een hoge prioriteit. Indien een fabrikant, importeur of downstreamgebruiker besluit om voor de toepassing van deze verordening informatie te genereren, moet hij daarom eerst kijken naar alternatieven voor dierproeven die onder Richtlijn 86/609/EEG vallen. Voor de toepassing van deze verordening dienen proeven op niet-menselijke primaten verboden te worden.
- (26) De testmethoden van Verordening (EG) nr. 440/2008 van de Commissie van 30 mei 2008 houdende vaststelling van testmethoden uit hoofde van Verordening (EG) nr. 1907/2006 van het Europees Parlement en de Raad inzake de registratie en beoordeling van en de autorisatie en beperkingen ten aanzien van chemische stoffen (REACH)<sup>(2)</sup> worden regelmatig herbezien en verbeterd om het aantal proeven op gewervelde dieren en het aantal betrokken dieren te verminderen. Het Europees Centrum voor de validatie van alternatieve methoden (CEVMA) van het Gemeenschappelijk Centrum voor onderzoek van de Commissie vervult een belangrijke rol bij de wetenschappelijke beoordeling en de validering van alternatieve proefmethoden.
- (27) De indelings- en etiketteringscriteria, vastgesteld in deze verordening, moeten zo veel mogelijk rekening houden met het bevorderen van alternatieve methoden voor het beoordelen van de gevaren van stoffen en mengsels en van de verplichting om met andere middelen dan proeven met dieren in de zin van Richtlijn 86/609/EEG informatie over de intrinsieke eigenschappen te verkrijgen, als bepaald in Verordening (EG) nr. 1907/2006. Nieuwe criteria mogen niet in de weg staan aan dit doel of aan de overeenkomstige verplichtingen van laatstgenoemde verordening, en mogen in geen geval leiden tot het gebruik van dierproeven indien alternatieve proeven adequaat zijn voor het indelen en etiketteren.
- (28) Voor de indeling mogen geen gegevens worden gegenereerd door middel van proeven op mensen. Er moet gebruik worden gemaakt van beschikbare, betrouwbare epidemiologische gegevens en ervaringen betreffende de effecten van stoffen en mengsels op de mens (bv. gegevens over beroepsmatige blootstelling en uit ongevalldatabases) en deze kunnen voorrang krijgen op dierproeven als er gevaren uit blijken die niet in dierproeven zijn gevonden. De resultaten van dierproeven moeten afgewogen worden tegen de gegevens over mensen en bij de beoordeling van beide soorten gegevens moet op basis van een deskundige beoordeling de best mogelijke bescherming van de gezondheid van de mens worden gewaarborgd.
- (29) Nieuwe informatie over fysische gevaren dient altijd nodig te zijn, behalve indien de gegevens al beschikbaar zijn of indien in deze verordening een uitzonderingsbepaling is opgenomen.
- (30) Tests die uitsluitend met het oog op de toepassing van deze verordening worden gedaan, moeten worden uitgevoerd op de stof of het mengsel in de vorm(en) of de fysische toestand(en) waarin de stof of het mengsel in de handel wordt gebracht en die naar redelijke verwachting gebruikt wordt (worden). Wel moet het toegestaan worden om voor de toepassing van deze verordening gebruik te maken van resultaten van tests die in verband met andere wettelijke verplichtingen, ook die van derde landen, zijn uitgevoerd, ook al had de stof of het mengsel daarbij niet de vorm(en) of de fysische toestand(en), waarin de stof of het mengsel in de handel wordt gebracht en die naar redelijke verwachting gebruikt wordt.
- (31) Eventuele tests moeten in voorkomend geval voldoen aan de toepasselijke eisen inzake de bescherming van proefdieren, vastgelegd in Richtlijn 86/609/EEG en, in het geval van ecotoxicologische en toxicologische tests, aan de goede laboratoriumpraktijken, vastgelegd in Richtlijn 2004/10/EG van het Europees Parlement en de Raad van 11 februari 2004 betreffende de onderlinge aanpassing van de wettelijke en bestuursrechtelijke bepalingen inzake de toepassing van de beginselen van goede laboratoriumpraktijken en het toezicht op de toepassing ervan voor tests op chemische stoffen<sup>(3)</sup>.
- (32) De criteria voor de indeling in verschillende gevarenklassen en onderverdelingen daarvan dienen vastgelegd, alsook nadere bepalingen voor de toepassing van die criteria zijn opgenomen.
- (33) De fabrikanten, importeurs en downstreamgebruikers moeten zich ervan bewust zijn dat het toepassen van de criteria voor de verschillende gevarenklassen op informatie niet altijd even eenvoudig is en daarom moeten zij op basis van een deskundige beoordeling van de bewijskracht tot de juiste resultaten komen.
- (34) Fabrikanten, importeurs of downstreamgebruikers dienen overeenkomstig de criteria van deze verordening specifieke concentratiegrenzen voor stoffen vast te stellen, op voorwaarde dat zij die grenzen kunnen motiveren en het Europees Agentschap voor chemische stoffen, hierna „het Agentschap” genoemd, daarvan op de hoogte stellen. Voor geharmoniseerde gevarenklassen of onderverdelingen van stoffen uit de tabellen voor geharmoniseerde indeling en etikettering in bijlage bij deze verordening hoeven evenwel geen specifieke concentratiegrenzen te worden bepaald. Het Agentschap dient richtsnoeren voor het vaststellen van specifieke concentratiegrenzen te verstrekken. In het belang van de uniformiteit moeten er, in voorkomend geval, ook specifieke concentratiegrenzen worden opgenomen in bepaalde geharmoniseerde indelingen. Specifieke concentratiegrenzen dienen te prevaleren boven andere concentratiegrenzen voor indeling.
- (35) Vermenigvuldigingsfactoren („M-factoren”) voor stoffen die ingedeeld zijn als gevaarlijk voor het aquatisch milieu, acuut categorie 1 of chronisch categorie 1, moeten door de fabrikant, importeur of downstreamgebruiker aan de stof worden toegewezen volgens de criteria bedoeld in deze verordening. Het Agentschap dient richtsnoeren voor het vaststellen van de M-factoren te verstrekken.

<sup>(1)</sup> PB L 358 van 18.12.1986, blz. 1.

<sup>(2)</sup> PB L 142 van 31.5.2008, blz. 1.

<sup>(3)</sup> PB L 50 van 20.2.2004, blz. 44.

- (36) In verband met de evenredigheid en de praktische uitvoerbaarheid moeten er algemene ondergrenzen vastgesteld worden voor geïdentificeerde verontreinigingen, additieven en afzonderlijke bestanddelen van stoffen, alsmede voor stoffen in mengsels, om aan te geven wanneer informatie over die stoffen bij de indeling van stoffen en mengsels in aanmerking moet worden genomen.
- (37) Met het oog op een juiste indeling van mengsels moet daarbij de beschikbare informatie over synergetische en antagonistische effecten in aanmerking genomen worden.
- (38) Fabrikanten, importeurs en downstreamgebruikers moeten de indelingen van de door hen in de handel gebrachte stoffen of mengsels opnieuw bezien indien zij bekend worden met nieuwe adequate en betrouwbare wetenschappelijke of technische informatie die gevolgen kan hebben voor de indeling van de stoffen of mengsels, of indien zij de samenstelling van hun mengsels wijzigen, zodat de indeling gebaseerd is op actuele informatie, tenzij er voldoende aanwijzingen zijn dat de indeling niet verandert. De leveranciers moeten de etiketten aan deze wijzigingen aanpassen.
- (39) Als gevaarlijk ingedeelde stoffen en mengsels moeten overeenkomstig hun indeling worden geëtiketteerd en verpakt, zodat de afnemers van die stoffen voldoende beschermd zijn en de belangrijkste informatie krijgen doordat hun aandacht op de gevaren van de stof of het mengsel gevestigd wordt.
- (40) De voorlichting over de gevaren van stoffen en mengsels uit hoofde van deze verordening gebeurt door middel van twee instrumenten, namelijk etikettering en de veiligheidsinformatiebladen bedoeld in Verordening (EG) nr. 1907/2006. Van deze instrumenten is het etiket het enige voorlichtingsinstrument voor consumenten, maar het kan ook dienen om werknemers te wijzen op de uitvoeriger informatie over stoffen of mengsels in de veiligheidsinformatiebladen. Aangezien de bepalingen over veiligheidsinformatiebladen zijn opgenomen in Verordening (EG) nr. 1907/2006, waarin het veiligheidsinformatieblad het belangrijkste communicatiemiddel in de toeleveringsketen van stoffen is, hoeven deze bepalingen niet nog eens in deze verordening te worden herhaald.
- (41) Om te waarborgen dat de consument correct en uitvoerig wordt voorgelicht over de gevaren en het veilige gebruik van chemische stoffen en mengsels, moeten het gebruik en de verspreiding van internetsites en gratis telefoonnummers worden bevorderd, met name in samenhang met voorlichting over specifieke soorten verpakkingen.
- (42) Werknemers en consumenten over de hele wereld zouden baat hebben bij een wereldwijd geharmoniseerd voorlichtingsinstrument voor gevaren in de vorm van etikettering. Daarom moet worden gespecificeerd wat op het etiket komt te staan, onder gebruikmaking van de gevarenpictogrammen, signaalwoorden, gevarenaanduidingen en veiligheidsmaatregelen die de kern van het GHS vormen. De overige informatie op etiketten moet tot een minimum beperkt worden en mag geen twijfel doen ontstaan over de voornaamste elementen.
- (43) Het is van groot belang dat in de handel gebrachte stoffen en mengsels duidelijk geïdentificeerd zijn. Wel moet het Agentschap bedrijven die daarom verzoeken zo nodig toestaan om de chemische identiteit van bepaalde stoffen zodanig te beschrijven dat de betrouwbaarheid van hun werkzaamheden niet in het geding komt. Ingeval het Agentschap dit verzoek weigert, moet beroep kunnen worden ingesteld overeenkomstig deze verordening. Het beroep moet schorsende werking hebben, zodat de vertrouwelijke informatie die het voorwerp van het verzoek uitmaakt, niet op het etiket wordt vermeld zolang het beroep hangende is.
- (44) De International Union of Pure and Applied Chemistry (IUPAC) geldt al vele jaren wereldwijd als autoriteit op het gebied van de chemische nomenclatuur en terminologie. In de hele wereld worden stoffen gewoonlijk aan de hand van hun IUPAC-naam geïdentificeerd en dit is het uitgangspunt voor de identificatie van stoffen in een internationale en meertalige context. Die namen moeten dus voor de toepassing van deze verordening worden gebruikt.
- (45) De Chemical Abstracts Service (CAS) beschikt over een systeem waarbij stoffen in het CAS-Registry worden opgenomen en een uniek CAS-nummer krijgen. Die CAS-nummers worden over de hele wereld in naslagwerken, databanken en wet- en regelgeving gebruikt om stoffen te identificeren zonder de dubbelzinnigheden van de chemische nomenclatuur. De CAS-nummers moeten dus voor de toepassing van deze verordening worden gebruikt.
- (46) Teneinde de informatie op het etiket te beperken tot de meest essentiële gegevens moeten er voorrangsbeginselen worden gehanteerd om de belangrijkste etiketteringselementen te bepalen ingeval stoffen of mengsels verscheidene gevaarlijke eigenschappen hebben.
- (47) Richtlijn 91/414/EEG van de Raad van 15 juli 1991 betreffende het op de markt brengen van gewasbeschermingsmiddelen <sup>(1)</sup> en Richtlijn 98/8/EG van het Europees Parlement en de Raad van 16 februari 1998 betreffende het op de markt brengen van biociden <sup>(2)</sup> moeten onverkort van toepassing blijven op de onder de werkingssfeer van die richtlijnen vallende producten.
- (48) Vermeldingen zoals „niet toxisch”, „onschadelijk”, „niet vervuילend”, „milieuvriendelijk”, of andere vermeldingen die aangeven dat de stof of het mengsel niet gevaarlijk is, of andere verklaringen die niet stroken met de indeling ervan, mogen niet op het etiket of de verpakking van een stof of mengsel worden aangebracht.
- (49) In het algemeen moeten stoffen en mengsels, en met name die welke aan het publiek worden aangeboden, verpakt worden samen met de nodige informatie op het etiket. De noodzakelijke informatieverstrekking tussen de actoren van de sector, ook met betrekking tot onverpakte stoffen en

<sup>(1)</sup> PB L 230 van 19.8.1991, blz. 1.

<sup>(2)</sup> PB L 123 van 24.4.1998, blz. 1.

- mengsels, wordt gewaarborgd door Verordening (EG) nr. 1907/2006. In uitzonderlijke gevallen mogen stoffen en mengsels echter ook onverpakt aan het publiek worden aangeboden. In voorkomend geval moet de betrokken informatie op het etiket via andere middelen zoals een rekening of factuur aan het publiek worden verstrekt.
- (50) Er zijn voorschriften voor het aanbrengen van etiketten en de plaatsing van de informatie op de etiketten nodig om te garanderen dat de informatie op de etiketten gemakkelijk te begrijpen is.
- (51) In deze verordening moeten algemene verpakkingsnormen worden vastgelegd zodat veilige levering van gevaarlijke stoffen en mengsels wordt gewaarborgd.
- (52) De instanties moeten hun middelen concentreren op de vanuit gezondheids- of milieuoogpunt meest zorgwekkende stoffen. Het moet daarom mogelijk zijn dat de bevoegde autoriteiten en fabrikanten, importeurs en downstreamgebruikers bij het Agentschap voorstellen indienen voor een geharmoniseerde indeling en etikettering van stoffen die zijn ingedeeld wegens kankerverwekkendheid, mutageniteit in geslachtscellen of voortplantingstoxiciteit van categorie 1A, 1B of 2, sensibilisatie van de luchtwegen of andere, per geval te beoordelen effecten. Het moet ook mogelijk zijn dat de bevoegde autoriteiten van de lidstaten een geharmoniseerde indeling en etikettering voorstellen voor werkzame stoffen in gewasbeschermingsmiddelen en biociden. Het Agentschap moet over het voorstel advies uitbrengen en belanghebbende partijen moeten daarop kunnen reageren. De Commissie moet een ontwerp-besluit over de definitieve indeling en etikettering indienen.
- (53) Om ten volle rekening te gehouden met de in het kader van Richtlijn 67/548/EEG verrichte werkzaamheden en opgedane ervaring, waaronder ook de indeling en etikettering van specifieke stoffen in bijlage I bij die richtlijn, moeten alle bestaande geharmoniseerde indelingen worden omgezet in nieuwe geharmoniseerde indelingen aan de hand van de nieuwe criteria. Aangezien voorts de toepassing van deze verordening is uitgesteld en de geharmoniseerde indelingen overeenkomstig de criteria van Richtlijn 67/548/EEG van belang zijn voor de indeling van stoffen en mengsels tijdens de hierdoor ontstane overgangperiode, moeten alle bestaande geharmoniseerde indelingen ongewijzigd in een bijlage bij deze verordening worden opgenomen. Door op alle toekomstige harmonisaties van indelingen deze verordening toe te passen, zouden inconsistenties in geharmoniseerde indelingen van dezelfde stof volgens de bestaande en de nieuwe criteria moeten worden vermeden.
- (54) Omwille van de efficiënte werking van de interne markt voor stoffen en mengsels en een hoog beschermingsniveau voor de gezondheid van de mens en het milieu moeten voorschriften voor een inventaris van indelingen en etiketteringen worden vastgesteld. De indeling en etikettering van alle in de handel gebrachte geregistreerde of gevaarlijke stoffen moeten bij het Agentschap worden aangemeld om in de inventaris te worden opgenomen.
- (55) Het Agentschap moet nagaan of de kennisgevingsprocedure verder kan worden vereenvoudigd, met name om rekening te houden met de behoeften van het MKB.
- (56) Verschillende fabrikanten of importeurs van dezelfde stof moeten alles in het werk stellen om overeenstemming te bereiken over de indeling van die stof, behalve voor de gevarenklassen en onderverdelingen daarvan waarvoor een geharmoniseerde indeling voor de stof geldt.
- (57) Met het oog op een geharmoniseerd beschermingsniveau van het publiek, en met name van wie met bepaalde stoffen in aanraking komt, alsmede de goede werking van andere communautaire wetgeving die op de indeling en etikettering berust, moeten de door de fabrikanten en importeurs van een stof op grond van deze verordening overeengekomen indeling, indien mogelijk, alsook de besluiten op Gemeenschapsniveau om de indeling en etikettering van bepaalde stoffen te harmoniseren, in een inventaris worden opgenomen.
- (58) De in de inventaris van indelingen en etiketteringen opgenomen informatie moet dezelfde toegankelijkheid en bescherming genieten als door Verordening (EG) nr. 1907/2006 wordt geboden, met name als het gaat om informatie waarvan openbaarmaking de commerciële belangen van de betrokkenen in gevaar zou kunnen brengen.
- (59) De lidstaten dienen een of meer instanties aan te wijzen die bevoegd zijn voor voorstellen voor geharmoniseerde indeling en etikettering alsook de instanties die verantwoordelijk zijn voor de handhaving van de in deze verordening vastgelegde verplichtingen. De lidstaten moeten doeltreffende toezicht- en controlemaatregelen treffen om de naleving van deze verordening te waarborgen.
- (60) Het is belangrijk dat de leveranciers en andere belanghebbende partijen, met name het MKB, advies wordt verstrekt over hun respectieve verantwoordelijkheden en verplichtingen overeenkomstig deze verordening. De overeenkomstig Verordening (EG) nr. 1907/2006 reeds ingestelde nationale helpdesks kunnen fungeren als de nationale helpdesks waarin bij deze verordening wordt voorzien.
- (61) Voor de doeltreffende werking van het bij deze verordening opgerichte systeem is een goede samenwerking en coördinatie tussen de lidstaten, het Agentschap en de Commissie nodig.
- (62) Teneinde contactpunten voor informatie over gevaarlijke stoffen en mengsels te creëren, moeten de lidstaten, naast de voor de toepassing van deze verordening bevoegde en de voor de handhaving van deze verordening verantwoordelijke instanties, organen aanwijzen die belast zijn met het ontvangen van informatie over de gezondheid en over de chemische identiteit, bestanddelen en aard van stoffen, met inbegrip van de stoffen waarvoor het gebruik van een andere chemische naam is toegestaan overeenkomstig deze verordening.
- (63) De verantwoordelijke organen kunnen, op verzoek van een lidstaat, door middel van statistische analyse bepalen op welke punten de risicobeheersmaatregelen vatbaar voor verbetering zijn.

- (64) Periodieke verslagen van de lidstaten en het Agentschap over de werking van deze verordening zijn onmisbaar om de uitvoering van de stoffenwetgeving en de trends op dit gebied te volgen. De conclusies uit de verslagen zullen nuttig en praktisch zijn om de verordening te evalueren en waar nodig wijzigingen voor te stellen.
- (65) Het Forum voor de uitwisseling van handhavingsinformatie van het Agentschap, opgericht bij Verordening (EG) nr. 1907/2006, moet ook informatie over de handhaving van deze verordening uitwisselen.
- (66) Met het oog op de transparantie, onpartijdigheid en samenhang van de handhavingsactiviteiten van de lidstaten moeten de lidstaten een geschikt kader instellen om bij niet-naleving doeltreffende, evenredige en ontmoedigende sancties op te leggen, daar niet-naleving van deze verordening tot schade voor de gezondheid van de mens en het milieu kan leiden.
- (67) Ter bescherming van de afnemers van stoffen, met inbegrip van consumenten, moet in voorschriften worden vastgelegd dat in reclame voor stoffen die aan de indelingscriteria van deze verordening voldoen, op de daaraan verbonden gevaren moet worden gewezen. Om dezelfde reden moet in reclame voor mengsels die als gevaarlijk zijn ingedeeld waarbij een particulier een koopcontract kan sluiten zonder eerst het etiket te hebben gezien, de op het etiket aangegeven aard van de gevaren worden vermeld.
- (68) Er moet een vrijwaringsclausule komen voor het geval dat een stof of mengsel een ernstig risico voor de gezondheid van de mens of het milieu inhoudt, ook al is die stof overeenkomstig deze verordening niet als gevaarlijk ingedeeld. In dergelijke gevallen kunnen maatregelen op VN-niveau nodig zijn in verband met de wereldwijde aard van de handel in stoffen en mengsels.
- (69) Hoewel een groot deel van de verplichtingen van het bedrijfsleven krachtens Verordening (EG) nr. 1907/2006 bepaald wordt door de indeling, mag deze verordening het toepassingsgebied en het effect van eerstgenoemde verordening niet wijzigen, behalve wat betreft de bepalingen ervan inzake veiligheidsinformatiebladen. Daarom moet deze verordening dienovereenkomstig worden gewijzigd.
- (70) De toepassing van deze verordening moet worden gespreid om alle betrokkenen (instanties, bedrijven, belanghebbenden) in staat te stellen om bij de voorbereiding op nieuwe taken op het juiste moment in middelen te voorzien. Daarom, en omdat de indeling van mengsels afhangt van de indeling van stoffen, mogen de bepalingen voor de indeling van mengsels pas in werking treden als alle stoffen opnieuw zijn ingedeeld. Marktdeelnemers dienen toegestaan te worden de indelingscriteria van deze verordening op vrijwillige basis eerder toe te passen, maar om verwarring te voorkomen moeten de etikettering en verpakking in dat geval voldoen aan deze verordening in plaats van aan Richtlijn 67/548/EEG of 1999/45/EG.
- (71) Om het bedrijfsleven niet nodeloos te belasten mogen stoffen en mengsels die zich al in de toeleveringsketen bevinden op het moment dat deze verordening erop van toepassing wordt, voor een bepaalde periode verder in de handel worden gebracht zonder dat zij opnieuw worden geëtiketteerd.
- (72) Aangezien de doelstellingen van deze verordening, namelijk de harmonisatie van de indelings-, etiketterings- en verpakkingsvoorschriften, met daarbij de verplichting om stoffen in te delen en een geharmoniseerde lijst van op Gemeenschapsniveau ingedeelde stoffen en een inventaris van indelingen en etiketteringen op te stellen, niet voldoende door de lidstaten kunnen worden verwezenlijkt en derhalve beter door de Gemeenschap kunnen worden verwezenlijkt, kan de Gemeenschap, overeenkomstig het in artikel 5 van het Verdrag neergelegde subsidiariteitsbeginsel, maatregelen nemen. Overeenkomstig het in hetzelfde artikel neergelegde evenredigheidsbeginsel, gaat deze verordening niet verder dan nodig is om deze doelstellingen te verwezenlijken.
- (73) Deze verordening is in overeenstemming met de grondrechten en beginselen die met name door het Handvest van de grondrechten van de Europese Unie<sup>(1)</sup> worden erkend.
- (74) Deze verordening moet bijdragen tot de verwezenlijking van de op 6 februari 2006 in Dubai aangenomen strategische aanpak voor het internationale beheer van chemische stoffen (SAICM).
- (75) Onder voorbehoud van de ontwikkelingen op VN-niveau, moeten de indeling en de etikettering van persistente, bioaccumulerende en toxische stoffen (PBT) en zeer persistente en sterk bioaccumulerende stoffen (zPzB) in een later stadium in deze verordening worden opgenomen.
- (76) De voor de uitvoering van deze verordening vereiste maatregelen moeten worden vastgesteld overeenkomstig Besluit 1999/468/EG van de Raad van 28 juni 1999 tot vaststelling van de voorwaarden voor de uitoefening van de aan de Commissie verleende uitvoeringsbevoegdheden<sup>(2)</sup>.
- (77) In het bijzonder moet de Commissie de bevoegdheid worden gegeven deze verordening aan de technische en wetenschappelijke vooruitgang aan te passen waaronder ook het implementeren van op VN-niveau in het GHS aangebrachte wijzigingen, met name wat betreft het gebruik van informatie over soortgelijke mengsels. Bij die aanpassingen aan de technische en wetenschappelijke vooruitgang moet met het tweejaarlijks ritme van de VN rekening worden gehouden. Ook moet de Commissie de bevoegdheid worden gegeven over de geharmoniseerde indeling en etikettering van specifieke stoffen te besluiten. Daar het maatregelen van algemene strekking betreft tot wijziging van niet-essentiële onderdelen van deze verordening, moeten zij worden vastgesteld volgens de in artikel 5 bis van Besluit 1999/468/EG bepaalde regelgevingsprocedure met toetsing.

(1) PB C 364 van 18.12.2000, blz. 1.

(2) PB L 184 van 17.7.1999, blz. 23.

- (78) Wanneer om dwingende urgente redenen de normaal voor de regelgevingsprocedure met toetsing toepasselijke termijnen niet kunnen worden nageleefd, moet de Commissie voor de aanpassing aan de technische vooruitgang de in artikel 5 bis, lid 6, van Besluit 1999/468/EG vastgestelde urgentieprocedure kunnen toepassen.
- (79) Ook voor de toepassing van deze verordening moet de Commissie worden bijgestaan door het bij Verordening (EG) nr. 1907/2006 ingestelde comité, om bij de actualisering van de stoffenwetgeving een consistente aanpak te waarborgen,

HEBLEN DE VOLGENDE VERORDENING VASTGESTELD:

#### TITEL I

#### ALGEMENE ASPECTEN

##### Artikel 1

#### Doel en toepassingsgebied

1. Deze verordening heeft ten doel een hoog niveau van bescherming van de gezondheid van de mens en het milieu alsmede het vrije verkeer van stoffen, mengsels en voorwerpen als bedoeld in artikel 4, lid 8, te waarborgen door:

- a) de criteria voor de indeling van stoffen en mengsels en de voorschriften voor de etikettering en verpakking van gevaarlijke stoffen en mengsels te harmoniseren;
- b) te voorzien in de verplichting voor:
  - i) fabrikanten, importeurs en downstreamgebruikers om in de handel gebrachte stoffen en mengsels in te delen;
  - ii) leveranciers om in de handel gebrachte verpakte stoffen en mengsels te etiketteren en te verpakken;
  - iii) fabrikanten, producenten van voorwerpen en importeurs om de niet in de handel verkrijgbare stoffen die onder de registratie- of aanmeldingsplicht van Verordening (EG) nr. 1907/2006 vallen, in te delen;
- c) te voorzien in de verplichtingen voor fabrikanten en importeurs van stoffen om de indelingen en etiketteringselementen die niet als onderdeel van de registratie overeenkomstig Verordening (EG) nr. 1907/2006 bij het Agentschap zijn ingediend aan het Agentschap te melden;
- d) in bijlage VI, deel 3, een lijst van stoffen met op Gemeenschapsniveau geharmoniseerde indelingen en etiketteringselementen op te stellen;
- e) een inventaris van indelingen en etiketteringen van stoffen op te stellen, die bestaat uit alle meldingen, indieningen en geharmoniseerde indelingen en etiketteringselementen als bedoeld onder c) en d).

2. Deze verordening is niet van toepassing op:

- a) radioactieve stoffen en mengsels die binnen het toepassingsgebied van Richtlijn 96/29/Euratom van de Raad van 13 mei 1996 tot vaststelling van de basisnormen voor de bescherming van de gezondheid der bevolking en der werkers tegen de aan ioniserende straling verbonden gevaren <sup>(1)</sup> vallen;
- b) stoffen en mengsels die onder douanetoezicht vallen, voor zover zij niet worden bewerkt of verwerkt, en die in tijdelijke opslag zijn, zich in een vrije zone of een vrij entrepot bevinden met het oog op wederuitvoer, of in transitio zijn;
- c) niet-geïsoleerde tussenproducten;
- d) stoffen en mengsels voor wetenschappelijk onderzoek en wetenschappelijke ontwikkeling die niet in de handel verkrijgbaar zijn, voor zover zij onder gecontroleerde omstandigheden worden gebruikt overeenkomstig de communautaire wetgeving inzake de arbeidsplaats en het milieu.

3. Afvalstoffen als omschreven in Richtlijn 2006/12/EG van het Europees Parlement en de Raad van 5 april 2006 betreffende afvalstoffen <sup>(2)</sup> zijn geen stof, mengsel of voorwerp in de zin van artikel 2 van deze verordening.

4. De lidstaten kunnen in specifieke gevallen bepaalde stoffen of mengsels van de toepassing van deze verordening vrijstellen wanneer zulks noodzakelijk is in het belang van defensie.

5. Deze verordening is niet van toepassing op de volgende voor de eindgebruiker bestemde stoffen en preparaten in afgewerkte vorm:

- a) geneesmiddelen zoals gedefinieerd in Richtlijn 2001/83/EG;
- b) geneesmiddelen voor diergeneeskundig gebruik zoals gedefinieerd in Richtlijn 2001/82/EG;
- c) cosmetische producten zoals gedefinieerd in Richtlijn 76/768/EEG;
- d) medische hulpmiddelen zoals gedefinieerd in de Richtlijnen 90/385/EEG en 93/42/EEG, die invasief zijn of in direct contact komen met het lichaam, en in Richtlijn 98/79/EG;
- e) levensmiddelen of diervoeders zoals gedefinieerd in Verordening (EG) nr. 178/2002, mede bij gebruik:
  - i) als levensmiddelenadditief in waren die binnen het toepassingsgebied van Richtlijn 89/107/EEG vallen;
  - ii) als aroma in levensmiddelen dat binnen het toepassingsgebied van Richtlijn 88/388/EG en Beschikking 1999/217/EG valt;

<sup>(1)</sup> PB L 159 van 29.6.1996, blz. 1.

<sup>(2)</sup> PB L 114 van 27.4.2006, blz. 9.



- iii) als toevoegingsmiddel voor diervoeding dat binnen het toepassingsgebied van Verordening (EG) nr. 1831/2003 valt;
- iv) in diervoeding die binnen het toepassingsgebied van Richtlijn 82/471/EEG valt.

6. Behalve waar artikel 33 van toepassing is, geldt deze verordening niet voor het vervoer van gevaarlijke goederen door de lucht, over zee, over de weg, per spoor of over de binnenwateren.

#### Artikel 2

#### Definities

Voor de toepassing van deze verordening gelden de volgende definities:

1. „gevaarklasse”: de aard van het fysische, gezondheids- of milieugevaar;
2. „gevaarcategorie”: onderverdeling naar de ernst van het gevaar binnen elke gevaarklasse aan de hand van criteria;
3. „gevaarpictogram”: grafische voorstelling bestaande uit een symbool en andere grafische elementen zoals een kader, een achtergrondpatroon of -kleur, bedoeld om specifieke informatie over het betrokken gevaar te verstrekken;
4. „signaalwoord”: woord ter aanduiding van de relatieve ernst van het gevaar, teneinde de lezer voor een mogelijk gevaar te waarschuwen; de volgende twee niveaus worden onderscheiden:
  - a) „gevaar”: signaalwoord ter aanduiding van de ernstigere gevarencategorieën;
  - b) „waarschuwing”: signaalwoord ter aanduiding van de minder ernstige gevarencategorieën;
5. „gevenaanduiding”: een woordcombinatie die geldt voor een gevaarklasse en -categorie, die de aard van de gevaren van een gevaarlijke stof of een gevaarlijk mengsel omschrijft en, in voorkomend geval, de ernst van het gevaar;
6. „veiligheidsaanbeveling”: een woordcombinatie die omschrijft welke de aanbevolen maatregelen zijn om de schadelijke gevolgen van blootstelling aan een gevaarlijke stof of een gevaarlijk mengsel bij gebruik of verwijdering daarvan zo klein mogelijk te maken of te voorkomen;
7. „stof”: een chemisch element en de verbindingen ervan, zoals zij voorkomen in natuurlijke toestand of bij de vervaardiging ontstaan, met inbegrip van alle additieven die nodig zijn voor het behoud van de stabiliteit ervan en alle onzuiverheden ten gevolge van het toegepaste procedé, doch met uitzondering van elk oplosmiddel dat kan worden afgescheiden zonder aantasting van de stabiliteit van de stof of wijziging van de samenstelling ervan;
8. „mengsel”: een mengsel of oplossing bestaande uit twee of meer stoffen;
9. „voorwerp”: een object waaraan tijdens de productie een speciale vorm, oppervlak of patroon wordt gegeven waardoor zijn functie in hogere mate wordt bepaald dan door zijn chemische samenstelling;
10. „producent van een voorwerp”: elke natuurlijke of rechtspersoon die een voorwerp in de Gemeenschap produceert of assembleert;
11. „polymeer”: een stof die bestaat uit moleculen welke worden gekenmerkt door een opeenvolging van een of meer soorten monomeereenheden. Die moleculen moeten over een reeks molecuulgewichten verdeeld zijn, waarbij de verschillen in molecuulgewicht in de eerste plaats het gevolg zijn van verschillen in het aantal monomeereenheden. Een polymeer bevat het volgende:
  - a) een gewichtsmeerderheid van moleculen die bestaan uit ten minste drie monomeereenheden die op covalente wijze aan ten minste een andere monomeereenheid of andere reactieve stof zijn gebonden;
  - b) minder dan een gewichtsmeerderheid aan moleculen van hetzelfde molecuulgewicht.

In deze definitie betekent „monomeereenheid” de gereageerde vorm van een monomeer in een polymeer;
12. „monomeer”: een stof die covalente bindingen kan vormen door herhaalde koppeling van soortgelijke of ongelijke moleculen onder de voorwaarden van de voor dat proces gebruikte polymerisatiereactie;
13. „registrant”: de fabrikant, of importeur van een stof, dan wel de producent of importeur van een voorwerp, die een registratie voor een stof indient overeenkomstig Verordening (EG) nr. 1907/2006;
14. „vervaardiging”: productie of extractie van stoffen in natuurlijke toestand;
15. „fabrikant”: een in de Gemeenschap gevestigde natuurlijke persoon of rechtspersoon die in de Gemeenschap een stof vervaardigt;
16. „invoer”: het binnen het douanegebied van de Gemeenschap brengen;
17. „importeur”: een in de Gemeenschap gevestigde natuurlijke persoon of rechtspersoon die voor de invoer verantwoordelijk is;
18. „in de handel brengen”: het aan een derde leveren of beschikbaar stellen, ongeacht of dit tegen betaling dan wel om niet geschiedt. Invoer wordt beschouwd als in de handel brengen;

19. „downstreamgebruiker”: elke in de Gemeenschap gevestigde natuurlijke persoon of rechtspersoon, met uitzondering van de fabrikant en de importeur, die een stof als zodanig, of in een mengsel, gebruikt bij zijn industriële activiteiten of beroepsactiviteiten. Distributeurs en consumenten zijn geen downstreamgebruikers. Wederimporteurs die vrijgesteld zijn krachtens artikel 2, lid 7, onder c), van Verordening (EG) nr. 1907/2006, worden als downstreamgebruikers beschouwd;
20. „distributeur”: elke in de Gemeenschap gevestigde natuurlijke persoon of rechtspersoon, met inbegrip van detailhandelaren, die een stof, als zodanig of in een mengsel, uitsluitend bewaart en in de handel brengt ten behoeve van derden;
21. „tussenproduct”: een stof die vervaardigd wordt voor en verbruikt wordt in of gebruikt wordt voor een chemische reactie, om omgezet te worden in een andere stof (hierna „synthese” genoemd);
22. „niet-geïsoleerd tussenproduct”: een tussenproduct dat tijdens de synthese niet opzettelijk wordt verwijderd (behalve voor bemonstering) uit de apparatuur waarin de synthese plaatsvindt. Deze apparatuur omvat het reactievat, de bijbehorende apparatuur en alle apparatuur waar de stof of stoffen tijdens een continue stroming of een batchprocedé doorheen gaan alsook het buizenstelsel voor de overbrenging van het ene vat naar het andere ten behoeve van de volgende reactiestap, maar omvat niet de tanks of andere vaten waarin de stof of stoffen na de vervaardiging worden bewaard;
23. „Agentschap”: het Europees Agentschap voor chemische stoffen, opgericht bij Verordening (EG) nr. 1907/2006;
24. „bevoegde instantie”: de instantie, instanties of organen die de lidstaten hebben aangewezen om de uit deze verordening voortvloeiende verplichtingen uit te voeren;
25. „gebruik”: elke vorm van verwerking, formulering, consumptie, opslag, bewaring, behandeling, overbrenging in containers, overbrenging van de ene container naar de andere, vermenging, vervaardiging van een voorwerp of elke andere toepassing;
26. „leverancier”: een fabrikant, importeur, downstreamgebruiker of distributeur die een stof als zodanig, of in een mengsel, of een mengsel in de handel brengt;
27. „metaallegering”: een macroscopisch homogeen metaal dat bestaat uit twee of meer chemische elementen die dusdanig met elkaar zijn verbonden dat zij niet vlot via mechanische middelen kunnen worden gescheiden. Voor de toepassing van deze verordening worden metaallegeringen als mengsels beschouwd;
28. „UN RTDG”: aanbevelingen van de Verenigde Naties over het vervoer van gevaarlijke goederen;
29. „informatieverstreker”: de fabrikant of importeur, dan wel de groep fabrikanten of importeurs die informatie verstrekt aan het Agentschap;
30. „wetenschappelijk onderzoek en wetenschappelijke ontwikkeling”: wetenschappelijke proefneming, analyse of chemisch onderzoek in gecontroleerde omstandigheden;
31. „ondergrens”: grenswaarde voor ingedeelde verontreinigingen, additieven of afzonderlijke bestanddelen van een stof of een mengsel, boven welke zij mede bepalen of de stof, respectievelijk het mengsel moet worden ingedeeld;
32. „concentratiegrens”: drempel voor verontreinigingen, additieven of afzonderlijke bestanddelen van een stof of een mengsel, die doorslaggevend kan zijn voor de indeling van de stof, respectievelijk het mengsel;
33. „onderverdeling”: onderscheid binnen gevarenklassen op basis van de blootstellingsroute of de aard van de effecten;
34. „M-factor”: een vermenigvuldigingsfactor. Deze is van toepassing op de concentratie van een stof die ingedeeld is als gevaarlijk voor het aquatisch milieu, acuut categorie 1 of chronisch categorie 1, en die gebruikt wordt om middels de sommatiemethode de indeling te bepalen van een mengsel waarin de stof aanwezig is;
35. „pakket”: het volledige verpakkingsproduct, bestaande uit de verpakking en de inhoud;
36. „verpakking”: een of meer houders en andere onderdelen of materialen die nodig zijn om de inhoud te bevatten en andere veiligheidsfuncties te vervullen;
37. „tussenverpakking”: verpakkingsmiddel tussen de binnenverpakkingen of de voorwerpen en de buitenverpakking.

### Artikel 3

#### **Gevaarlijke stoffen en mengsels en specificatie van de gevarenklassen**

Een stof of mengsel waarvoor de criteria voor fysische gevaren, gezondheidsgevaren of milieugevaren van de delen 2 tot en met 5 van bijlage I vervuld zijn, is gevaarlijk en wordt ingedeeld in de toepasselijke gevarenklassen van die bijlage.

Indien in bijlage I de gevarenklassen onderverdeeld zijn op grond van de blootstellingsroute of de aard van de effecten, wordt de stof of het mengsel volgens die onderverdeling ingedeeld.

### Artikel 4

#### **Algemene indelings-, etiketterings- en verpakkingsverplichtingen**

1. Fabrikanten, importeurs en downstreamgebruikers delen stoffen en mengsels in overeenkomstig titel II alvorens zij ze in de handel brengen.

2. Onverminderd de in lid 1 bedoelde verplichtingen, delen fabrikanten, producenten van voorwerpen en importeurs stoffen die niet op de markt verkrijgbaar zijn in overeenkomstig titel II:

- a) indien een stof op grond van artikel 6, artikel 7, lid 1 of lid 5, artikel 17 of artikel 18 van Verordening (EG) nr. 1907/2006 moet worden geregistreerd;
- b) indien een stof op grond van artikel 7, lid 2, of artikel 9 van Verordening (EG) nr. 1907/2006 moet worden aangemeld.

3. Indien voor een stof een geharmoniseerde indeling en etikettering overeenkomstig titel V geldt op grond van een vermelding in bijlage VI, deel 3, wordt de stof overeenkomstig die vermelding ingedeeld en wordt de indeling van de stof voor de onder die vermelding vallende gevarenklassen of onderverdelingen daarvan niet bepaald overeenkomstig titel II.

Evenwel wordt een stof die ook valt onder een of meer gevarenklassen of onderverdelingen daarvan welke niet door een vermelding in bijlage VI, deel 3, worden bestreken, voor die gevarenklassen of onderverdelingen toch overeenkomstig titel II bepaald.

4. Indien een stof of mengsel als gevaarlijk is ingedeeld, zorgen de leveranciers ervoor dat die stof of dat mengsel geëtiketteerd en verpakt wordt overeenkomstig de titels III en IV voordat zij het in de handel brengen.

5. Bij het vervullen van hun verantwoordelijkheden als bedoeld in lid 4, kunnen distributeurs de indeling van een stof of mengsel gebruiken zoals die overeenkomstig titel II door een actor in de toeleveringsketen is bepaald.

6. Bij het vervullen van hun verantwoordelijkheden als bedoeld in de leden 1 en 4, kunnen downstreamgebruikers de indeling van een stof of mengsel gebruiken zoals die overeenkomstig titel II door een actor in de toeleveringsketen is bepaald, mits zij de samenstelling van de stof of het mengsel niet wijzigen.

7. Een mengsel als bedoeld in bijlage II, deel 2, dat een stof bevat die als gevaarlijk is ingedeeld, mag niet in de handel worden gebracht, tenzij het overeenkomstig titel III is geëtiketteerd.

8. Voor de toepassing van deze verordening worden de in bijlage I, punt 2.1, bedoelde voorwerpen ingedeeld, geëtiketteerd en verpakt overeenkomstig de voorschriften voor stoffen en mengsels, voordat zij in de handel worden gebracht.

9. Leveranciers in een toeleveringsketen werken samen om aan de indelings-, etiketterings- en verpakkingsverplichtingen van deze verordening te voldoen.

10. Stoffen en mengsels worden uitsluitend in de handel gebracht indien zij voldoen aan deze verordening.

## TITEL II

## GEVARENINDELING

## HOOFDSTUK 1

**Inventarisatie en bestudering van informatie**

## Artikel 5

**Inventarisatie en bestudering van de over stoffen beschikbare informatie**

1. Fabrikanten, importeurs en downstreamgebruikers van een stof inventariseren de relevante beschikbare informatie om te bepalen of aan de stof een materieel, gezondheids- of milieugevaar verbonden is zoals omschreven in bijlage I, en met name de volgende informatie:

- a) volgens de in artikel 8, lid 3, genoemde methoden gegenereerde gegevens;
- b) epidemiologische gegevens en ervaringen over de effecten op de mens, bijvoorbeeld gegevens over beroepsmatige blootstelling en uit ongevallendatabases;
- c) andere overeenkomstig punt 1 van bijlage XI bij Verordening (EG) nr. 1907/2006 gegenereerde informatie;
- d) nieuwe wetenschappelijke informatie;
- e) andere uit internationaal erkende chemische programma's verkregen informatie.

De informatie heeft betrekking op de vorm of de fysische toestand waarin de stof in de handel wordt gebracht en waarin de stof naar redelijke verwachting zal worden gebruikt.

2. Fabrikanten, importeurs en downstreamgebruikers bestuderen de in lid 1 bedoelde informatie om na te gaan of die adequaat, betrouwbaar en wetenschappelijk geldig is met het oog op de evaluatie overeenkomstig hoofdstuk 2 van deze titel.

## Artikel 6

**Inventarisatie en bestudering van de over mengsels beschikbare informatie**

1. De fabrikanten, importeurs en downstreamgebruikers van een mengsel inventariseren de relevante beschikbare informatie over het mengsel zelf of over de stoffen die het bevat, om te bepalen of aan het mengsel een materieel, gezondheids- of milieugevaar verbonden is zoals omschreven in bijlage I, en met name de volgende informatie:

- a) volgens de in artikel 8, lid 3, genoemde methoden gegenereerde gegevens over het mengsel zelf of de stoffen die het bevat;

- b) epidemiologische gegevens en ervaringen over de effecten op de mens van het mengsel zelf of van de stoffen die het bevat, bijvoorbeeld gegevens over beroepsmatige blootstelling en uit ongevallendatabases;
- c) andere overeenkomstig punt 1 van bijlage XI bij Verordening (EG) nr. 1907/2006 gegenereerde informatie over het mengsel zelf of de stoffen die het bevat;
- d) andere uit internationaal erkende chemische programma's verkregen informatie over het mengsel zelf of over de stoffen die het bevat.

De informatie heeft betrekking hebben op de vorm of de fysische toestand waarin de stof in de handel wordt gebracht en, voor zover van toepassing, waarin de stof naar redelijke verwachting zal worden gebruikt.

2. Indien de in lid 1 bedoelde informatie over het mengsel zelf beschikbaar is en de fabrikant, importeur of downstreamgebruiker zich ervan heeft vergewist dat die informatie adequaat en betrouwbaar en, indien toepasselijk, wetenschappelijk geldig is, gebruikt de fabrikant, importeur of downstreamgebruiker die informatie voor de evaluatie overeenkomstig hoofdstuk 2 van deze titel, behoudens de leden 3 en 4.

3. Voor de evaluatie van mengsels overeenkomstig hoofdstuk 2 van deze titel ten aanzien van de gevarenklassen „mutageniteit in geslachtscellen”, „kankerverwekkendheid” en „giftigheid voor de voortplanting” als bedoeld in bijlage I, punten 3.5.3.1, 3.6.3.1 en 3.7.3.1, gebruikt de fabrikant, importeur of downstreamgebruiker alleen de in lid 1 bedoelde relevante beschikbare informatie voor de stoffen waaruit het mengsel bestaat.

Indien voorts de beschikbare testgegevens over het mengsel zelf duiden op in geslachtscellen mutagene, kankerverwekkende of voor de voortplanting giftige effecten die niet uit de informatie van de afzonderlijke stoffen naar voren gekomen zijn, worden ook die gegevens in aanmerking genomen.

4. Voor de evaluatie van mengsels overeenkomstig hoofdstuk 2 van deze titel ten aanzien van de eigenschappen „biologische afbraak en bioaccumulatie” in de gevarenklasse „gevaar voor het aquatisch milieu” als bedoeld in bijlage I, punten 4.1.2.8 en 4.1.2.9, gebruikt de fabrikant, importeur of downstreamgebruiker alleen de in lid 1 bedoelde relevante beschikbare informatie voor de stoffen waaruit het mengsel bestaat.

5. Indien voor het mengsel zelf geen of ontoereikende testgegevens als bedoeld in lid 1 beschikbaar zijn, gebruikt de fabrikant, importeur of downstreamgebruiker andere beschikbare informatie over de afzonderlijke stoffen en soortgelijke geteste mengsels die ook relevant geacht kunnen worden om na te gaan of het mengsel gevaarlijk is, mits de fabrikant, importeur of downstreamgebruiker zich ervan heeft vergewist dat de informatie adequaat en betrouwbaar is met het oog op de evaluatie overeenkomstig artikel 9, lid 4.

## Artikel 7

### Proeven op dieren en mensen

1. Wanneer voor de toepassing van deze verordening nieuwe proeven worden gedaan, mogen alleen proeven op dieren in de zin van Richtlijn 86/609/EEG worden uitgevoerd als daar geen alternatieven voor zijn die voldoende betrouwbare en kwalitatieve gegevens opleveren.

2. Voor de toepassing van deze verordening zijn proeven op niet-menselijke primaten verboden.

3. Voor de toepassing van deze verordening zijn proeven op mensen verboden. Uit andere bronnen, bijvoorbeeld klinische studies, verkregen gegevens kunnen evenwel voor de toepassing van deze verordening worden gebruikt.

## Artikel 8

### Genereren van nieuwe informatie over stoffen en mengsels

1. Om na te gaan of aan een stof of mengsel een gezondheids- of milieugevaar zoals omschreven in bijlage I van deze verordening verbonden is, kan de fabrikant, importeur of downstreamgebruiker nieuwe proeven uitvoeren, mits hij eerst alle andere manieren om informatie te genereren, waaronder het toepassen van de regels van punt 1 van bijlage XI bij Verordening (EG) nr. 1907/2006, heeft onderzocht.

2. Om na te gaan of aan een stof of mengsel een of meer van de in bijlage I, deel 2, bedoelde fysische gevaren verbonden zijn, voert de fabrikant, importeur of downstreamgebruiker de in dat deel voorgeschreven proeven uit, tenzij er al adequate en betrouwbare gegevens beschikbaar zijn.

3. De in lid 1 bedoelde proeven worden uitgevoerd volgens een van de volgende methoden:

- a) de in artikel 13, lid 3, van Verordening (EG) nr. 1907/2006 bedoelde testmethoden;

of

- b) deugdelijke wetenschappelijke beginselen die internationaal zijn erkend, of methoden die volgens internationale procedures zijn gevalideerd.

4. Ingeval de fabrikant, importeur of downstreamgebruiker nieuwe ecotoxicologische of toxicologische proeven en analyses uitvoert, worden die uitgevoerd met inachtneming van artikel 13, lid 4, van Verordening (EG) nr. 1907/2006.

5. Uiterlijk vanaf 1 januari 2014 worden nieuwe proeven voor fysische gevaren die voor de toepassing van deze verordening worden verricht, uitgevoerd volgens een toepasselijk erkend kwaliteitsborgingsysteem of door laboratoria die aan een toepasselijke erkende norm voldoen.

6. Proeven die met het oog op de toepassing van deze verordening worden verricht, worden uitgevoerd op de stof of het mengsel in de vorm(en) of de fysische toestand(en) waarin de stof of het mengsel in de handel wordt gebracht en waarin het naar redelijke verwachting wordt gebruikt.

#### HOOFDSTUK 2

### **Evaluatie van de informatie over de gevaren en bepaling van de indeling**

#### Artikel 9

### **Evaluatie van de informatie over de gevaren van stoffen en mengsels**

1. Fabrikanten, importeurs en downstreamgebruikers van een stof of mengsel evalueren de overeenkomstig hoofdstuk 1 van deze titel geïnventariseerde informatie aan de hand van de indelingscriteria voor elke gevaar Klasse of onderverdeling daarvan in bijlage I, delen 2 tot en met 5, om de aan de stof of het mengsel verbonden gevaren te identificeren.

2. Bij de evaluatie van over een stof of mengsel beschikbare testgegevens die zijn verkregen met andere dan de in artikel 8, lid 3, bedoelde testmethoden, vergelijken fabrikanten, importeurs en downstreamgebruikers de gebruikte testmethoden met de in dat artikel aangegeven methoden om na te gaan of de gebruikte methoden van invloed zijn op de in lid 1 van dit artikel bedoelde evaluatie.

3. Indien de criteria niet rechtstreeks op de beschikbare geïnventariseerde informatie kunnen worden toegepast, maken fabrikanten, importeurs en downstreamgebruikers een evaluatie door bepaling van de bewijskracht op basis van een beoordeling door deskundigen overeenkomstig bijlage I bij deze verordening, punt 1.1.1, waarbij zij alle beschikbare informatie in aanmerking nemen die van invloed is op de bepaling van de gevaren van de stof of het mengsel, met inachtneming van punt 1.2 van bijlage XI bij Verordening (EG) nr. 1907/2006.

4. Indien alleen de in artikel 6, lid 5, bedoelde informatie beschikbaar is, maken fabrikanten, importeurs en downstreamgebruikers voor de evaluatie gebruik van de in punt 1.1.3 en in elk punt van de delen 3 en 4 van bijlage I bedoelde extrapolatieprincipes.

Indien echter toepassing van de extrapolatieprincipes, noch van de beginselen betreffende het gebruik van de beoordeling door deskundigen en bewijskrachtbepaling zoals beschreven in deel 1 van bijlage I bij deze verordening met die informatie mogelijk is, evalueren fabrikanten, importeurs en downstreamgebruikers de informatie met behulp van de andere methode(n) zoals beschreven in elk punt van de delen 3 en 4 van bijlage I.

5. Bij het beoordelen van de beschikbare informatie voor indeling, bezien de fabrikanten, importeurs en downstreamgebruikers de vorm(en) of de fysische toestand(en) waarin de stof of het mengsel in de handel wordt gebracht en die naar redelijke verwachting wordt gebruikt.

#### Artikel 10

### **Concentratiegrenzen en M-factoren voor de indeling van stoffen en mengsels**

1. Specifieke concentratiegrenzen en algemene concentratiegrenzen zijn aan een stof toegewezen drempels waarop of waarboven de aanwezigheid van de betrokken stof als geïdentificeerde verontreiniging, additief of afzonderlijk bestanddeel in een andere stof of in een mengsel ertoe leidt dat de stof of het mengsel als gevaarlijk wordt ingedeeld.

Specifieke concentratiegrenzen worden vastgesteld door de fabrikant, importeur of downstreamgebruiker indien uit adequate en betrouwbare informatie blijkt dat het gevaar van een stof evident is wanneer die stof aanwezig is in een concentratie die kleiner is dan de in bijlage I, deel 2, voor de gevaar Klassen vermelde concentraties of onder de in bijlage I, delen 3, 4 en 5, voor de gevaar Klassen vermelde algemene concentratiegrenzen ligt.

In uitzonderlijke omstandigheden mag de fabrikant, importeur of downstreamgebruiker specifieke concentratiegrenzen vaststellen indien hij over adequate, betrouwbare en overtuigende wetenschappelijke informatie beschikt dat het gevaar van een als gevaarlijk ingedeelde stof niet evident is in een concentratie die hoger is dan de in bijlage I, deel 2, voor de toepasselijke gevaar Klassen vermelde concentraties of hoger dan de in bijlage I, delen 3, 4 en 5, voor de toepasselijke gevaar Klassen vermelde algemene concentratiegrenzen.

2. M-factoren voor stoffen die ingedeeld zijn als gevaarlijk voor het aquatisch milieu, acuut categorie 1 of chronisch categorie 1, worden door fabrikanten, importeurs en downstreamgebruikers vastgesteld.

3. In afwijking van lid 1 mogen voor geharmoniseerde gevaar Klassen of onderverdelingen van stoffen opgenomen in bijlage VI, deel 3, geen specifieke concentratiegrenzen als bedoeld in lid 1 worden vastgesteld.

4. In afwijking van lid 2 mogen voor geharmoniseerde gevaar Klassen of onderverdelingen van stoffen opgenomen in bijlage VI, deel 3, waarvoor in dat deel een M-factor is opgenomen, geen M-factoren als bedoeld in lid 2 worden vastgesteld.

Indien in bijlage VI, deel 3, geen M-factor is opgenomen voor stoffen die ingedeeld zijn als gevaarlijk voor het aquatisch milieu, acuut categorie 1 of chronisch categorie 1, wijst de fabrikant, importeur of downstreamgebruiker evenwel een M-factor toe op basis van de beschikbare gegevens voor de stof. Ingeval een mengsel dat een van deze stoffen bevat, door middel van de sommatiemethode door de fabrikant, importeur of downstreamgebruiker wordt ingedeeld, wordt deze vermenigvuldigingsfactor gebruikt.

5. Bij de vaststelling van de specifieke concentratiegrens of M-factor houden fabrikanten, importeurs en downstreamgebruikers rekening met de eventuele specifieke concentratiegrenzen of M-factoren die in de inventaris van indelingen en etiketteringen voor die stof zijn opgenomen.

6. Overeenkomstig lid 1 vastgestelde specifieke concentratiegrenzen hebben voorrang op de concentraties in de toepasselijke punten van bijlage I, deel 2, of de algemene concentratiegrenzen voor indeling in de toepasselijke punten van bijlage I, delen 3, 4 en 5.

7. Het Agentschap verstrekt nadere richtsnoeren voor de toepassing van de leden 1 en 2.

#### Artikel 11

##### Ondergrenzen

1. Indien een stof een andere, op zichzelf als gevaarlijk ingedeelde stof bevat, hetzij als geïdentificeerde verontreiniging, additief of afzonderlijk bestanddeel, wordt hiermee voor de indeling rekening gehouden als de concentratie van de geïdentificeerde verontreiniging, het additief of het afzonderlijke bestanddeel gelijk aan of groter is dan de toepasselijke ondergrens overeenkomstig lid 3.

2. Indien een mengsel als bestanddeel of als geïdentificeerde verontreiniging of additief een als gevaarlijk ingedeelde stof bevat, wordt voor de indeling met deze informatie rekening gehouden als de concentratie van die stof gelijk aan of groter is dan de toepasselijke ondergrens overeenkomstig lid 3.

3. De in de leden 1 en 2 bedoelde ondergrens wordt bepaald zoals aangegeven in punt 1.1.2.2 van bijlage I.

#### Artikel 12

##### Nadere evaluatie van specifieke gevallen

Indien bij de overeenkomstig artikel 9 uitgevoerde evaluatie de volgende eigenschappen of effecten worden vastgesteld, nemen fabrikanten, importeurs en downstreamgebruikers die voor de indeling in aanmerking:

- uit adequate, betrouwbare informatie blijkt dat de fysische gevaren van een stof of mengsel in de praktijk anders zijn dan in tests;
- uit overtuigende wetenschappelijke experimentele gegevens blijkt dat de stof of het mengsel niet biologisch beschikbaar is en vastgesteld is dat die gegevens adequaat en betrouwbaar zijn;
- uit adequate, betrouwbare wetenschappelijke informatie blijkt dat er synergetische of antagonistische effecten kunnen optreden tussen de stoffen van een mengsel waarvoor de evaluatie is uitgevoerd op grond van de informatie over de stoffen waaruit het mengsel bestaat.

#### Artikel 13

##### Beslissing over de indeling van stoffen en mengsels

Indien uit de overeenkomstig de artikelen 9 en 12 uitgevoerde evaluatie blijkt dat de aan de stof of het mengsel verbonden gevaren voldoen aan de criteria voor indeling in een of meer gevarenklassen of onderverdelingen daarvan in bijlage I, delen 2 tot en met 5, delen fabrikanten, importeurs en downstreamgebruikers de stof of het mengsel ten aanzien van de toepasselijke gevarenklasse(n) of onderverdelingen in door toekenning van:

- een of meer gevarencategorieën voor elke toepasselijke gevarenklasse of onderverdeling daarvan;
- behoudens artikel 21, een of meer gevarenaanduidingen voor elke overeenkomstig het bepaalde onder a) toegekende gevarencategorie.

#### Artikel 14

##### Specifieke voorschriften voor de indeling van mengsels

1. Indien uit de evaluatie van de informatie een van de volgende eigenschappen blijkt, heeft dat geen invloed op de indeling van het mengsel:

- de reactie van de stoffen in het mengsel met atmosferische gassen, met name zuurstof, koolstofdioxide, waterdamp, waarbij andere stoffen in een lage concentratie ontstaan, verloopt langzaam;
- de reactie van de stoffen in het mengsel met andere stoffen in het mengsel, waarbij weer andere stoffen in een lage concentratie ontstaan, verloopt langzaam;
- de stoffen in het mengsel kunnen door zelfpolymerisatie oligomeren of polymeren in een lage concentratie vormen.

2. Een mengsel hoeft niet wegens ontplofbare, oxiderende of ontvlambare eigenschappen als bedoeld in bijlage I, deel 2, te worden ingedeeld indien aan een van de volgende eisen is voldaan:

- de stoffen in het mengsel hebben geen enkele van die eigenschappen en volgens de gegevens waarover de leverancier beschikt is het weinig waarschijnlijk dat bij het mengsel een dergelijk gevaar aanwezig is;
- bij wijziging van de samenstelling van een mengsel zijn er wetenschappelijke aanwijzingen dat een evaluatie van de informatie over het mengsel niet tot een wijziging van de indeling zal leiden;
- indien het mengsel in de handel gebracht wordt in de vorm van een aerosol, voldoet het aan artikel 8, lid 1 bis, van Richtlijn 75/324/EEG van de Raad van 20 mei 1975 inzake onderlinge aanpassing van de wetgevingen van de lidstaten betreffende aerosol <sup>(1)</sup>.

<sup>(1)</sup> PB L 147 van 9.6.1975, blz. 40.

## Artikel 15

**Evaluatie van de indeling van stoffen en mengsels**

1. Fabrikanten, importeurs en downstreamgebruikers nemen alle redelijke maatregelen die hen ter beschikking staan om zich op de hoogte te stellen van nieuwe wetenschappelijke of technische informatie die gevolgen kan hebben voor de indeling van de stoffen of mengsels die zij in de handel brengen. Ingeval een fabrikant, importeur of downstreamgebruiker kennis heeft van informatie die hij adequaat en betrouwbaar acht, voert die fabrikant, importeur of downstreamgebruiker onverwijld een nieuwe evaluatie overeenkomstig dit hoofdstuk uit.

2. Indien de fabrikant, importeur of downstreamgebruiker wijzigingen aanbrengt in de samenstelling van een mengsel dat als gevaarlijk is ingedeeld, voert hij een nieuwe evaluatie overeenkomstig dit hoofdstuk uit indien:

- a) de oorspronkelijke concentratie van een of meer van de gevaarlijke bestanddelen gelijk is aan of hoger is dan de in tabel 1.2 van bijlage I, deel 1, vermelde concentratiegrenzen;
- b) de samenstelling is gewijzigd door een of meer bestanddelen te vervangen of toe te voegen in concentraties die gelijk zijn aan of hoger zijn dan de in artikel 11, lid 3, bedoelde ondergrens.

3. Een nieuwe evaluatie overeenkomstig de leden 1 en 2 is niet nodig indien er valide wetenschappelijke bewijzen zijn dat dit niet tot een andere indeling zal leiden.

4. Fabrikanten, importeurs en downstreamgebruikers wijzigen de indeling van de stof of het mengsel overeenkomstig de resultaten van de nieuwe evaluatie, tenzij er in bijlage VI, deel 3, geharmoniseerde indelingen of onderverdelingen voor de stoffen zijn vermeld.

5. Voor de toepassing van de leden 1 tot en met 4 van dit artikel zijn, ingeval de stof of het mengsel onder het toepassingsgebied van Richtlijn 91/414/EEG of Richtlijn 98/8/EG valt, de voorschriften van die richtlijnen eveneens van toepassing.

## Artikel 16

**Indeling van stoffen die in de inventaris van indelingen en etiketteringen zijn opgenomen**

1. Fabrikanten en importeurs mogen een stof anders indelen dan in de inventaris van indelingen en etiketteringen is gebeurd, mits zij bij de kennisgeving overeenkomstig artikel 40 de redenen voor de indeling aan het Agentschap meedelen.

2. Lid 1 is niet van toepassing als de in de inventaris van indelingen en etiketteringen opgenomen indeling een geharmoniseerde indeling is die in bijlage VI, deel 3, is opgenomen.

## TITEL III

**VOORLICHTING OVER DE GEVAREN VIA HET ETIKET**

## HOOFDSTUK 1

**Inhoud van het etiket**

## Artikel 17

**Algemene voorschriften**

1. Als gevaarlijk ingedeelde stoffen en mengsels die zijn verpakt, worden van een etiket voorzien dat de volgende elementen bevat:

- a) de naam, het adres en het telefoonnummer van de leverancier(s);
- b) de nominale hoeveelheid van de stof of het mengsel in de aan het publiek aangeboden verpakking, tenzij die hoeveelheid elders op de verpakking wordt vermeld;
- c) productidentificaties zoals vermeld in artikel 18;
- d) indien toepasselijk, gevarenpictogrammen overeenkomstig artikel 19;
- e) indien toepasselijk, signaalwoorden overeenkomstig artikel 20;
- f) indien toepasselijk, gevarenaanduidingen overeenkomstig artikel 21;
- g) indien toepasselijk, de toepasselijke veiligheidsaanbevelingen overeenkomstig artikel 22;
- h) indien toepasselijk, een rubriek voor aanvullende informatie overeenkomstig artikel 25.

2. Het etiket wordt gesteld in de officiële taal of talen van de lidstaat (lidstaten) waar de stof of het mengsel in de handel wordt gebracht, tenzij door de betrokken lidstaat (lidstaten) anders wordt bepaald.

Leveranciers mogen op het etiket meer talen gebruiken dan door de lidstaten wordt vereist, mits in alle gebruikte talen dezelfde gegevens worden vermeld.

## Artikel 18

**Productidentificaties**

1. Het etiket bevat gegevens aan de hand waarvan de stof of het mengsel kan worden geïdentificeerd (hierna „productidentificaties” genoemd).

Voor de identificatie van de stof of het mengsel wordt dezelfde term gebruikt als in het veiligheidsinformatieblad dat wordt opgesteld overeenkomstig artikel 31 van Verordening (EG) nr. 1907/2006 (hierna „veiligheidsinformatieblad” genoemd), onverminderd artikel 17, lid 2, van deze verordening.

2. De productidentificatie van een stof bestaat ten minste uit het volgende:

- a) indien de stof in bijlage VI, deel 3, is opgenomen, een naam en een identificatienummer zoals aldaar vermeld;
- b) indien de stof niet in bijlage VI, deel 3, is opgenomen, maar wel in de inventaris van indelingen en etiketteringen, een naam en een identificatienummer zoals aldaar vermeld;
- c) indien de stof noch in bijlage VI, deel 3, noch in de inventaris van indelingen en etiketteringen is opgenomen, het door de CAS toegekende nummer, hierna „CAS-nummer” genoemd, en de naam volgens de nomenclatuur van de IUPAC, hierna „IUPAC-nomenclatuur” genoemd, of het CAS-nummer en een andere internationale chemische naam of namen; of
- d) indien er geen CAS-nummer beschikbaar is, de naam volgens de IUPAC-nomenclatuur of een andere internationale chemische naam of namen.

Indien de naam volgens de IUPAC-nomenclatuur meer dan 100 tekens lang is, mag een van de andere namen worden gebruikt (gangbare naam, handelsnaam, afkorting) als bedoeld in sectie 2.1.2 van bijlage VI van Verordening (EG) nr. 1907/2006, mits in de kennisgeving overeenkomstig artikel 40 de naam volgens de IUPAC-nomenclatuur en de gebruikte andere naam worden vermeld.

3. De productidentificatie van een mengsel bestaat uit:

- a) de handelsnaam of de benaming van het mengsel, en
- b) de identiteit van alle stoffen in het mengsel die bijdragen tot de indeling van het mengsel wat betreft acute toxiciteit, huidcorrosie of ernstig oogletsel, mutageniteit in geslachtscellen, kankerverwekkendheid, voortplantingstoxiciteit, sensibilisatie van de luchtwegen of de huid, specifieke doelorgaan toxiciteit (STOT) of aspiratiegevaar.

Indien op grond van het bepaalde onder b) een groot aantal chemische namen zou moeten worden vermeld, kan met vier chemische namen worden volstaan, tenzij meer dan vier namen nodig zijn om de aard en de ernst van de gevaren aan te geven.

Vermeld worden de chemische namen van de stoffen die in eerste instantie aanleiding geven tot de belangrijkste gezondheidsgevaaren waarop de indeling en de gekozen bijbehorende gevarenaanduidingen gebaseerd zijn.

#### Artikel 19

### Gevarenpictogrammen

1. Het etiket bevat de van toepassing zijnde gevarenpictogrammen, bedoeld om specifieke informatie over het desbetreffende gevaar te verstrekken.

2. Onverminderd artikel 33, voldoen de gevarenpictogrammen aan de voorschriften van bijlage I, punt 1.2.1, en bijlage V.

3. Het gevarenpictogram voor elke specifieke indeling is aangegeven in de tabellen met de etiketteringselementen voor elke gevarenklasse in bijlage I.

#### Artikel 20

### Signaalwoorden

1. Op het etiket wordt het toepasselijke signaalwoord vermeld overeenkomstig de indeling van de gevaarlijke stof of het gevaarlijke mengsel.

2. Voor elke specifieke indeling is het signaalwoord aangegeven in de tabellen met de etiketteringselementen voor elke gevarenklasse in bijlage I, delen 2 tot en met 5.

3. Als het signaalwoord „gevaar” op het etiket vermeld staat, wordt het signaalwoord „waarschuwing” niet vermeld.

#### Artikel 21

### Gevarenaanduidingen

1. Op het etiket worden de toepasselijke gevarenaanduidingen vermeld overeenkomstig de indeling van de gevaarlijke stof of het gevaarlijk mengsel.

2. Voor elke indeling zijn de toepasselijke gevarenaanduidingen aangegeven in de tabellen met de etiketteringselementen voor elke gevarenklasse in bijlage I, delen 2 tot en met 5.

3. Indien een stof in bijlage VI, deel 3, is opgenomen, wordt de gevarenaanduiding voor elke specifieke indeling onder de vermelding in dat deel op het etiket gebruikt, samen met de in lid 2 bedoelde gevarenaanduidingen voor elke andere indeling die niet onder de bedoelde vermelding valt.

4. De te gebruiken gevarenaanduidingen staan vermeld in bijlage III.

#### Artikel 22

### Veiligheidsaanbevelingen

1. Op het etiket worden de toepasselijke veiligheidsaanbevelingen vermeld.

2. De veiligheidsaanbevelingen worden gekozen uit die welke zijn vermeld in de tabellen met de etiketteringselementen voor elke gevarenklasse in bijlage I, delen 2 tot en met 5.

3. De veiligheidsaanbevelingen worden gekozen aan de hand van de criteria in bijlage IV, deel 1, met inachtneming van de gevarenaanduidingen en de beoogde of geïdentificeerde vormen van gebruik van de stof of het mengsel.

4. De te gebruiken veiligheidsaanbevelingen staan vermeld in bijlage IV, deel 2.



*Artikel 23***Afwijkingen van de van de etiketteringsvoorschriften in bijzondere gevallen**

De specifieke etiketteringsvoorschriften van bijlage I, punt 1.3, gelden voor:

- a) verplaatsbare gasflessen;
- b) gasflessen bedoeld voor propaan, butaan of vloeibaar petroleumgas;
- c) aërosolen en van een vaste verstuiver voorziene houders die stoffen of mengsels bevatten die als gevaarlijk bij aspiratie zijn ingedeeld;
- d) metalen in massieve vorm, legeringen, mengsels die polymeren bevatten, mengsels die elastomeren bevatten;
- e) ontplofbare stoffen als bedoeld in bijlage I, punt 2.1, die in de handel worden gebracht met het oog op hun explosieve of pyrotechnische eigenschappen.

*Artikel 24***Verzoek tot gebruik van een andere chemische naam**

1. De fabrikant, importeur of downstreamgebruiker van een stof in een mengsel kan het Agentschap verzoeken een andere chemische naam voor die stof in een mengsel die de belangrijkste functionele groepen aangeeft dan wel een andere benaming te mogen gebruiken, indien de stof voldoet aan de criteria van bijlage I, deel 1, en indien hij kan aantonen dat bekendmaking van de chemische identiteit van die stof op het etiket of het veiligheidsinformatieblad de vertrouwelijkheid van zijn werkzaamheden, en in het bijzonder zijn intellectuele eigendom, in gevaar zou brengen.

2. De in lid 1 van dit artikel bedoelde verzoeken worden gedaan in het in artikel 111 van Verordening (EG) nr. 1907/2006 bedoelde formaat; voor deze verzoeken wordt een vergoeding geheven.

De hoogte van de vergoedingen wordt door de Commissie vastgesteld volgens de in artikel 54, lid 2, van deze verordening bedoelde regelgevingsprocedure.

Voor het MKB wordt een lagere vergoeding vastgesteld.

3. Het Agentschap kan de fabrikant, importeur of downstreamgebruiker die het verzoek heeft ingediend om nadere informatie vragen indien dat nodig is om een besluit te nemen. Indien het Agentschap binnen zes weken na het verzoek of de ontvangst van nadere informatie geen bezwaar aantekent, wordt het gebruik van de naam waarom is verzocht, geacht te zijn toegestaan.

4. Indien het Agentschap het verzoek niet aanvaardt, zijn de praktische regelingen bedoeld in artikel 118, lid 3, van Verordening (EG) nr. 1907/2006 van toepassing.

5. Het Agentschap stelt de bevoegde autoriteiten in overeenstemming met lid 3 of lid 4, in kennis van het resultaat van het

verzoek en verstrekt hen de door de fabrikant, importeur of downstreamgebruiker ingediende informatie.

6. Ingeval uit nieuwe informatie blijkt dat het gebruik van een andere chemische naam niet voldoende informatie verschaft voor de nodige veiligheidsaanbevelingen inzake gezondheid en veiligheid op het werk en voor minimalisatie van de risico's van het omgaan met het mengsel, herbezieet het Agentschap zijn besluit betreffende het gebruik van de andere chemische naam. Het Agentschap kan zijn besluit intrekken of wijzigen bij een besluit waarin het specificeert welke andere chemische naam mag worden gebruikt. Indien het Agentschap zijn besluit intrekt of wijzigt, zijn de praktische regelingen bedoeld in artikel 118, lid 3, van Verordening (EG) nr. 1907/2006 van toepassing.

7. Indien het gebruik van een andere chemische naam is toegestaan maar de indeling van de stof in een mengsel waarvoor de naam is gebruikt niet langer aan de criteria vastgelegd in bijlage I, afdeling 1.4.1, voldoet, gebruikt de leverancier van die stof in een mengsel de productidentificatie van de stof, overeenkomstig artikel 18, op het etiket en in het veiligheidsblad, en niet de andere chemische naam.

8. Voor stoffen, als zodanig of in een mengsel, waarvoor een verantwoording overeenkomstig artikel 10, onder a), xi), van Verordening (EG) nr. 1907/2006 betreffende informatie als bedoeld in artikel 119, lid 2, onder f) of onder g), van die verordening door het Agentschap als geldig is aanvaard, mag de fabrikant, importeur of downstreamgebruiker op het etiket en in het veiligheidsblad een naam gebruiken die op het internet openbaar wordt gemaakt. Voor stoffen in een mengsel waarvoor artikel 119, lid 2, onder f) of onder g), van die verordening niet langer van toepassing is, mag de fabrikant, importeur of downstreamgebruiker het Agentschap verzoeken een andere chemische naam, als beschreven in lid 1 van dit artikel, te mogen gebruiken.

9. Indien de leverancier van een mengsel vóór 1 juni 2015 overeenkomstig artikel 15 van Richtlijn 1999/45/EG heeft aangetoond dat bekendmaking van de chemische identiteit van een stof in een mengsel de vertrouwelijke aard van zijn werkzaamheden in gevaar zou brengen, kan hij voor de toepassing van deze verordening van de overeengekomen andere naam gebruik blijven maken.

*Artikel 25***Aanvullende informatie op het etiket**

1. Indien als gevaarlijk ingedeelde stoffen of mengsels de in bijlage II, punten 1.1 en 1.2, bedoelde fysische of gezondheidseigenschappen hebben, wordt een vermelding opgenomen in de rubriek voor aanvullende informatie op het etiket.

De te gebruiken vermeldingen zijn opgenomen in bijlage II, punten 1.1 en 1.2, en bijlage III, deel 2.

Indien een stof is opgenomen in bijlage VI, deel 3, worden de daarin voor die stof opgenomen aanvullende gevarenaanduidingen opgenomen in de rubriek voor aanvullende informatie op het etiket.

2. Indien als gevaarlijk ingedeelde stoffen of mengsels binnen de werkingssfeer van Richtlijn 91/414/EEG vallen, wordt een vermelding opgenomen in de rubriek voor aanvullende informatie op het etiket.

De vermelding wordt geformuleerd overeenkomstig bijlage II, deel 4, en bijlage III, deel 3, bij deze verordening.

3. De leverancier kan in de rubriek voor aanvullende informatie op het etiket andere aanvullende informatie dan bedoeld in de leden 1 en 2 opnemen, mits die informatie het niet moeilijker maakt de in artikel 17, lid 1, onder a) tot en met g), genoemde etiketteringselementen te onderscheiden en die informatie nadere bijzonderheden verstrekt en niet in tegenspraak is met of twijfel zaait over de geldigheid van de met die etiketteringselementen verstrekte informatie.

4. Vermeldingen zoals „niet toxisch”, „onschadelijk”, „niet vervuילend”, „milieuvriendelijk” of andere vermeldingen die aangeven dat een stof of mengsel niet gevaarlijk is dan wel andere aanduidingen of aanbevelingen die niet stroken met de indeling van die stof of dat mengsel, mogen niet op het etiket of de verpakking van stoffen en mengsels worden aangebracht.

5. Indien een stof overeenkomstig bijlage I, deel 5, wordt ingedeeld:

- a) wordt er geen gevarenpictogram op het etiket geplaatst;
- b) worden de signaalwoorden, gevarenaanduidingen en veiligheidsaanbevelingen in de rubriek voor aanvullende informatie van het etiket geplaatst.

6. Stoffen en mengsels die als gevaarlijk ingedeelde stoffen bevatten, worden geëtiketteerd overeenkomstig bijlage II, deel 2.

De aanduidingen worden geformuleerd overeenkomstig bijlage III, deel 3, en worden in de rubriek voor aanvullende informatie van het etiket geplaatst.

Op het etiket wordt voorts de in artikel 18 bedoelde productidentificatie vermeld, alsmede de naam, het adres en het telefoonnummer van de leverancier van het mengsel.

#### Artikel 26

##### **Voorrangsbeginselen voor gevarenpictogrammen**

1. Indien de indeling van een stof of mengsel aanleiding zou geven tot meer dan één gevarenpictogram op het etiket, gelden de volgende voorrangsregels teneinde het aantal vereiste gevarenpictogrammen te beperken:

- a) indien het gevarenpictogram „GHS01” van toepassing is, is het gebruik van de gevarenpictogrammen „GHS02” en „GHS03” facultatief, uitgezonderd in gevallen waarin meer dan een van deze gevarenpictogrammen verplicht is;
- b) indien het gevarenpictogram „GHS06” van toepassing is, wordt het gevarenpictogram „GHS07” niet gebruikt;

c) indien het gevarenpictogram „GHS05” van toepassing is, wordt het gevarenpictogram „GHS07” niet gebruikt voor huid- of oogirritatie;

d) indien het gevarenpictogram „GHS08” van toepassing is voor inhaliatieallergeen, wordt het gevarenpictogram „GHS07” niet gebruikt voor huidallergeen of huid- en oogirritatie.

2. Indien de indeling van een stof of mengsel aanleiding zou geven tot meer dan één gevarenpictogram voor dezelfde gevarenklasse, wordt op het etiket voor elke betrokken gevarenklasse het gevarenpictogram voor de ernstigste gevarencategorie aangebracht.

Voor stoffen van bijlage VI, deel 3, die tevens ingedeeld zijn overeenkomstig titel II, wordt op het etiket voor elke betrokken gevarenklasse het pictogram voor de ernstigste gevarencategorie aangebracht.

#### Artikel 27

##### **Voorrangsbeginselen voor gevarenaanduidingen**

Indien een stof of mengsel in verscheidene gevarenklassen of in verscheidene onderverdelingen van een gevarenklasse is ingedeeld, worden op het etiket alle uit de indeling voortvloeiende gevarenaanduidingen aangebracht, tenzij dat onmiskenbaar leidt tot dubbele of overbodige aanduidingen.

#### Artikel 28

##### **Voorrangsbeginselen voor veiligheidsaanbevelingen**

1. Indien de keuze van de veiligheidsaanbevelingen ertoe leidt dat bepaalde veiligheidsaanbevelingen duidelijk overbodig dan wel voor de stof, het mengsel of de verpakking in kwestie duidelijk onnodig zijn, worden die veiligheidsaanbevelingen niet op het etiket vermeld.

2. Indien de stof of het mengsel aan het publiek wordt aangeboden, wordt één veiligheidsaanbeveling betreffende de verwijdering van die stof of dat mengsel alsook betreffende de verwijdering van de verpakking, op het etiket vermeld, tenzij dit niet vereist is uit hoofde van artikel 22 van deze verordening.

In alle andere gevallen zijn veiligheidsaanbevelingen betreffende verwijdering niet vereist als duidelijk is dat de verwijdering van de stof of het mengsel of de verpakking geen gevaar voor de gezondheid van de mens of voor het milieu oplevert.

3. Op het etiket worden niet meer dan zes veiligheidsaanbevelingen vermeld, tenzij dat nodig is om de aard en de ernst van de gevaren aan te geven.

#### Artikel 29

##### **Vrijstelling van de voorschriften voor het etiketteren en verpakken**

1. Indien de vorm van de verpakking van die aard is, of de verpakking dermate klein is dat onmogelijk kan worden voldaan aan het bepaalde in artikel 31, namelijk dat het etiket gesteld is in

de officiële talen van de lidstaat waar de stof of het mengsel in de handel wordt gebracht, dan worden de etiketteringselementen als bedoeld in de eerste alinea van artikel 17, lid 2, verstrekt overeenkomstig bijlage I, afdeling 1.5.1.

2. Indien niet alle informatie op het etiket kan worden verstrekt zoals in lid 1 is vermeld, mag de informatie op het etiket worden beperkt overeenkomstig bijlage I, afdeling 1.5.2.

3. Indien een gevaarlijke stof of mengsel als bedoeld in bijlage II, deel 5 aan het publiek wordt aangeboden zonder verpakking, gaat de stof of het mengsel vergezeld van een afschrift van de etiketteringselementen overeenkomstig artikel 17.

4. Voor bepaalde als gevaarlijk voor het milieu ingedeelde mengsels kan in uitzonderingen op bepaalde voorschriften inzake milieuetikettering of in specifieke voorschriften met betrekking tot milieuetikettering worden voorzien overeenkomstig de in artikel 53 bedoelde procedure, indien een beperking van de milieueffecten kan worden aangetoond. Die uitzonderingen of specifieke voorschriften worden omschreven in bijlage II, deel 2.

5. De Commissie kan het Agentschap verzoeken nadere ontwerpen voor vrijstelling van de etiketterings- en verpakkingsvoorschriften op te stellen en die aan haar voor te leggen.

#### Artikel 30

##### Aanpassing van de informatie op het etiket

1. De leverancier zorgt ervoor dat het etiket onverwijld wordt bijgewerkt wanneer de indeling en/of etikettering van die stof of dat mengsel wordt gewijzigd, wanneer er een nieuw, ernstiger gevaar is of wanneer er uit hoofde van artikel 25 nieuwe aanvullende etiketteringselementen vereist zijn, rekening houdend met de aard van de wijziging voor de bescherming van de gezondheid van de mens en het milieu. Leveranciers werken samen overeenkomstig artikel 4, lid 9, om de wijzigingen van de etikettering onverwijld uit te voeren.

2. Ingeval andere wijzigingen van de etikettering vereist zijn dan die, bedoeld in lid 1, zorgt de leverancier ervoor dat het etiket binnen 18 maanden wordt bijgewerkt.

3. De leverancier van een stof die, of een mengsel dat onder het toepassingsgebied van Richtlijn 91/414/EEG of Richtlijn 98/8/EG valt, werkt het etiket bij overeenkomstig die richtlijnen.

#### HOOFDSTUK 2

##### Aanbrengen van etiketten

#### Artikel 31

##### Algemene voorschriften voor het aanbrengen van etiketten

1. Etiketten worden duurzaam op één of meer oppervlakken van de onmiddellijke verpakking van de stof of het mengsel bevestigd en zijn horizontaal leesbaar wanneer de verpakking op normale wijze neergezet wordt.

2. De kleur en de lay-out van etiketten zijn zodanig dat het gevarenpictogram duidelijk afsteekt.

3. De in artikel 17, lid 1, bedoelde etiketteringselementen worden duidelijk en onuitwisbaar aangebracht. Zij steken duidelijk tegen de achtergrond af en de grootte en spatiering zijn zo gekozen dat zij gemakkelijk leesbaar zijn.

4. De vorm, kleur en grootte van een gevarenpictogram, alsook de afmetingen van het etiket voldoen aan bijlage I, deel 1.2.1.

5. Een etiket is niet vereist indien de in artikel 17, lid 1, bedoelde etiketteringselementen duidelijk op de verpakking zelf zijn aangebracht. In dat geval gelden de etiketteringsvoorschriften van dit hoofdstuk voor de informatie die op de verpakking wordt verstrekt.

#### Artikel 32

##### Plaatsing van de informatie op het etiket

1. De gevarenpictogrammen, signaalwoorden, gevarenaanduidingen en veiligheidsaanbevelingen worden bij elkaar op het etiket geplaatst.

2. De leverancier kan de volgorde van de gevarenaanduidingen vrij kiezen. Onverminderd lid 4, worden alle gevarenaanduidingen op het etiket per taal gegroepeerd.

De leverancier kan de volgorde van de veiligheidsaanbevelingen op het etiket kiezen. Onverminderd lid 4, worden veiligheidsaanbevelingen op het etiket evenwel per taal gegroepeerd.

3. Groepen van gevarenaanduidingen en groepen van veiligheidsaanbevelingen als bedoeld in lid 2 worden per taal bij elkaar op het etiket geplaatst.

4. De aanvullende informatie wordt in de rubriek voor aanvullende informatie als bedoeld in artikel 25 geplaatst, en weergegeven bij de andere etiketteringselementen, bepaald in artikel 17, lid 1, onder a) tot en met g).

5. Naast het gebruik in pictogrammen mogen kleuren in andere gedeelten van het etiket worden gebruikt om speciale etiketteringsvoorschriften toe te passen.

6. Etiketteringselementen die voortvloeien uit de voorschriften van andere communautaire besluiten, worden geplaatst in de rubriek voor aanvullende informatie op het etiket als bedoeld in artikel 25.

#### Artikel 33

##### Specifieke voorschriften voor de etikettering van buitenverpakkingen, binnenverpakkingen en enkele verpakkingen

1. Indien een verpakking bestaat uit een buiten-, binnen- en enigerlei tussenverpakking, en de buitenverpakking voldoet aan de etiketteringsvoorschriften voor het vervoer van gevaarlijke goederen, worden de binnen- en tussenverpakking overeenkomstig deze verordening geëtiketteerd. Ook de buitenverpakking kan overeenkomstig deze verordening worden geëtiketteerd.

Indien de bij deze verordening voorgeschreven gevarenpictogrammen verband houden met dezelfde gevaren als die van het vervoer van gevaarlijke goederen, behoeven de bij deze verordening voorgeschreven gevarenpictogrammen niet op de buitenverpakking te worden aangebracht.

2. Indien de buitenverpakking van een pakket niet aan de etiketteringsvoorschriften voor het vervoer van gevaarlijke goederen behoeft te voldoen, worden zowel de buiten- als enigerlei binnenverpakking, waaronder de tussenverpakking, overeenkomstig deze verordening geëtiketteerd. Indien de binnen- of tussenverpakking goed zichtbaar zijn door de buitenverpakking heen, behoeft de buitenverpakking evenwel niet te worden geëtiketteerd.

3. Enkele verpakkingen die aan de voorschriften voor het vervoer van gevaarlijke goederen voldoen, worden geëtiketteerd overeenkomstig deze verordening en overeenkomstig de voorschriften voor het vervoer van gevaarlijke goederen. Indien de bij deze verordening voorgeschreven gevarenpictogrammen verband houden met dezelfde gevaren als die van het vervoer van gevaarlijke goederen, behoeven de bij deze verordening voorgeschreven gevarenpictogrammen niet te worden aangebracht.

#### Artikel 34

### Verslag over de mededeling van informatie over veilig gebruik van chemische stoffen

1. Uiterlijk op 20 januari 2012 voert het Agentschap een onderzoek uit naar de mededeling van informatie aan het publiek over het veilige gebruik van stoffen en mengsels, en naar de mogelijke behoefte aan aanvullende informatie op het etiket. Dit onderzoek gebeurt in overleg met de bevoegde instanties en de belanghebbende partijen en bouwt, indien toepasselijk, voort op de beste praktijken ter zake.

2. Onverminderd de etiketteringsvoorschriften vastgelegd in deze titel, legt de Commissie, op basis van het in lid 1 bedoelde onderzoek, het Europees Parlement en de Raad een verslag voor, en dient zij, indien zulks gerechtvaardigd is, een wetgevingsvoorstel tot wijziging van deze verordening in.

#### TITEL IV

### VERPAKKING

#### Artikel 35

### Verpakking

1. Verpakkingen die gevaarlijke stoffen of gevaarlijke mengsels bevatten, voldoen aan de volgende voorschriften:

- de verpakking is zodanig ontworpen en uitgevoerd dat verlies van de inhoud wordt voorkomen, behalve als andere, specifiekere veiligheidsvoorzieningen zijn voorgeschreven;
- het materiaal van verpakking en sluiting mag niet door de inhoud kunnen worden beschadigd of daarmee een gevaarlijke verbinding kunnen vormen;
- de verpakking en sluiting moeten in alle onderdelen zo stevig en sterk zijn dat zij niet losraken en afdoende tegen elke normale behandeling bestand zijn;

- verpakkingen die voorzien zijn van een herbruikbare sluiting, moeten zodanig zijn ontworpen dat de verpakking herhaalde malen opnieuw kan worden gesloten zonder verlies van inhoud.

2. Verpakkingen die een gevaarlijke stof of een gevaarlijk mengsel bevatten en aan het publiek aangeboden worden, mogen niet door vorm of ontwerp de actieve nieuwsgierigheid van kinderen wekken of prikkelen noch de consument in verwarring brengen, noch een gelijkaardige aanbiedingsvorm of ontwerp hebben als gebruikt voor levensmiddelen, diervoeders, geneesmiddelen of cosmetische producten, wat de consument zou misleiden.

Een verpakking die een aan de voorschriften van bijlage II, punt 3.1.1, beantwoordende stof of mengsel bevat, moet voorzien zijn van een kinderveilige sluiting overeenkomstig bijlage II, punten 3.1.2, 3.1.3 en 3.1.4.2.

Een verpakking die een aan de voorschriften van bijlage II, punt 3.2.1, beantwoordende stof of mengsel bevat, moet voorzien zijn van een tastbare gevarenaanduiding overeenkomstig bijlage II, punt 3.2.2.

3. Verpakkingen van stoffen en mengsels worden geacht aan de in lid 1, onder a), b) en c), vermelde voorschriften te beantwoorden, als ze voldoen aan de eisen voor vervoer van gevaarlijke goederen door de lucht, over zee, over de weg, per spoor of over de binnenwateren.

#### TITEL V

### HARMONISATIE VAN DE INDELING EN ETIKETTERING VAN STOFFEN EN DE INVENTARIS VAN INDELINGEN EN ETIKETTERINGEN

#### HOOFDSTUK 1

### Opstelling van een geharmoniseerde indeling en etikettering van stoffen

#### Artikel 36

### Harmonisatie van de indeling en etikettering van stoffen

1. Een stof die voor de volgende eigenschappen voldoet aan de in bijlage I opgenomen criteria, wordt normaliter een geharmoniseerde indeling en etikettering toegekend overeenkomstig artikel 37:

- sensibilisatie van de luchtwegen, categorie 1 (bijlage I, afdeling 3.4);
- mutageniteit in geslachtscellen, categorie 1A, 1B of 2 (bijlage I, afdeling 3.5);
- kankerverwekkendheid, categorie 1A, 1B of 2 (bijlage I, afdeling 3.6);
- voortplantingstoxiciteit, categorie 1A, 1B of 2 (bijlage I, afdeling 3.7).

2. Een stof die een werkzame stof is in de zin van Richtlijn 91/414/EEG of Richtlijn 98/8/EG, wordt normaliter een geharmoniseerde indeling en etikettering toegekend. Op die stoffen zijn de procedures vastgelegd in artikel 37, leden 1, 4, 5 en 6 van toepassing.

3. Indien een stof voldoet aan de criteria voor andere dan de in lid 1 bedoelde gevarenklassen of onderverdelingen, en niet onder lid 2 valt, kan per geval ook aan bijlage VI een geharmoniseerde indeling en etikettering overeenkomstig artikel 37 worden toegevoegd indien wordt aangetoond dat deze maatregelen op Gemeenschapsniveau nodig zijn.

#### Artikel 37

##### Procedure voor de harmonisatie van de indeling en etikettering van stoffen

1. Een bevoegde instantie kan bij het Agentschap een voorstel voor een geharmoniseerde indeling en etikettering van stoffen of voor een herziening daarvan indienen, in voorkomend geval met specifieke concentratiegrenzen of M-factoren.

Het voorstel wordt ingediend in het formaat dat in bijlage VI, deel 2, is aangegeven en bevat de in bijlage VI, deel 1, genoemde relevante informatie.

2. Een fabrikant, importeur, downstreamgebruiker van een stof kan bij het Agentschap een voorstel voor een geharmoniseerde indeling en etikettering van die stof indienen, indien van toepassing met specifieke concentratiegrenzen of M-factoren, mits voor die stof ten aanzien van de in het voorstel aangegeven gevarenklasse of onderverdeling daarvan geen vermelding is opgenomen in bijlage VI, deel 3.

Het voorstel wordt opgesteld overeenkomstig de desbetreffende gedeelten van de punten 1, 2 en 3 van bijlage I bij Verordening (EG) nr. 1907/2006 en volgens het formaat in deel B van het chemische veiligheidsrapport van punt 7 van die bijlage. Het bevat de relevante informatie zoals aangegeven in bijlage VI, deel 1, bij deze verordening. Artikel 111 van Verordening (EG) nr. 1907/2006 is van toepassing.

3. Indien het voorstel van de fabrikant, importeur of downstreamgebruiker de geharmoniseerde indeling en etikettering van een stof overeenkomstig artikel 36, lid 3, betreft, gaat het vergezeld van de vergoeding die door de Commissie volgens de in artikel 54, lid 2, bedoelde regelgevingsprocedure is vastgesteld.

4. Het krachtens artikel 76, lid 1, onder c), van Verordening (EG) nr. 1907/2006 ingestelde Comité risicobeoordeling van het Agentschap brengt binnen achttien maanden na ontvangst van een voorstel overeenkomstig lid 1 of lid 2 daarover advies uit en stelt de betrokken partijen in de gelegenheid opmerkingen te maken. Het Agentschap zendt het advies en de eventuele opmerkingen aan de Commissie.

5. Indien de Commissie de harmonisatie van de indeling en etikettering van de desbetreffende stof juist acht, legt zij onverwijld een ontwerp-besluit voor betreffende de opneming

van die stof in tabel 3.1 van bijlage VI, deel 3, samen met de bijbehorende indeling en etiketteringselementen en, in voorkomend geval, de specifieke concentratiegrenzen of M-factoren.

Tot en met 31 mei 2015 wordt onder dezelfde voorwaarden een overeenkomstige vermelding opgenomen in tabel 3.2 van bijlage VI, deel 3.

Die maatregel, die beoogt niet-essentiële onderdelen van deze verordening te wijzigen, wordt vastgesteld volgens de in artikel 54, lid 3, bedoelde regelgevingsprocedure met toetsing. Om dwingende urgente redenen kan de Commissie gebruikmaken van de in artikel 54, lid 4, bedoelde urgentieprocedure.

6. Fabrikanten, importeurs en downstreamgebruikers die over nieuwe informatie beschikken welke tot een wijziging kan leiden van de geharmoniseerde indeling en etiketteringselementen van een stof van bijlage VI, deel 3, dienen bij de bevoegde autoriteit in een van de lidstaten waar de stof in de handel is gebracht een voorstel in overeenkomstig lid 2, tweede alinea.

#### Artikel 38

##### Inhoud van adviezen en besluiten betreffende geharmoniseerde indelingen en etiketteringen in bijlage VI, deel 3 — toegankelijkheid van informatie

1. Adviezen als bedoeld in artikel 37, lid 4, en besluiten overeenkomstig artikel 37, lid 5, bevatten als minimum voor elke stof:

- a) de identiteit van de stof overeenkomstig de punten 2.1 tot en met 2.3.4 van bijlage VI bij Verordening (EG) nr. 1907/2006;
- b) de met redenen omklede geharmoniseerde indeling van de stof als bedoeld in artikel 36;
- c) de specifieke concentratiegrenzen of M-factoren, indien van toepassing;
- d) de in artikel 17, lid 1, onder d), e) en f), gespecificeerde etiketteringselementen voor de stof, vergezeld van aanvullende gevarenaanduidingen voor de stof, bepaald overeenkomstig artikel 25, lid 1;
- e) eventuele andere parameters aan de hand waarvan het gezondheids- of milieugevaar van mengsels die de desbetreffende gevaarlijke stof bevatten, of van stoffen die de gevaarlijke stof als geïdentificeerde verontreiniging, additief of bestanddeel bevatten, kan worden beoordeeld, indien toepasselijk.

2. Bij het openbaar maken van een advies of besluit als bedoeld in artikel 37, leden 4 en 5, van deze verordening, zijn de artikelen 118, lid 2, en artikel 119 van Verordening (EG) nr. 1907/2006 van toepassing.

## HOOFDSTUK 2

**Inventaris van indelingen en etiketteringen**

## Artikel 39

**Toepassingsgebied**

Dit hoofdstuk is van toepassing op:

- a) stoffen die overeenkomstig Verordening (EG) nr. 1907/2006 moeten worden geregistreerd;
- b) binnen het toepassingsgebied van artikel 1 vallende stoffen die aan de criteria voor indeling als gevaarlijk voldoen en in de handel worden gebracht als zodanig of in een mengsel in een concentratie die groter is dan de in deze verordening of in Richtlijn 1999/45/EG, indien toepasselijk, vermelde concentratiegrenzen, zodat het mengsel als gevaarlijk wordt ingedeeld.

## Artikel 40

**Verplichting om het Agentschap in kennis te stellen**

1. Een fabrikant of importeur, of een groep fabrikanten of importeurs, hierna „de informatieverstrekkers” genoemd, die een stof als bedoeld in artikel 39 in de handel brengt, verstrekt het Agentschap de volgende informatie voor opname in de in artikel 42 bedoelde inventaris:

- a) de identiteit van de informatieverstrekker(s) die verantwoordelijk is (zijn) voor het in de handel brengen van de stof(fen) overeenkomstig punt 1 van bijlage VI bij Verordening (EG) nr. 1907/2006;
- b) de identiteit van de stof(fen) overeenkomstig de punten 2.1 tot en met 2.3.4 van bijlage VI bij Verordening (EG) nr. 1907/2006;
- c) de indeling van de stof(fen) overeenkomstig artikel 13;
- d) indien een stof in een aantal, maar niet alle gevarenklassen of onderverdelingen daarvan is ingedeeld, een vermelding of dit het geval is wegens ontbrekende gegevens, gegevens die niet overtuigend zijn of gegevens die wel overtuigend zijn maar onvoldoende zijn om een indeling op te baseren;
- e) indien van toepassing, specifieke concentratiegrenzen of M-factoren overeenkomstig artikel 10, met redenen omkleed aan de hand van de desbetreffende gedeelten van de hoofdstukken 1, 2 en 3 van bijlage I bij Verordening (EG) nr. 1907/2006;
- f) de in artikel 17, lid 1, onder d), e) en f), gespecificeerde etiketteringselementen voor de stof(fen), vergezeld van aanvullende gevarenaanduidingen voor de stof, bepaald overeenkomstig artikel 25, lid 1.

De onder a) tot en met f) bedoelde informatie wordt niet meegedeeld als zij bij het Agentschap is ingediend in het kader van een registratie overeenkomstig Verordening (EG) nr. 1907/2006 of als zij door die informatieverstrekker al is gemeld.

De informatieverstrekker legt deze informatie voor in het overeenkomstig artikel 111 van Verordening (EG) nr. 1907/2006 vastgestelde formaat.

2. De in lid 1 genoemde informatie wordt door de betrokken informatieverstrekker(s) aangepast en aan het Agentschap meegedeeld wanneer op grond van de in artikel 15, lid 1, bedoelde herziening is besloten de indeling en etikettering van de stof te wijzigen.

3. Stoffen die op of na 1 december 2010 in de handel zijn gebracht, worden uiterlijk één maand nadat zij in de handel zijn gebracht overeenkomstig lid 1 gemeld.

Stoffen die vóór 1 december 2010 in de handel zijn gebracht, kunnen echter overeenkomstig lid 1 vóór die datum worden gemeld.

## Artikel 41

**Overeengekomen vermeldingen**

Wanneer de kennisgeving krachtens artikel 40, lid 1, leidt tot verschillende vermeldingen in de in artikel 42 bedoelde inventaris voor dezelfde stof, stellen de informatieverstrekkers en registranten alles in het werk om een overeengekomen vermelding in de inventaris tot stand te brengen. De informatieverstrekkers stellen het Agentschap hiervan op de hoogte.

## Artikel 42

**Inventaris van indelingen en etiketteringen**

1. Het Agentschap stelt een inventaris van indelingen en etiketteringen in de vorm van een databank op en houdt deze bij.

De overeenkomstig artikel 40, lid 1, verstrekte informatie wordt in de inventaris opgenomen, samen met de informatie die is ingediend in het kader van de registratie overeenkomstig Verordening (EG) nr. 1907/2006.

Informatie in de inventaris zoals bedoeld in artikel 119, lid 1, van Verordening (EG) nr. 1907/2006 is openbaar toegankelijk. Het Agentschap verleent de informatieverstrekkers en registranten die informatie over een stof hebben ingediend, toegang tot de overige gegevens die over die stof in de inventaris beschikbaar zijn overeenkomstig artikel 29, lid 1, van Verordening (EG) nr. 1907/2006. Zij verleent derden toegang tot die informatie overeenkomstig artikel 118 van die verordening.

2. Bij ontvangst van aangepaste informatie overeenkomstig artikel 40, lid 2, of artikel 41 werkt het Agentschap de inventaris bij.

3. Naast de in lid 1 bedoelde informatie legt het Agentschap, indien van toepassing, voor elke vermelding de volgende informatie vast:

- a) of voor de vermelding een geharmoniseerde indeling en etikettering op Gemeenschapsniveau bestaat, door opname in bijlage VI, deel 3;

- b) of het een gezamenlijke vermelding van registranten van dezelfde stof betreft, als bedoeld in artikel 11, lid 1, van Verordening (EG) nr. 1907/2006;
- c) of het een overeengekomen vermelding van twee of meer informatieverstrekkers of registranten als bedoeld in artikel 41 betreft;
- d) of de vermelding verschilt van een andere vermelding die al voor dezelfde stof in de inventaris is opgenomen.

De onder a) bedoelde informatie wordt bijgewerkt indien een besluit overeenkomstig artikel 37, lid 5, wordt genomen.

#### TITEL VI

### BEVOEGDE INSTANTIES EN HANDHAVING

#### Artikel 43

#### **Aanwijzing van bevoegde instanties en handhavinginstanties en samenwerking tussen instanties**

De lidstaten wijzen een of meer instanties aan die bevoegd zijn voor voorstellen voor geharmoniseerde indeling en etikettering alsook de instanties bevoegd voor de handhaving van de in deze verordening vastgelegde verplichtingen.

De bevoegde instanties en de voor handhaving bevoegde instanties werken onderling samen bij de uitvoering van hun taken overeenkomstig deze verordening en verlenen de bevoegde instanties van de overige lidstaten hiertoe alle noodzakelijke en nuttige steun.

#### Artikel 44

#### **Helpdesk**

De lidstaten richten een nationale helpdesk op om fabrikanten, importeurs, distributeurs of downstreamgebruikers en andere belangstellende partijen advies te verstrekken over hun respectieve verantwoordelijkheden en verplichtingen uit hoofde van deze verordening.

#### Artikel 45

#### **Aanwijzing van organen die verantwoordelijk zijn voor het ontvangen van informatie in verband met de gezondheid, met het oog op respons in noodgevallen**

1. De lidstaten wijzen een of meer organen aan die verantwoordelijk zijn voor het ontvangen van informatie die wordt verstrekt door de importeurs en downstreamgebruikers die mengsels in de handel brengen, met name wat betreft informatie die van belang is voor preventieve en curatieve maatregelen, in het bijzonder in het geval van respons in noodgevallen. Deze informatie behelst de chemische samenstelling van mengsels die in de handel worden gebracht en wegens hun gevolgen voor de gezondheid of hun fysische effecten als gevaarlijk worden ingedeeld, met inbegrip van de chemische identiteit van stoffen in mengsels waarvoor een verzoek tot gebruik van een andere chemische naam door het Agentschap overeenkomstig artikel 24 is aanvaard.

2. De aangewezen organen bieden alle nodige waarborgen inzake de vertrouwelijke behandeling van de ontvangen informatie. Deze informatie mag alleen worden gebruikt:

- a) om te reageren op medische verzoeken met het oog op zowel preventieve als curatieve maatregelen, met name bij spoedgevallen;
- en tevens
- b) op verzoek van de lidstaat, om middels statistische analyse te bepalen waar de risicobeheersmaatregelen vatbaar zijn voor verbetering.

De informatie mag niet voor andere doeleinden worden gebruikt.

3. De aangewezen organen beschikken over alle informatie die zij van de voor het in de handel brengen verantwoordelijke importeurs en downstreamgebruikers nodig hebben om hun taken uit te voeren.

4. Uiterlijk op 20 januari 2012 verricht de Commissie een evaluatie om te beoordelen of de in lid 1 bedoelde informatie kan worden geharmoniseerd, onder meer door een formaat vast te stellen voor het indienen van informatie door de importeurs en downstreamgebruikers bij de aangewezen organen. Op basis van deze evaluatie en na overleg met de belanghebbende partijen, zoals de Europese vereniging van antigifcentra en klinisch toxicologen (European Association of Poison Centres and Clinical Toxicologists — EAPCCT), kan de Commissie een verordening vaststellen waarin een bijlage aan deze verordening wordt toegevoegd.

Deze maatregelen, die beogen niet-essentiële onderdelen van deze verordening te wijzigen door haar aan te vullen, worden vastgesteld volgens de in artikel 54, lid 3, bedoelde regelgevingsprocedure met toetsing.

#### Artikel 46

#### **Handhaving en rapportage**

1. De lidstaten nemen alle nodige maatregelen, met inbegrip van het onderhouden van een systeem van officiële controles, om te waarborgen dat stoffen en mengsels niet in de handel worden gebracht tenzij zij overeenkomstig deze verordening ingedeeld, geëtiketteerd, aangemeld en verpakt zijn.

2. De lidstaten dienen elke vijf jaar vóór 1 juli bij het Agentschap een verslag in over de resultaten van de officiële controles en de andere genomen handhavingmaatregelen. Het eerste verslag wordt uiterlijk op 20 januari 2012 ingediend. Het Agentschap stelt deze verslagen beschikbaar aan de Commissie, die ze in aanmerking neemt bij het verslag dat zij overeenkomstig artikel 117 van Verordening (EG) nr. 1907/2006 opstelt.

3. Het in artikel 76, lid 1, onder f), van Verordening (EG) nr. 1907/2006 bedoelde forum voert de in artikel 77, lid 4, onder a) tot en met g), van Verordening (EG) nr. 1907/2006 vermelde taken uit betreffende de handhaving van de onderhavige verordening.

*Artikel 47***Sancties bij niet naleving**

De lidstaten stellen sancties voor bij niet-naleving van deze verordening en treffen alle nodige maatregelen om ervoor te zorgen dat de bepalingen van deze verordening worden toegepast. De sancties moeten doeltreffend, evenredig en afschrikkend zijn. De lidstaten stellen de Commissie uiterlijk op 20 juli 2010 op de hoogte van de sanctiebepalingen en stellen haar onverwijld op de hoogte van eventuele latere wijzigingen.

## TITEL VII

**GEMEENSCHAPPELIJKE EN SLOTBEPALINGEN***Artikel 48***Reclame**

1. Elke vorm van reclame voor een stof die als gevaarlijk is ingedeeld, moet melding maken van de desbetreffende gevaarclassen of gevarencategorieën.

2. Elke vorm van reclame voor een als gevaarlijk ingedeeld of onder artikel 25, lid 6, vallend mengsel waarbij een particulier een koopcontract kan sluiten zonder eerst het etiket te hebben gezien, moet melding maken van de op het etiket genoemde soort of soorten gevaren.

De eerste alinea geldt onverminderd Richtlijn 97/7/EG van het Europees Parlement en de Raad van 20 mei 1997 betreffende de bescherming van de consument bij op afstand gesloten overeenkomsten<sup>(1)</sup>.

*Artikel 49***Verplichting om informatie te bewaren en verzoeken om informatie**

1. De leverancier is gehouden alle informatie die hij uit hoofde van deze verordening voor de indeling en etikettering heeft gebruikt, te verzamelen en te bewaren gedurende ten minste tien jaar nadat de stof of het mengsel voor het laatst door de betrokken leverancier is geleverd.

De leverancier bewaart die informatie samen met de krachtens artikel 36 van Verordening (EG) nr. 1907/2006 vereiste informatie.

2. Indien een leverancier zijn activiteiten beëindigt, of zijn activiteiten geheel of gedeeltelijk overdraagt aan een derde, is degene die verantwoordelijk is voor de liquidatie van de onderneming van de leverancier of die de verantwoordelijkheid op zich neemt om de stof of het mengsel in kwestie in de handel te brengen, gehouden aan de verplichting van lid 1, in plaats van de leverancier.

3. De bevoegde instantie of de handhavingsautoriteiten van een lidstaat waarin een leverancier is gevestigd of het Agentschap kunnen de leverancier verzoeken hen de informatie als bedoeld in lid 1, eerste alinea, over te leggen.

Wanneer die informatie echter bij het Agentschap beschikbaar is uit hoofde van een registratie overeenkomstig Verordening (EG) nr. 1907/2006 of een kennisgeving overeenkomstig artikel 40 van deze verordening, gebruikt het Agentschap die informatie en wendt de instantie zich tot het Agentschap.

*Artikel 50***Taken van het Agentschap**

1. Het Agentschap verstrekt de lidstaten en de instellingen van de Gemeenschap zo goed mogelijk wetenschappelijk en technisch advies over vraagstukken in verband met chemische stoffen die binnen de bevoegdheid van het Agentschap vallen en overeenkomstig deze verordening aan het Agentschap worden voorgelegd.

2. Het secretariaat van het Agentschap dient:

- a) waar nodig technische en wetenschappelijke richtsnoeren en hulpmiddelen aan de industrie te verstrekken over hoe aan de verplichtingen vastgesteld in deze verordening moet worden voldaan;
- b) technische en wetenschappelijke richtsnoeren aan de bevoegde instanties te verstrekken over de werking van deze verordening en ondersteuning te verlenen aan de krachtens artikel 44 opgerichte helpdesks.

*Artikel 51***Vrij verkeer van goederen**

De lidstaten mogen het in de handel brengen van stoffen en mengsels die in overeenstemming zijn met deze verordening, en in voorkomend geval met communautaire besluiten die ter uitvoering van deze verordening zijn vastgesteld, niet verbieden, beperken of belemmeren om redenen die verband houden met de indeling, etikettering of verpakking van stoffen en mengsels.

*Artikel 52***Vrijwaringsclausule**

1. Wanneer een lidstaat gegronde redenen heeft om aan te nemen dat een stof of mengsel, hoewel ten aanzien daarvan aan de voorschriften van deze verordening wordt voldaan, niettemin een ernstig risico voor de gezondheid van de mens of voor het milieu vormt wegens de indeling, etikettering of verpakking ervan, kan die lidstaat passende voorlopige maatregelen nemen. De lidstaat stelt de Commissie, het Agentschap en de overige lidstaten daarvan onverwijld op de hoogte, met vermelding van de redenen voor zijn besluit.

2. Binnen zestig dagen na ontvangst van de informatie van de lidstaat neemt de Commissie volgens de in artikel 54, lid 2, bedoelde regelgevingsprocedure een besluit waarbij zij de voorlopige maatregel voor een in het besluit vastgelegde termijn goedkeurt dan wel de lidstaat verzoekt de voorlopige maatregel in te trekken.

<sup>(1)</sup> PB L 144 van 4.6.1997, blz. 19.



3. Indien een in lid 2 bedoelde voorlopige maatregel in verband met indeling of etikettering van een stof wordt goedgekeurd, dient de bevoegde instantie van de betrokken lidstaat volgens de in artikel 37 bedoelde procedure binnen drie maanden na het besluit van de Commissie bij het Agentschap een voorstel voor een geharmoniseerde indeling en etikettering in.

#### Artikel 53

### Aanpassing aan technische en wetenschappelijke vooruitgang

1. De Commissie kan artikel 6, lid 5, artikel 11, lid 3, artikelen 12, 14 en 18, lid 3, onder b), artikelen 23, 25 tot en met 29 en artikel 35, lid 2, tweede en derde alinea, en de bijlagen I tot en met VII aan de technische en wetenschappelijke vooruitgang aanpassen, waarbij zij terdege rekening houdt met de verdere ontwikkelingen betreffende het GHS op het niveau van de Verenigde Naties, met name VN-wijzigingen met betrekking tot het gebruik van informatie over soortgelijke mengsels, en neemt de ontwikkelingen in het kader van internationaal erkende chemische programma's en de gegevens uit ongevalldatabases in acht. Die maatregelen, die beogen niet-essentiële onderdelen van deze verordening te wijzigen, worden vastgesteld volgens de in artikel 54, lid 3, bedoelde regelgevingsprocedure met toetsing. Om dwingende urgente redenen kan de Commissie gebruikmaken van de in artikel 54, lid 4, bedoelde urgentieprocedure.

2. De lidstaten en de Commissie bevorderen, op een wijze die aansluit bij hun rol in de relevante fora van de Verenigde Naties, de harmonisatie van de criteria voor de indeling en etikettering van persistente, bioaccumulerende en toxische stoffen (PBT) en zeer persistente en sterk bioaccumulerende stoffen (zPzB) op het niveau van de VN.

#### Artikel 54

### Comitéprocedure

1. De Commissie wordt bijgestaan door het bij artikel 133 van Verordening (EG) nr. 1907/2006 ingestelde comité.

2. Wanneer naar dit lid wordt verwezen, zijn de artikelen 5 en 7 van Besluit 1999/468/EG van toepassing, met inachtneming van de bepalingen van artikel 8 van dat besluit.

De in artikel 5, lid 6, van Besluit 1999/468/EG bedoelde termijn wordt vastgesteld op drie maanden.

3. Wanneer naar dit lid wordt verwezen, zijn artikel 5 bis, leden 1 tot en met 4, en artikel 7 van Besluit 1999/468/EG van toepassing, met inachtneming van de bepalingen van artikel 8 van dat besluit.

4. Wanneer naar dit lid wordt verwezen, zijn artikel 5 bis, leden 1, 2, 4 en 6, en artikel 7 van Besluit 1999/468/EG van toepassing, met inachtneming van de bepalingen van artikel 8 van dat besluit.

#### Artikel 55

### Wijziging van Richtlijn 67/548/EEG

Richtlijn 67/548/EEG wordt als volgt gewijzigd:

1) Artikel 1, lid 2, tweede alinea, wordt geschrapt.

2) Artikel 4 wordt als volgt gewijzigd:

a) lid 3 wordt vervangen door:

„3. Indien voor een bepaalde stof een vermelding met de geharmoniseerde indeling en etikettering in deel 3 van bijlage VI bij Verordening (EG) nr. 1272/2008 van het Europees Parlement en de Raad van 16 december 2008 betreffende de indeling, etikettering en verpakking van stoffen en mengsels (\*) is opgenomen, wordt die stof overeenkomstig die vermelding ingedeeld en zijn de leden 1 en 2 niet van toepassing op de door die vermelding bestreken gevaarscategorieën.

(\*) PB L 353 van 31.12.2008, blz. 1”;

b) lid 4 wordt geschrapt.

3) Artikel 5 wordt als volgt gewijzigd:

a) lid 1, tweede alinea, wordt geschrapt;

b) lid 2 wordt vervangen door:

„2. De in lid 1, eerste alinea, bedoelde maatregelen zijn van toepassing totdat de stof in deel 3 van bijlage VI bij Verordening (EG) nr. 1272/2008 is opgenomen voor de door die vermelding bestreken gevaarscategorieën of totdat volgens de procedure van artikel 37 van Verordening (EG) nr. 1272/2008 besloten is de stof niet op te nemen.”.

4) Artikel 6 wordt vervangen door:

„De fabrikanten, distributeurs en importeurs van stoffen die wel in Einesc maar niet in deel 3 van bijlage VI bij Verordening (EG) nr. 1272/2008 zijn opgenomen, stellen een onderzoek in teneinde kennis te nemen van de bestaande relevante en toegankelijke gegevens betreffende de eigenschappen van die stoffen. Aan de hand van die gegevens moeten zij gevaarlijke stoffen verpakken en voorlopig kenmerken overeenkomstig de artikelen 22 tot en met 25 van deze richtlijn en de criteria van bijlage VI van deze richtlijn.”.

5) In artikel 22 worden de leden 3 en 4 geschrapt.

6) Artikel 23, lid 2, wordt als volgt gewijzigd:

a) onder a) worden de woorden „bijlage I” vervangen door „deel 3 van bijlage VI bij Verordening (EG) nr. 1272/2008”;

b) onder c) worden de woorden „bijlage I” vervangen door „deel 3 van bijlage VI bij Verordening (EG) nr. 1272/2008”;

- c) onder d) worden de woorden „bijlage I” vervangen door „deel 3 van bijlage VI bij Verordening (EG) nr. 1272/2008”; — punt 2.1.1, onder a) en b),  
— punt 2.2, onder a) en b),
- d) onder e) worden de woorden „bijlage I” vervangen door „deel 3 van bijlage VI bij Verordening (EG) nr. 1272/2008”; — punt 2.3, onder a) en b),  
— punt 3.1.1, onder a) en b),
- e) onder f) worden de woorden „bijlage I” vervangen door „deel 3 van bijlage VI bij Verordening (EG) nr. 1272/2008”. — punt 3.3, onder a) en b),  
— punt 3.4, onder a) en b),
- 7) Artikel 24, lid 4, tweede alinea, wordt geschrapt. — punt 4.1.1, onder a) en b),
- 8) Artikel 28 wordt geschrapt. — punt 4.2.1, onder a) en b),
- 9) In artikel 31 worden de leden 2 en 3 geschrapt. — punt 5.1.1, onder a) en b),
- 10) Het volgende artikel wordt ingevoegd na artikel 32:  
— punt 5.2.1, onder a) en b),  
— punt 5.3.1, onder a) en b),  
— punt 5.4.1, onder a) en b),  
— punt 6.1, onder a) en b),  
— punt 6.2, onder a) en b),  
— punt 7.1, onder a) en b),  
— punt 7.2, onder a) en b),  
— punt 8.1, onder a) en b),  
— punt 8.2, onder a) en b),  
— punt 9.1, onder a) en b),  
— punt 9.2, onder a) en b),  
— punt 9.3, onder a) en b),  
— punt 9.4, onder a) en b);
- „Artikel 32 bis
- Overgangsbepalingen betreffende etikettering en verpakking van stoffen**
- De artikelen 22 tot en met 25 zijn vanaf 1 december 2010 niet van toepassing voor stoffen.”
- 11) Bijlage I wordt geschrapt.
- Artikel 56*
- Wijziging van Richtlijn 1999/45/EG**
- Richtlijn 1999/45/EG wordt als volgt gewijzigd:
- 1) In artikel 3, lid 2, eerste streepje, worden de woorden „bijlage I van Richtlijn 67/548/EEG” vervangen door „deel 3 van bijlage VI van Verordening (EG) nr. 1272/2008 van het Europees Parlement en de Raad van 16 december 2008 betreffende de indeling, etikettering en verpakking van stoffen en mengsels (\*).  
— punt 9.1, onder a) en b),  
— punt 9.2, onder a) en b),  
— punt 9.3, onder a) en b),  
— punt 9.4, onder a) en b);
- (\* PB L 353 van 31.12.2008, blz. 1”.
- 2) De woorden „bijlage I van Richtlijn 67/548/EEG” worden vervangen door „deel 3 van bijlage VI bij Verordening (EG) nr. 1272/2008” in:
- a) artikel 3, lid 3;
- b) artikel 10, lid 2, punten 2.3.1, 2.3.2, 2.3.3 en 2.4, eerste streepje;
- c) bijlage II, punten a) en b) en de laatste alinea van de inleiding;
- d) bijlage II, deel A,  
— punt 1.1.1, onder a) en b),  
— punt 1.2, onder a) en b),
- e) bijlage II, de inleidende alinea van deel B;
- f) bijlage III, punten a) en b), van de inleiding;
- g) bijlage III, deel A, afdeling a) Aquatisch milieu  
— punt 1.1, onder a) en b),  
— punt 2.1, onder a) en b),  
— punt 3.1, onder a) en b),  
— punt 4.1, onder a) en b),  
— punt 5.1, onder a) en b),  
— punt 6.1, onder a) en b);

- h) bijlage III, deel A, afdeling b) Niet-aquatisch milieu, punt 1.1, onder a) en b);
- i) bijlage V, deel A, punten 3 en 4;
- j) bijlage V, deel B, punt 9;
- k) bijlage VI, deel A, derde kolom van de tabel onder punt 2;
- l) bijlage VI, deel B, punt 1, eerste alinea, en eerste kolom van de tabel onder punt 3;
- m) bijlage VIII, aanhangsel 1, tweede kolom van de tabel;
- n) bijlage VIII, aanhangsel 2, tweede kolom van de tabel.
- 3) In bijlage VI, deel B, punt 1, derde alinea, eerste streepje, en vijfde alinea, worden de woorden „bijlage I” vervangen door „deel 3 van bijlage VI bij Verordening (EG) nr. 1272/2008”.
- 4) In bijlage VI, deel B, punt 4.2, laatste alinea, worden de woorden „bijlage I van Richtlijn 67/548/EEG (19e aanpassing)” vervangen door „deel 3 van bijlage VI bij Verordening (EG) nr. 1272/2008”.

#### Artikel 57

#### Wijziging van Verordening (EG) Nr. 1907/2006 vanaf de inwerkingtreding van deze verordening

Verordening (EG) nr. 1907/2006 wordt vanaf de inwerkingtreding van deze verordening als volgt gewijzigd:

- 1) Artikel 14, lid 2, wordt als volgt gewijzigd:
- a) punt b) wordt vervangen door:
- „b) de specifieke concentratiegrenzen die zijn vastgesteld in deel 3 van bijlage VI bij Verordening (EG) nr. 1272/2008 van het Europees Parlement en de Raad van 16 december 2008 betreffende de indeling, etikettering en verpakking van stoffen en mengsels (\*);
- b bis) voor als gevaarlijk voor het aquatisch milieu ingedeelde stoffen en indien in bijlage VI, deel 3, bij Verordening (EG) nr. 1272/2008 een vermenigvuldigingsfactor (M-factor) is vermeld, de ondergrens van bijlage I, tabel 1.1, bij die verordening, aangepast volgens de berekeningsmethode van bijlage I, deel 4.1, bij die verordening;
- \_\_\_\_\_
- (\* PB L 353 van 31.12.2008, blz. 1”;
- b) punt e) wordt vervangen door:
- „e) de specifieke concentratiegrenzen in een overeengekomen vermelding in de inventaris van indelingen en etiketteringen bedoeld in artikel 42 van Verordening (EG) nr. 1272/2008;
- e bis) voor als gevaarlijk voor het aquatisch milieu ingedeelde stoffen en indien een M-factor is

2) Artikel 31 wordt als volgt gewijzigd:

a) lid 8 wordt vervangen door:

„8. Een veiligheidsinformatieblad wordt gratis op papier of elektronisch verstrekt uiterlijk op de datum waarop de stof of het mengsel voor het eerst is geleverd.”;

b) het volgende lid wordt toegevoegd:

„10. Indien stoffen in de periode tussen de inwerkingtreding van Verordening (EG) nr. 1272/2008 en 1 december 2010 overeenkomstig die verordening worden ingedeeld, kan die indeling samen met de indeling overeenkomstig Richtlijn 67/548/EEG in het veiligheidsinformatieblad worden opgenomen.

Van 1 december 2010 tot 1 juni 2015 wordt in de veiligheidsinformatiebladen voor stoffen zowel de indeling overeenkomstig Richtlijn 67/548/EEG als die overeenkomstig Verordening (EG) nr. 1272/2008 vermeld.

Indien mengsels in de periode tussen de inwerkingtreding van Verordening (EG) nr. 1272/2008 en 1 juni 2015 overeenkomstig die verordening worden ingedeeld, kan die indeling samen met de indeling overeenkomstig Richtlijn 1999/45/EG in het veiligheidsinformatieblad worden opgenomen. Tot 1 juni 2015 wordt de indeling van stoffen of mengsels die zowel ingedeeld als geëtiketteerd zijn overeenkomstig Verordening (EG) nr. 1272/2008 evenwel samen met de indeling van de stof, het mengsel of de bestanddelen daarvan overeenkomstig Richtlijn 67/548/EEG, respectievelijk Richtlijn 1999/45/EG in het veiligheidsinformatieblad opgenomen.”.

3) Artikel 56, lid 6, punt b), wordt vervangen door:

„b) onder de laagste van de in Richtlijn 1999/45/EG of in deel 3 van bijlage VI bij Verordening (EG) nr. 1272/2008 vastgestelde concentratiegrenzen voor indeling van het mengsel als gevaarlijk, wat betreft alle overige stoffen.”.

4) In artikel 59 worden de leden 2 en 3 als volgt gewijzigd:

a) lid 2, tweede volzin, wordt vervangen door:

„Het dossier kan, indien opportuun, beperkt blijven tot een verwijzing naar een vermelding in deel 3 van bijlage VI bij Verordening (EG) nr. 1272/2008.”;

- b) lid 3, tweede volzin, wordt vervangen door:
- „Het dossier kan, indien opportuun, beperkt blijven tot een verwijzing naar een vermelding in deel 3 van bijlage VI bij Verordening (EG) nr. 1272/2008.”.
- 5) In artikel 76, lid 1, onder c), worden de woorden „titel XI” vervangen door „titel V van Verordening (EG) nr. 1272/2008”.
- 6) Artikel 77 wordt als volgt gewijzigd:
- a) lid 2, onder e), eerste zin, wordt vervangen door:
- „e) het opzetten en beheren van een of meer databanken met informatie over alle geregistreerde stoffen, de inventaris van indelingen en etiketteringen en de lijst van geharmoniseerde indelingen en etiketteringen zoals opgesteld overeenkomstig Verordening (EG) nr. 1272/2008.”;
- b) in lid 3, onder a), worden de woorden „titel VI tot en met XI” vervangen door „de titels VI tot en met X”.
- 7) Titel XI wordt geschrapt.
- 8) Bijlage XV, delen I en II, worden als volgt gewijzigd:
- a) deel I wordt als volgt gewijzigd:
- i) het eerste streepje wordt geschrapt;
- ii) het tweede streepje wordt vervangen door:
- „— de vaststelling van stoffen als CMR-, PBT-, zPzB- of even zorgwekkende stoffen overeenkomstig artikel 59;”;
- b) in deel II wordt punt 1 geschrapt.
- 9) De tabel in bijlage XVII wordt als volgt gewijzigd:
- a) de kolom „Benaming van de stof of de groepen van stoffen of van het preparaat” wordt als volgt gewijzigd:
- i) vermeldingen 28, 29 en 30 worden vervangen door:
- „28. Stoffen die in deel 3 van bijlage VI bij Verordening (EG) nr. 1272/2008 als kankerverwekkende stof van categorie 1A of 1B (tabel 3.1) zijn ingedeeld of als kankerverwekkende stof van categorie 1 of 2 (tabel 3.2), en die als volgt zijn vermeld:
- kankerverwekkende stof van categorie 1A (tabel 3.1)/kankerverwekkende stof categorie 1 (tabel 3.2): vermeld in aanhangsel 1;
  - kankerverwekkende stof van categorie 1B (tabel 3.1)/kankerverwekkende stof categorie 2 (tabel 3.2): vermeld in aanhangsel 2.
29. Stoffen die in deel 3 van bijlage VI bij Verordening (EG) nr. 1272/2008 als in
- geslachtscellen mutagene stof van categorie 1A of 1B (tabel 3.1) zijn ingedeeld of mutagene stof van categorie 1 of 2 (tabel 3.2), en die als volgt zijn vermeld:
- mutagene stof van categorie 1A (tabel 3.1)/mutagene stof categorie 1 (tabel 3.2): vermeld in aanhangsel 3,
  - mutagene stof van categorie 1B (tabel 3.1)/mutagene stof categorie 1 (tabel 3.2): vermeld in aanhangsel 4.
30. Stoffen die in deel 3 van bijlage VI bij Verordening (EG) nr. 1272/2008 als voor de voortplanting giftige stof van categorie 1A of 1B (tabel 3.1) of voor de voortplanting giftige stof van categorie 1 of 2 (tabel 3.2) zijn ingedeeld en die als volgt zijn vermeld:
- voor de voortplanting giftige stof van categorie 1A, schadelijke gevolgen voor de seksuele functie, de vruchtbaarheid of de ontwikkeling (tabel 3.1) of voor de voortplanting giftige stof van categorie 1 met R60 (Kan de vruchtbaarheid schaden), of R61 (Kan het ongeboren kind schaden) (tabel 3.2), vermeld in aanhangsel 5;
  - voor de voortplanting giftige stof van categorie 1B, schadelijke gevolgen voor de seksuele functie, de vruchtbaarheid of de ontwikkeling (tabel 3.1) of voor de voortplanting giftige stof van categorie 1 met R60 (Kan de vruchtbaarheid schaden), of R61 (Kan het ongeboren kind schaden) (tabel 3.2), vermeld in aanhangsel 6.”;
- b) in de kolom „Beperkingsvoorwaarden”, in punt 28, wordt het eerste streepje van punt 1 vervangen door:
- „— hetzij de in deel 3 van bijlage VI bij Verordening (EG) nr. 1272/2008, of”.
- 10) De aanhangsels 1 tot en met 6 bij bijlage XVII worden als volgt gewijzigd:
- a) het voorwoord wordt als volgt gewijzigd:
- i) onder het kopje „Naam van de stof” worden de woorden „bijlage I van Richtlijn 67/548/EEG” vervangen door „deel 3 van bijlage VI bij Verordening (EG) nr. 1272/2008”;
- ii) onder het kopje „Catalogusnummer” worden de woorden „bijlage I van Richtlijn 67/548/EEG” vervangen door „deel 3 van bijlage VI bij Verordening (EG) nr. 1272/2008”;
- iii) onder het kopje „Nota's” worden de woorden „het voorwoord van bijlage I van Richtlijn 67/548/EEG” vervangen door „deel 1 van bijlage VI bij Verordening (EG) nr. 1272/2008”;

- iv) nota A wordt vervangen door:
- „Nota A
- Onverminderd artikel 17, lid 2, van Verordening (EG) nr. 1272/2008, moet op het etiket als naam van de stof een van de benamingen in deel 3 van bijlage VI bij die verordening worden vermeld.
- In dat deel wordt soms een algemene benaming gebruikt, zoals „...verbindingen” of „...zouten”. In dat geval moet de leverancier die een dergelijke stof in de handel brengt, op het etiket de juiste naam vermelden, met inachtneming van punt 1.1.1.4, van bijlage VI bij Verordening (EG) nr. 1272/2008.
- Indien een stof in deel 3, van bijlage VI bij Verordening (EG) nr. 1272/2008 is opgenomen, worden, overeenkomstig die verordening, de etiketteringselementen voor elke specifieke indeling die onder de vermelding in dat deel valt, op het etiket gebruikt, samen met de toepasselijke etiketteringselementen voor andere indelingen die niet onder die vermelding vallen en andere toepasselijke etiketteringselementen overeenkomstig artikel 17 van die verordening.
- Voor stoffen die onder één bepaalde groep stoffen van bijlage VI, deel 3, van Verordening (EG) nr. 1272/2008 vallen, worden de etiketteringselementen voor elke specifieke indeling die onder de vermelding in dat deel valt, op het etiket gebruikt, samen met de toepasselijke etiketteringselementen voor andere indelingen die niet onder die vermelding vallen en andere toepasselijke etiketteringselementen overeenkomstig artikel 17 van die verordening.
- Voor stoffen die onder meer dan één groep stoffen van bijlage VI, deel 3, bij Verordening (EG) nr. 1272/2008 vallen, worden de etiketteringselementen voor elke specifieke indeling die onder de beide vermeldingen in dat deel valt, op het etiket gebruikt, samen met de toepasselijke etiketteringselementen voor andere indelingen die niet onder die vermelding vallen en andere toepasselijke etiketteringselementen overeenkomstig artikel 17 van die verordening. Wanneer er in die twee vermeldingen voor dezelfde gevekenklasse of onderverdeling daarvan twee verschillende indelingen worden gegeven, wordt de ernstigste indeling gebruikt.”;
- v) nota D wordt vervangen door:
- „Nota D
- Sommige stoffen die spontaan kunnen polymeriseren of ontleden, worden doorgaans in een gestabiliseerde vorm in de handel gebracht. In deel 3 van bijlage VI bij Verordening (EG) nr. 1272/2008 zijn die stoffen in gestabiliseerde vorm opgenomen.
- Dergelijke stoffen worden echter soms in een niet-gestabiliseerde vorm in de handel gebracht. In dat geval moet de leverancier die een dergelijke stof in de handel brengt, op het etiket de naam van de stof met daaraan toegevoegd de vermelding „niet-gestabiliseerd” aanbrengen.”;
- vi) nota E wordt geschrapt;
- vii) nota H wordt vervangen door:
- „Nota H
- De voor deze stof vermelde indeling en etikettering heeft alleen betrekking op het gevaar of de gevaren zoals aangegeven door de vermelde gevarenaanduiding(en) in combinatie met de vermelde gevekenindeling. Voor alle andere gevekenklassen, onderverdelingen daarvan en categorieën dienen leveranciers van deze stof zich te houden aan de eisen van artikel 4 van Verordening (EG) nr. 1272/2008.
- Voor het uiteindelijke etiket moeten de voorschriften van punt 1.2 van bijlage I bij Verordening (EG) nr. 1272/2008 worden gevolgd.”;
- viii) nota K wordt vervangen door:
- „Nota K
- De stof hoeft niet als kankerverwekkend of mutageen te worden ingedeeld als kan worden aangetoond dat zij minder dan 0,1 % (g/g) buta-1,3-dieen (Einecs-nr. 203-450-8) bevat. Als de stof niet als kankerverwekkend of mutageen wordt ingedeeld, gelden hiervoor minimaal de voorzorgsmaatregelen (102-)210-403. Deze nota is alleen van toepassing op bepaalde complexe aardoliederivaten in deel 3 van bijlage VI bij Verordening (EG) nr. 1272/2008.”;
- ix) nota S wordt vervangen door:
- „Nota S
- Voor deze stof is mogelijk geen etiket overeenkomstig artikel 17 van Verordening (EG) nr. 1272/2008 vereist (zie punt 1.3, bijlage I bij die verordening).”;
- b) in aanhangsel 1 wordt de titel vervangen door:
- „Punt 28 — Kankerverwekkende stoffen: categorie 1A (tabel 3.1)/categorie 1 (tabel 3.2)”;
- c) aanhangsel 2 wordt als volgt gewijzigd:
- i) de titel wordt vervangen door „Punt 28 — Kankerverwekkende stoffen: categorie 1B (tabel 3.1)/categorie 2 (tabel 3.2)”;

- ii) in de indexnummers 024-017-00-8, 611-024-001, 611-029-00-9, 611-030-00-4 en 650-017-00-8 worden de woorden „Bijlage I van Richtlijn 67/548/EEG” vervangen door „Bijlage VI bij Verordening (EG) nr. 1272/2008”;
- d) in aanhangsel 3 wordt de titel vervangen door:  
„Punt 29 — Mutagene stoffen: categorie 1A (tabel 3.1)/categorie 1 (tabel 3.2)”;
- e) in aanhangsel 4 wordt de titel vervangen door:  
„Punt 29 — Mutagene stoffen: categorie 1B (tabel 3.1)/categorie 2 (tabel 3.2)”;
- f) in aanhangsel 5 wordt de titel vervangen door:  
„Punt 30 — Voor de voorplanting giftige stoffen: categorie 1A (tabel 3.1)/categorie 2 (tabel 3.2)”;
- g) in aanhangsel 6 wordt de titel vervangen door:  
„Punt 30 — Voor de voorplanting giftige stoffen: categorie 1B (tabel 3.1)/categorie 2 (tabel 3.2)”.
- 11) De woorden „preparaat” en „preparaten” in de zin van artikel 3, lid 2, van Verordening (EG) nr. 1907/2006 worden overal in de tekst vervangen door „mengsel”, respectievelijk „mengsels”.

#### Artikel 58

#### Wijziging van Verordening (EG) Nr. 1907/2006 vanaf 1 december 2010

Verordening (EG) nr. 1907/2006 zal met ingang van 1 december 2010 als volgt gewijzigd worden:

- 1) In artikel 14, lid 4, wordt de inleidende zin van vervangen door:  
„4. Indien de registrant als gevolg van de uitvoering van de stappen a) tot en met d) van lid 3 de conclusie trekt dat de stof voldoet aan de criteria voor indeling in een of meer van de volgende gevarenklassen of categorieën van bijlage I bij Verordening (EG) nr. 1272/2008:
- a) de gevarenklassen 2.1 tot en met 2.4, 2.6 en 2.7, 2.8 typen A en B, 2.9, 2.10, 2.12, 2.13 categorieën 1 en 2, 2.14 categorieën 1 en 2, en 2.15 typen A tot en met F;
- b) de gevarenklassen 3.1 tot en met 3.6, 3.7 schadelijke effecten op de seksuele functie en de vruchtbaarheid of de ontwikkeling, 3.8 andere effecten dan een narcotische werking, 3.9 en 3.10;
- c) gevarenklasse 4.1;
- d) gevarenklasse 5.1,  
of na beoordeling als een PBT of zPzB wordt beschouwd, moet de veiligheidsbeoordeling tevens de volgende aanvullende stappen omvatten:”.
- 2) Artikel 31 wordt als volgt gewijzigd:
- a) lid 1, onder a), wordt vervangen door:
- „a) indien een stof voldoet aan de criteria voor indeling als gevaarlijk overeenkomstig Verordening (EG) nr. 1272/2008 of een mengsel voldoet aan de criteria voor indeling als gevaarlijk overeenkomstig Richtlijn 1999/45/EG; of”;
- b) lid 4 wordt vervangen door:  
„4. Het veiligheidsinformatieblad hoeft niet te worden verstrekt voor aan het publiek aangeboden of verkochte stoffen die gevaarlijk zijn overeenkomstig Verordening (EG) nr. 1272/2008 dan wel mengsels die gevaarlijk zijn overeenkomstig Richtlijn 1999/45/EG en die vergezeld gaan van voldoende informatie om gebruikers in staat te stellen de nodige maatregelen op het gebied van de bescherming van de gezondheid van de mens, de veiligheid en het milieu te nemen, tenzij een downstreamgebruiker of distributeur daarom vraagt.”.
- 3) Artikel 40, lid 1, wordt vervangen door:  
„1. Het Agentschap onderzoekt elk testvoorstel uiteengezet in een registratie of een rapport van een downstreamgebruiker ten behoeve van de verstrekking van de in de bijlagen IX en X vermelde informatie voor een stof. Prioriteit wordt gegeven aan de registratie van stoffen die PBT-, zPzB-, sensibiliserende en/of kankerverwekkende, mutagene en voor de voortplanting giftige (CMR) eigenschappen hebben of kunnen hebben, en van stoffen in hoeveelheden van meer dan 100 ton per jaar met gebruik dat resulteert in wijdverspreide en diffuse blootstelling, mits zij voldoen aan de criteria voor indeling in een of meer van de volgende gevarenklassen of categorieën van bijlage I bij Verordening (EG) nr. 1272/2008:
- a) de gevarenklassen 2.1 tot en met 2.4, 2.6 en 2.7, 2.8 typen A en B, 2.9, 2.10, 2.12, 2.13 categorieën 1 en 2, 2.14 categorieën 1 en 2, en 2.15 typen A tot en met F;
- b) de gevarenklassen 3.1 tot en met 3.6, 3.7 schadelijke effecten op de seksuele functie en de vruchtbaarheid of de ontwikkeling, 3.8 andere effecten dan een narcotische werking, 3.9 en 3.10;
- c) gevarenklasse 4.1;
- d) gevarenklasse 5.1.”.
- 4) Artikel 57, onder a), b) en c), worden vervangen door:  
„a) stoffen die voldoen aan de criteria voor indeling in de gevarenklasse kankerverwekkendheid van categorie 1A of 1B overeenkomstig afdeling 3.6, van bijlage I bij Verordening (EG) nr. 1272/2008;
- b) stoffen die voldoen aan de criteria voor indeling in de gevarenklasse mutageniteit in geslachtscellen van categorie 1A of 1B overeenkomstig afdeling 3.5, van bijlage I bij Verordening (EG) nr. 1272/2008;

- c) stoffen die voldoen aan de criteria voor indeling in de gevarenklasse voortplantingstoxiciteit categorie 1A of 1B, schadelijke effecten voor de seksuele functie, de vruchtbaarheid of de ontwikkeling, overeenkomstig afdeling 3.7, van bijlage I bij Verordening (EG) nr. 1272/2008;”.
- 5) In artikel 65 worden de woorden „Richtlijn 67/548/EEG” vervangen door „Richtlijn 67/548/EEG en Verordening (EG) nr. 1272/2008”.
- 6) Artikel 68, lid 2, wordt vervangen door:
- „2. Voor een stof als zodanig, in een mengsel of in een voorwerp, die aan de criteria voor indeling in de gevarenklassen kankerverwekkendheid, mutageniteit in geslachtscellen of giftig voor de voortplanting, categorie 1A of 1B, voldoet en die door consumenten zou kunnen worden gebruikt, en waarvoor de Commissie beperkingen op het gebruik door consumenten voorstelt, wordt bijlage XVII volgens de in artikel 133, lid 4, bedoelde procedure gewijzigd. De artikelen 69 tot en met 73 zijn niet van toepassing.”.
- 7) Artikel 119 wordt als volgt gewijzigd:
- a) lid 1, onder a), wordt vervangen door:
- „a) onverminderd lid 2, onder f) en g), van onderhavig artikel, de naam in de IUPAC-nomenclatuur van stoffen die voldoen aan de criteria voor indeling in een of meer van de volgende gevarenklassen of categorieën van bijlage I bij Verordening (EG) nr. 1272/2008:
- de gevarenklassen 2.1 tot en met 2.4, 2.6 en 2.7, 2.8 typen A en B, 2.9, 2.10, 2.12, 2.13 categorieën 1 en 2, 2.14 categorieën 1 en 2, en 2.15 typen A tot en met F;
  - de gevarenklassen 3.1 tot en met 3.6, 3.7 schadelijke effecten op de seksuele functie en de vruchtbaarheid of de ontwikkeling, 3.8 andere effecten dan een narcotische werking, 3.9 en 3.10;
  - gevarenklasse 4.1;
  - gevarenklasse 5.1.”;
- b) lid 2 wordt als volgt gewijzigd:
- i) punt f) wordt vervangen door:
- „f) onverminderd artikel 24 van Verordening (EG) nr. 1272/2008, de naam in de IUPAC-nomenclatuur van niet-geïntegreerde stoffen als bedoeld in lid 1 bis van dit artikel voor een periode van ten hoogste zes jaar;”;
- ii) in punt g) wordt de inleidende zin vervangen door:
- „g) onverminderd artikel 24 van Verordening (EG) nr. 1272/2008, de naam volgens de
- IUPAC-nomenclatuur van stoffen als bedoeld in lid 1, onder a), van dit artikel die slechts op een van de volgende manieren worden gebruikt:”.
- 8) Artikel 138, lid 1, eerste alinea, tweede zin, wordt vervangen door:
- „Voor stoffen die overeenkomstig Verordening (EG) nr. 1272/2008 aan de criteria voor indeling in de gevarenklassen kankerverwekkendheid, mutageniteit in geslachtscellen of voortplantingstoxiciteit, categorie 1A of 1B, voldoen, wordt de evaluatie echter uiterlijk op 1 juni 2014 uitgevoerd.”.
- 9) Bijlage III wordt als volgt gewijzigd:
- a) punt a) wordt vervangen door:
- „a) stoffen waarvan is voorspeld (bijvoorbeeld door de toepassing van (Q)SAR's of op grond van andere gegevens) dat zij waarschijnlijk voldoen aan de criteria voor indeling in categorie 1A of 1B van de gevarenklassen kankerverwekkendheid, mutageniteit in geslachtscellen of voortplantingstoxiciteit, dan wel aan de criteria in bijlage XIII.”;
- b) punt b), onder ii), wordt vervangen door:
- „ii) stoffen waarvan is voorspeld (bijvoorbeeld door de toepassing van (Q)SAR's of op grond van andere gegevens) dat zij waarschijnlijk voldoen aan de criteria voor indeling in de gevarenklassen voor gezondheids- of milieugevaren of onderverdelingen daarvan overeenkomstig Verordening (EG) nr. 1272/2008.”.
- 10) In bijlage V, punt 8, worden de woorden „Richtlijn 67/548/EEG” vervangen door „Verordening (EG) nr. 1272/2008”.
- 11) In bijlage VI worden de afdelingen 4.1, 4.2 en 4.3 vervangen door:
- „4.1 De gevarenindeling van de stof(fen) als gevolg van de toepassing van de titels I en II van Verordening (EG) nr. 1272/2008 voor alle gevarenklassen en gevaren-categorieën van die verordening.
- Voorts moeten voor elke vermelding de redenen worden vermeld waarom geen indeling voor een gevarenklasse of onderverdeling daarvan wordt gegeven (bijvoorbeeld als gegevens ontbreken, niet overtuigend zijn, of wel overtuigend zijn maar onvoldoende zijn om een indeling op te baseren).
- 4.2 De gevarenetiketten van de stof(fen) als gevolg van de toepassing van titel III van Verordening (EG) nr. 1272/2008.

4.3 In voorkomend geval, specifieke concentratiegrenswaarden als gevolg van de toepassing van artikel 10 van Verordening (EG) nr. 1272/2008 en de artikelen 4 tot en met 7 van Richtlijn 1999/45/EG.”.

12) Bijlage VIII wordt als volgt gewijzigd:

a) in kolom 2 wordt punt 8.4.2, tweede streepje, vervangen door:

„— indien van de stof bekend is dat zij kankerverwekkend, categorie 1A of 1B, dan wel mutageen in geslachtscellen, categorie 1A, 1B of 2, is.”;

b) in kolom 2 wordt punt 8.7.1, tweede en derde alinea, vervangen door:

„Indien van de betrokken stof bekend is dat zij een schadelijk effect op de vruchtbaarheid heeft en zij voldoet aan de criteria om te worden ingedeeld als giftig voor de voortplanting, categorie 1A of 1B: kan de vruchtbaarheid schaden (H360F), en de beschikbare gegevens toereikend zijn om een degelijk onderbouwde risicobeoordeling te ondersteunen, is geen verder onderzoek naar de vruchtbaarheid nodig. Onderzoek naar de ontwikkelingstoxiciteit dient evenwel te worden overwogen.

Indien van de betrokken stof bekend is dat zij ontwikkelingstoxiciteit teweegbrengt en zij voldoet aan de criteria om te worden ingedeeld als giftig voor de voortplanting, categorie 1A of 1B: kan het ongeboren kind schaden (H360F), en de beschikbare gegevens toereikend zijn om een degelijk onderbouwde risicobeoordeling te ondersteunen, is geen verder onderzoek naar de ontwikkelingstoxiciteit nodig. Onderzoek naar de gevolgen voor de vruchtbaarheid dient evenwel te worden overwogen.”.

13) In bijlage IX, kolom 2, punt 8.7, derde streepje, worden de tweede en de derde alinea vervangen door:

„Indien van de betrokken stof bekend is dat zij een schadelijk effect op de vruchtbaarheid heeft en zij voldoet aan de criteria om te worden ingedeeld als giftig voor de voortplanting, categorie 1A of 1B: kan de vruchtbaarheid schaden (H360F), en de beschikbare gegevens toereikend zijn om een degelijk onderbouwde risicobeoordeling te ondersteunen, is geen verder onderzoek naar de vruchtbaarheid nodig. Onderzoek naar de ontwikkelingstoxiciteit dient evenwel te worden overwogen.

Indien van de betrokken stof bekend is dat zij ontwikkelingstoxiciteit teweegbrengt en zij voldoet aan de criteria om te worden ingedeeld als giftig voor de voortplanting, categorie 1A of 1B: kan het ongeboren kind schaden (H360F), en de beschikbare gegevens toereikend zijn om een degelijk onderbouwde risicobeoordeling te ondersteunen, is geen verder onderzoek naar de ontwikkelingstoxiciteit nodig. Onderzoek naar de gevolgen voor de vruchtbaarheid dient evenwel te worden overwogen.”.

14) Bijlage X wordt als volgt gewijzigd:

a) in kolom 2, punt 8.7, derde streepje, worden de tweede en derde alinea vervangen door:

„Indien van de betrokken stof bekend is dat zij een schadelijk effect op de vruchtbaarheid heeft en zij voldoet aan de criteria om te worden ingedeeld als giftig voor de voortplanting, categorie 1A of 1B: kan de vruchtbaarheid schaden (H360F), en de beschikbare gegevens toereikend zijn om een degelijk onderbouwde risicobeoordeling te ondersteunen, is geen verder onderzoek naar de vruchtbaarheid nodig. Onderzoek naar de ontwikkelingstoxiciteit dient evenwel te worden overwogen.

Indien van de betrokken stof bekend is dat zij ontwikkelingstoxiciteit teweegbrengt en zij voldoet aan de criteria om te worden ingedeeld als giftig voor de voortplanting, categorie 1A of 1B: kan het ongeboren kind schaden (H360F), en de beschikbare gegevens toereikend zijn om een degelijk onderbouwde risicobeoordeling te ondersteunen, is geen verder onderzoek naar de ontwikkelingstoxiciteit nodig. Onderzoek naar de gevolgen voor de vruchtbaarheid dient evenwel te worden overwogen.”;

b) in kolom 2, punt 8.9.1, eerste alinea, wordt het tweede streepje vervangen door:

„— indien de stof als in geslachtscellen mutagene stof van categorie 2 wordt ingedeeld of er op grond van het onderzoek of de onderzoeken bij herhaalde toediening aanwijzingen zijn dat de stof hyperplasie en/of preneoplastisch letsel kan induceren.”;

c) in kolom 2 wordt de tweede alinea van punt 8.9.1 vervangen door:

„Indien de stof als in geslachtscellen mutagene stof van categorie 1A of 1B wordt ingedeeld, geldt als standaard het vermoeden dat een genotoxisch mechanisme voor kankerverwekkendheid waarschijnlijk is. In dat geval zal een test naar kankerverwekkendheid normaliter niet vereist zijn.”.

15) In bijlage XIII, punt 1.3, worden het tweede en derde streepje, vervangen door:

„— de stof als kankerverwekkend (categorie 1A of 1B), mutageen in geslachtscellen (categorie 1A of 1B), of giftig voor de voortplanting (categorie 1A, 1B of 2) is ingedeeld, of

— er andere aanwijzingen voor chronische toxiciteit zijn, zoals aangegeven door de indelingen STOT (herhaalde blootstelling), categorie 1 (oraal, dermaal, inademing van gassen/dampen, inademing van stofdeeltjes/nevel/rook) of categorie 2 (oraal, dermaal, inademing van gassen/dampen, inademing van stofdeeltjes/nevel/rook) volgens Verordening (EG) nr. 1272/2008.”.



16) In de tabel van bijlage XVII, „Benaming van de stof of van de groepen van stoffen of van het preparaat” wordt als volgt gewijzigd:

a) vermelding 3 wordt vervangen door:

„3. Vloeibare stoffen of mengsels die overeenkomstig Richtlijn 1999/45/EG als gevaarlijk worden beschouwd of waarvoor de criteria van een of meer van de volgende gevarenklassen of categorieën van bijlage I bij Verordening (EG) nr. 1272/2008 vervuld zijn:

- a) de gevarenklassen 2.1 tot en met 2.4, 2.6 en 2.7, 2.8 typen A en B, 2.9, 2.10, 2.12, 2.13 categorieën 1 en 2, 2.14 categorieën 1 en 2, en 2.15 typen A tot en met F;
- b) de gevarenklassen 3.1 tot en met 3.6, 3.7 schadelijke effecten op de seksuele functie en de vruchtbaarheid of de ontwikkeling, 3.8 andere effecten dan een narcotische werking, 3.9 en 3.10;
- c) gevarenklasse 4.1;
- d) gevarenklasse 5.1.”;

b) vermelding 40 wordt vervangen door:

„40. Stoffen die zijn ingedeeld als ontvlambare gassen van categorie 1 of 2, ontvlambare vloeistoffen van categorie 1, 2 of 3, ontvlambare vaste stoffen van categorie 1 of 2, stoffen en mengsels die in contact met water ontvlambare gassen ontwikkelen van categorie 1, 2 of 3, pyrofore vloeistoffen van categorie 1 of pyrofore vaste stoffen van categorie 1, ongeacht of zij in deel 3 van bijlage VI bij Verordening (EG) nr. 1272/2008 zijn opgenomen.”.

#### Artikel 59

### Wijziging van Verordening (EG) Nr. 1907/2006 vanaf 1 juni 2015

Verordening (EG) nr. 1907/2006 zal met ingang van 1 juni 2015 als volgt gewijzigd worden:

1) Artikel 14, lid 2, wordt vervangen door:

„2. De chemische veiligheidsbeoordeling overeenkomstig lid 1 is niet verplicht voor een stof die aanwezig is in een preparaat indien de concentratie van die stof in het preparaat lager is dan:

- a) de ondergrens van artikel 11, lid 3, van Verordening (EG) nr. 1272/2008,
- b) 0,1 gewichtsprocent (g/g) indien de stof aan de criteria in bijlage XIII van deze verordening voldoet.”.

2) Artikel 31 wordt als volgt gewijzigd:

a) lid 1, onder a), wordt vervangen door:

„a) indien een stof of mengsel voldoet aan de criteria voor indeling als gevaarlijk overeenkomstig Verordening (EG) nr. 1272/2008; of”;

b) lid 3 wordt vervangen door:

„3. De leverancier verstrekt de afnemer op diens verzoek een overeenkomstig bijlage II opgesteld veiligheidsinformatieblad wanneer een mengsel overeenkomstig de titels I en II van Verordening (EG) nr. 1272/2008 niet aan de criteria voor indeling als gevaarlijk voldoet, maar:

a) in een afzonderlijke concentratie van  $\geq 0,1$  gewichtsprocent voor niet-gasvormige mengsels en  $\geq 0,2$  volumeprocent voor gasvormige mengsels niet ten minste één stof bevat met gevaarlijke preparaten voor de gezondheid of het milieu; of

b) in een afzonderlijke concentratie van  $\geq 0,1$  gewichtsprocent voor niet-gasvormige mengsels ten minste één stof bevat die kankerverwekkend van categorie 2, giftig voor de voortplanting van categorie 1A, 1B en 2, gevoelig voor de huid categorie 1 is, effecten op of via lactatie heeft, dan wel persistent, bioaccumulerend en toxisch (PBT) is volgens de criteria van bijlage XIII, of zeer persistent en sterk bioaccumulerend (zPzB) is volgens de criteria van bijlage XIII, of om andere dan de onder a) genoemde redenen is opgenomen in de overeenkomstig artikel 59, lid 1, opgestelde lijst.; of

c) een stof bevat waarvoor in de Gemeenschap grenzen voor de blootstelling op het werk zijn.”;

c) lid 4 wordt vervangen door:

„4. Het veiligheidsinformatieblad dient niet te worden verstrekt voor aan het grote publiek aangeboden of verkochte gevaarlijke stoffen of mengsels die vergezeld gaan van voldoende informatie om gebruikers in staat te stellen de nodige maatregelen op het gebied van de bescherming van de gezondheid, de veiligheid en het milieu te nemen, tenzij een downstreamgebruiker of distributeur daarom vraagt.”.

3) Artikel 56, lid 6, onder b), wordt vervangen door:

„b) onder de in artikel 11, lid 3, van Verordening (EG) nr. 1272/2008 vermelde grenzen voor indeling van het mengsel als gevaarlijk, wat betreft alle overige stoffen.”.

- 4) In artikel 65 worden de woorden „en Richtlijn 1999/45/EG” geschrapt. vastgestelde desbetreffende algemene concentratiegrens.”;
- 5) Bijlage II wordt als volgt gewijzigd:
- a) punt 1.1 wordt vervangen door:
- „1.1. Identificatie van de stof of het mengsel
- De voor de identificatie van een stof gebruikte naam moet gelijk zijn aan de naam op het etiket overeenkomstig artikel 18, lid 2, van Verordening (EG) nr. 1272/2008.
- De voor de identificatie van een mengsel gebruikte naam moet gelijk zijn aan de naam op het etiket overeenkomstig artikel 18, lid 3, onder a), van Verordening (EG) nr. 1272/2008.”
- b) voetnoot 1 bij punt 3.3, onder a), eerste streepje, wordt geschrapt;
- c) punt 3.6 wordt vervangen door:
- „3.6 Indien het Agentschap overeenkomstig artikel 24 van Verordening (EG) nr. 1272/2008 heeft besloten dat op het etiket of het veiligheidsinformatieblad de chemische identiteit van een stof vertrouwelijk mag blijven, wordt de chemische aard daarvan omschreven in punt 3, teneinde een veilige hantering te waarborgen.
- De naam op het veiligheidsinformatieblad (onder meer voor de toepassing van bovengenoemde punten 1.1, 3.2, 3.3 en 3.5), is dezelfde als die op het etiket en die welke is overeengekomen overeenkomstig de procedure van artikel 24 van Verordening (EG) nr. 1272/2008.”
- 6) Bijlage VI, afdeling 4.3 wordt vervangen door:
- „4.3. In voorkomend geval, specifieke concentratiegrenzen als gevolg van de toepassing van artikel 10 van Verordening (EG) nr. 1272/2008.”.
- 7) Bijlage XVII wordt als volgt gewijzigd:
- a) in de kolom „Benaming van de stof of de groepen van stoffen of van het mengsel” van de tabel in vermelding 3 worden de woorden „die overeenkomstig Richtlijn 1999/45/EG als gevaarlijk worden beschouwd” geschrapt;
- b) in de kolom „Bepervingsvoorwaarden” van de tabel wordt vermelding 28 als volgt gewijzigd:
- i) punt 1, tweede streepje, wordt vervangen door:
- „— hetzij de in deel 3 van bijlage I bij Verordening (EG) nr. 1272/2008
- ii) punt 2, onder d), wordt vervangen door:
- „d) kunstschilderverven die onder Verordening (EG) nr. 1272/2008 vallen.”.
- Artikel 60*
- Intrekking**
- Richtlijn 67/548/EEG en Richtlijn 1999/45/EG worden met ingang van 1 juni 2015 ingetrokken.
- Artikel 61*
- Overgangsbepalingen**
1. Tot 1 december 2010 worden stoffen ingedeeld, geëtiketteerd en verpakt overeenkomstig Richtlijn 67/548/EEG.
- Tot 1 juni 2015 worden mengsels ingedeeld, geëtiketteerd en verpakt overeenkomstig Richtlijn 1999/45/EG.
2. In afwijking van artikel 62, tweede alinea, van deze verordening en in aanvulling op de voorschriften van lid 1 van dit artikel, mogen stoffen en mengsels respectievelijk vóór 1 december 2010 en 1 juni 2015 overeenkomstig deze verordening worden ingedeeld, geëtiketteerd en verpakt. In dat geval zijn de etiketterings- en verpakkingsbepalingen van de Richtlijnen 67/548/EEG en 1999/45/EG niet van toepassing.
3. Van 1 december 2010 tot en met 1 juni 2015 worden stoffen zowel overeenkomstig Richtlijn 67/548/EEG als overeenkomstig deze verordening ingedeeld. Zij worden overeenkomstig deze verordening geëtiketteerd en verpakt.
4. In afwijking van artikel 62, tweede alinea, van deze verordening, behoeven stoffen die overeenkomstig Richtlijn 67/548/EEG zijn ingedeeld, verpakt en geëtiketteerd en reeds vóór 1 december 2010 op de markt zijn gebracht, tot 1 december 2012 niet overeenkomstig deze verordening opnieuw te worden geëtiketteerd of verpakt.
- In afwijking van artikel 62, tweede alinea, van deze verordening hoeven mengsels die overeenkomstig Richtlijn 1999/45/EG zijn ingedeeld, verpakt en geëtiketteerd en reeds vóór 1 juni 2015 op de markt zijn gebracht, tot 1 juni 2017 niet overeenkomstig deze verordening opnieuw te worden geëtiketteerd of verpakt.
5. Indien een stof of mengsel vóór 1 december 2010 respectievelijk 1 juni 2015 al overeenkomstig Richtlijn 67/548/EEG of Richtlijn 1999/45/EG is ingedeeld, kunnen fabrikanten, importeurs en downstreamgebruikers de indeling van de stof of het mengsel wijzigen met behulp van de omzettingstabel in bijlage VII.

6. De lidstaten kunnen tot 1 december 2011 bestaande en striktere indelings- en etiketteringsstelsels voor in bijlage VI, deel 3, van deze verordening vermelde stoffen handhaven, mits van die indelingen en etiketteringselementen overeenkomstig de vrijwaringsclausule van Richtlijn 67/548/EEG vóór 20 januari 2009 aan de Commissie kennis is gegeven en de lidstaat vóór 1 juni 2009 bij het Agentschap overeenkomstig artikel 37, lid 1, van deze verordening een voorstel voor harmonisering van de betrokken indeling en etikettering indient.

Als voorwaarde geldt dat de Commissie, overeenkomstig de vrijwaringclausule van Richtlijn 67/548/EEG, vóór 20 januari 2009 over het voorstel voor indeling en etikettering nog geen besluit heeft genomen.

Indien het in de eerste alinea bedoelde voorstel voor geharmoniseerde indeling en etikettering niet, dan wel in een gewijzigde

vorm, overeenkomstig artikel 37, lid 5, is vermeld in deel 3 van bijlage VI, geldt de in de eerste alinea genoemde vrijstelling niet meer.

#### Artikel 62

### Inwerkingtreding

Deze verordening treedt in werking op de twintigste dag volgende op die van haar bekendmaking in het *Publicatieblad van de Europese Unie*.

De titels II, III en IV zijn voor stoffen van toepassing met ingang van 1 december 2010 en voor mengsels met ingang van 1 juni 2015.

Deze verordening is verbindend in al haar onderdelen en is rechtstreeks toepasselijk in elke lidstaat.

Gedaan te Straatsburg, 16 december 2008.

*Voor het Europees Parlement*

*De voorzitter*

H.-G. PÖTTERING

*Voor de Raad*

*De voorzitter*

B. LE MAIRE

## BIJLAGE I

## VOORSCHRIFTEN VOOR DE INDELING EN ETIKETTERING VAN GEVAARLIJKE STOFFEN EN MENGSELS

Deze bijlage bevat de criteria voor de indeling in gevarenklassen en in onderverdelingen daarvan, alsmede nadere bepalingen voor de toepassing van die criteria.

## 1. DEEL 1: ALGEMENE BEGINSELEN VOOR DE INDELING EN ETIKETTERING

1.0. **Definities**

Gas: een stof die

- i) bij 50 °C een dampspanning heeft van meer dan 300 kPa (absoluut); of
- ii) bij 20 °C volledig gasvormig is bij een standaarddruk van 101,3 kPa;

Vloeistof: een stof die of een mengsel dat

- i) bij 50 °C een dampspanning heeft van maximaal 300 kPa (3 bar);
- ii) bij 20 °C en een standaarddruk van 101,3 kPa niet volledig gasvormig is;
- iii) en een smeltpunt of beginsmeltpunt heeft van 20 °C of minder bij een standaarddruk van 101,3 kPa;

Vaste stof: een stof die of een mengsel dat niet beantwoordt aan de definities van vloeistof of gas.

1.1. **Indeling van stoffen en mengsels**1.1.0. ***Samenwerking om aan de voorschriften van deze verordening te voldoen***

Leveranciers in een toeleveringsketen werken samen om aan de indelings-, etiketterings- en verpakkingsvoorschriften vastgelegd in deze verordening te voldoen.

Leveranciers in een bedrijfstak mogen samenwerken om de overgangsregelingen bedoeld in artikel 61 voor in de handel gebrachte stoffen en mengsels te beheren.

Leveranciers in een bedrijfstak mogen door middel van de vorming van een netwerk of via andere middelen samenwerken om gegevens en deskundigheid te delen bij de indeling van stoffen en mengsels overeenkomstig Titel II van deze verordening. In dit geval leggen leveranciers in een bedrijfstak de basis waarop indelingsbeslissingen worden genomen volledig vast in documenten en stellen zij de documentatie, samen met de gegevens en informatie waarop de indelingen zijn gebaseerd, ter beschikking van de bevoegde autoriteiten en, op verzoek, aan de handhavingsautoriteiten. Wanneer leveranciers in een bedrijfstak aldus samenwerken, blijft iedere leverancier evenwel volledig verantwoordelijk voor de indeling, etikettering en verpakking van de stoffen en mengsels die hij in de handel brengt, en voor de naleving van alle andere voorschriften van deze verordening.

Het netwerk kan ook worden gebruikt om informatie en beste praktijken uit te wisselen met het oog op vereenvoudiging van de nakoming van de kennisgevingsverplichtingen.

1.1.1. ***Rol en gebruik van de mening van deskundigen en bepaling van de bewijskracht***

1.1.1.1. Indien de criteria niet rechtstreeks op de beschikbare geïnventariseerde informatie kunnen worden toegepast, of indien uitsluitend de in artikel 6, lid 5, bedoelde informatie beschikbaar is, wordt overeenkomstig respectievelijk artikel 9, lid 3, of artikel 9, lid 4, de bewijskracht bepaald met behulp van de mening van deskundigen.

1.1.1.2. Voor de indeling van mengsels kan de mening van deskundigen op een aantal gebieden worden gebruikt, zodat bestaande informatie voor zoveel mogelijk mengsels ter bescherming van de gezondheid van de mens en het milieu kan worden gebruikt. Deskundig advies kan ook nodig zijn bij het interpreteren van gegevens voor de gevarenindeling van stoffen, vooral wanneer er beoordeling van de bewijskracht nodig is.

- 1.1.1.3. Het bepalen van de bewijskracht houdt in dat alle beschikbare relevante informatie over het gevaar naast elkaar wordt gelegd, bijvoorbeeld de resultaten van relevante in-vitrotests, relevante gegevens over dieren, informatie afkomstig uit de categoriebenadering (groepering, „read-across”), (Q)SAR-resultaten, ervaringen bij mensen, zoals beroepsgegevens en gegevens uit ongevalledatabanken, epidemiologische en klinische studies, en goed gedocumenteerde casusverslagen en waarnemingen. Aan de kwaliteit en de consistentie van de gegevens wordt een passend gewicht toegekend. Er wordt rekening gehouden met relevante informatie over stoffen of mengsels die verwant zijn aan de stof of het mengsel waarvan de indeling wordt bepaald, alsmede met onderzoeksresultaten betreffende de werkingsplaats en het werkingsmechanisme of de werkingswijze. In de bepaling van de bewijskracht moeten tegelijkertijd de positieve en de negatieve resultaten worden betrokken.
- 1.1.1.4. Voor de indeling van gezondheidsgevaaren (Deel 3) geldt dat gevaarlijke gevolgen die zijn vastgesteld in passende dierproeven of bij de ervaring met mensen en die consistent zijn met de indelingscriteria normaliter indeling rechtvaardigen. Wanneer er gegevens over zowel mensen als dieren beschikbaar zijn en deze elkaar tegenspreken, worden de kwaliteit en de betrouwbaarheid van de gegevens uit beide bronnen geëvalueerd om een besluit over de indeling te nemen. Over het algemeen hebben adequate, betrouwbare en representatieve gegevens over mensen (waaronder epidemiologische studies, wetenschappelijk gefundeerde casestudies als omschreven in deze bijlage of statistisch onderbouwde ervaring) voorrang op andere gegevens. Het is echter mogelijk dat aan correct opgezette en uitgevoerde epidemiologische studies onvoldoende proefpersonen deelnemen om relatief zeldzame, maar niettemin significante effecten te kunnen opsporen teneinde mogelijk verstoringen te beoordelen. Positieve resultaten van correct uitgevoerde dierproeven worden dan ook niet noodzakelijkerwijs ontkracht door een gebrek aan positieve ervaring bij mensen, maar vereisen een beoordeling van de degelijkheid, kwaliteit en het statistische onderscheidingsvermogen van zowel de gegevens over mensen als die over dieren.
- 1.1.1.5. Bij de indeling van gezondheidsgevaaren (Deel 3) zijn de blootstellingsroute, mechanistische informatie en stofwisselingsonderzoeken van belang voor de bepaling van de relevantie van een effect bij mensen. Wanneer dergelijke informatie twijfel doet rijzen omtrent de relevantie bij mensen en de degelijkheid en kwaliteit van die gegevens is bevestigd, kan een lagere indeling gerechtvaardigd zijn. Wanneer er wetenschappelijke bewijzen zijn dat het werkingsmechanisme of de werkingswijze niet relevant is voor mensen, wordt de stof of het mengsel niet ingedeeld.
- 1.1.2. **Specifieke concentratiegrenzen, vermenigvuldigingsfactoren M en algemene ondergrenzen**
- 1.1.2.1. Specifieke concentratiegrenzen of vermenigvuldigingsfactoren worden toegepast overeenkomstig artikel 10.
- 1.1.2.2. *Ondergrenzen*
- 1.1.2.2.1. Ondergrenzen geven aan wanneer met de aanwezigheid van een stof rekening moet worden gehouden met het oog op indeling van een stof die of een mengsel dat de betreffende gevaarlijke stof bevat, als geïdentificeerde verontreiniging, additief of afzonderlijk bestanddeel (zie artikel 11).
- 1.1.2.2.2. De in artikel 11 bedoelde ondergrenzen zijn als volgt:
- a) Voor de gezondheids- en milieugevaaren in de delen 3, 4 en 5 van deze bijlage:
    - i) voor stoffen waarvoor een specifieke concentratiegrens is bepaald voor de toepasselijke gevaarenklasse of onderverdeling daarvan, hetzij in deel 3 van bijlage VI hetzij in de in artikel 42 bedoelde inventaris van indelingen en etiketteringen, en wanneer de gevaarenklasse of onderverdeling daarvan in Tabel 1.1. wordt genoemd, de laagste waarde van de specifieke concentratiegrens en de toepasselijke algemene ondergrens in Tabel 1.1; of
    - ii) voor stoffen waarvoor een specifieke concentratiegrens is bepaald voor de toepasselijke gevaarenklasse of onderverdeling daarvan, hetzij in deel 3 van bijlage VI hetzij in de in artikel 42 bedoelde inventaris van indelingen en etiketteringen, en wanneer de gevaarenklasse of onderverdeling daarvan in Tabel 1.1. niet wordt genoemd, de specifieke concentratiegrens die hetzij in deel 3 van bijlage VI hetzij in de in artikel 43 bedoelde inventaris van indelingen en etiketteringen wordt genoemd; of
    - iii) voor stoffen waarvoor geen specifieke concentratiegrens is bepaald voor de toepasselijke gevaarenklasse of onderverdeling daarvan, hetzij in deel 3 van bijlage VI hetzij in de in artikel 42 bedoelde inventaris van indelingen en etiketteringen, en wanneer de gevaarenklasse of onderverdeling daarvan in Tabel 1.1 wordt genoemd, de toepasselijke algemene ondergrens als genoemd in deze tabel; of
    - (iv) voor stoffen waarvoor geen specifieke concentratiegrens is bepaald voor de toepasselijke gevaarenklasse of onderverdeling daarvan, hetzij in deel 3 van bijlage VI hetzij in de in artikel 42 bedoelde inventaris van indelingen en etiketteringen, en wanneer de gevaarenklasse of onderverdeling daarvan in Tabel 1.1 niet wordt genoemd, de algemene concentratiegrens voor indeling in de toepasselijke punten van de delen 3, 4 en 5 van deze bijlage.

- b) Voor gevaren voor het aquatisch milieu in punt 4.1 van deze bijlage:
- i) voor stoffen waarvoor een M-factor is bepaald voor de toepasselijke gevarencategorie in deel 3 van bijlage VI, of in de in artikel 42 bedoelde inventaris van indelingen en etiketteringen, de algemene ondergrens in Tabel 1.1, aangepast met behulp van de berekening in punt 4.1 van deze bijlage; of
  - ii) voor stoffen waarvoor geen M-factor is bepaald voor de toepasselijke gevarencategorie in deel 3 van bijlage VI of in de in artikel 42 bedoelde inventaris van indelingen en etiketteringen, de algemene ondergrens in Tabel 1.1.

Tabel 1.1

**Algemene ondergrenzen**

Gevarenklasse	Algemene ondergrenzen waarmee rekening moet worden gehouden
Acute toxiciteit:	
— Categorieën 1, 2 en 3	0,1 %
— Categorie 4	1 %
Huidcorrosie/-irritatie	1 % <sup>(1)</sup>
Ernstig oogletsel/oogirritatie	1 % <sup>(2)</sup>
Gevaar voor het aquatisch milieu	
— Categorie 1 voor acute toxiciteit	0,1 % <sup>(3)</sup>
— Categorie 1 voor chronische toxiciteit	0,1 % <sup>(3)</sup>
— Categorieën 2, 3 en 4 voor chronische toxiciteit	1 %

<sup>(1)</sup> Of, in bepaalde gevallen, < 1 %, zie punt 3.2.3.3.1.  
<sup>(2)</sup> Of, in bepaalde gevallen, < 1 %, zie punt 3.3.3.3.1.  
<sup>(3)</sup> Of, in bepaalde gevallen, < 0,1 %, zie punt 4.1.3.1.

*Opmerking*

De algemene ondergrenzen zijn uitgedrukt in gewichtpercenten, behalve die voor gasmengsels, die in volumepercenten zijn uitgedrukt.

### 1.1.3. **Extrapolatieprincipes voor de indeling van mengsels wanneer er geen testgegevens over het mengsel als geheel beschikbaar zijn**

Wanneer het mengsel zelf niet op gevaarlijke eigenschappen is getest, maar er wel voldoende gegevens over soortgelijke geteste mengsels en afzonderlijke gevaarlijke samenstellende stoffen beschikbaar zijn om de gevaren van het mengsel adequaat te typeren, worden deze gegevens gebruikt overeenkomstig de volgende extrapolatieregels, als bedoeld in artikel 9, lid 4, voor elke afzonderlijke gevarenklasse in de delen 3 en 4 van deze bijlage behoudens de eventuele specifieke bepalingen voor mengsels in elke gevarenklasse.

#### 1.1.3.1. *Verdunning*

Indien een mengsel wordt verdund met een stof (verdunningsmiddel) die in een gelijkwaardige of lagere gevarencategorie is ingedeeld als de minst gevaarlijke oorspronkelijke samenstellende stof en die naar verwachting de gevarenindeling van andere samenstellende stoffen niet beïnvloedt, wordt een van de volgende werkwijzen gevolgd:

- het nieuwe mengsel wordt ingedeeld in een categorie die gelijkwaardig is aan die van het oorspronkelijke mengsel;
- de in elk punt van deel 3 en in deel 4 beschreven methode voor de indeling van mengsels wanneer gegevens over alle bestanddelen of over enkele bestanddelen van het mengsel beschikbaar zijn, wordt toegepast;
- in het geval van acute toxiciteit wordt de methode voor de indeling van mengsels op basis van de bestanddelen van het mengsel (somformule) toegepast.

1.1.3.2. *Productiepartijen*

Er kan van uit worden gegaan dat de gevarencategorie van een productiepartij van een mengsel in wezen gelijkwaardig is aan die van een andere productiepartij van hetzelfde handelsproduct die door of onder toezicht van dezelfde leverancier is vervaardigd, tenzij er redenen zijn om aan te nemen dat er zodanige significante afwijkingen zijn dat de gevarenindeling van de partij is gewijzigd. In dat geval is een nieuwe beoordeling noodzakelijk.

1.1.3.3. *Concentratie van zeer gevaarlijke mengsels*

Bij de indeling van mengsels die onder de punten 3.1, 3.2, 3.3, 3.8, 3.9, 3.10 en 4.1 vallen, wordt, indien een mengsel in de hoogste gevarencategorie of -subcategorie is ingedeeld en de concentratie van de bestanddelen van het mengsel die in die categorie of subcategorie zijn ingedeeld wordt verhoogd, het nieuwe mengsel in dezelfde categorie of -subcategorie ingedeeld, zonder dat aanvullende tests worden verricht.

1.1.3.4. *Interpolatie binnen een toxiciteitscategorie*

Bij de indeling van mengsels die onder de punten 3.1, 3.2, 3.3, 3.8, 3.9, 3.10 en 4.1 vallen, wordt, voor drie mengsels met identieke gevaarlijke bestanddelen waarvan de mengsels A en B tot dezelfde gevarencategorie behoren en mengsel C dezelfde actieve gevaarlijke bestanddelen bevat in concentraties tussen die van de gevaarlijke bestanddelen in de mengsels A en B, mengsel C geacht tot dezelfde gevarencategorie te behoren als A en B.

1.1.3.5. *In wezen gelijke mengsels*

Gegeven:

- a) twee mengsels die elk twee bestanddelen bevatten:
  - i) A + B
  - ii) C + B;
- b) de concentratie van bestanddeel B is in wezen gelijk in beide mengsels;
- c) de concentratie van bestanddeel A in mengsel i) is gelijk aan die van bestanddeel C in mengsel ii);
- d) de gegevens over de gevaren van A en C zijn beschikbaar en in wezen gelijkwaardig, dat wil zeggen dat zij tot dezelfde gevarencategorie behoren en niet verwacht wordt dat zij de gevarenindeling van B beïnvloeden.

Indien mengsel i) op basis van testgegevens reeds in een bepaalde gevarenklasse is ingedeeld, wordt mengsel ii) in dezelfde gevarencategorie ingedeeld.

1.1.3.6. *Herziening van de indeling indien de samenstelling van een mengsel is gewijzigd*

Voor de toepassing van artikel 15, lid 2, onder a), worden de volgende afwijkingen van de oorspronkelijke concentratie vastgesteld:

Tabel 1.2

**Extrapolatieprincipe voor wijzigingen van de samenstelling van een mengsel**

Oorspronkelijk concentratiebereik van het bestanddeel	Toegestane afwijking van de oorspronkelijke concentratie van het bestanddeel
$\leq 2,5 \%$	$\pm 30 \%$
$2,5 < C \leq 10 \%$	$\pm 20 \%$
$10 < C \leq 25 \%$	$\pm 10 \%$
$25 < C \leq 100 \%$	$\pm 5 \%$

1.1.3.7. *Aërosolen*

Bij de indeling van mengsels die onder de punten 3.1, 3.2, 3.3, 3.4, 3.8 en 3.9 vallen, wordt een aerosolvorm van een mengsel in dezelfde gevarencategorie ingedeeld als het niet in aerosolvorm gebrachte mengsel, mits het toegevoegde drijfgas bij het sproeien geen invloed heeft op de gevaarlijke eigenschappen van het mengsel en wetenschappelijk bewijs beschikbaar is dat aantoont dat de aerosolvorm niet gevaarlijker is dan het niet in aerosolvorm gebrachte mengsel.

1.2. **Etikettering**1.2.1. **Afmetingen en vorm van de etiketteringselementen**

1.2.1.1. Voor de in bijlage V vermelde gevarenpictogrammen wordt een zwart symbool op een witte achtergrond gebruikt in een rood kader dat groot genoeg is om duidelijk zichtbaar te zijn.

1.2.1.2. De gevarenpictogrammen hebben de vorm van een vierkant op zijn punt. Elk gevarenpictogram beslaat ten minste een vijftiende deel van het oppervlak van het geharmoniseerde etiket en het oppervlak is niet minder dan 1 cm<sup>2</sup>.

1.2.1.3. De afmetingen van het etiket zijn als volgt:

Tabel 1.3

**Afmeting van etiketten**

Inhoud van de verpakking	Afmetingen (in mm)
Niet meer dan 3 liter:	zo mogelijk ten minste 52 × 74
Meer dan 3 liter, maar niet meer dan 50 liter:	ten minste 74 × 105
Meer dan 50 liter, maar niet meer dan 500 liter:	ten minste 105 × 148
Meer dan 500 liter:	ten minste 148 × 210

1.3. **Afwijkingen van de etiketteringsvoorschriften in bijzondere gevallen**

Overeenkomstig artikel 23 zijn de volgende afwijkingen van toepassing:

1.3.1. **Transportabele gasflessen**

Bij transportabele gasflessen met een watercapaciteit van 150 liter of minder mag:

- a) gebruik worden gemaakt van de opmaak en de afmetingen die zijn voorgeschreven in de meest recente uitgave van de norm ISO 7225 „Gasflessen — Veiligheidsetiketten”. In dit geval mag het etiket de gangbare benaming of de industriële of handelsbenaming van de stof of het mengsel dragen, mits de namen van de gevaarlijke stoffen in een mengsel duidelijk en onuitwisbaar op de buitenkant van de gasfles worden vermeld; of
- b) de in artikel 17 gespecificeerde informatie worden verstrekt op een duurzaam op de fles aangebracht informatieschijfje of -plaatje.

1.3.2. **Gasflessen bedoeld voor propaan, butaan of vloeibaar petroleumgas (LPG)**

1.3.2.1. Indien propaan, butaan en vloeibaar petroleumgas of een mengsel dat deze stoffen bevat en overeenkomstig de criteria van deze bijlage is ingedeeld, in gesloten navulbare flessen of in niet-navulbare gashouders in de zin van EN 417 op de markt wordt gebracht, waarbij zij alleen vrijkomen voor verbranding (meest recente uitgave van EN 417, inzake „Metalen gashouders voor vloeibaar gas (LPG) voor eenmalig gebruik, met of zonder ventiel, voor gebruik met draagbare toestellen — Bouw, inspectie, beproeving en merken”), worden deze flessen of houders alleen geëtiketteerd met het passende pictogram en de gevarenaanduiding en voorzorgsmaatregelen voor ontvlambaarheid.

1.3.2.2. Op het etiket hoeft geen informatie over de effecten op de gezondheid van de mens en op het milieu te worden vermeld. In plaats daarvan verstrekt de leverancier de informatie over de effecten op de gezondheid van de mens en op het milieu via het veiligheidsinformatieblad aan downstreamgebruikers of distributeurs.



1.3.2.3. Aan consumenten moet voldoende informatie worden verstrekt om hen in staat te stellen alle nodige maatregelen ter bescherming van de veiligheid en gezondheid te nemen.

1.3.3. ***Aërosolen en van een vaste verstuiver voorziene houders die stoffen of mengsels bevatten die als gevaarlijk bij aspiratie zijn ingedeeld***

Met het oog op de toepassing van punt 3.10.4 is voor stoffen of mengsels die overeenkomstig de criteria van de punten 3.10.2 en 3.10.3 zijn ingedeeld, geen etikettering voor dat gevaar vereist wanneer zij in spuitbussen of houders met een vaste verstuiver op de markt worden gebracht.

1.3.4. ***Metalen in massieve vorm, legeringen, mengsels die polymeren bevatten, mengsels die elastomeren bevatten***

1.3.4.1. Voor metalen in massieve vorm, legeringen, mengsels die polymeren bevatten en mengsels die elastomeren bevatten, is op grond van deze bijlage geen etiket vereist indien zij, ondanks hun indeling als gevaarlijk overeenkomstig de criteria van deze bijlage, in de vorm waarin ze op de markt worden gebracht geen gevaar opleveren voor de gezondheid van de mens bij inademing, opname door de mond of contact met de huid, en evenmin een gevaar voor het aquatisch milieu vormen.

1.3.4.2. In plaats daarvan verstrekt de leverancier deze informatie via het veiligheidsinformatieblad aan downstreamgebruikers en distributeurs.

1.3.5. ***Ontplobbare stoffen die met het oog op hun explosieve of pyrotechnische eigenschappen op de markt worden gebracht***

Ontplobbare stoffen zoals bedoeld in punt 2.1, die met het oog op hun explosieve of pyrotechnische eigenschappen op de markt worden gebracht, worden uitsluitend overeenkomstig de voorschriften voor ontplobbare stoffen geëtiketteerd en verpakt.

1.4. ***Verzoek tot gebruik van een andere chemische naam***

1.4.1. ***Verzoeken tot gebruik van een andere chemische naam uit hoofde van artikel 24 kunnen alleen worden ingewilligd wanneer***

- I) voor deze stof in de Gemeenschap geen blootstellingsgrens voor de werkplek is vastgesteld en
- II) de fabrikant, importeur of downstreamgebruiker kan aantonen dat met het gebruik van een andere chemische naam wordt voldaan aan de eis om voldoende informatie te verstrekken opdat de nodige voorzorgsmaatregelen op het gebied van gezondheid en veiligheid op de werkplek kunnen worden genomen, en aan de eis dat de risico's die uit de verwerking van het mengsel voortvloeien, kunnen worden beheerst; en tevens
- III) de stof uitsluitend in een of meerdere van de volgende gevarencategorieën is ingedeeld:
  - a) een van de gevarencategorieën vermeld in deel 2 van deze bijlage;
  - b) acute toxiciteit, categorie 4;
  - c) huidcorrosie/-irritatie, categorie 2;
  - d) ernstig oogletsel/oogirritatie, categorie 2;
  - e) specifieke doelorgaan toxiciteit bij eenmalige blootstelling, categorie 2 of 3;
  - f) specifieke doelorgaan toxiciteit bij herhaalde blootstelling, categorie 2;
  - g) gevaar voor het aquatisch milieu, chronisch, categorie 3 of 4.

1.4.2. ***De keuze van de chemische naam (namen) voor mengsels die voor de geur- of reukstoffensector zijn bestemd***

Voor stoffen die in de natuur voorkomen, kan een chemische naam of kunnen chemische namen van het type „etherische olie van ...” of „extract van ...” worden gebruikt in plaats van de chemische namen van de bestanddelen van die etherische olie of dat extract bedoeld in artikel 18, lid 3, onder b).

**1.5. Vrijstelling van de etiketterings- en verpakkingsvoorschriften****1.5.1. Vrijstelling van artikel 31 [artikel 29, lid 1]**

1.5.1.1. Indien artikel 29, lid 1, van toepassing is, kunnen de in artikel 17 genoemde etiketteringselementen aangebracht worden op een van de volgende manieren:

- a) uitvouwbare etiketten; of
- b) hangkaartjes; of
- c) een buitenverpakking.

1.5.1.2. Op het etiket van een binnenverpakking staan ten minste de gevarenpictogrammen, de in artikel 18 bedoelde productidentificatie alsmede de naam en het telefoonnummer van de leverancier van de stof of het mengsel vermeld.

**1.5.2. Vrijstelling van artikel 17 [artikel 29, lid 2]**

1.5.2.1. *Etikettering van pakketten met een totale inhoud van ten hoogste 125 ml*

1.5.2.1.1. De in artikel 17 bedoelde voorschriften inzake etiketteringselementen behoeven wat betreft de gevarenaanduidingen en de voorzorgsmaatregelen verbonden aan de volgende gevarencategorieën niet te worden nageleefd:

- a) bij pakketten met een inhoud van ten hoogste 125 ml, wanneer
- b) de stof of het mengsel in een of meerdere van de volgende gevarencategorieën is ingedeeld:
  - 1) oxiderende gassen van categorie 1;
  - 2) gassen onder druk
  - 3) ontvlambare vloeistoffen van categorie 2 of 3;
  - 4) ontvlambare vaste stoffen van categorie 1 of 2;
  - 5) zelfontledende stof of mengsel, type C tot en met F;
  - 6) voor zelfverhitting vatbare stof of mengsel van categorie 2
  - 7) stoffen en mengsels die in contact met water ontvlambare gassen van categorie 1, 2 of 3 ontwikkelt;
  - 8) oxiderende vloeistoffen van categorie 2 of 3;
  - 9) oxiderende vaste stoffen van categorie 2 of 3;
  - 10) organische peroxiden, types C tot en met F;
  - 11) acuut toxische stoffen van categorie 4, indien de stoffen of mengsels niet aan het publiek worden aangeboden;
  - 12) irriterend voor de huid, categorie 2;
  - 13) irriterend voor de ogen, categorie 2;
  - 14) specifieke doelorgaantoxiciteit bij eenmalige blootstelling, categorie 2 of 3, indien de stof of het mengsel niet aan het publiek wordt aangeboden;
  - 15) specifieke doelorgaantoxiciteit bij herhaalde blootstelling, categorie 2, indien de stof of het mengsel niet aan het publiek wordt aangeboden;

16) acuut gevaar voor het aquatisch milieu, categorie 1;

17) chronisch gevaar voor het aquatisch milieu, categorie 1 of 2.

De vrijstellingen van Richtlijn 75/324/EEG, op grond waarvan kleine pakketten van aerosolen niet als ontvlambaar hoeven te worden geëtiketteerd, is van toepassing op spuitbussen.

1.5.2.1.2. De voorzorgsmaatregelen verbonden aan de volgende gevarencategorieën mogen uit de bij artikel 17 voorgeschreven etiketteringselementen worden weggelaten:

- a) bij pakketten met een inhoud van ten hoogste 125 ml, wanneer
- b) de stof of het mengsel in een of meerdere van de volgende gevarencategorieën is ingedeeld:
  - 1) ontvlambare gassen van categorie 2;
  - 2) giftig voor de voortplanting; effecten op of via lactatie.
  - 3) chronisch gevaar voor het aquatisch milieu, categorie 3 of 4.

1.5.2.1.3. Het pictogram, de gevarenaanduidingen en de voorzorgsmaatregelen verbonden aan de volgende gevarencategorieën mogen uit de bij artikel 17 voorgeschreven etiketteringselementen worden weggelaten:

- a) bij pakketten met een inhoud van ten hoogste 125 ml, wanneer
- b) de stof of het mengsel in een of meerdere van de volgende gevarencategorieën is ingedeeld:
  - 1) bijtend voor metalen.

1.5.2.2. *Etikettering van oplosbare verpakkingen voor eenmalig gebruik*

De bij artikel 17 voorgeschreven etiketteringselementen mogen van oplosbare verpakkingen voor eenmalig gebruik worden weggelaten:

- a) bij oplosbare verpakkingen met een inhoud van ten hoogste 25 ml;
- b) wanneer de inhoud van de oplosbare verpakking in uitsluitend een of meerdere van de bij punt 1.5.2.1.1, onder b), vermelde gevarencategorieën is ingedeeld; en
- c) wanneer de oplosbare verpakkingen in een buitenverpakking zit die volledig aan de eisen van artikel 17 voldoet.

1.5.2.3. Punt 1.5.2.2 is niet van toepassing op stoffen of mengsels die onder Richtlijn 91/414/EEG of Richtlijn 98/8/EG vallen.

2. DEEL 2: FYSISCHE GEVAREN

2.1. **Ontplobbare stoffen**

2.1.1. **Definities**

2.1.1.1. Onder de klasse ontplobbare stoffen vallen:

- a) ontplobbare stoffen en mengsels;
- b) ontplobbare voorwerpen, met uitzondering van apparatuur die ontplobbare stoffen of mengsels in zodanige hoeveelheid of van zodanige aard bevat dat onopzettelijke of accidentele ontsteking of inleiding ervan geen effecten buiten die apparatuur teweegbrengt door scherfwerking, brand, rook, warmte of lawaai; en tevens
- c) niet onder a) en b) vermelde stoffen, mengsels en voorwerpen die vervaardigd zijn om een praktisch explosief of pyrotechnisch effect teweeg te brengen.

2.1.1.2. Voor de toepassing van deze verordening wordt verstaan onder:

„ontplobbare stoffen of mengsels”: vaste of vloeibare stoffen of mengsels van stoffen die als zodanig door een chemische reactie gassen kunnen ontwikkelen met een zodanige temperatuur en druk, en met zodanige snelheid dat schade aan de omgeving wordt toegebracht. Hieronder vallen ook pyrotechnische stoffen die geen gassen ontwikkelen;

„pyrotechnische stoffen of mengsels”: stoffen of mengsels van stoffen bestemd om als gevolg van niet-detonatieve, zichzelf onderhoudende exotherme chemische reacties een effect te veroorzaken in de vorm van warmte, licht, geluid, gas of rook of een combinatie daarvan;

„instabiele ontplobbare stoffen”: ontplobbare stoffen of mengsels die thermisch instabiel zijn en/of te gevoelig zijn om normaal te worden behandeld, vervoerd en gebruikt;

„ontplobbare voorwerpen”: voorwerpen die een of meer ontplobbare stoffen of mengsels bevatten;

„pyrotechnische voorwerpen”: voorwerpen die een of meer pyrotechnische stoffen of mengsels bevatten;

„intentionele ontplobbare stoffen”: stoffen, mengsels en voorwerpen die vervaardigd zijn om een praktisch explosief of pyrotechnisch effect teweeg te brengen.

2.1.2. **Indelingscriteria**

2.1.2.1. Stoffen, mengsels en voorwerpen van deze klasse worden als instabiele ontplobbare stoffen ingedeeld op basis van de flowchart in figuur 2.1.2. De testmethoden staan beschreven in deel I van de UN Recommendations on the Transport of Dangerous Goods, Manual of Tests and Criteria.

2.1.2.2. Stoffen, mengsels en voorwerpen van deze klasse die niet als instabiele ontplobbare stof zijn ingedeeld, worden aan de hand van het soort gevaar dat zij opleveren in een van de volgende subklassen ingedeeld:

- a) Subklasse 1.1 stoffen, mengsels en voorwerpen met gevaar voor massa-explosie (een massa-explosie is een explosie die vrijwel onmiddellijk nagenoeg de volledige aanwezige hoeveelheid treft);
- b) Subklasse 1.2 stoffen, mengsels en voorwerpen met gevaar voor scherfwerking, maar zonder gevaar voor massa-explosie;
- c) Subklasse 1.3 stoffen, mengsels en voorwerpen met gevaar voor brand en hetzij een gering gevaar voor luchtdrukwerking, hetzij een gering gevaar voor scherfwerking, of beide, maar zonder gevaar voor massa-explosie:
  - i) waarvan de verbranding aanzienlijke warmtestraling oplevert; of
  - ii) die een voor een uitbranden, waarbij een geringe luchtdruk- of scherfwerking, of beide, optreden;

- d) Subklasse 1.4 stoffen, mengsels en voorwerpen die geen groot gevaar opleveren:
- stoffen, mengsels en voorwerpen die slechts een gering gevaar opleveren bij ontsteking of inleiding. De gevolgen blijven in hoofdzaak beperkt tot de verpakking en er valt geen scherfwerking van enige omvang of reikwijdte te verwachten. Een van buitenaf inwerkende brand mag niet leiden tot een vrijwel onmiddellijke ontploffing van nagenoeg de gehele inhoud van de verpakking;
- e) Subklasse 1.5 zeer weinig gevoelige stoffen of mengsels met gevaar voor massa-explosie:
- stoffen en mengsels met gevaar voor massa-explosie, maar die zo weinig gevoelig zijn dat er onder normale omstandigheden een zeer geringe kans bestaat op inleiding of op de overgang van verbranding naar detonatie;
- f) Subklasse 1.6 extreem weinig gevoelige voorwerpen zonder gevaar voor massa-explosie:
- voorwerpen die uitsluitend extreem weinig gevoelige detonerende stoffen of mengsels bevatten en een verwaarloosbare kans op een onbedoelde inleiding of voortplanting vertonen.
- 2.1.2.3. Ontplobbare stoffen die niet als instabiele ontplobbare stof zijn ingedeeld, worden in een van de zes, in punt 2.1.2.2 van deze bijlage bedoelde subklassen ingedeeld op basis de testreeksen 2 tot en met 8 in deel I van de UN Recommendations on the Transport of Dangerous Goods, Manual of Tests and Criteria aan de hand van de resultaten van de in tabel 2.1.1 vermelde tests:

Tabel 2.1.1

**Criteria voor ontplobbare stoffen**

Categorie	Criteria
Instabiele ontplobbare stoffen of ontplobbare stoffen van de subklassen 1.1 t/m 1.6	Voor ontplobbare stoffen van de subklassen 1.1 tot en met 1.6 wordt de volgende basistestreeks uitgevoerd: Ontploffbaarheid: VN-testreeks 2 (afdeling 12 van de UN Recommendations on the Transport of Dangerous Goods, Manual of Tests and Criteria). Intentionele ontplobbare stoffen <sup>(1)</sup> worden niet aan VN-testreeks 2 onderworpen. Gevoeligheid: VN-testreeks 3 (afdeling 13 van de UN Recommendations on the Transport of Dangerous Goods, Manual of Tests and Criteria). Thermische stabiliteit: VN-testreeks 3(c) (onderafdeling 13.6.1 van de UN Recommendations on the Transport of Dangerous Goods, Manual of Tests and Criteria). Nadere tests zijn noodzakelijk voor de indeling in de juiste subklasse.

<sup>(1)</sup> Hieronder vallen stoffen, mengsels en voorwerpen die vervaardigd zijn om een praktisch explosief of pyrotechnisch effect teweeg te brengen.

- 2.1.2.4. Als ontplobbare stoffen onverpakt zijn of zijn herverpakt in een andere verpakking dan de oorspronkelijke verpakking of een soortgelijke verpakking, worden zij opnieuw getest.

2.1.3. **Voorlichting over de gevaren**

Voor stoffen, mengsels en voorwerpen die aan de criteria voor indeling in deze gevarenklasse voldoen, worden de in tabel 2.1.2 vermelde etiketteringselementen gebruikt.

Noot bij tabel 2.1.2: Onverpakte ontplobbare stoffen of ontplobbare stoffen die zijn herverpakt in een andere verpakking dan de oorspronkelijke verpakking of een soortgelijke verpakking, worden voorzien van alle onderstaande etiketteringselementen:

- a) Pictogram: ontplofende bom;
- b) Signaalwoord: „Gevaar”; en tevens
- c) Gevarenaanduiding: „Ontplobbaar; gevaar voor massa-explosie”,

tenzij aangetoond is dat het gevaar met een van de gevarencategorieën in tabel 2.1.2 overeenkomt, in welk geval de daarmee overeenkomende symbolen, signaalwoorden en/of gevarenaanduidingen worden toegekend.

Tabel 2.1.2

## Etiketteringselementen voor ontplofbare stoffen

Indeling	Instabiele ontplofbare stof	Subklasse 1.1	Subklasse 1.2	Subklasse 1.3	Subklasse 1.4	Subklasse 1.5	Subklasse 1.6
GHS-pictogrammen							
Signaalwoord:	Gevaar	Gevaar	Gevaar	Gevaar	Waarschuwing	Gevaar	Geen signaalwoord
Gevarenaanduiding	H200: Instabiele ontplofbare stof	H201: Ontploffbaar; gevaar voor massa-explosie	H202: Ontploffbaar; ernstig gevaar voor scherfwerking	H203: Ontploffbaar; gevaar voor brand, luchtdrukwerking of scherfwerking	H204: Gevaar voor brand of scherfwerking	H205: Gevaar voor massa-explosie bij brand	Geen gevarenaanduiding
Voorzorgsmaatregelen i.v.m. reactie	P201 P202 P281	P210 P230 P240 P250 P280	P210 P230 P240 P250 P280	P210 P230 P240 P250 P280	P210 P240 P250 P280	P210 P230 P240 P250 P280	Geen voorzorgsmaatregel
Voorzorgsmaatregelen i.v.m. reactie	P372 P373 P380	P370 + P380 P372 P373	P370 + P380 P372 P373	P370 + P380 P372 P373	P370 + P380 P372 P373	P370 + P380 P372 P373	Geen voorzorgsmaatregel
Voorzorgsmaatregelen i.v.m. opslag	P401	P401	P401	P401	P401	P401	Geen voorzorgsmaatregel
Voorzorgsmaatregelen i.v.m. reactie	P501	P501	P501	P501	P501	P501	Geen voorzorgsmaatregel

2.1.4. ***Aanvullende overwegingen bij de indeling***

- 2.1.4.1. De indeling van stoffen, mengsels en voorwerpen in gevarenklassen voor ontplofbare stoffen en de verdere indeling in subklassen is een zeer complexe procedure, die uit drie stappen bestaat. Er moet verwezen worden naar deel I van de UN Recommendations on the Transport of Dangerous Goods, Manual of Tests and Criteria.

Als eerste stap wordt nagegaan of de stof of het mengsel ontplofbaar is (testreeks 1). De tweede stap is de acceptatieprocedure (testreeksen 2 tot en met 4) en de derde stap is de indeling in een gevarensubklasse (testreeksen 5 tot en met 7). De vraag of een kandidaat voor „ammoniumnitraatemulsie, -suspensie of -gel, tussenproduct voor brisante ontplofbare stoffen (ANE)” voldoende weinig gevoelig is om te worden opgenomen als oxiderende vloeistof (punt 2.1.3) of oxiderende vaste stof (punt 2.1.4), wordt beantwoord met behulp van de tests van testreeks 8.


Ontplofbare stoffen en mengsels die vochtig worden gemaakt met water of alcohol of met andere stoffen worden verdund om hun explosieve eigenschappen te onderdrukken, kunnen voor de indeling anders worden behandeld en er kan gebruik worden gemaakt andere gevarenklassen, rekening houdend met de fysische eigenschappen ervan (zie ook bijlage II, punt 1.1).

Bepaalde fysische gevaren (als gevolg van explosieve eigenschappen) worden gewijzigd door verdunding, zoals het geval is bij ongevoelig gemaakte ontplofbare stoffen, door opname in een mengsel of voorwerp, door verpakking of door andere factoren.

De indelingsprocedure volgt het onderstaande stroomschema (zie figuren 2.1.1 tot en met 2.1.4).

Figuur 2.1.1

Algemeen schema van de indelingsprocedure voor een stof, mengsel of voorwerp in de klasse ontplofbare stoffen (vervoersklasse 1)

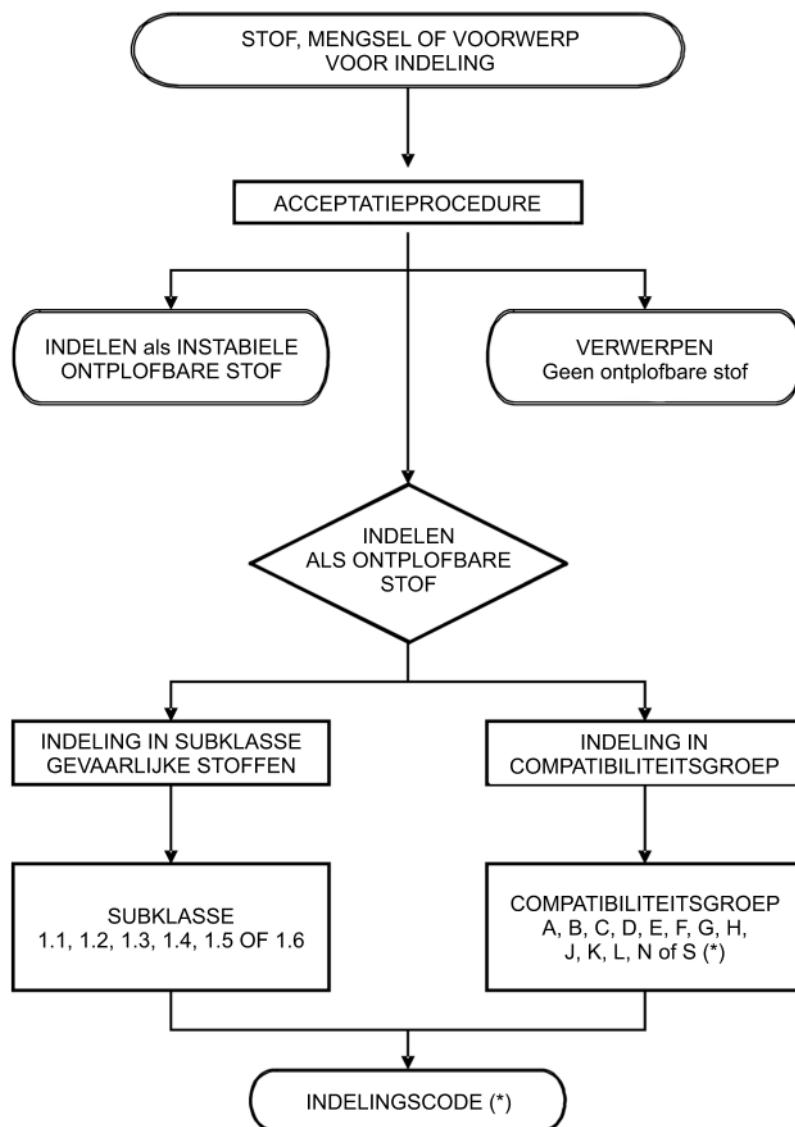


(\*) zie UN Recommendations on the Transport of Dangerous Goods, Model Regulations, 15de, herziene uitgave, punt 2.1.2.



Figuur 2.1.2


Procedure voor de voorlopige acceptatie van een stof, mengsel of voorwerp in de klasse ontplofbare stoffen (vervoersklasse 1)

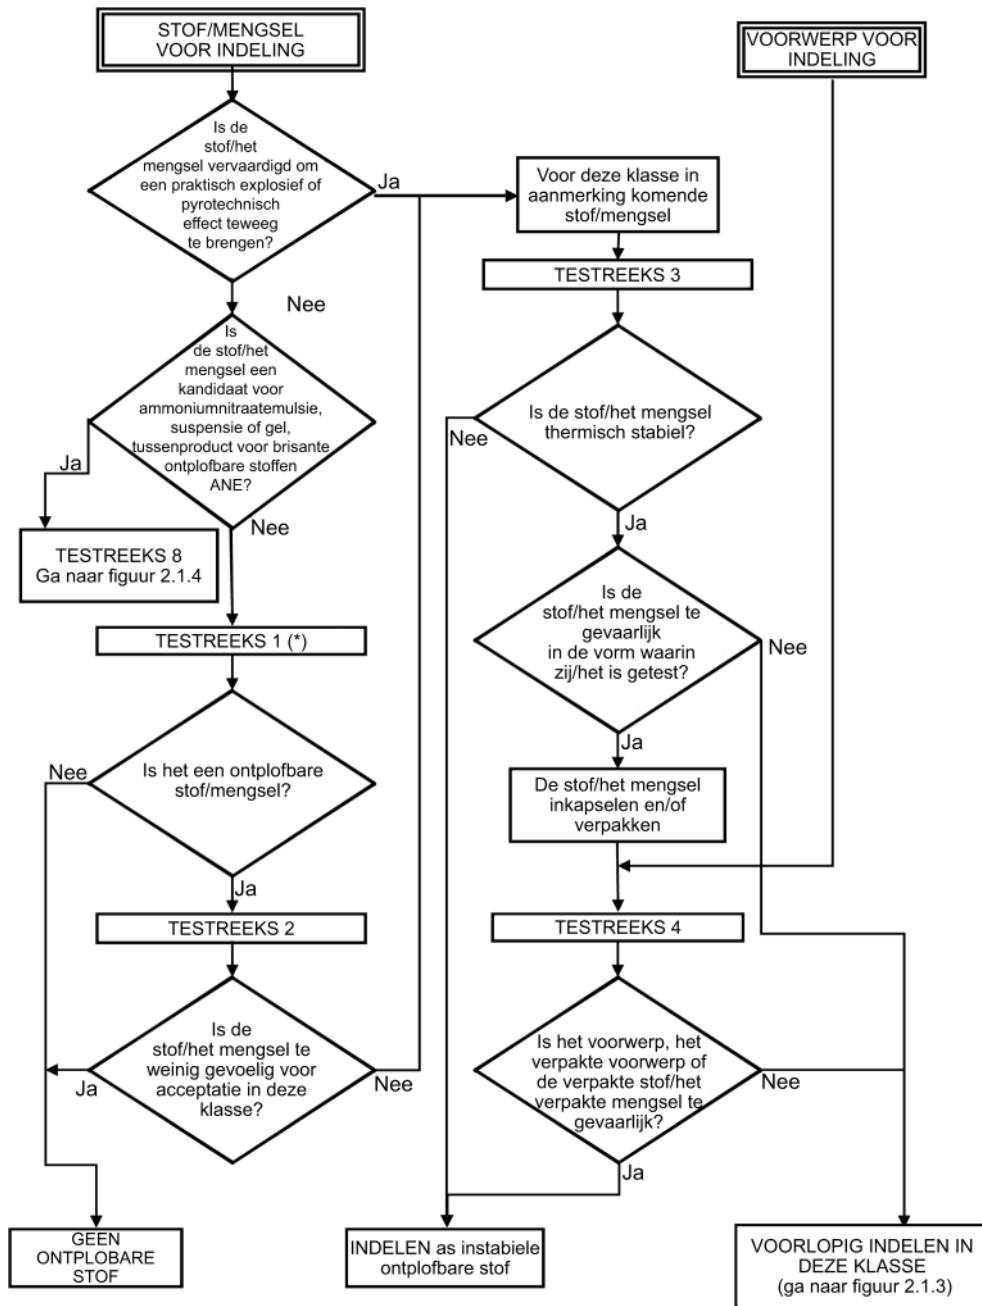


(\*) Voor de indeling starten met testreeks 2.

Figuur 2.1.3

Procedure voor het indelen van ontplofbare stoffen in een subklasse (vervoersklasse 1)

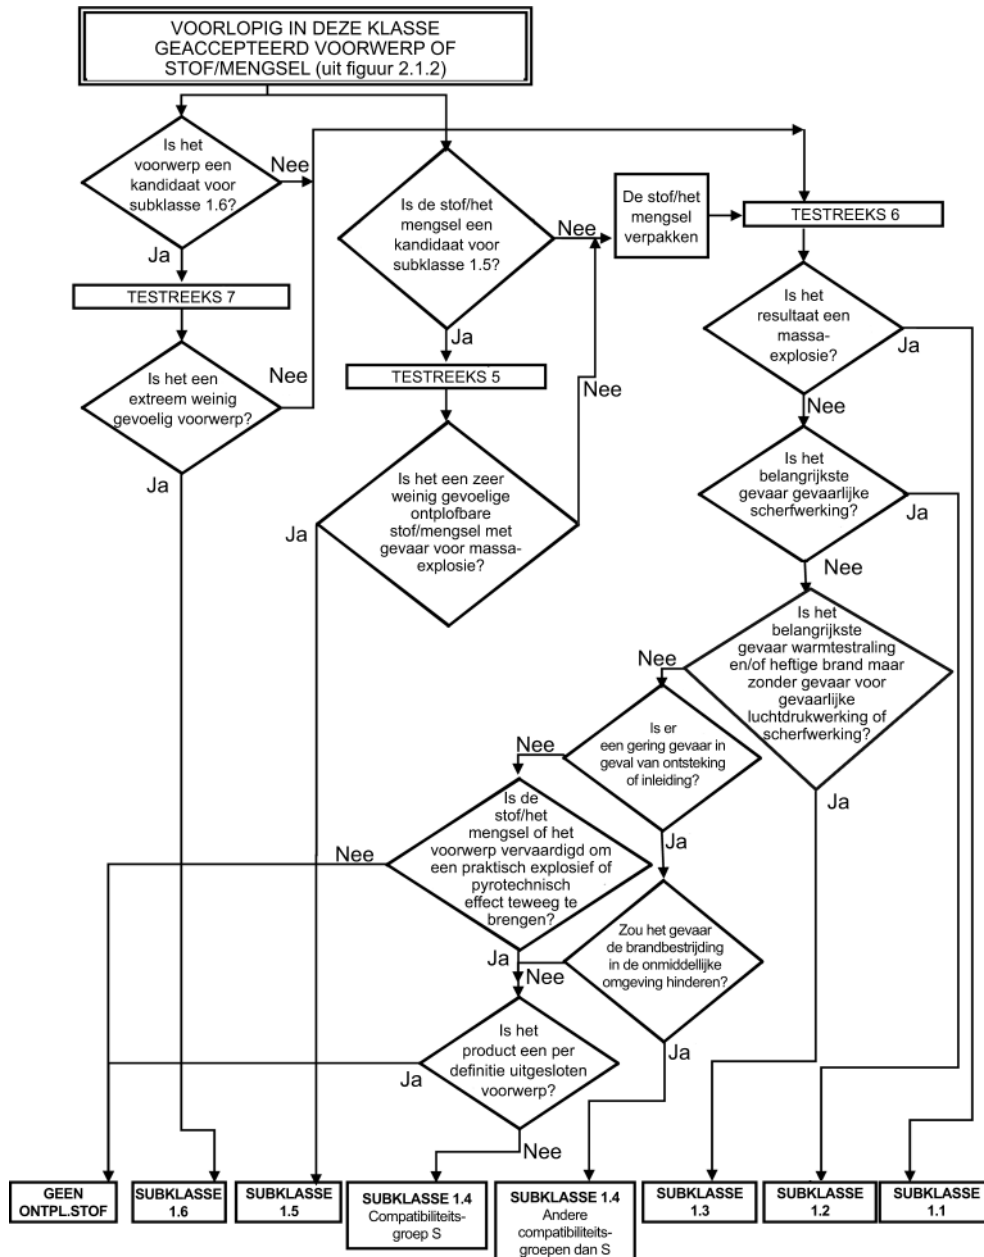

Figuur 2.1.4

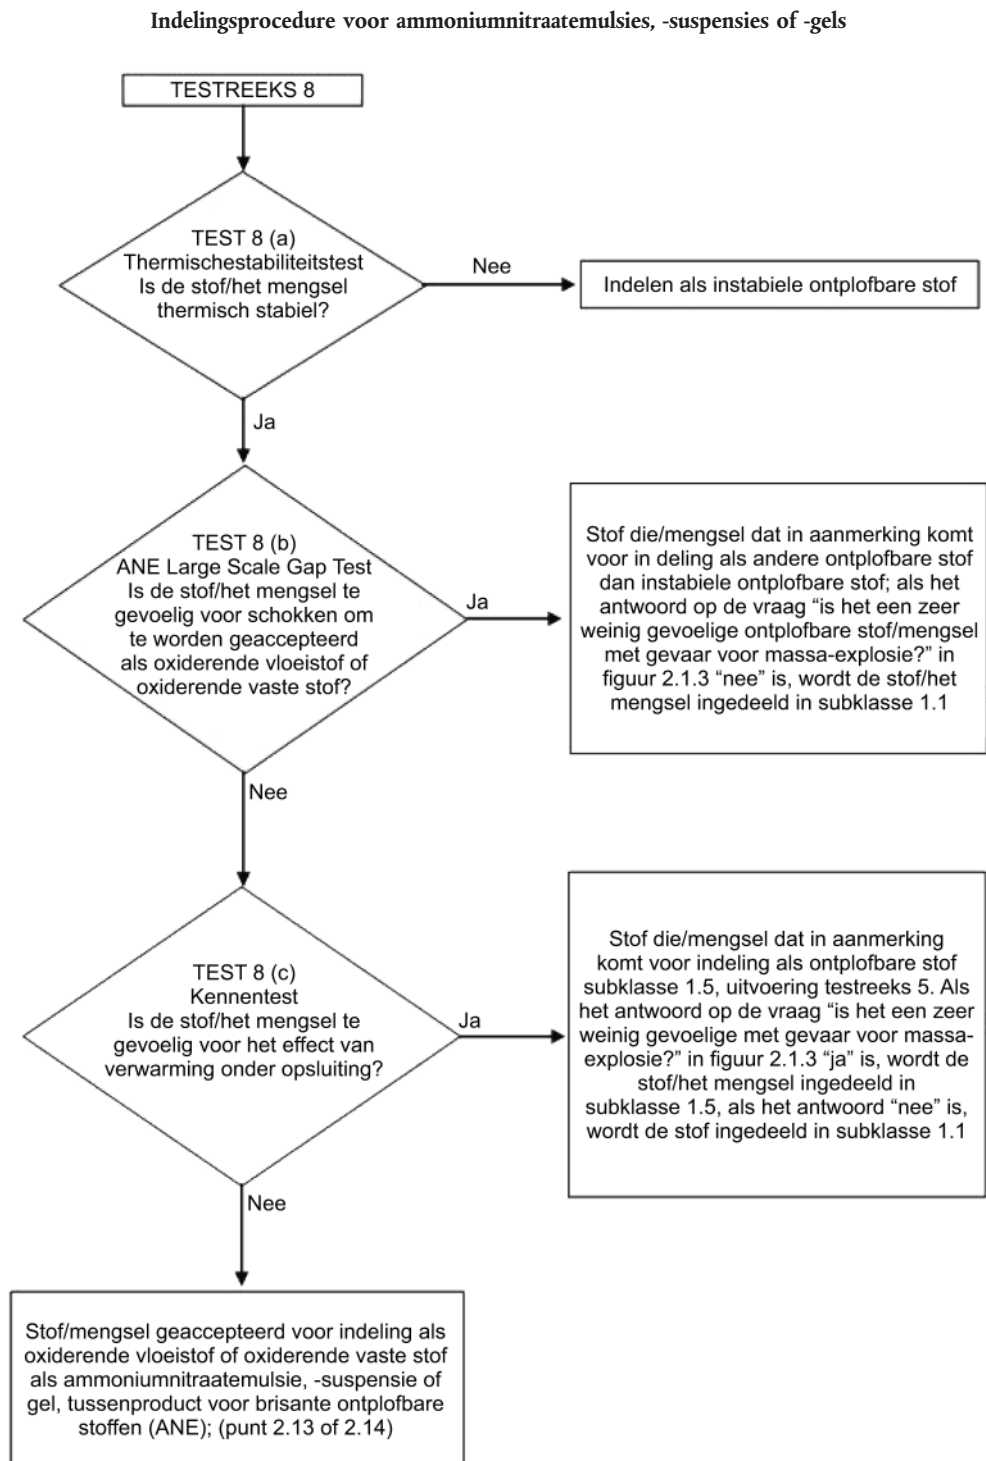

#### 2.1.4.2. *Screeningprocedure*

Explosieve eigenschappen worden geassocieerd met de aanwezigheid van bepaalde chemische groepen in een molecuul die een reactie kunnen veroorzaken waarbij de temperatuur of de druk zeer snel toeneemt. De screeningprocedure is bedoeld om vast te stellen of dergelijke reactieve groepen aanwezig zijn en of snel energie kan vrijkomen. Indien de screeningprocedure uitwijst dat de stof of het mengsel een potentiële ontplofbare stof is, wordt de acceptatieprocedure toegepast (zie afdeling 10.3 van de UN Recommendations on the Transport of Dangerous Goods, Manual of Tests and Criteria).


*Noot:*

Als de exotherme ontledingsenergie van organische materialen lager is dan 800 J/g, is geen test op detonatievoortplanting (reeks 1, type a) en geen test op gevoeligheid voor detonatieschok (reeks 2, type a) vereist.

#### 2.1.4.3. Een stof of mengsel wordt niet als ontplofbare stof ingedeeld indien:

- a) het molecuul geen chemische groepen bevat die met ontploffingsgevaar worden geassocieerd. Voorbeelden van groepen die explosieve eigenschappen kunnen vertonen, worden gegeven in tabel A6.1 in aanhangsel 6 van de UN Recommendations on the Transport of Dangerous Goods, Manual of Tests and Criteria; of
- b) de stof chemische groepen bevat die met explosieve eigenschappen worden geassocieerd die zuurstof bevatten en de berekende zuurstofbalans lager is dan - 200.

De zuurstofbalans wordt berekend voor de chemische reactie:



Gebruikte formule:

$$\text{zuurstofbalans} = - 1\,600 [2x + (y/2) - z]/\text{molecuulgewicht};$$

- c) de organische stof of een homogeen mengsel van organische stoffen chemische groepen bevat die met explosieve eigenschappen worden geassocieerd, maar de exotherme ontledingsenergie lager is dan 500 J/g en de exotherme ontleding beneden 500 °C begint. De exotherme ontledingsenergie kan worden bepaald met een geschikte calorimetrische techniek; of
- d) bij mengsels van anorganische oxiderende stoffen met een of meer organische materialen, de concentratie van de anorganische oxiderende stof:
  - minder bedraagt dan 15 gewichtspersent, indien de oxiderende stof in categorie 1 of 2 is ingedeeld;
  - minder bedraagt dan 30 gewichtspersent, indien de oxiderende stof in categorie 3 is ingedeeld.

#### 2.1.4.4. Bij mengsels die bekende ontplofbare stoffen bevatten, wordt de acceptatieprocedure toegepast.

## 2.2. **Ontvlambare gassen**

### 2.2.1. **Definitie**

Onder „ontvlambare gassen” worden verstaan gassen of gasmengsels die een ontvlambaarheidsinterval met lucht hebben bij 20 °C en een standaarddruk van 101,3 kPa.

### 2.2.2. **Indelingscriteria**

#### 2.2.2.1. Een ontvlambaar gas wordt overeenkomstig tabel 2.2.1 in deze klasse ingedeeld.

Tabel 2.2.1.

**Criteria voor ontvlambare gassen**

Categorie	Criteria
1	Gassen die bij 20 °C en een standaarddruk van 101,3 kPa: a) ontvlambaar zijn wanneer zij 13 volumepercent of minder uitmaken van een mengsel met lucht; of b) een ontvlambaarheidsinterval met lucht hebben van ten minste 12 procentpunt, ongeacht de ondergrens van het ontvlambaarheidsinterval.
2	Gassen, met uitzondering van gassen van categorie 1, die bij 20 °C en een standaarddruk van 101,3 kPa een ontvlambaarheidsinterval hebben wanneer zij gemengd zijn met lucht.

*Nota*


Zie punt 2.3 voor de indeling van aerosolen.

2.2.3. **Voorlichting over de gevaren**

Voor stoffen en mengsels die aan de criteria voor indeling in deze gevarenklasse voldoen, worden de in tabel 2.2.2 vermelde etiketteringselementen gebruikt.

Tabel 2.2.2.

**Etiketteringselementen voor ontvlambare gassen**

Indeling	categorie 1	categorie 2
GHS-pictogram		Geen pictogram
Signaalwoord:	Gevaar	Waarschuwing
Gevarenaanduiding	H220: Zeer licht ontvlambaar gas	H221: Ontvlambaar gas
Voorzorgsmaatregelen i.v.m. reactie	P210	P210
Voorzorgsmaatregelen i.v.m. reactie	P377 P381	P377 P381
Voorzorgsmaatregelen i.v.m. opslag	P403	P403
Voorzorgsmaatregelen i.v.m. reactie		

2.2.4. **Aanvullende overwegingen bij de indeling**

2.2.4.1. De ontvlambaarheid wordt bepaald met tests, of bij mengsels waarover voldoende gegevens beschikbaar zijn, met berekeningen volgens de ISO-methoden (zie ISO 10156, zoals gewijzigd, Gases and gas mixtures — Determination of fire potential and oxidising ability for the selection of cylinder valve outlet). Wanneer er onvoldoende gegevens zijn om deze methoden toe te passen, mag de testmethode EN 1839, zoals gewijzigd, worden toegepast (Bepaling van ontploffingen van gassen en dampen).

2.3. **Ontvlambare aerosolen**2.3.1. **Definities**

Onder „aerosolen”, d.w.z. spuitbussen, worden verstaan niet-navulbare houders van metaal, glas of kunststof die een samengeperst, vloeibaar gemaakt of onder druk opgelost gas bevatten, al dan niet met een vloeistof, pasta of poeder, en voorzien zijn van een afgiftesysteem waarmee de inhoud als vaste of vloeibare deeltjes in suspensie in een gas dan wel als schuim, pasta, poeder, vloeistof of gas kan worden vrijgegeven.

### 2.3.2. *Indelingscriteria*

2.3.2.1. Aerosolen komen overeenkomstig punt 2.3.2.2 in aanmerking voor indeling als ontvlambaar indien zij een bestanddeel bevatten dat overeenkomstig de criteria in dit deel als ontvlambaar is ingedeeld, dat wil zeggen:

- vloeistoffen waarvan het vlampunt niet hoger is dan 93 °C, met inbegrip van ontvlambare vloeistoffen overeenkomstig punt 2.6;
- ontvlambare gassen (zie punt 2.2);
- ontvlambare vaste stoffen (zie punt 2.7).


*Noot:*

Onder ontvlambare bestanddelen worden niet verstaan pyrofore, voor zelfverhitting vatbare of met water reagerende stoffen en mengsels, omdat dergelijke bestanddelen nooit in aerosolen worden gebruikt.

2.3.2.2. Een ontvlambare aerosol wordt op basis van de bestanddelen, de chemische verbrandingswarmte, en in voorkomend geval de resultaten van de schuimtest (voor schuimaerosolen) of de ontbrandingsafstandtest en de ontbrandingstest in gesloten ruimte (voor sprayaerosolen) overeenkomstig figuur 2.3.1 en de UN Recommendations on the Transport of Dangerous Goods, Manual of Tests and Criteria, deel III, punten 31.4, 31.5 en 31.6 ingedeeld in een van de twee categorieën van deze klasse.

Figuur 2.3.1.


**Figuur 2.3.1 (a) voor ontvlambare aerosolen**

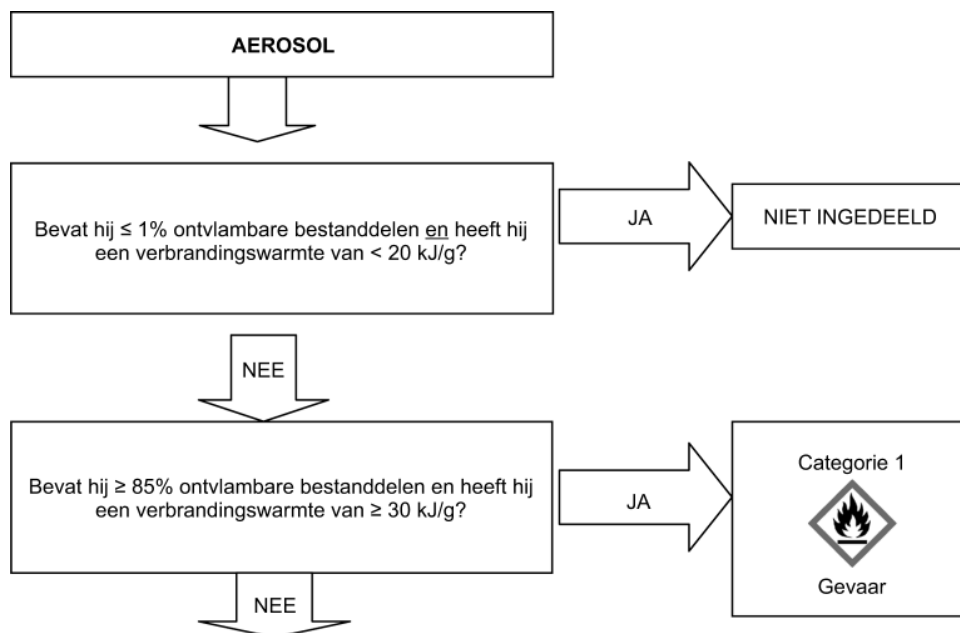


Voor sprayaerosolen, zie stroomschema 2.3.1 (b);

Voor schuimaerosolen, zie stroomschema 2.3.1 (c);

Figuur 2.3.1 (b) voor sprayaerosolen

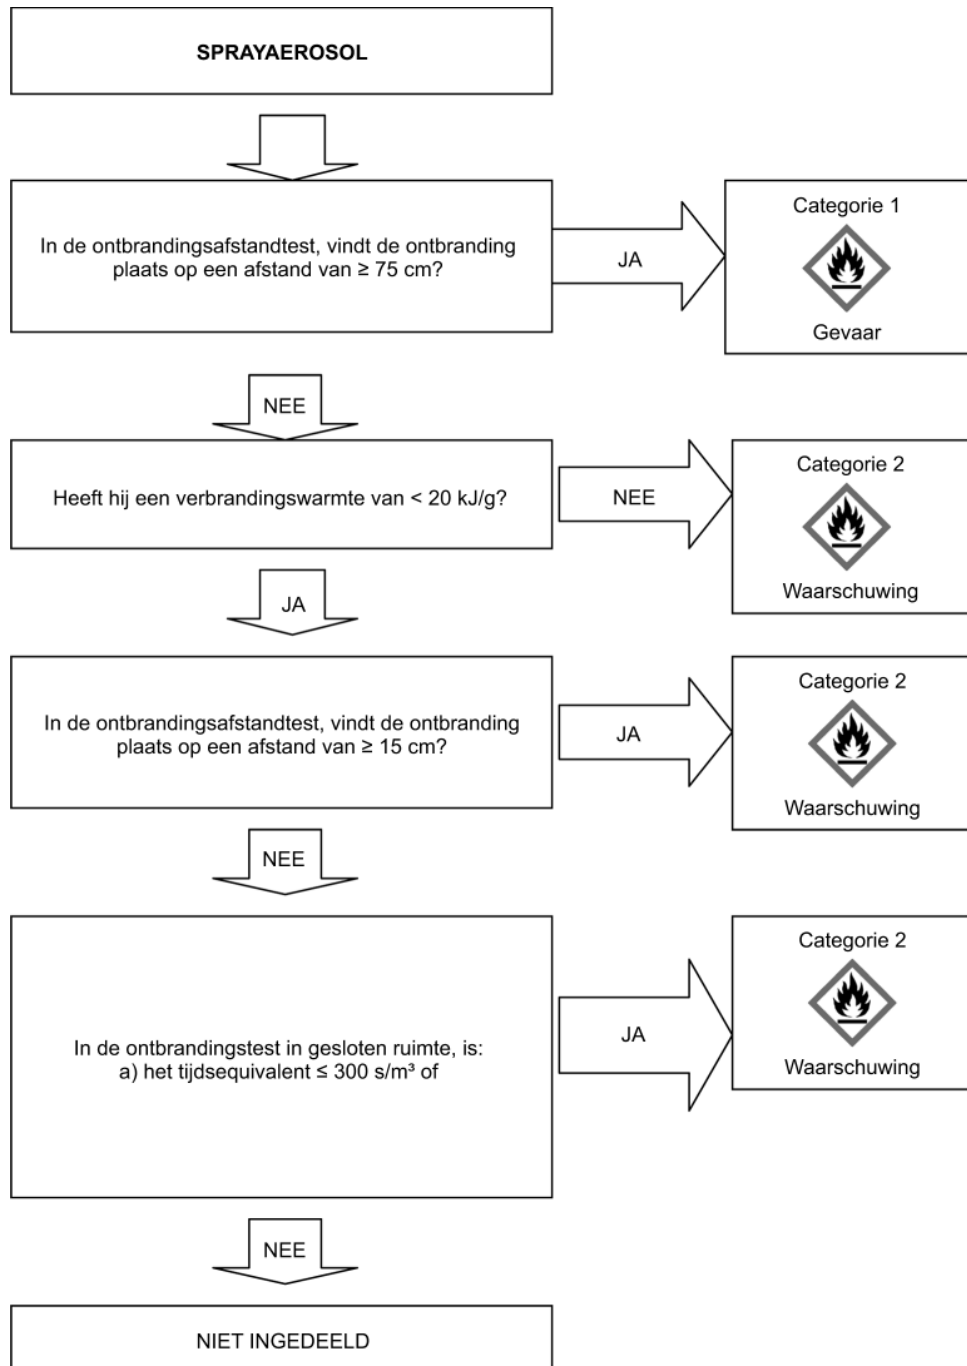

Figuur 2.3.1 (c) voor schuimaerosolen

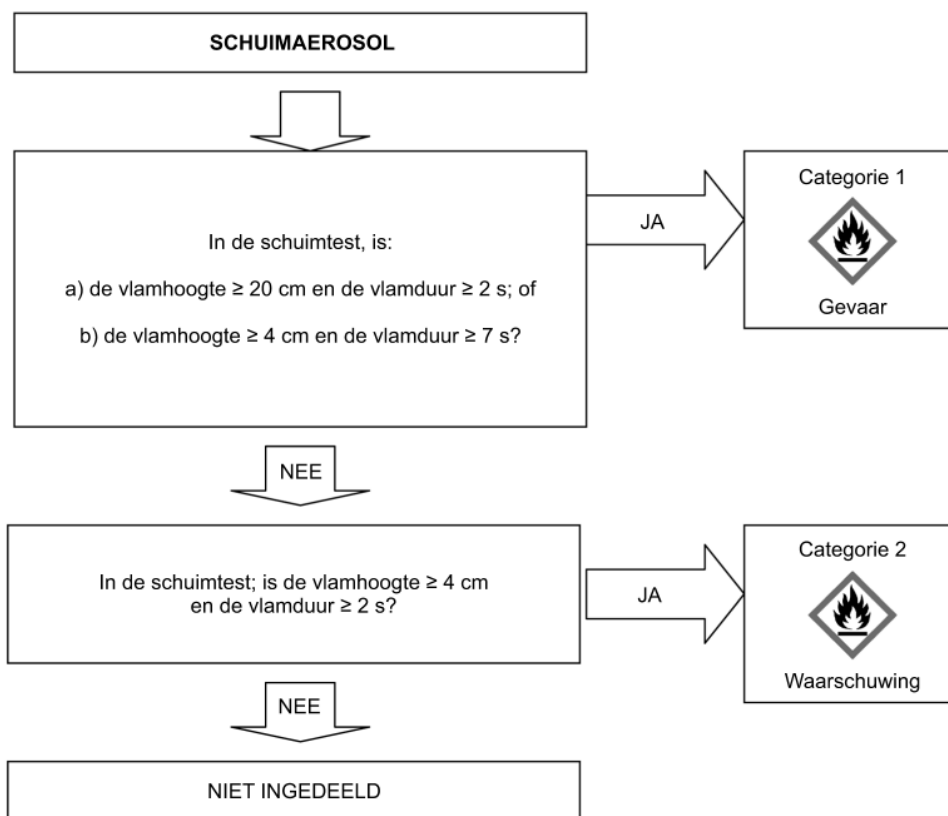



### 2.3.3. Voorlichting over de gevaren

Voor stoffen en mengsels die aan de criteria voor indeling in deze gevarenklasse voldoen, worden de in tabel 2.3.2 vermelde etiketteringselementen gebruikt.

Tabel 2.3.2.

#### Etiketteringselementen voor ontvlambare aerosolen

Indeling	categorie 1	categorie 2
GHS-pictogrammen		
Signaalwoord:	Gevaar	Waarschuwing
Gevarenaanduiding	H222: Zeer licht ontvlambare aerosol	H223: Ontvlambare aerosol
Voorzorgsmaatregelen i.v.m. reactie	P210 P211 P251	P210 P211 P251
Voorzorgsmaatregelen i.v.m. reactie		
Voorzorgsmaatregelen i.v.m. opslag	P410 + P412	P410 + P412
Voorzorgsmaatregelen i.v.m. reactie		



### 2.3.4. **Aanvullende overwegingen bij de indeling**

- 2.3.4.1. De chemische verbrandingswarmte ( $\Delta H_c$ ), uitgedrukt in kilojoule per gram (kJ/g), is het product van de theoretische verbrandingswarmte ( $\Delta H_{comb}$ ) en een verbrandingsrendement, gewoonlijk minder dan 1,0 (een gebruikelijk verbrandingsrendement is 0,95 of 95 %).

Voor samengestelde aerosolen is de chemische verbrandingswarmte de som van de gewogen verbrandingswarmten van de afzonderlijke bestanddelen:

$$\Delta H_{c(\text{product})} = \sum_1^n [w_i \% \times \Delta H_{c(i)}]$$

waarbij:

$\Delta H_c$  = chemische verbrandingswarmte (kJ/g);

$w_i$  % = massafractie van bestanddeel i in het product;

$\Delta H_{c(i)}$  = specifieke verbrandingswarmte (kJ/g) van bestanddeel i in het product.

De chemische verbrandingswarmte kan aan de literatuur worden ontleend, worden berekend of proefondervindelijk worden bepaald (zie ASTM D 240, zoals gewijzigd, Standard Test Methods for Heat of Combustion of Liquid Hydrocarbon Fuels by Bomb Calorimeter, EN/ISO 13943, zoals gewijzigd, 86.1 t/m 86.3, Fire safety, Vocabulary, en NFPA 30B, zoals gewijzigd, Code for the Manufacture and Storage of Aerosol Products).

## 2.4. **Oxiderende gassen**

### 2.4.1. **Definities**

Onder „oxiderende gassen” worden verstaan gassen of gasmengsels die, gewoonlijk door het afstaan van zuurstof, de verbranding van ander materiaal in grotere mate veroorzaken of bevorderen dan lucht.

### 2.4.2. **Indelingscriteria**

- 2.4.2.1. Een oxiderend gas wordt overeenkomstig tabel 2.4.1 in de enige categorie van deze klasse ingedeeld.

Tabel 2.4.1.

#### Criteria voor oxiderende gassen

Categorie	Criteria
1	Een gas dat, gewoonlijk door het afstaan van zuurstof, de verbranding van ander materiaal in grotere mate veroorzaakt of bevordert dan lucht.

Nota:


„gassen die de verbranding van ander materiaal in grotere mate veroorzaken of bevorderen dan lucht” zijn zuivere gassen of gasmengsels met een oxiderende kracht groter dan 23,5 %, vastgesteld volgens een methode gespecificeerd in ISO 10156, gewijzigd, of 10156-2, gewijzigd.

### 2.4.3. **Voorlichting over de gevaren**

Voor stoffen en mengsels die aan de criteria voor indeling in deze gevarenklasse voldoen, worden de in tabel 2.4.2 vermelde etiketteringselementen gebruikt.

Tabel 2.4.2.

#### Etiketteringselementen voor oxiderende gassen

Indeling	categorie 1
GHS-pictogram	

Indeling	categorie 1
Signaalwoord:	Gevaar
Gevarenaanduiding	H270: Kan brand veroorzaken of bevorderen; oxiderend
Voorzorgsmaatregelen i.v.m. reactie	P220 P244
Voorzorgsmaatregelen i.v.m. reactie	P370 + P376
Voorzorgsmaatregelen i.v.m. opslag	P403
Voorzorgsmaatregelen i.v.m. reactie	

#### 2.4.4. **Aanvullende overwegingen bij de indeling**

Bij de indeling van een oxiderend gas wordt gebruikgemaakt van de tests of berekeningsmethoden in ISO 10156, zoals gewijzigd, Gases and gas mixtures — Determination of fire potential and oxidizing ability for the selection of cylinder valve outlets, en ISO 10156-2, zoals gewijzigd, Gasflessen — Gassen en gasmengsels — Bepaling van het oxidatievermogen van giftige en corrosieve gassen en gasmengsels.

### 2.5. **Gassen onder druk**

#### 2.5.1. **Definitie**

2.5.1.1. Onder „gassen onder druk” worden verstaan gassen die zich bij een druk van 200 kPa (overdruk) of meer in een houder bevinden of die een vloeibaar of een vloeibaar en sterk gekoeld gas zijn.

Hieronder vallen samengeperste, vloeibare, opgeloste en sterk gekoelde vloeibare gassen.

2.5.1.2. De kritische temperatuur is de temperatuur waarboven een zuiver gas, ongeacht de mate van compressie, niet vloeibaar kan worden gemaakt.

#### 2.5.2. **Indelingscriteria**

Gassen worden op basis van hun fysische toestand in de verpakking, overeenkomstig tabel 2.5.1 in een van de vier groepen ingedeeld.

Tabel 2.5.1.

#### **Criteria voor gassen onder druk**





Groep	Criteria
Samengeperst gas	Een gas dat, wanneer het onder druk is verpakt, volledig gasvormig is bij $-50\text{ °C}$ ; met inbegrip van alle gassen met een kritische temperatuur van $\leq -50\text{ °C}$ .
Vloeibaar gemaakt gas	Een gas dat, wanneer het onder druk is verpakt, gedeeltelijk vloeibaar is bij temperaturen hoger dan $-50\text{ °C}$ . Er wordt onderscheid gemaakt tussen: i) bij hoge druk vloeibare gassen: gassen met een kritische temperatuur tussen $-50\text{ °C}$ en $+65\text{ °C}$ ; en tevens ii) bij lage druk vloeibare gassen: gassen met een kritische temperatuur van meer dan $+65\text{ °C}$ .
Sterk gekoeld vloeibaar gas	Een gas dat, wanneer het verpakt is, door de lage temperatuur gedeeltelijk vloeibaar is.
Opgelost gas	Een gas dat, wanneer het onder druk verpakt is, opgelost is in een oplosmiddel in de vloeistoffase.

### 2.5.3. **Voorlichting over de gevaren**

Voor stoffen en mengsels die aan de criteria voor indeling in deze gevarenklasse voldoen, worden de in tabel 2.5.2 vermelde etiketteringselementen gebruikt.

Tabel 2.5.2.

#### Etiketteringselementen voor gassen onder druk

Indeling	Samengeperst gas	Vloeibaar gemaakt gas	Sterk gekoeld vloeibaar gas	Opgelost gas
GHS-pictogrammen				
Signaalwoord:	Waarschuwing	Waarschuwing	Waarschuwing	Waarschuwing
Gevarenaanduiding	H280: Bevat gas onder druk; kan ontploffen bij verwarming	H280: Bevat gas onder druk; kan ontploffen bij verwarming	H281: Bevat sterk gekoeld gas; kan cryogene brandwonden of letsels veroorzaken	H280: Bevat gas onder druk; kan ontploffen bij verwarming
Voorzorgsmaatregelen i.v.m. reactie			P282	
Voorzorgsmaatregelen i.v.m. reactie			P336 P315	
Voorzorgsmaatregelen i.v.m. opslag	P410 + P403	P410 + P403	P403	P410 + P403
Voorzorgsmaatregelen i.v.m. reactie				

### 2.5.4. **Aanvullende overwegingen bij de indeling**

Voor deze groep gassen moet de volgende informatie bekend zijn:

- de dampspanning bij 50 °C;
- de fysische toestand bij 20 °C en standaardomgevingsdruk;
- de kritische temperatuur.

De gegevens kunnen aan de literatuur worden ontleend, worden berekend of proefondervindelijk worden bepaald. De meeste zuivere gassen zijn al ingedeeld in de UN Recommendations on the Transport of Dangerous Goods, Model Regulations.

## 2.6. **Ontvlambare vloeistoffen**

### 2.6.1. **Definitie**

Onder „ontvlambare vloeistoffen” worden verstaan vloeistoffen waarvan het vlampunt niet hoger is dan 60 °C.

### 2.6.2. **Indelingscriteria**

- 2.6.2.1. Een ontvlambare vloeistof wordt overeenkomstig tabel 2.6.1 in een van de drie categorieën van deze klasse ingedeeld.

Tabel 2.6.1.

**Criteria voor ontvlambare vloeistoffen**

Categorie	Criteria
1	Vlampunt < 23 °C en beginkookpunt ≤ 35 °C
2	Vlampunt < 23 °C en beginkookpunt > 35 °C
3	Vlampunt ≥ 23 °C en ≤ 60 °C <sup>(1)</sup>




<sup>(1)</sup> Voor de toepassing van deze verordening kunnen gasolie, diesel en lichte stookolie met een vlampuntbereik tussen ≥ 55 °C en ≤ 75 °C tot categorie 3 worden gerekend.

2.6.3. **Voorlichting over de gevaren**

Voor stoffen en mengsels die aan de criteria voor indeling in deze gevarenklasse voldoen, worden de in tabel 2.6.2 vermelde etiketteringselementen gebruikt.

Tabel 2.6.2.

**Etiketteringselementen voor ontvlambare vloeistoffen**

Indeling	categorie 1	categorie 2	categorie 3
GHS-pictogrammen			
Signaalwoord:	Gevaar	Gevaar	Waarschuwing
Gevarenaanduiding	H224: Zeer licht ontvlambare vloeistof en damp	H225: Licht ontvlambare vloeistof en damp	H226: Ontvlambare vloeistof en damp
Voorzorgsmaatregelen i.v.m. reactie	P210 P233 P240 P241 P242 P243 P280	P210 P233 P240 P241 P242 P243 P280	P210 P233 P240 P241 P242 P243 P280
Voorzorgsmaatregelen i.v.m. reactie	P303 + P361 + P353 P370 + P378	P303 + P361 + P353 P370 + P378	P303 + P361 + P353 P370 + P378
Voorzorgsmaatregelen i.v.m. opslag	P403 + P235	P403 + P235	P403 + P235
Voorzorgsmaatregelen i.v.m. reactie	P501	P501	P501

2.6.4. **Aanvullende overwegingen bij de indeling**

- 2.6.4.1. Voor de indeling van ontvlambare vloeistoffen zijn gegevens over het vlampunt en het beginkookpunt vereist. De gegevens kunnen aan de literatuur worden ontleend, worden berekend of proefondervindelijk worden bepaald. Indien geen gegevens beschikbaar zijn, worden het vlampunt en het beginkookpunt proefondervindelijk bepaald. Voor de bepaling van het vlampunt wordt een methode met gesloten kroes gevolgd.

- 2.6.4.2. Bij mengsels <sup>(1)</sup> die bekende ontvlambare vloeistoffen bevatten in vastgestelde concentraties, hoewel zij ook niet-vluchtige bestanddelen, zoals polymeren of additieven kunnen bevatten, heeft het vlampunt niet proefondervindelijk te worden bepaald als het volgens de methode in punt 2.6.4.3 berekende vlampunt van het mengsel ten minste 5 °C <sup>(2)</sup> hoger ligt dan dat van het desbetreffende indelingscriterium, en mits:
- de precieze samenstelling van het mengsel bekend is (als het materiaal een gespecificeerd samenstellingsbereik heeft, wordt de samenstelling met het laagste berekende vlampunt voor de beoordeling gebruikt);
  - de onderste ontploffingsgrens van elk bestanddeel bekend is (wanneer deze gegevens worden geëxtrapoleerd naar andere temperaturen dan de testomstandigheden, vindt passende correlatie plaats) alsmede een methode voor de berekening van de onderste ontploffingsgrens;
  - de temperatuursafhankelijkheid van de verzadigde dampspanning en van de activiteitscoëfficiënt voor elk bestanddeel van het mengsel bekend is;
  - de vloeistoffase homogeen is.
- 2.6.4.3. Één geschikte methode staat beschreven in Gmehling and Rasmussen (Ind. Eng. Fundament, 21, 186, (1982)). Voor een mengsel dat niet-vluchtige bestanddelen bevat, wordt het vlampunt berekend op grond van de vluchtige bestanddelen. Niet-vluchtige bestanddelen worden geacht de partiële druk van de oplosmiddelen slechts licht te verlagen, en het berekende vlampunt ligt dan ook slechts iets onder de gemeten waarde.
- 2.6.4.4. Mogelijke testmethoden voor het bepalen van het vlampunt van ontvlambare vloeistoffen zijn opgenomen in tabel 2.6.3.

Tabel 2.6.3.

**Methoden voor het bepalen van het vlampunt van ontvlambare vloeistoffen:**

Europese normen:	EN ISO 1516, gewijzigd Bepaling vlampunt/geen vlampunt — Evenwichtsmethode met afgesloten kroes
	EN ISO 1523, gewijzigd Bepaling vlampunt — Evenwichtsmethode met afgesloten kroes
	EN ISO 2719, gewijzigd Bepaling vlampunt — Pensky-Martens methode met afgesloten kroes
	EN ISO 3679, gewijzigd Bepaling vlampunt — Versnelde evenwichtsmethode met afgesloten kroes
	EN ISO 3680, gewijzigd Bepaling vlampunt/geen vlampunt — Versnelde evenwichtsmethode met afgesloten kroes
	EN ISO 13736, gewijzigd Petroleumproducten en andere vloeistoffen — Bepaling vlampunt — Abel methode met afgesloten kroes
<i>Nationale normen:</i>	
Association française de normalisation, AFNOR:	NF M07-036, gewijzigd Bepaling vlampunt — Vase clos Abel-Pensky (identiek met DIN 51755)
British Standards Institute	BS 2000 Part 170, gewijzigd (identiek met EN ISO 13736)
Deutsches Institut für Normung	DIN 51755 (vlampunten onder 65 °C), gewijzigd Prüfung von Mineralölen und anderen brennbaren Flüssigkeiten; Bestimmung des Flammpunktes im geschlossenen Tiegel, nach Abel-Pensky (identiek met NF M07-036)

<sup>(1)</sup> Tot nu toe is de berekeningsmethode gevalideerd voor mengsels die maximum zes vluchtige bestanddelen bevatten. Deze bestanddelen kunnen ontvlambare vloeistoffen als koolwaterstoffen, ethers, alcohol en esters (behalve acrylaten) zijn en water. Zij is evenwel nog niet gevalideerd voor mengsels die gehalogeneerde zwavelachtige, en/of fosforachtige bestanddelen, alsmede reactieve acrylaten bevatten.

<sup>(2)</sup> Als het berekende vlampunt minder dan 5 °C hoger ligt dan het geldende indelingscriterium, mag de berekeningsmethode niet worden gebruikt en moet het vlampunt proefondervindelijk worden bepaald.

- 2.6.4.5. Vloeistoffen met een vlampunt hoger dan 35 °C behoeven niet in categorie 3 te worden ingedeeld indien test L.2 van de UN Recommendations on the Transport of Dangerous Goods, Manual of Tests and Criteria, deel III, afdeling 32, ter bepaling van het vermogen om verbranding te doorstaan, een negatief resultaat heeft opgeleverd.

## 2.7. Ontvlambare vaste stoffen

### 2.7.1. Definitie

- 2.7.1.1. Onder „ontvlambare vaste stoffen” worden verstaan vaste stoffen die gemakkelijk brandbaar zijn of die door wrijving brand kunnen veroorzaken of bevorderen.

Onder „gemakkelijk brandbare vaste stoffen” worden verstaan poedervormige, korrelige of pasteuze stoffen of mengsels die gevaarlijk zijn omdat zij gemakkelijk worden ontstoken door kortstondig contact met de ontstekingsbron, zoals een brandende lucifer, en omdat de vlammen zich snel verspreiden.

### 2.7.2. Indelingscriteria

- 2.7.2.1. Poedervormige, korrelige of pasteuze stoffen of mengsels (met uitzondering van poeders van metalen of metaallegeringen — zie punt 2.7.2.2) worden ingedeeld als gemakkelijk brandbare vaste stoffen indien in een of meer tests, uitgevoerd volgens de in deel III, onderafdeling 33.2.1, van de UN Recommendations on the Transport of Dangerous Goods, Manual of Tests and Criteria beschreven testmethode, de brandduur minder dan 45 seconden bedraagt of de verbrandingssnelheid hoger ligt dan 2,2 mm/s.

- 2.7.2.2. Poeders van metalen of metaallegeringen worden ingedeeld als ontvlambare vaste stoffen indien zij kunnen worden ontstoken en de reactie zich binnen 10 minuten over de gehele lengte van het monster uitbreidt.

- 2.7.2.3. Een ontvlambare vaste stof wordt overeenkomstig tabel 2.7.1 in een van de twee categorieën van deze klasse ingedeeld aan de hand van methode N.1, zoals beschreven in onderafdeling 33.2.1 van de UN Recommendations on the Transport of Dangerous Goods, Manual of Tests and Criteria.

Tabel 2.7.1.

#### Criteria voor ontvlambare vaste stoffen

Categorie	Criteria
1	Verbrandingssnelheidstest Andere stoffen en mengsels dan metaalpoeders: a) bevochtigde zone stopt vuur niet en b) brandduur < 45 seconden of verbrandingssnelheid > 2,2 mm/s. Metaalpoeders: brandduur ≤ 5 minuten.
2	Verbrandingssnelheidstest Andere stoffen en mengsels dan metaalpoeders: a) bevochtigde zone stopt het vuur ten minste 4 minuten en b) brandduur < 45 seconden of verbrandingssnelheid > 2,2 mm/s. Metaalpoeders: brandduur > 5 minuten en ≤ 10 minuten.

Noot:



De test wordt uitgevoerd op de stof of het mengsel in de aangeboden fysische vorm. Als een bepaalde chemische stof bijvoorbeeld voor levering of opslag wordt aangeboden in een andere fysische vorm dan degene waarin zij is getest en het waarschijnlijk wordt geacht dat deze vorm gevolgen voor de resultaten van de stof in een indelingstest heeft, wordt de stof ook in de nieuwe vorm getest.

2.7.3. **Voorlichting over de gevaren**

Voor stoffen en mengsels die aan de criteria voor indeling in deze gevarenklasse voldoen, worden de in tabel 2.7.2 vermelde etiketteringselementen gebruikt.

Tabel 2.7.2.

**Etiketteringselementen voor ontvlambare vaste stoffen**

Indeling	categorie 1	categorie 2
GHS-pictogrammen		
Signaalwoord:	Gevaar	Waarschuwing
Gevarenaanduiding	H228: Ontvlambare vaste stof	H228: Ontvlambare vaste stof
Voorzorgsmaatregelen i.v.m. reactie	P210 P240 P241 P280	P210 P240 P241 P280
Voorzorgsmaatregelen i.v.m. reactie	P370 + P378	P370 + P378
Voorzorgsmaatregelen i.v.m. opslag		
Voorzorgsmaatregelen i.v.m. reactie		

2.8. **Zelfontledende stoffen en mengsels**2.8.1. **Definitie**

2.8.1.1. Onder „zelfontledende stoffen of mengsels” worden verstaan thermisch instabiele vloeibare of vaste stoffen of mengsels die, ook zonder dat daarbij zuurstof (lucht) is betrokken, een sterk exotherme ontleding kunnen ondergaan. Stoffen en mengsels die overeenkomstig dit deel als ontplofbare stoffen, organische peroxiden of oxiderende stoffen zijn ingedeeld, vallen niet onder deze definitie.

2.8.1.2. Zelfontledende stoffen en mengsels worden geacht explosieve eigenschappen te hebben wanneer laboratoriumproeven uitwijzen dat zij kunnen detoneren, snel explosief kunnen verbranden of bij verwarming onder opsluiting een heftige reactie kunnen vertonen.

2.8.2. **Indelingscriteria**

2.8.2.1. Indeling in deze klasse wordt overwogen voor alle zelfontledende stoffen of mengsels, tenzij:

- a) het ontplofbare stoffen overeenkomstig de criteria in punt 2.1 zijn;
- b) het oxiderende vloeistoffen of vaste stoffen overeenkomstig de criteria in punt 2.13 of 2.14 zijn, met dien verstande dat mengsels van oxiderende stoffen die voor ten minste 5 % uit brandbare organische stoffen bestaan, volgens de procedure van punt 2.8.2.2 als zelfontledende stoffen worden ingedeeld;
- c) het organische peroxiden overeenkomstig de criteria in punt 2.15 zijn;
- d) hun ontledingswarmte minder dan 300 J/g bedraagt; of
- e) hun temperatuur van zelfversnellende ontleding (SADT) hoger is dan 75 °C voor een verpakking van 50 kg <sup>(1)</sup>.

<sup>(1)</sup> Zie Manual of Tests and Criteria van de VN, hoofdstukken 28.1, 28.2 en 28.3 en tabel 28.3.

- 2.8.2.2. Mengsels van oxiderende stoffen die aan de criteria voor indeling als oxiderende stof voldoen, voor ten minste 5 % uit brandbare organische stoffen bestaan en niet aan de in punt 2.8.2.1 onder a), c), d) of e) vermelde criteria voldoen, worden onderworpen aan de indelingsprocedure voor zelfontledende stoffen.

Wanneer dergelijke mengsels de eigenschappen van een zelfontledende stof van type B tot en met F blijken te hebben (zie punt 2.8.2.3), worden zij als zelfontledende stoffen ingedeeld.

Wanneer de test in verpakte vorm wordt uitgevoerd en de verpakking wordt gewijzigd, wordt een nieuwe test uitgevoerd wanneer geoordeeld wordt dat de wijziging van de verpakking gevolgen heeft voor de uitkomst van de test.

- 2.8.2.3. Zelfontledende stoffen en mengsels worden volgens de volgende principes ingedeeld in een van de zeven categorieën (typen A tot en met G) van deze klasse:

- a) zelfontledende stoffen of mengsels die in de verpakking kunnen detoneren of snel explosief kunnen verbranden, worden ingedeeld als zelfontledende stof van TYPE A;
- b) zelfontledende stoffen of mengsels met explosieve eigenschappen die in de verpakking niet kunnen detoneren of snel explosief kunnen verbranden, maar wel onder invloed van warmte in de verpakking kunnen ontploffen, worden ingedeeld als zelfontledende stof van TYPE B;
- c) zelfontledende stoffen of mengsels met explosieve eigenschappen die in de verpakking niet kunnen detoneren, snel explosief kunnen verbranden of onder invloed van warmte kunnen ontploffen, worden ingedeeld als zelfontledende stof van TYPE C;
- d) zelfontledende stoffen of mengsels die bij laboratoriumproeven:
  - i) gedeeltelijk detoneren, niet snel explosief verbranden en bij verwarming onder opsluiting geen heftige reactie vertonen; of
  - ii) in het geheel niet detoneren, langzaam explosief verbranden en bij verwarming onder opsluiting geen heftige reactie vertonen; of
  - iii) in het geheel niet detoneren of explosief verbranden en bij verwarming onder opsluiting een matige reactie vertonen,worden ingedeeld als zelfontledende stof van TYPE D;
- e) zelfontledende stoffen of mengsels die bij laboratoriumproeven in het geheel niet detoneren of explosief verbranden en bij verwarming onder opsluiting een geringe of geen reactie vertonen, worden ingedeeld als zelfontledende stof van TYPE E;
- f) zelfontledende stoffen of mengsels die bij laboratoriumproeven niet onder invloed van cavitatie detoneren, in het geheel niet explosief verbranden, bij verwarming onder opsluiting een geringe of geen reactie vertonen en een gering of geen explosief vermogen bezitten, worden ingedeeld als zelfontledende stof van TYPE F;
- g) zelfontledende stoffen of mengsels die bij laboratoriumproeven niet onder invloed van cavitatie detoneren, in het geheel niet explosief verbranden, bij verwarming onder opsluiting geen reactie vertonen en geen explosief vermogen bezitten, worden, mits zij thermisch stabiel zijn (SADT tussen 60 °C en 75 °C voor een verpakking van 50 kg) en, voor vloeibare mengsels, een verdunningsmiddel met een kookpunt van ten minste 150 °C voor desensibilisatie wordt gebruikt, ingedeeld als zelfontledende stof van TYPE G. Indien het mengsel niet thermisch stabiel is of een verdunningsmiddel met een kookpunt van minder dan 150 °C voor desensibilisatie wordt gebruikt, wordt het mengsel ingedeeld als zelfontledende stof van TYPE F.

Wanneer de test in verpakte vorm wordt uitgevoerd en de verpakking wordt gewijzigd, wordt een nieuwe test uitgevoerd wanneer geoordeeld wordt dat de wijziging van de verpakking gevolgen heeft voor de uitkomst van de test.

- 2.8.2.4. *Criteria voor temperatuurregeling*

Zelfontledende stoffen worden aan temperatuurregeling onderworpen als hun SADT 55 °C of lager is. Deel II, afdeling 28, van de UN Recommendations on the Transport of Dangerous Goods, Manual of Tests and Criteria bevat testmethoden voor het bepalen van de SADT en het afleiden van de controletemperatuur en de kritieke temperatuur. De gekozen test wordt verricht op een wijze die representatief is voor de omvang en de materialen van de verpakking.








2.8.3. **Voorlichting over de gevaren**

Voor stoffen en mengsels die aan de criteria voor indeling in deze gevarenklasse voldoen, worden de in tabel 2.8.1 vermelde etiketteringselementen gebruikt.

Tabel 2.8.1.

**Etiketteringselementen voor zelfontledende stoffen en mengsels**

Indeling	Type A	Type B	Typen C & D	Typen E & F	Type G
GHS-pictogrammen		 			Aan deze gevarencategorie zijn geen etiketteringselementen toegewezen
Signaalwoord:	Gevaar	Gevaar	Gevaar	Waarschuwing	
Gevarenaanduiding	H240: Ontploffingsgevaar bij verwarming	H241: Brand- of ontploffingsgevaar bij verwarming	H242: Brandgevaar bij verwarming	H242: Brandgevaar bij verwarming	
Voorzorgsmaatregelen i.v.m. reactie	P210 P220 P234 P280	P210 P220 P234 P280	P210 P220 P234 P280	P210 P220 P234 P280	
Voorzorgsmaatregelen i.v.m. reactie	P370 + P378 P370 + P380 + P375	P370 + P378 P370 + P380 + P375	P370 + P378	P370 + P378	
Voorzorgsmaatregelen i.v.m. opslag	P403 + P235 P411 P420	P403 + P235 P411 P420	P403 + P235 P411 P420	P403 + P235 P411 P420	
Voorzorgsmaatregelen i.v.m. reactie	P501	P501	P501	P501	

Aan type G zijn geen gevarenvoorlichtingselementen toegewezen, het type komt aan bod in verband met eigenschappen die behoren tot andere gevarenklassen.

2.8.4. **Aanvullende overwegingen bij de indeling**


2.8.4.1. De eigenschappen van zelfontledende stoffen of mengsels die doorslaggevend zijn voor hun indeling, worden proefondervindelijk bepaald. De indeling van een zelfontledende stof of mengsel vindt plaats overeenkomstig de testreeksen A tot en met H in deel II van de UN Recommendations on the Transport of Dangerous Goods, Manual of Tests and Criteria. De indelingsprocedure is beschreven in figuur 2.8.1.

2.8.4.2. De indelingsprocedures voor zelfontledende stoffen en mengsels hoeven niet te worden toegepast als:

- het molecuul geen chemische groepen bevat die met explosieve of zelfontledende eigenschappen worden geassocieerd. Voorbeelden van deze groepen worden gegeven in de tabellen A6.1 en A6.2 in aanhangsel 6 van de UN Recommendations on the Transport of Dangerous Goods, Manual of Tests and Criteria; of
- voor één organische stof of een homogeen mengsel van organische stoffen, de geschatte Sadt voor een verpakking van 50 kg hoger is dan 75 °C of de exotherme ontledingsenergie lager is dan 300 J/g. De begintemperatuur en de ontledingsenergie kunnen worden geschat met een geschikte calorimetrische techniek (zie deel II, onderafdeling 20.3.3.3, van de UN Recommendations on the Transport of Dangerous Goods, Manual of Tests and Criteria).

Figuur 2.8.1

## Zelfontledende stoffen en mengsels

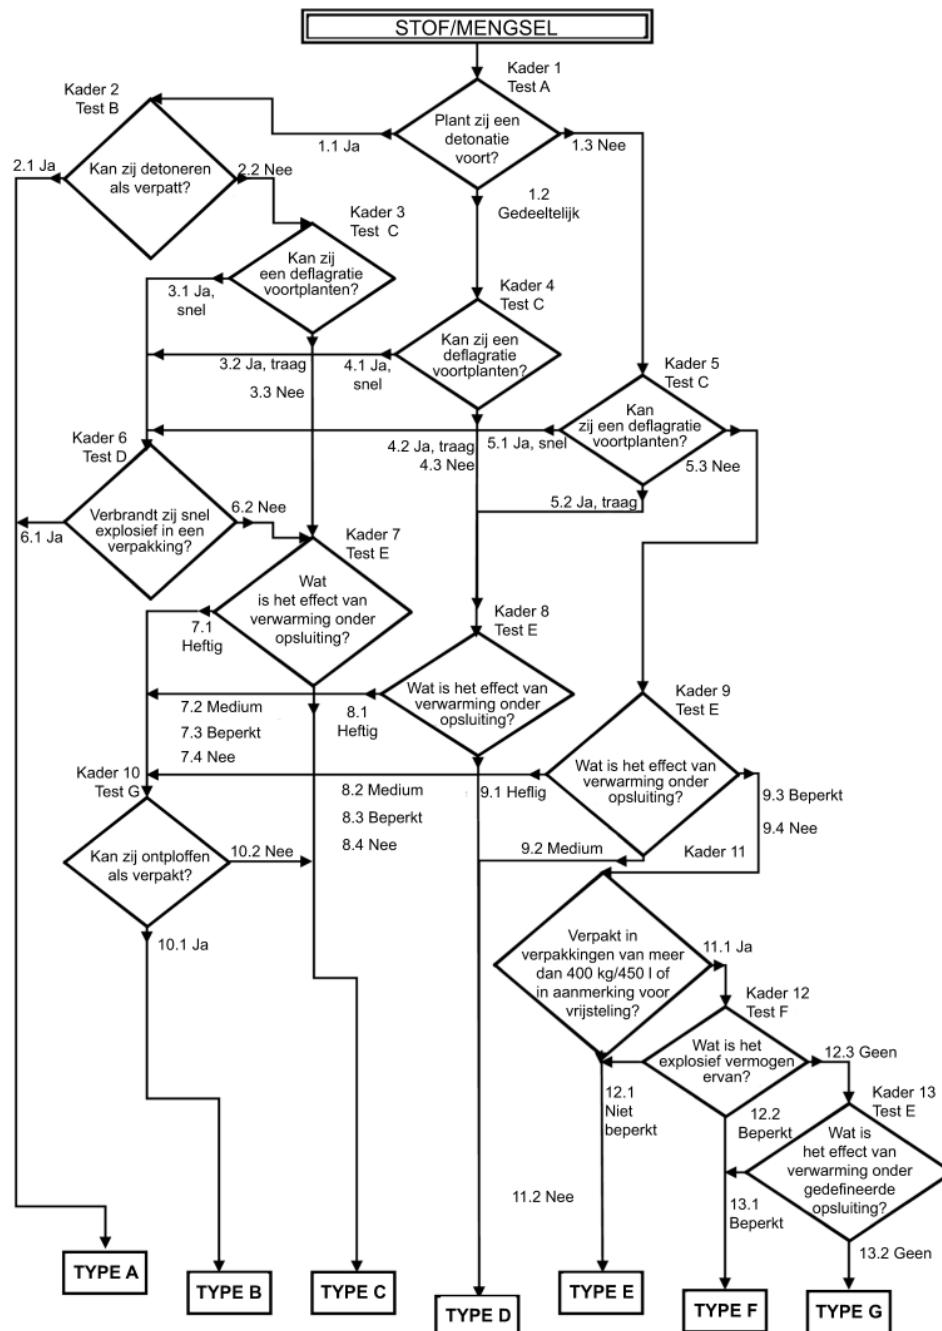

## 2.9. Pyrofore vloeistoffen

## 2.9.1. Definitie

Onder „pyrofore vloeistoffen” worden verstaan vloeibare stoffen of mengsels die bij blootstelling aan lucht zelfs in kleine hoeveelheden binnen vijf minuten ontbranden.

## 2.9.2. Indelingscriteria

2.9.2.1. Een pyrofore vloeistof wordt overeenkomstig Tabel 2.9.1 in de enige categorie van deze klasse ingedeeld aan de hand van test N.3 in deel III, onderafdeling 33.3.1.5, van de UN Recommendations on the Transport of Dangerous Goods, Manual of Tests and Criteria.

Tabel 2.9.1.

**Criteria voor pyrofore vloeistoffen**


Categorie	Criteria
1	De vloeistof ontbrandt binnen vijf minuten na opbrengen op een inerte drager en blootstelling aan lucht, of verkoolt een filterpapiertje dan wel doet dat ontbranden binnen vijf minuten na blootstelling aan lucht.

2.9.3. **Voorlichting over de gevaren**

Voor stoffen en mengsels die aan de criteria voor indeling in deze gevarenklasse voldoen, worden de in tabel 2.9.2 vermelde etiketteringselementen gebruikt.

Tabel 2.9.2.

**Etiketteringselementen voor pyrofore vloeistoffen**

Indeling	categorie 1
GHS-pictogram	
Signaalwoord:	Gevaar
Gevarenaanduiding	H250: Vat spontaan vlam bij blootstelling aan lucht
Voorzorgsmaatregelen i.v.m. reactie	P210 P222 P280
Voorzorgsmaatregelen i.v.m. reactie	P302 + P334 P370 + P378
Voorzorgsmaatregelen i.v.m. opslag	P422
Voorzorgsmaatregelen i.v.m. reactie	

2.9.4. **Aanvullende overwegingen bij de indeling**

- 2.9.4.1. De indelingsprocedure voor pyrofore vloeistoffen hoeft niet te worden toegepast wanneer de ervaring met de vervaardiging of verwerking uitwijst dat een stof of mengsel bij blootstelling aan lucht bij normale temperaturen niet spontaan ontbrandt (dat wil zeggen dat bekend is dat de stof bij kamertemperatuur langdurig (verscheidene dagen) stabiel is).

2.10. **Pyrofore vaste stoffen**2.10.1. **Definitie**

Onder „pyrofore vaste stoffen” worden verstaan vaste stoffen of mengsels die bij blootstelling aan lucht zelfs in kleine hoeveelheden binnen vijf minuten ontbranden.

2.10.2. **Indelingscriteria**

- 2.10.2.1. Een pyrofore vaste stof wordt overeenkomstig tabel 2.10.1 in de enige categorie van deze klasse ingedeeld aan de hand van test N.2 in deel III, onderafdeling 33.3.1.4, van de UN Recommendations on the Transport of Dangerous Goods, Manual of Tests and Criteria.

Tabel 2.10.1.

**Criteria voor pyrofore vaste stoffen**

Categorie	Criteria
1	De vaste stof ontbrandt binnen vijf minuten na blootstelling aan lucht.

Noot:


De test wordt uitgevoerd op de stof of het mengsel in de aangeboden fysische vorm. Als een bepaalde chemische stof bijvoorbeeld voor levering of opslag wordt aangeboden in een andere fysische vorm dan degene waarin zij is getest en het waarschijnlijk wordt geacht dat deze vorm gevolgen voor de resultaten van de stof in een indelingstest heeft, wordt de stof ook in de nieuwe vorm getest.

### 2.10.3. **Voorlichting over de gevaren**

Voor stoffen en mengsels die aan de criteria voor indeling in deze gevarenklasse voldoen, worden de in tabel 2.10.2 vermelde etiketteringselementen gebruikt.

Tabel 2.10.2.

**Etiketteringselementen voor pyrofore vaste stoffen**

Indeling	categorie 1
GHS-pictogram	
Signaalwoord:	Gevaar
Gevarenaanduiding	H250: Vat spontaan vlam bij blootstelling aan lucht
Voorzorgsmaatregelen i.v.m. reactie	P210 P222 P280
Voorzorgsmaatregelen i.v.m. reactie	P335 + P334 P370 + P378
Voorzorgsmaatregelen i.v.m. opslag	P422
Voorzorgsmaatregelen i.v.m. reactie	

### 2.10.4. **Aanvullende overwegingen bij de indeling**

- 2.10.4.1. De indelingsprocedure voor pyrofore vaste stoffen hoeft niet te worden toegepast wanneer de ervaring met de vervaardiging of verwerking uitwijst dat een stof of mengsel bij blootstelling aan lucht bij normale temperaturen niet spontaan ontbrandt (dat wil zeggen dat bekend is dat de stof bij kamertemperatuur langdurig (verscheidene dagen) stabiel is).

## 2.11. **Voor zelfverhitting vatbare stoffen en mengsels**

### 2.11.1. **Definitie**

- 2.11.1.1. Onder „voor zelfverhitting vatbare stoffen en mengsels” worden verstaan vloeibare of vaste stoffen of mengsels, met uitzondering van pyrofore vloeistoffen en pyrofore vaste stoffen, die bij blootstelling aan lucht zonder toevoer van energie voor zelfverhitting vatbaar zijn; deze stoffen en mengsels verschillen van pyrofore vloeistoffen en pyrofore vaste stoffen doordat zij slechts in grote hoeveelheden (verscheidene kilogrammen) en na lange tijdsduur (uren of dagen) ontbranden.

- 2.11.1.2. De zelfverhitting van stoffen of mengsels, die leidt tot zelfontbranding, wordt veroorzaakt door de reactie van de stof of het mengsel met zuurstof (in de lucht), waarbij de ontwikkelde warmte niet snel genoeg afgevoerd wordt naar de omgeving. Zelfontbranding treedt op wanneer de snelheid van de warmteproductie de snelheid van de warmteafvoer overschrijdt en de zelfontbrandingstemperatuur wordt bereikt.
- 2.11.2. **Indelingscriteria**
- 2.11.2.1. Stoffen en mengsels worden ingedeeld als voor zelfverhitting vatbare stoffen of mengsels van deze klasse als bij de tests in de UN Recommendations on the Transport of Dangerous Goods, Manual of Tests and Criteria, deel III, onderafdeling 33.3.1.6:
- een positief resultaat wordt verkregen met een kubusvormig monster met een ribbe van 25 mm bij 140 °C;
  - een positief resultaat wordt verkregen met een kubusvormig monster met een ribbe van 100 mm bij 140 °C en een negatief resultaat wordt verkregen met een kubusvormig monster met een ribbe van 100 mm bij 120 °C en de stof of het mengsel zal worden verpakt in verpakkingen met een volume van meer dan 3 m<sup>3</sup>;
  - een positief resultaat wordt verkregen met een kubusvormig monster met een ribbe van 100 mm bij 140 °C en een test met een kubusvormig monster met een ribbe van 100 mm bij 100 °C levert een negatief resultaat op en de stof of het mengsel zal worden verpakt in verpakkingen met een volume van meer dan 450 liter;
  - een test met een kubusvormig monster met een ribbe van 100 mm bij 140 °C levert een positief resultaat op en een test met een kubusvormig monster met een ribbe van 100 mm bij 100 °C levert een positief resultaat op.
- 2.11.2.2. Voor zelfverhitting vatbare stoffen en mengsels worden in een van de twee categorieën van deze klasse ingedeeld als het resultaat van de tests die overeenkomstig testmethode N.4 in deel III, onderafdeling 33.3.1.6, van de UN Recommendations on the Transport of Dangerous Goods, Manual of Tests and Criteria worden verricht, aan de criteria in tabel 2.11.1 beantwoordt.

Tabel 2.11.1.

**Stoffen en mengsels die voor zelfverhitting vatbaar zijn**

Categorie	Criteria
1	Een test met een kubusvormig monster met een ribbe van 25 mm bij 140 °C levert een positief resultaat op.
2	<ol style="list-style-type: none"> <li>een positief resultaat wordt verkregen met een kubusvormig monster met een ribbe van 100 mm bij 140 °C en een test met een kubusvormig monster met een ribbe van 25 mm bij 140 °C levert een negatief resultaat op en de stof of het mengsel zal worden verpakt in verpakkingen met een volume van meer dan 3 m<sup>3</sup>; of</li> <li>een positief resultaat wordt verkregen met een kubusvormig monster met een ribbe van 100 mm bij 140 °C en een test met een kubusvormig monster met een ribbe van 25 mm bij 140 °C levert een negatief resultaat op, een positief resultaat wordt verkregen met een kubusvormig monster met een ribbe van 100 mm bij 120 °C en de stof of het mengsel zal worden verpakt in verpakkingen met een volume van meer dan 450 liter; of</li> <li>een positief resultaat wordt verkregen met een kubusvormig monster met een ribbe van 100 mm bij 140 °C en een negatief resultaat wordt verkregen met een kubusvormig monster met een ribbe van 25 mm bij 140 °C en een positief resultaat wordt verkregen met een kubusvormig monster met een ribbe van 100 mm bij 100 °C;</li> </ol>

Noot:

De test wordt uitgevoerd op de stof of het mengsel in de aangeboden fysische vorm. Als een bepaalde chemische stof bijvoorbeeld voor levering of opslag wordt aangeboden in een andere fysische vorm dan degene waarin zij is getest en het waarschijnlijk wordt geacht dat deze vorm gevolgen voor de resultaten van de stof in een indelingstest heeft, wordt de stof ook in de nieuwe vorm getest.

2.11.2.3. Stoffen en mengsels waarvan de zelfontbrandingstemperatuur voor een volume van 27 m<sup>3</sup> hoger is dan 50 °C, worden niet ingedeeld als voor zelfverhitting vatbare stoffen of mengsels.



2.11.2.4. Stoffen en mengsels waarvan de zelfontbrandingstemperatuur voor een volume van 450 liter hoger is dan 50 °C, worden niet ingedeeld in categorie 1 van deze klasse.

2.11.3. **Voorlichting over de gevaren**

Voor stoffen en mengsels die aan de criteria voor indeling in deze gevarenklasse voldoen, worden de in tabel 2.11.2 vermelde etiketteringselementen gebruikt.

Tabel 2.11.2.

**Etiketteringselementen voor stoffen en mengsels die voor zelfverhitting vatbaar zijn**

Indeling	categorie 1	categorie 2
GHS-pictogrammen		
Signaalwoord:	Gevaar	Waarschuwing
Gevarenaanduiding	H251: Vatbaar voor zelfverhitting; kan vlam vatten	H252: In grote hoeveelheden vatbaar voor zelfverhitting; kan vlam vatten
Voorzorgsmaatregelen i.v.m. reactie	P235 + P410 P280	P235 + P410 P280
Voorzorgsmaatregelen i.v.m. reactie		
Voorzorgsmaatregelen i.v.m. opslag	P407 P413 P420	P407 P413 P420
Voorzorgsmaatregelen i.v.m. reactie		

2.11.4. **Aanvullende overwegingen bij de indeling**


2.11.4.1. Zie figuur 2.11.1 voor een gedetailleerd stroomschema van de indeling, waarin is aangegeven welke tests voor de verschillende categorieën moeten worden verricht.

2.11.4.2. De indelingsprocedure voor stoffen en mengsels die voor zelfverhitting vatbaar zijn, hoeft niet te worden toegepast als de resultaten van een screeningtest afdoende getoetst kunnen worden aan de indelingstest en een passende veiligheidsmarge wordt toegepast. Voorbeelden van screeningtests zijn:

- a) de test met de Grever-oven (VDI guideline 2263, deel 1, 1990, Test methods for the Determination of the Safety Characteristics of Dusts) met een begintemperatuur van 80 K boven de referentietemperatuur voor een volume van 1 l;
- b) de screeningtest voor bulkpoeder (N. Gibson, D.J Harper en R. Rogers, Evaluation of the fire and explosion risks in drying powders, Plant Operations Progress, 4 (3), 181-189, 1985) met een begintemperatuur van 60 K boven de referentietemperatuur voor een volume van 1 l.

Figuur 2.11.1

Figuur voor zelfverhitting vatbare stoffen en mengsels

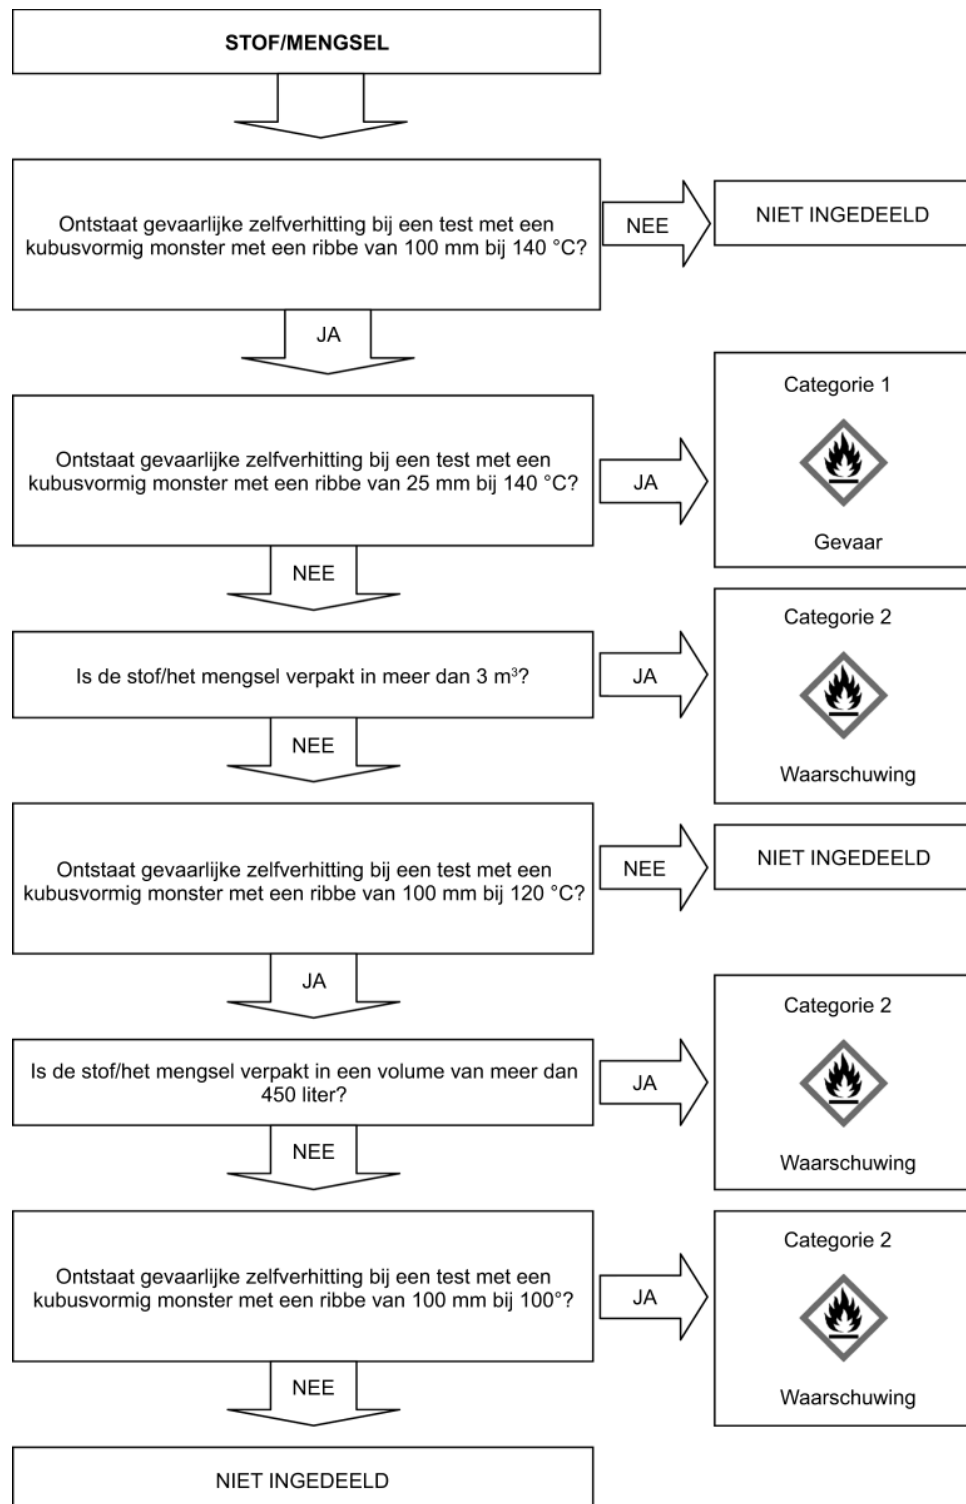

## 2.12. Stoffen en mengsels die in contact met water ontvlambare gassen ontwikkelen

### 2.12.1. Definitie

Onder „stoffen en mengsels die in contact met water ontvlambare gassen ontwikkelen” worden verstaan vaste of vloeibare stoffen en mengsels die door interactie met water spontaan kunnen ontvlammen of ontvlambare gassen kunnen ontwikkelen in gevaarlijke hoeveelheden.

2.12.2. **Indelingscriteria**

- 2.12.2.1. Stoffen en mengsels die in contact met water ontvlambare gassen ontwikkelen, worden overeenkomstig tabel 2.12.1 in een van de drie categorieën van deze klasse ingedeeld aan de hand van test N.5 in deel III, onderafdeling 33.4.1.4, van de UN Recommendations on the Transport of Dangerous Goods, Manual of Tests and Criteria.

Tabel 2.12.1.

**Criteria voor stoffen en mengsels die in contact met water ontvlambare gassen ontwikkelen**

Categorie	Criteria
1	Stoffen en mengsels die bij kamertemperatuur heftig met water reageren waarbij het geproduceerde gas gewoonlijk spontaan ontbrandt, of die bij kamertemperatuur gemakkelijk met water reageren waarbij de gasontwikkeling per minuut ten minste 10 liter ontvlambaar gas per kilo stof bedraagt.
2	Stoffen en mengsels die bij kamertemperatuur gemakkelijk met water reageren waarbij de maximale gasontwikkeling per uur ten minste 20 liter ontvlambaar gas per kilo stof bedraagt, en die niet aan de criteria voor categorie 1 voldoen.
3	Stoffen en mengsels die bij kamertemperatuur langzaam met water reageren waarbij de maximale gasontwikkeling per uur ten minste 1 liter ontvlambaar gas per kilo stof bedraagt, en die niet aan de criteria voor de categorieën 1 en 2 voldoen.

Noot:

De test wordt uitgevoerd op de stof of het mengsel in de aangeboden fysische vorm. Bijvoorbeeld indien de chemische stof, met het oog op levering of vervoer, in een andere fysische vorm aangeboden moet worden dan de vorm waarin hij getest is, waardoor de prestatie in een indelingstest naar verwachting wezenlijk zal veranderen, moet de stof ook in de nieuwe vorm getest worden.




- 2.12.2.2. Stoffen en mengsels worden ingedeeld als stoffen of mengsels die in contact met water ontvlambare gassen ontwikkelen, als bij een stap van de testprocedure zelfontbranding optreedt.

2.12.3. **Voorlichting over de gevaren**

Voor stoffen en mengsels die aan de criteria voor indeling in deze gevarenklasse voldoen, worden de in tabel 2.12.2 vermelde etiketteringselementen gebruikt.

Tabel 2.12.2.

**Etiketteringselementen voor stoffen en mengsels die in contact met water ontvlambare gassen ontwikkelen**

Indeling	categorie 1	categorie 2	categorie 3
GHS-pictogrammen			
Signaalwoord:	Gevaar	Gevaar	Waarschuwing
Gevarenaanduiding	H260: In contact met water komen ontvlambare gassen vrij die spontaan kunnen ontbranden	H261: In contact met water komen ontvlambare gassen vrij	H261: In contact met water komen ontvlambare gassen vrij
Voorzorgsmaatregelen i.v.m. reactie	P223 P231 + P232 P280	P223 P231 + P232 P280	P231 + P232 P280
Voorzorgsmaatregelen i.v.m. reactie	P335 + P334 P370 + P378	P335 + P334 P370 + P378	P370 + P378
Voorzorgsmaatregelen i.v.m. opslag	P402 + P404	P402 + P404	P402 + P404



Indeling	categorie 1	categorie 2	categorie 3
Vorzorgsmaatregelen i.v.m. reactie	P501	P501	P501

2.12.4. **Aanvullende overwegingen bij de indeling**

2.12.4.1. De indelingsprocedure voor deze klasse hoeft niet te worden toegepast als:

- de chemische structuur van de stof of het mengsel geen metalen of metalloïden bevat; of
- de ervaring met de vervaardiging of verwerking uitwijst dat de stof of het mengsel niet met water reageert (de stof is bijvoorbeeld met water vervaardigd of gereinigd); of
- bekend is dat de stof of het mengsel in water oplosbaar is en dan een stabiel mengsel vormt.

2.13. **Oxiderende vloeistoffen**

2.13.1. **Definitie**

Onder „oxiderende vloeistoffen” worden verstaan vloeibare stoffen en mengsels die, zonder dat zij zelf brandbaar hoeven te zijn, gewoonlijk door het afstaan van zuurstof, de verbranding van ander materiaal kunnen veroorzaken of bevorderen.

2.13.2. **Indelingscriteria**

2.13.2.1. Een oxiderende vloeistof wordt overeenkomstig tabel 2.13.1 in een van de drie categorieën van deze klasse ingedeeld aan de hand van test O.2 in deel III, onderafdeling 34.4.2, van de UN Recommendations on the Transport of Dangerous Goods, Manual of Tests and Criteria.

Tabel 2.13.1.

**Criteria voor oxiderende vloeistoffen**




Categorie	Criteria
1	Stoffen en mengsels die in een massaverhouding van 1:1 gemengd met cellulose spontaan ontbranden; of die in een massaverhouding van 1:1 gemengd met cellulose een lagere gemiddelde tijdsduur voor de drukverhoging vertonen dan een mengsel van 50 % perchloorzuur en cellulose in een massaverhouding van 1:1.
2	Stoffen en mengsels die in een massaverhouding van 1:1 gemengd met cellulose een gelijke of lagere gemiddelde tijdsduur voor de drukverhoging vertonen dan een mengsel van 40 % natriumchloraatoplossing in water en cellulose in een massaverhouding van 1:1; en niet aan de criteria voor categorie 1 voldoen.
3	Stoffen en mengsels die in een massaverhouding van 1:1 gemengd met cellulose een gelijke of lagere gemiddelde tijdsduur voor de drukverhoging vertonen dan een mengsel van 65 % salpeterzuuroplossing in water en cellulose in een massaverhouding van 1:1; en niet aan de criteria voor de categorieën 1 en 2 voldoen.

2.13.3. **Voorlichting over de gevaren**

Voor stoffen en mengsels die aan de criteria voor indeling in deze gevarenklasse voldoen, worden de in tabel 2.13.2 vermelde etiketteringselementen gebruikt.

Tabel 2.13.2.

**Etiketteringselementen voor oxiderende vloeistoffen**

Indeling	categorie 1	categorie 2	categorie 3
GHS-pictogrammen			

Indeling	categorie 1	categorie 2	categorie 3
Signaalwoord:	Gevaar	Gevaar	Waarschuwing
Gevarenaanduiding	Kan brand of ontplofingen veroorzaken; sterk oxiderend	H272: Kan brand bevorderen; oxiderend	H272: Kan brand bevorderen; oxiderend
Voorzorgsmaatregelen i.v.m. reactie	P210 P220 P221 P280 P283	P210 P220 P221 P280	P210 P220 P221 P280
Voorzorgsmaatregelen i.v.m. reactie	P306 + P360 P371 + P380 + P375 P370 + P378	P370 + P378	P370 + P378
Voorzorgsmaatregelen i.v.m. opslag			
Voorzorgsmaatregelen i.v.m. reactie	P501	P501	P501

#### 2.1.3.4. **Aanvullende overwegingen bij de indeling**

2.1.3.4.1. Voor organische stoffen en mengsels is de indelingsprocedure voor deze klasse niet van toepassing als:

- a) de stof of het mengsel geen zuurstof, fluor of chloor bevat; of
- b) de stof of het mengsel zuurstof, fluor of chloor bevat en deze elementen uitsluitend chemisch gebonden zijn aan koolstof of waterstof.

2.1.3.4.2. Voor anorganische stoffen of mengsels is de indelingsprocedure voor deze klasse niet van toepassing als zij geen zuurstof- of halogeenatomen bevatten.

2.1.3.4.3. Als de testresultaten afwijken van de bestaande ervaring met de verwerking en het gebruik van stoffen of mengsels, die uitwijst dat zij oxiderend zijn, weegt de evaluatie op grond van bestaande ervaring zwaarder dan de testresultaten.

2.1.3.4.4. Als stoffen of mengsels een drukverhoging veroorzaken (te hoog of te laag) als gevolg van chemische reacties die niet typerend zijn voor de oxiderende eigenschappen van de stof of het mengsel, wordt de test in deel III, onderafdeling 34.4.2, van de UN Recommendations on the Transport of Dangerous Goods, Manual of Tests and Criteria herhaald met een inerte stof, zoals diatomiet (kieselgoer), in plaats van de cellulose teneinde meer duidelijkheid te krijgen over de aard van de reactie en na te gaan of er sprake is van vals-positieve resultaten.

#### 2.14. **Oxiderende vaste stoffen**

##### 2.14.1. **Definitie**

Onder „oxiderende vaste stoffen” worden verstaan vaste stoffen en mengsels die, zonder dat zij zelf brandbaar hoeven te zijn, gewoonlijk door het afstaan van zuurstof, de verbranding van ander materiaal kunnen veroorzaken of bevorderen.

##### 2.14.2. **Indelingscriteria**

2.14.2.1. Een oxiderende vaste stof wordt overeenkomstig tabel 2.14.1 in een van de drie categorieën van deze klasse ingedeeld aan de hand van test O.1 in deel III, onderafdeling 34.4.1, van de UN Recommendations on the Transport of Dangerous Goods, Manual of Tests and Criteria.

Tabel 2.14.1.

**Criteria voor oxiderende vaste stoffen**

Categorie	Criteria
1	Stoffen en mengsels die in een massaverhouding van 4:1 of 1:1 gemengd met cellulose een lagere gemiddelde brandduur vertonen dan een mengsel van kaliumbromaat en cellulose in een massaverhouding van 3:2.
2	Stoffen en mengsels die in een massaverhouding van 4:1 of 1:1 gemengd met cellulose een gelijke of lagere gemiddelde brandduur vertonen dan een mengsel van kaliumbromaat en cellulose in een massaverhouding van 2:3, en niet aan de criteria voor categorie 1 voldoen.
3	Stoffen en mengsels die in een massaverhouding van 4:1 of 1:1 gemengd met cellulose een gelijke of lagere gemiddelde brandduur vertonen dan een mengsel van kaliumbromaat en cellulose in een massaverhouding van 3:7, en niet aan de criteria voor de categorieën 1 en 2 voldoen.

*Noot 1:*

Sommige oxiderende vaste stoffen leveren ook onder bepaalde omstandigheden ontploffingsgevaar op (wanneer zij in grote hoeveelheden worden bewaard). Sommige soorten ammoniumnitraat leveren bij extreme omstandigheden ontploffingsgevaar op; dit gevaar kan worden beoordeeld met de „Resistance to detonation test” (BC-code, bijlage 3, test 5). Op het veiligheidsinformatieblad moet relevante informatie worden gegeven.

*Noot 2:*




De test wordt uitgevoerd op de stof of het mengsel in de aangeboden fysische vorm. Als een bepaalde chemische stof bijvoorbeeld voor levering of opslag wordt aangeboden in een andere fysische vorm dan degene waarin zij is getest en het waarschijnlijk wordt geacht dat deze vorm gevolgen voor de resultaten van de stof in een indelingstest heeft, wordt de stof ook in de nieuwe vorm getest.

2.14.3. **Voorlichting over de gevaren**

Voor stoffen en mengsels die aan de criteria voor indeling in deze gevarenklasse voldoen, worden de in tabel 2.14.2 vermelde etiketteringselementen gebruikt.

Tabel 2.14.2.

**Etiketteringselementen voor oxiderende vaste stoffen**

	categorie 1	categorie 2	categorie 3
GHS-pictogrammen			
Signaalwoord:	Gevaar	Gevaar	Waarschuwing
Gevarenaanduiding	H271: Kan brand of ontploffingen veroorzaken; sterk oxiderend	H272: Kan brand bevorderen; oxiderend	H272: Kan brand bevorderen; oxiderend
Voorzorgsmaatregelen i.v.m. reactie	P210 P220 P221 P280 P283	P210 P220 P221 P280	P210 P220 P221 P280
Voorzorgsmaatregelen i.v.m. reactie	P306 + P360 P371 + P380 + P375 P370 + P378	P370 + P378	P370 + P378
Voorzorgsmaatregelen i.v.m. opslag			

	categorie 1	categorie 2	categorie 3
Voorzorgsmaatregelen i.v.m. reactie	P501	P501	P501

#### 2.14.4. **Aanvullende overwegingen bij de indeling**

- 2.14.4.1. Voor organische stoffen en mengsels is de indelingsprocedure voor deze klasse niet van toepassing als:
- de stof of het mengsel geen zuurstof, fluor of chloor bevat; of
  - de stof of het mengsel zuurstof, fluor of chloor bevat en deze elementen uitsluitend chemisch gebonden zijn aan koolstof of waterstof.
- 2.14.4.2. Voor anorganische stoffen of mengsels is de indelingsprocedure voor deze klasse niet van toepassing als zij geen zuurstof- of halogeenatomen bevatten.
- 2.14.4.3. Als de testresultaten afwijken van de bestaande ervaring met de verwerking en het gebruik van stoffen of mengsels, die uitwijst dat zij oxiderend zijn, weegt de evaluatie op grond van bestaande ervaring zwaarder dan de testresultaten.

#### 2.15. **Organische peroxiden**

##### 2.15.1. **Definitie**

2.15.1.1. Onder „organische peroxiden” worden verstaan vloeibare of vaste organische stoffen die het bivalente structurelement -O-O- bevatten en als derivaten van waterstofperoxide kunnen worden beschouwd, waarin één of beide waterstofatomen vervangen zijn door organische radicalen. Hieronder worden ook begrepen organische peroxidemengsels (samenstellingen) die ten minste één organisch peroxide bevatten. Organische peroxiden zijn stoffen en mengsels die thermisch instabiel zijn en vatbaar zijn voor exotherme zelfversnellende ontleding. Daarnaast kunnen zij een of meer van de volgende eigenschappen bezitten:

- vatbaar zijn voor explosieve ontleding;
- snel verbranden;
- schok- of wrijvingsgevoelig zijn;
- gevaarlijk reageren met andere stoffen.

2.15.1.2. Organische peroxiden worden geacht explosieve eigenschappen te hebben wanneer laboratoriumproeven uitwijzen dat het mengsel (de formulering) kan detoneren, snel explosief kan verbranden of bij verwarming onder opsluiting een heftige reactie kan vertonen.

##### 2.15.2. **Indelingscriteria**

- 2.15.2.1. Indeling in deze klasse wordt overwogen voor alle organische peroxiden, tenzij zij:
- niet meer dan 1,0 % beschikbare zuurstof afkomstig van de organische peroxiden bevatten, wanneer zij niet meer dan 1,0 % waterstofperoxide bevatten; of
  - niet meer dan 0,5 % beschikbare zuurstof afkomstig van de organische peroxiden bevatten, wanneer zij meer dan 1,0 %, maar niet meer dan 7,0 % waterstofperoxide bevatten.

##### *Opmerking*

Het beschikbare zuurstofgehalte (%) van een organisch peroxidemengsel wordt gegeven door de formule:

$$16 \times \sum_i^n \left( \frac{n_i \times c_i}{m_i} \right)$$

waarbij:

- $n_i$  = het aantal peroxygroepen per molecuul organisch peroxide  $i$ ;  
 $c_i$  = de concentratie (gewichtspersent) van organisch peroxide  $i$ ;  
 $m_i$  = de molecuulmassa van organisch peroxide  $i$ .

- 2.15.2.2. Organische peroxiden worden volgens de volgende principes ingedeeld in een van de zeven categorieën (typen A tot en met G) van deze klasse:
- a) organische peroxiden die in de verpakking kunnen detoneren of snel explosief kunnen verbranden, worden ingedeeld als organisch peroxide van TYPE A;
  - b) organische peroxiden met explosieve eigenschappen die in de verpakking niet kunnen detoneren of snel explosief kunnen verbranden, maar wel onder invloed van warmte in de verpakking kunnen ontploffen, worden ingedeeld als organisch peroxide van TYPE B;
  - c) organische peroxiden met explosieve eigenschappen die in de verpakking niet kunnen detoneren, snel explosief kunnen verbranden of onder invloed van warmte kunnen ontploffen, worden ingedeeld als organisch peroxide van TYPE C;
  - d) organische peroxiden die bij laboratoriumproeven:
    - i) gedeeltelijk detoneren, niet snel explosief verbranden en bij verwarming onder opsluiting geen heftige reactie vertonen; of
    - ii) in het geheel niet detoneren, langzaam explosief verbranden en bij verwarming onder opsluiting geen heftige reactie vertonen; of
    - iii) in het geheel niet detoneren of explosief verbranden en bij verwarming onder opsluiting een matige reactie vertonen,worden ingedeeld als organisch peroxide van TYPE D;
  - e) organische peroxiden die bij laboratoriumproeven in het geheel niet detoneren of explosief verbranden en bij verwarming onder opsluiting een geringe of geen reactie vertonen, worden ingedeeld als organisch peroxide van TYPE E;
  - f) organische peroxiden die bij laboratoriumproeven niet onder invloed van cavitatie detoneren, in het geheel niet explosief verbranden, een geringe of geen reactie vertonen bij verwarming onder opsluiting en een gering of geen explosief vermogen bezitten, worden ingedeeld als organisch peroxide van TYPE F;
  - g) organische peroxiden die bij laboratoriumproeven niet onder invloed van cavitatie detoneren, in het geheel niet explosief verbranden, geen reactie vertonen bij verwarming onder opsluiting en geen explosief vermogen bezitten, worden, mits zij thermisch stabiel zijn (SADT van 60 °C of hoger voor een verpakking van 50 kg) <sup>(1)</sup> en, voor vloeibare mengsels, een verdunningsmiddel met een kookpunt van ten minste 150 °C voor desensibilisatie wordt gebruikt, ingedeeld als organisch peroxide van TYPE G. Indien het organische peroxide niet thermisch stabiel is of een verdunningsmiddel met een kookpunt van minder dan 150 °C voor desensibilisatie wordt gebruikt, wordt het organische peroxide ingedeeld als organisch peroxide van TYPE F.

Wanneer de test in verpakte vorm wordt uitgevoerd en de verpakking wordt gewijzigd, wordt een nieuwe test uitgevoerd wanneer geoordeeld wordt dat de wijziging van de verpakking gevolgen heeft voor de uitkomst van de test.

2.15.2.3. *Criteria voor temperatuurregeling*

De volgende organische peroxiden worden aan temperatuurregeling onderworpen:

- a) organische peroxiden van de typen B en C met een  $Sadt \leq 50^\circ C$ ;
- b) organische peroxiden van type D met een  $Sadt \leq 50^\circ C$  die bij verwarming onder opsluiting een matige reactie vertonen <sup>(2)</sup> of met een  $Sadt \leq 45^\circ C$  die bij verwarming onder opsluiting een geringe of geen reactie vertonen; en tevens
- c) organische peroxiden van de typen E en F met een  $Sadt \leq 45^\circ C$ .

<sup>(1)</sup> Zie UN Recommendations on the Transport of Dangerous Goods, Manual of Tests and Criteria, hoofdstukken 28.1, 28.2 en 28.3 en tabel 28.3.

<sup>(2)</sup> Zoals bepaald met trestreks E van de UN Recommendations on the Transport of Dangerous Goods, Manual of Tests and Criteria, Manual of Tests and Criteria, deel II.






Deel II, afdeling 28, van de UN Recommendations on the Transport of Dangerous Goods, Manual of Tests and Criteria bevat testmethoden voor het bepalen van de Sadt en het afleiden van de controletemperatuur en de kritieke temperatuur. De gekozen test wordt verricht op een wijze die representatief is voor de omvang en de materialen van de verpakking.

### 2.15.3. **Voorlichting over de gevaren**

Voor stoffen en mengsels die aan de criteria voor indeling in deze gevarenklasse voldoen, worden de in tabel 2.15.1 vermelde etiketteringselementen gebruikt.

Tabel 2.15.1.

#### Etiketteringselementen voor organische peroxiden

Indeling	Type A	Type B	Typen C & D	Typen E & F	Type G
GHS-pictogrammen		 			Aan deze gevaar-categorie zijn geen etiketteringselementen toegewezen
Signaalwoord:	Gevaar	Gevaar	Gevaar	Waarschuwing	
Gevarenaanduiding	H240: Ontploffingsgevaar bij verwarming	H241: Brand- of ontploffingsgevaar bij verwarming	H242: Brandgevaar bij verwarming	H242: Brandgevaar bij verwarming	
Voorzorgsmaatregelen i.v.m. reactie	P210 P220 P234 P280	P210 P220 P234 P280	P210 P220 P234 P280	P210 P220 P234 P280	
Voorzorgsmaatregelen i.v.m. reactie					
Voorzorgsmaatregelen i.v.m. opslag	P411 + P235 P410 P420	P411 + P235 P410 P420	P411 + P235 P410 P420	P411 + P235 P410 P420	
Voorzorgsmaatregelen i.v.m. reactie	P501	P501	P501	P501	

Aan type G zijn geen gevarenvoorlichtingselementen toegewezen, het type komt aan bod in verband met eigenschappen die behoren tot andere gevarenklassen.


### 2.15.4. **Aanvullende overwegingen bij de indeling**

2.15.4.1. Organische peroxiden worden per definitie ingedeeld op grond van hun chemische structuur en het beschikbare zuurstofgehalte en het waterstofperoxidegehalte van het mengsel (zie punt 2.15.2.1). De voor de indeling benodigde gegevens over de eigenschappen van organische peroxiden worden proefondervindelijk bepaald. De indeling van organische peroxiden vindt plaats overeenkomstig de testreeksen A tot en met H in deel II van de UN Recommendations on the Transport of Dangerous Goods, Manual of Tests and Criteria. De indelingsprocedure is beschreven in figuur 2.15.1.

2.15.4.2. Mengsels van reeds ingedeelde organische peroxiden mogen worden ingedeeld bij hetzelfde type organisch peroxide als het gevaarlijkste bestanddeel. Omdat twee stabiele componenten echter een thermisch minder stabiel mengsel kunnen vormen, wordt wel de temperatuur van zelfversnellende ontleding (Sadt) van het mengsel bepaald.

Noot: De som van de afzonderlijke delen kan gevaarlijker zijn dan de afzonderlijke bestanddelen.

Figuur 2.15.1

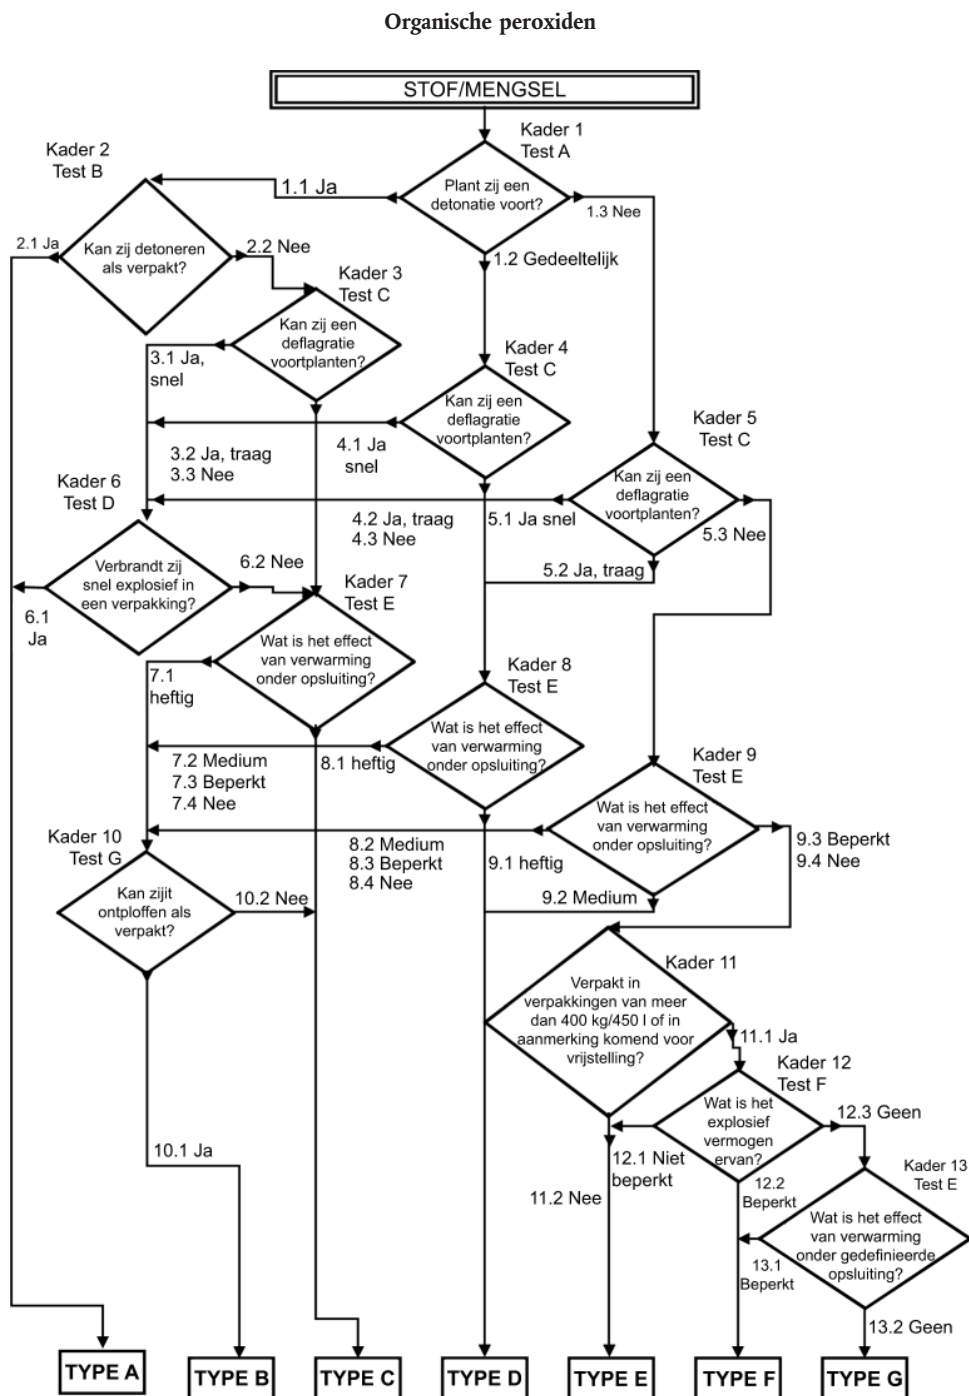

## 2.16. Bijtend voor metalen

### 2.16.1. Definitie

Onder „voor metalen bijtende stoffen en mengsels” worden verstaan stoffen en mengsels die door hun chemische werking metalen aantasten of zelfs vernietigen.

### 2.16.2. Indelingscriteria

- 2.16.2.1. Voor metalen bijtende stoffen en mengsels worden overeenkomstig Tabel 2.16.1 in de enige categorie van deze klasse ingedeeld aan de hand van de test in deel III, onderafdeling 37.4, van de UN Recommendations on the Transport of Dangerous Goods, Manual of Tests and Criteria.

Tabel 2.16.1.

**Criteria voor stoffen en mengsels die bijtend zijn voor metalen**

Categorie	Criteria
1	Corrosiesnelheid op oppervlakken van staal of aluminium overschrijdt 6,25 mm per jaar bij een testtemperatuur van 55 °C wanneer beide materialen worden getest.

Noot:


Wanneer uit de eerste test op staal of aluminium blijkt dat de stof of het mengsel bijtend is, hoeft de test op het andere materiaal niet te worden uitgevoerd.

2.16.3. **Voorlichting over de gevaren**

Voor stoffen en mengsels die aan de criteria voor indeling in deze gevarenklasse voldoen, worden de in tabel 2.16.2 vermelde etiketteringselementen gebruikt.

Tabel 2.16.2.

**Etiketteringselementen voor stoffen en mengsels die bijtend zijn voor metalen**

Indeling	categorie 1
GHS-pictogram	
Signaalwoord:	Waarschuwing
Gevarenaanduiding	H290: Kan bijtend zijn voor metalen
Voorzorgsmaatregelen i.v.m. reactie	P234
Voorzorgsmaatregelen i.v.m. reactie	P390
Voorzorgsmaatregelen i.v.m. opslag	P406
Voorzorgsmaatregelen i.v.m. reactie	

2.16.4. **Aanvullende overwegingen bij de indeling**

2.16.4.1. De corrosiesnelheid kan worden gemeten volgens de testmethode van deel III, onderafdeling 37.4, van de UN Recommendations on the Transport of Dangerous Goods, Manual of tests and Criteria. De monsters die voor de test worden gebruikt, bestaan uit de volgende materialen:

- a) voor de test op staal, de typen:
  - S235JR + CR (1.0037 resp. St 37-2),
  - S275J2G3 + CR (1.0144 resp. St 44-3), ISO 3574 zoals gewijzigd, Unified Numbering System (UNS) G 10200, of SAE 1020;
- b) voor de test op aluminium: de niet-geanodiseerde typen 7075-T6 of AZ5GU-T6.



## 3. DEEL 3: GEZONDHEIDSGEVAREN

3.1. **Acute toxiciteit**3.1.1. **Definities**

3.1.1.1. Onder „acute toxiciteit” worden verstaan schadelijke effecten die optreden na orale of dermale toediening van één dosis van een stof of mengsel of van verschillende doses binnen 24 uur, of na blootstelling via inademing gedurende 4 uur.

3.1.1.2. De gevarenklasse acute toxiciteit is onderverdeeld in:

- acute orale toxiciteit;
- acute dermale toxiciteit;
- acute toxiciteit bij inademing.

3.1.2. **Criteria voor de indeling van stoffen als acuut toxisch**

3.1.2.1. Stoffen kunnen overeenkomstig de numerieke criteria in tabel 3.1.1 op basis van hun acute toxiciteit bij orale of dermale blootstelling of bij inademing in een van de vier toxiciteitscategorieën worden ingedeeld. De acute toxiciteit wordt uitgedrukt in een (approximatieve) LD<sub>50</sub>-waarde (oraal, dermaal) of LC<sub>50</sub>-waarde (inademing), dan wel in een ATE-waarde (acute toxiciteitsschattingen). De noten waarnaar in tabel 3.1.1 wordt verwezen, volgen na de tabel.

Tabel 3.1.1.

**Acute toxiciteitscategorieën en acute toxiciteitsschattingen (ATE) ter bepaling van de respectieve categorieën**

Blootstellingsroute	categorie 1	categorie 2	categorie 3	categorie 4
Oraal (mg/kg lichaamsgewicht) Zie noot a)	ATE ≤ 5	5 < ATE ≤ 50	50 < ATE ≤ 300	300 < ATE ≤ 2 000
Dermaal (mg/kg lichaamsgewicht) Zie noot a)	ATE ≤ 50	50 < ATE ≤ 200	200 < ATE ≤ 1 000	1 000 < ATE ≤ 2 000
Gases (ppmV <sup>(1)</sup> ) zie: Noot a) Noot b)	ATE ≤ 100	100 < ATE ≤ 500	500 < ATE ≤ 2 500	2 500 < ATE ≤ 20 000
Dampen (mg/l) zie: Noot a) Noot b) Noot c)	ATE ≤ 0,5	0,5 < ATE ≤ 2,0	2,0 < ATE ≤ 10,0	10,0 < ATE ≤ 20,0
Stofdeeltjes en nevels (mg/l) zie: Noot a) Noot b)	ATE ≤ 0,05	0,05 < ATE ≤ 0,5	0,5 < ATE ≤ 1,0	1,0 < ATE ≤ 5,0

(<sup>1</sup>) Gasconcentraties worden uitgedrukt in volumedelen per miljoen (ppmV).

Noten bij tabel 3.1.1:

- a) De acute toxiciteitsschatting (ATE) voor de indeling van een stof of een bestanddeel van een mengsel wordt gebaseerd op:
- de LD<sub>50</sub>/LC<sub>50</sub>-waarde, indien beschikbaar,

- de conversiewaarde in tabel 3.1.2 voor de resultaten van een test naar het toxische bereik, of
  - de conversiewaarde in tabel 3.1.2 voor een indelingscategorie.
- b) De algemene concentratiegrenzen voor toxiciteit bij inademing in de tabel zijn gebaseerd op een blootstelling gedurende 4 uur in een testopstelling. Bestaande gegevens over toxiciteit bij inademing die zijn verkregen bij blootstelling gedurende 1 uur, kunnen worden omgerekend door de waarden te delen door 2 (in geval van gassen en dampen) of 4 (in geval van stofdeeltjes en nevels).
- c) Sommige stoffen en mengsels worden niet in een atmosfeer van uitsluitend damp getest, maar in een mengsel van vloeistof- en dampfasen. Andere stoffen en mengsels worden getest in een atmosfeer bestaande uit een damp die zich bijna in de gasfase bevindt. Laatstgenoemde stoffen en mengsels worden als volgt op basis van hun concentratie ingedeeld: categorie 1 (100 ppmV), categorie 2 (500 ppmV), categorie 3 (2 500 ppmV), categorie 4 (20 000 ppmV).

De begrippen „stofdeeltjes”, „nevels” en „dampen” worden als volgt gedefinieerd:

- Stofdeeltjes: vaste deeltjes van stoffen of mengsels die zijn gesuspenderd in een gas (doorgaans lucht);
- Nevels: vloeibare druppels van stoffen of mengsels die zijn gesuspenderd in een gas (doorgaans lucht);
- Dampen: de gasvorm van stoffen of mengsels die uit de vloeistof- of vaste fase zijn gemigreerd.

Stofdeeltjes worden gewoonlijk met mechanische procedés gevormd. Nevels worden gewoonlijk gevormd door oververzadigde dampen te condenseren of door vloeistoffen fysiek te vernevelen. De grootte van stofdeeltjes en nevels ligt gewoonlijk tussen minder dan 1 en ongeveer 100 µm.

### 3.1.2.2. *Specifieke overwegingen voor indeling als acuut toxische stof*

3.1.2.2.1. Voor de evaluatie van de acute toxiciteit bij orale blootstelling en inademing worden bij voorkeur ratten gebruikt, en voor de evaluatie van de acute dermale toxiciteit bij voorkeur ratten of konijnen. Wanneer experimentele gegevens over de acute toxiciteit bij verschillende diersoorten bekend zijn, wordt op wetenschappelijke gronden besloten welke LD<sub>50</sub>-waarde, voortvloeiend uit valide, correct uitgevoerde tests, wordt gekozen.

### 3.1.2.3. *Specifieke overwegingen voor indeling als bij inademing acuut toxische stof*

3.1.2.3.1. De eenheid voor de toxiciteit bij inademing hangt af van de vorm van het ingeademde materiaal. De waarden voor stofdeeltjes en nevels worden uitgedrukt in mg/l. De waarden voor gassen worden uitgedrukt in ppmV. De waarden voor dampen zijn in de tabel uitgedrukt in mg/l, al wordt erkend het testen van dampen in sommige gevallen problematisch kan zijn, omdat zij uit mengsels van vloeistof- en dampfasen kunnen bestaan. De indeling van dampen die zich bijna in de gasfase bevinden, moet echter worden gebaseerd op een waarde uitgedrukt in ppmV.

3.1.2.3.2. Het is van bijzonder belang dat correct uitgedrukte waarden worden gebruikt bij de indeling van stofdeeltjes en nevels in de hoge toxiciteitscategorieën voor inademing. Ingeademde deeltjes met een massa-mediane aerodynamische diameter (M<sub>mad</sub>) tussen 1 en 4 micrometer slaan neer in alle delen van de luchtwegen van de rat. Dit groottebereik komt overeen met een maximumdosis van ongeveer 2 mg/l. Om dierproeven te kunnen toepassen op blootstelling van mensen, zouden de stofdeeltjes en nevels die op ratten worden getest idealiter van deze afmetingen moeten zijn.

3.1.2.3.3. Indien gegevens beschikbaar zijn waaruit blijkt dat de toxiciteit voortvloeit uit een bijtende werking, wordt de stof of het mengsel, naast de indeling voor toxiciteit bij inademing, ook geëtiketteerd als „bijtend voor de luchtwegen” (zie noot 1 in 3.1.4.1). Een stof of mengsel is bijtend voor de luchtwegen als het luchtwegweefsel na één beperkte blootstellingsperiode, analoog aan de huidcorrosie wordt aangetast; ook aantasting van het slijmvlies wordt hieronder begrepen. De evaluatie van de bijtende werking kan op de mening van deskundigen worden gebaseerd aan de hand van bijvoorbeeld: ervaring bij mensen en dieren, bestaande (in-vitro)gegevens, pH-waarden en informatie over soortgelijke stoffen of andere relevante gegevens.


### 3.1.3. **Indelingscriteria voor mengsels**

3.1.3.1. De criteria voor de indeling van stoffen op basis van hun acute toxiciteit in punt 3.1.2 zijn gebaseerd op (experimentele of afgeleide) gegevens over de letale dosis. Voor mengsels moet zodanige informatie worden verkregen of afgeleid dat de indelingscriteria kunnen worden toegepast. De acute toxiciteitsindeling vindt plaats volgens een gefaseerde aanpak, afhankelijk van de hoeveelheid informatie die over het mengsel en de bestanddelen beschikbaar is. De procedure is weergegeven in het stroomschema van figuur 3.1.1.

- 3.1.3.2. Voor de indeling van mengsels op basis van hun acute toxiciteit wordt elke blootstellingsroute in aanmerking genomen; slechts één blootstellingsroute is echter noodzakelijk, mits deze route voor alle bestanddelen wordt gevolgd (op basis van schattingen of tests). Indien de acute toxiciteit wordt vastgesteld voor meer dan één blootstellingsroute, wordt de categorie die het ernstigste gevaar oplevert, gebruikt voor de indeling. Voor de voorlichting over de gevaren wordt alle beschikbare informatie in aanmerking genomen en worden alle relevante blootstellingsroutes vastgesteld.
- 3.1.3.3. Om bij de gevarenindeling van mengsels gebruik te kunnen maken van alle beschikbare gegevens, zijn bepaalde uitgangspunten geformuleerd die bij de gefaseerde aanpak in voorkomend geval worden gevolgd:
- de „relevante bestanddelen” van een mengsel zijn de bestanddelen die in concentraties van ten minste 1 % (gewichtspersent voor vaste stoffen, vloeistoffen, stofdeeltjes, nevels en dampen; volumepersent voor gassen) aanwezig zijn, tenzij er redenen zijn om te vermoeden dat een bestanddeel dat in een lagere concentratie dan 1 % aanwezig is, toch relevant is voor de acute toxiciteitsindeling van het mengsel. (Zie tabel 1.1)
  - wanneer een ingedeeld mengsel als bestanddeel van een ander mengsel wordt gebruikt, mag de feitelijke of afgeleide acute toxiciteitschatting (ATE) van dat mengsel worden gebruikt bij de berekening van de indeling van het nieuwe mengsel met de formules in de punten 3.1.3.6.1 en 3.1.3.6.2.3.

Figuur 3.1.1

#### Gefaseerde aanpak voor de acute toxiciteitsindeling van mengsels

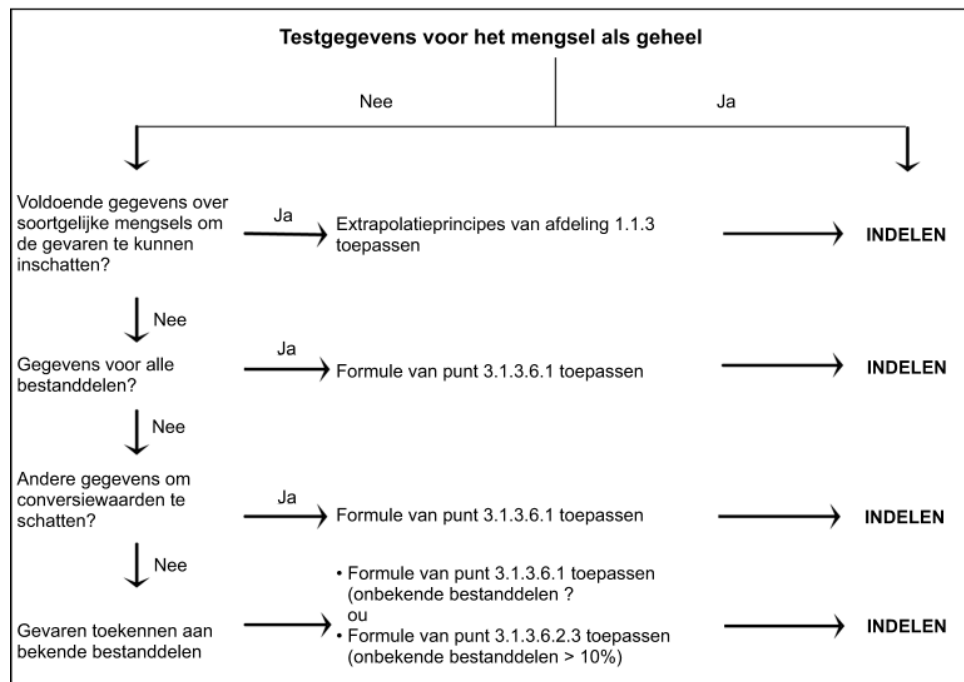

- 3.1.3.4. *Indeling van mengsels wanneer acute toxiciteitsgegevens over het mengsel als geheel beschikbaar zijn*
- 3.1.3.4.1. Wanneer het mengsel zelf op acute toxiciteit is getest, wordt het ingedeeld volgens de criteria in tabel 3.1.1 die ook voor stoffen worden gebruikt. Indien geen testgegevens over het mengsel beschikbaar zijn, worden de procedures van de punten 3.1.3.5 en 3.1.3.6 gevolgd.
- 3.1.3.5. *Indeling van mengsels wanneer geen acute toxiciteitsgegevens over het mengsel als geheel beschikbaar zijn: extrapolatieprincipes*
- 3.1.3.5.1. Wanneer het mengsel zelf niet op acute toxiciteit is getest, maar wel voldoende gegevens over de afzonderlijke bestanddelen en over soortgelijke geteste mengsels beschikbaar zijn om de gevaren van het mengsel adequaat te typeren, worden deze gegevens gebruikt overeenkomstig de extrapolatieregels in punt 1.1.3.

3.1.3.5.2. Indien een mengsel wordt verdund met water of een ander volledig niet-toxisch materiaal, kan de toxiciteit van het mengsel worden berekend op basis van de testgegevens over het onverdunde mengsel.

3.1.3.6. *Indeling van mengsels op basis van de bestanddelen van het mengsel (somformule)*

3.1.3.6.1. Gegevens over alle bestanddelen beschikbaar

Om te waarborgen dat het mengsel accuraat wordt ingedeeld en dat de berekening voor alle systemen, sectoren en categorieën slechts een keer hoeft te worden uitgevoerd, wordt de acute toxiciteitsschatting (ATE) van de bestanddelen op de volgende beginselen gebaseerd:

- a) de bestanddelen met bekende acute toxiciteit die in een van de acute toxiciteitscategorieën van tabel 3.1.1 vallen, worden meegerekend;
- b) bestanddelen waarvan aangenomen wordt dat ze niet acuut toxisch zijn (zoals water en suiker), blijven buiten beschouwing;
- c) bestanddelen waarvoor de orale limiettest uitwijst dat ze niet acuut toxisch zijn bij 2 000 mg/kg lichaamsgewicht, blijven buiten beschouwing.

De bestanddelen die overeenkomstig dit punt worden meegerekend, worden beschouwd als bestanddelen met een bekende acute toxiciteitsschatting (ATE).

De ATE van het mengsel wordt voor orale en dermale toxiciteit en toxiciteit bij inademing volgens volgende formule op basis van de ATE-waarden van alle relevante bestanddelen berekend:

$$\frac{100}{ATE_{\text{mix}}} = \sum_{i=1}^n \frac{C_i}{ATE_i}$$

waarin:

- $C_i$  = concentratie van bestanddeel  $i$  (% w/w of % v/v)  
 $i$  = de afzonderlijke bestanddelen 1 tot en met  $n$ ;  
 $n$  = het aantal bestanddelen;  
 $ATE_i$  = de acute toxiciteitsschatting van bestanddeel  $i$ .

3.1.3.6.2. *Indeling van mengsels wanneer geen gegevens over alle bestanddelen beschikbaar zijn*

3.1.3.6.2.1. Wanneer voor een afzonderlijk bestanddeel van een mengsel geen ATE beschikbaar is, maar wel op grond van de hieronder bedoelde beschikbare informatie zoals in tabel 3.1.2 een conversiewaarde kan worden afgeleid, wordt de formule in punt 3.1.3.6.1 toegepast.

De volgende gegevens worden beoordeeld:

- a) acute toxiciteitsschattingen <sup>(1)</sup> voor orale of dermale blootstelling of blootstelling bij inademing die naar een andere blootstellingsroute worden geëxtrapoleerd. Voor de evaluatie hiervan kunnen passende farmacodynamische en farmacokinetische gegevens vereist zijn;
- b) gegevens over blootstelling van de mens die wijzen op toxische effecten, hoewel de letale dosis niet bekend is;
- c) gegevens over de stof uit andere toxiciteitstests/onderzoeken die wijzen op acute toxische effecten, hoewel de letale dosis niet noodzakelijkerwijs bekend is; of
- d) gegevens over nauw verwante stoffen waarop structuur-activiteitsrelaties worden toegepast.

<sup>(1)</sup> Wanneer voor een bestanddeel een acute toxiciteitsschatting voor een andere dan de meest passende blootstellingsroute beschikbaar is, kan deze naar de meest relevante route worden geëxtrapoleerd. Voor bestanddelen zijn niet altijd gegevens over de dermale en de inademingsroute vereist. Indien echter voor specifieke bestanddelen acute toxiciteitsschattingen voor de dermale en de inademingsroute tot de gegevensvereisten behoren, moeten de waarden die in de formule worden gebruikt betrekking hebben op de vereiste blootstellingsroute.

Deze aanpak vergt gewoonlijk substantiële aanvullende technische informatie en hoogopgeleide en ervaren deskundigen om een betrouwbare schatting van de acute toxiciteit mogelijk te maken (zie punt 1.1.1 over de mening van deskundigen). Wanneer dergelijke informatie ontbreekt, wordt de procedure van punt 3.1.3.6.2.3 gevolgd.

- 3.1.3.6.2.2. Wanneer een bestanddeel waarover in het geheel geen bruikbare informatie beschikbaar is, in een concentratie van ten minste 1 % in een mengsel wordt gebruikt, wordt geconcludeerd dat aan het mengsel geen definitieve acute toxiciteitschatting kan worden toegekend. Het mengsel wordt dan uitsluitend op basis van de bekende bestanddelen ingedeeld, en er wordt vermeld dat het mengsel voor x procent bestaat uit een of meer bestanddelen waarvan de giftigheid niet bekend is.
- 3.1.3.6.2.3. Indien de totale concentratie van de bestanddelen met onbekende acute toxiciteit niet meer dan 10 % bedraagt, wordt de formule in punt 3.1.3.6.1 gebruikt. Indien de totale concentratie van de bestanddelen met onbekende toxiciteit meer dan 10 % bedraagt, wordt de formule in punt 3.1.3.6.1 als volgt gecorrigeerd voor het totale percentage van de onbekende bestanddelen:

$$\frac{100 - \left( \sum C_{\text{unknown if}} > 10\% \right)}{ATE_{\text{mix}}} = \sum \frac{C_i}{n ATE_i}$$

Tabel 3.1.2

**Omrekening van experimentele gegevens over het acute toxiciteitsbereik (of gevarencategorieën voor acute toxiciteit) naar acute toxiciteitschattingen met het oog op indeling voor de verschillende blootstellingsroutes**

Blootstellingsroute	Indelingscategorie of experimentele gegevens over het acute toxiciteitsbereik	Omgerekende acute toxiciteitschatting (zie noot 1)
Oraal (mg/kg lichaamsgewicht)	0 < categorie 1 ≤ 5	0,5
	5 < categorie 2 ≤ 50	5
	50 < categorie 3 ≤ 300	100
	300 < categorie 4 ≤ 2 000	500
Dermaal (mg/kg lichaamsgewicht)	0 < categorie 1 ≤ 50	5
	50 < categorie 2 ≤ 200	50
	200 < categorie 3 ≤ 1 000	300
	1 000 < categorie 4 ≤ 2 000	1 100
Gas (ppmV)	0 < categorie 1 ≤ 100	10
	100 < categorie 2 ≤ 500	100
	500 < categorie 3 ≤ 2 500	700
	2 500 < categorie 4 ≤ 20 000	4 500
damp (mg/l)	0 < categorie 1 ≤ 0,5	0,05
	0,5 < categorie 2 ≤ 2,0	0,5
	2,0 < categorie 3 ≤ 10,0	3
	10,0 < categorie 4 ≤ 20,0	11
stof/nevel (mg/l)	0 < categorie 1 ≤ 0,05	0,005
	0,05 < categorie 2 ≤ 0,5	0,05
	0,5 < categorie 3 ≤ 1,0	0,5
	1,0 < categorie 4 ≤ 5,0	1,5

Noot 1:





Deze waarden zijn bedoeld voor de berekening van de ATE van een mengsel met het oog op indeling op basis van de bestanddelen, en vertegenwoordigen geen testresultaten.

3.1.4. **Voorlichting over de gevaren**

- 3.1.4.1. Voor stoffen en mengsels die aan de criteria voor indeling in deze gevarenklasse voldoen, worden de in tabel 3.1.3 vermelde etiketteringselementen gebruikt.

Tabel 3.1.3.

## Etiketteringselementen voor acute toxiciteit

Indeling	categorie 1	categorie 2	categorie 3	categorie 4
GHS-pictogrammen				
Signaalwoord	Gevaarlijk	Gevaarlijk	Gevaarlijk	Waarschuwing
Gevarenaanduiding: — Oraal	H300: Dodelijk bij inslikken	H300: Dodelijk bij inslikken	H301: Giftig bij inslikken	H302: Schadelijk bij inslikken
— Dermaal	H310: Dodelijk bij contact met de huid	H310: Dodelijk bij contact met de huid	H311: Giftig bij contact met de huid	H312: Schadelijk bij contact met de huid
— Inhalatie (zie noot 1)	Dodelijk bij inademing	H330: Dodelijk bij inademing	H311: Giftig bij inademing	H332: Schadelijk bij inademing
Voorzorgsmaatregelen i.v.m. preventie (oraal)	P264 P270	P264 P270	P264 P270	P264 P270
Voorzorgsmaatregelen i.v.m. reactie (oraal)	P301 + P310 P321 P330	P301 + P310 P321 P330	P301 + P310 P321 P330	P301 + P312 P330
Voorzorgsmaatregelen i.v.m. opslag (oraal)	P405	P405	P405	
Voorzorgsmaatregelen i.v.m. verwijdering (oraal)	P501	P501	P501	P501
Voorzorgsmaatregelen i.v.m. preventie (dermaal)	P262 P264 P270 P280	P262 P264 P270 P280	P280	P280
Voorzorgsmaatregelen i.v.m. reactie (dermaal)	P302 + P350 P310 P322 P361 P363	P302 + P350 P310 P322 P361 P363	P302 + P352 P312 P322 P361 P363	P302 + P352 P312 P322 P363
Voorzorgsmaatregelen i.v.m. opslag (dermaal)	P405	P405	P405	
Voorzorgsmaatregelen i.v.m. verwijdering (dermaal)	P501	P501	P501	P501
Voorzorgsmaatregelen i.v.m. preventie (inademing)	P260 P271 P284	P260 P271 P284	P261 P271	P261 P271
Voorzorgsmaatregelen i.v.m. reactie (inademing)	P304 + P340 P310 P320	P304 + P340 P310 P320	P304 + P340 P311 P321	P304 + P340 P312
Voorzorgsmaatregelen i.v.m. opslag (inademing)	P403 + P233 P405	P403 + P233 P405	P403 + P233 P405	
Voorzorgsmaatregelen i.v.m. verwijdering (inademing)	P501	P501	P501	

*Noot 1:*

Indien gegevens beschikbaar zijn waaruit blijkt dat de toxiciteit voortvloeit uit een bijtende werking, wordt de stof of het mengsel, naast de indeling voor toxiciteit bij inademing, ook geëtiketteerd als EUH071: „bijtend voor de luchtwegen” — zie aanwijzingen in punt 3.1.2.3.3. Naast een desbetreffend pictogram inzake de acute toxiciteit kan een pictogram inzake de bijtende werking (gebruikt voor bijtende uitwerking op huid en ogen) worden toegevoegd vergezeld van de mededeling „bijtend voor de luchtwegen”.

*Noot 2:*

Wanneer een bestanddeel waarover in het geheel geen bruikbare informatie beschikbaar is, in een concentratie van ten minste 1 % in een mengsel wordt gebruikt, wordt op het etiket van het mengsel de volgende aanvullende tekst vermeld: „Het mengsel bestaat voor x procent uit bestanddelen waarvan de giftigheid niet bekend is” — zie advies onder 3.1.3.6.2.2;

**3.2. Huidcorrosie/-irritatie****3.2.1. Definities**

- 3.2.1.1. „Bijtend voor de huid”: de huid wordt onomkeerbaar beschadigd; dat wil zeggen dat zichtbare necrose optreedt door de epidermis heen in de dermis nadat een teststof gedurende maximaal 4 uur aangebracht is geweest. Bijtende reacties worden gekenmerkt door zweren, bloedingen, bloedkorsten en, tegen het eind van de observatieperiode van 14 dagen, verkleuring door bleking van de huid, gebieden met volledige haaruitval en littekens. Voor de evaluatie van twijfelachtig letsel wordt histopathologie overwogen.

Een stof of mengsel is „irriterend voor de huid” wanneer de huid omkeerbaar wordt beschadigd nadat een teststof gedurende maximaal 4 uur aangebracht is geweest.

**3.2.2. Indelingscriteria voor stoffen**

- 3.2.2.1. Bij de bepaling of een stof bijtende en irriterende eigenschappen heeft, worden diverse factoren in aanmerking genomen alvorens tests worden uitgevoerd. Vaste stoffen (poeders) kunnen bijtend of irriterend worden wanneer zij vochtig worden of in contact komen met vochtige huid of slijmvliezen. De analyse wordt in eerste instantie gebaseerd op bestaande ervaringen en gegevens over eenmalige of herhaalde blootstelling van mensen en dieren, omdat deze informatie rechtstreeks van belang is voor de effecten op de huid. Gevalideerde en aanvaarde in-vitroalternatieven kunnen eveneens worden gebruikt als hulp bij het nemen van de beslissing over de indeling (zie artikel 5). In sommige gevallen is uit qua structuur verwante verbindingen wellicht voldoende informatie beschikbaar om een beslissing over de indeling te nemen.
- 3.2.2.2. Ook kunnen extreme pH-waarden, zoals  $\leq 2$  en  $\geq 11,5$ , duiden op mogelijke huideffecten, met name als bekend is dat er een buffercapaciteit bestaat, al is de correlatie niet perfect. Over het algemeen kan worden verwacht dat dergelijke stoffen significante effecten op de huid hebben. Indien op basis van de zuur-/alkaliereserve wordt vermoed dat de stof ondanks de hoge of lage pH-waarde niet bijtend is, worden ter bevestiging aanvullende tests uitgevoerd (bij voorkeur een passende gevalideerde in-vitrotest).
- 3.2.2.3. Voor stoffen met een hoge dermale toxiciteit kan geen studie naar huidirritatie/-corrosie worden uitgevoerd, aangezien de aan te brengen hoeveelheid teststof de toxische dosis verre overschrijdt en de dieren bijgevolg zouden sterven. Wanneer bij acute toxiciteitsstudies wordt waargenomen dat stoffen irriterend of bijtend voor de huid zijn bij doses tot de limiet, hoeven geen aanvullende tests te worden uitgevoerd mits de gebruikte verdunningen en de geteste dieren gelijk zijn.
- 3.2.2.4. Alle hierboven bedoelde beschikbare informatie over een stof wordt gebruikt om te bepalen of in-vivotests op oogirritatie nodig zijn.

Hoewel binnen een fase informatie op de evaluatie van één parameter kan worden gebaseerd (zie punt 3.2.2.5), bijvoorbeeld caustische alkaliën op grond van hun extreme pH-waarde als bijtend voor de huid kunnen worden beschouwd, is het wenselijk de totale hoeveelheid beschikbare informatie in aanmerking te nemen en de bewijskracht van alle informatie te bepalen. Dit geldt in het bijzonder wanneer niet over alle parameters informatie beschikbaar is. Over het algemeen moet primair de nadruk liggen op de bestaande ervaringen en gegevens over mensen, vervolgens op ervaringen en testgegevens over dieren, en vervolgens op andere informatiebronnen; dit dient echter per geval te worden bepaald.

- 3.2.2.5. Voor de evaluatie van de initiële informatie wordt in voorkomend geval overwogen een gefaseerde aanpak te volgen, waarbij wordt erkend dat in bepaalde gevallen niet alle elementen relevant kunnen zijn.

3.2.2.6. *Corrosie*

3.2.2.6.1. Een stof wordt aan de hand van de resultaten van dierproeven als bijtend ingedeeld (zie Tabel 3.2.1). Een bijtende stof is een stof die bij ten minste één getest dier het huidweefsel aantast, dat wil zeggen dat na blootstelling gedurende maximaal 4 uur zichtbare necrose optreedt door de epidermis heen in de dermis. Bijtende reacties worden gekenmerkt door zweren, bloedingen, bloedkorsten en, tegen het eind van de observatieperiode van 14 dagen, verkleuring door bleking van de huid, gebieden met volledige haaruitval en littekens. Voor de evaluatie van twijfelachtig letsel wordt histopathologie overwogen.

3.2.2.6.2. De categorie bijtend is onderverdeeld in drie subcategorieën: subcategorie 1A: na blootstelling gedurende maximaal 3 minuten, binnen 1 uur een reactie waargenomen; subcategorie 1B: na blootstelling gedurende 3 minuten tot 1 uur, binnen 14 dagen een reactie waargenomen; en subcategorie 1C: na blootstelling gedurende 1 tot 4 uur, binnen 14 dagen een reactie waargenomen.

3.2.2.6.3. Het gebruik van gegevens over de mens wordt behandeld in de punten 3.2.2.1 en 3.2.2.4, alsmede in deel 1, punten 1.1.1.3, 1.1.1.4 en 1.1.1.5.

Tabel 3.2.1.

**Categorie en subcategorieën voor huidcorrosie**

	Subcategorieën	Bijtend bij $\geq 1$ van de 3 dieren	
		Blootstelling	Waarneming
Categorie 1 Bijtend	1A	$\leq 3$ minuten	$\leq 1$ uur
	1B	$> 3$ minuten - $\leq 1$ uur	$\leq 14$ dagen
	1C	$> 1$ uur - $\leq 4$ uur	$\leq 14$ dagen

3.2.2.7. *Irritatie*

3.2.2.7.1. Tabel 3.2.2 bevat één categorie voor irritatie (categorie 2) op basis van de resultaten van dierproeven. Het gebruik van gegevens over de mens wordt behandeld in de punten 3.2.2.1 en 3.2.2.4, alsmede in deel 1, punten 1.1.1.3, 1.1.1.4 en 1.1.1.5. Het belangrijkste criterium voor de categorie voor irritatie is dat ten minste twee van drie geteste dieren een gemiddelde score vertonen van  $\geq 2,3 - \leq 4,0$ .

Tabel 3.2.2

**Categorie voor huidirritatie**

Categorie	Criteria
Irriterend (categorie 2)	(1) Gemiddelde waarde van $\geq 2,3$ en $\leq 4,0$ voor erytheem/eschara of voor oedeem bij ten minste twee van de drie geteste dieren bij meting na 24, 48 en 72 uur na verwijdering van de pleister, of bij vertraagde reactie, bij meting op drie achtereenvolgende dagen na de eerste huidreacties; of
	(2) bij ten minste twee dieren persisterende ontsteking tot het einde van de observatieperiode van gewoonlijk 14 dagen, waarbij met name gelet wordt op alopecia (beperkt gebied), hyperkeratose, hyperplasie en schilfering; of
	(3) in sommige gevallen, wanneer de reactie per dier sterk verschilt, zeer duidelijke positieve effecten van de chemische blootstelling van één dier, die echter niet aan bovenstaande criteria voldoen.

3.2.2.8. *Opmerkingen over de reacties bij dieren bij huidirritatietests*

3.2.2.8.1. De huidirritatie kan, net als de huidcorrosie, per proefdier sterk verschillen. Zoals aangegeven in punt 3.2.2.7.1, is het belangrijkste criterium voor indeling van een stof als irriterend voor de huid de gemiddelde waarde van de scores voor erytheem/eschara of oedeem van ten minste twee van de drie geteste dieren. Er is een speciaal criterium voor gevallen waarin sterke irritatie optreedt, maar de positieve test niet aan het criterium van de gemiddelde score voldoet. Een testmateriaal kan bij voorbeeld als irriterend worden bestempeld indien ten minste één van de drie geteste dieren gedurende het hele onderzoek een zeer hoge gemiddelde score vertoont, o.m. letsel dat blijft bestaan na afloop van een observatieperiode van gemeenlijk 14 dagen. Andere reacties kunnen eveneens aan deze norm voldoen. Het dient echter vast te staan dat de reacties het gevolg zijn van blootstelling aan chemische stoffen.



- 3.2.2.8.2. Een ander punt dat bij de evaluatie van de irritatie een rol speelt, is de omkeerbaarheid van het huidletsel. Wanneer de ontsteking aan het einde van de observatieperiode bij twee of meer proefdieren voortduurt, gelet op alopecia (beperkt gebied), hyperkeratose, hyperplasie en schilfering, wordt het materiaal beschouwd als irriterend.
- 3.2.3. **Indelingscriteria voor mengsels**
- 3.2.3.1. *Indeling van mengsels wanneer gegevens over het mengsel als geheel beschikbaar zijn*
- 3.2.3.1.1. Het mengsel wordt ingedeeld aan de hand van de criteria voor stoffen, waarbij rekening wordt gehouden met de test- en evaluatiestrategieën voor het verzamelen van gegevens voor deze gevarenklassen.
- 3.2.3.1.2. Anders dan voor andere gevarenklassen, zijn er voor huidcorrosie alternatieve tests voor bepaalde soorten stoffen en mengsels beschikbaar die een nauwkeurig, voor de indeling bruikbaar resultaat opleveren, en die tegelijkertijd eenvoudig en relatief goedkoop kunnen worden uitgevoerd. Wanneer wordt overwogen of het mengsel met het oog op indeling moet worden getest, wordt aangeraden een gefaseerde strategie op basis van bewijskracht te volgen, zoals beschreven in de indelingscriteria voor stoffen ten aanzien van huidcorrosie en -irritatie (punt 3.2.2.5), zodat de indeling nauwkeurig geschiedt en onnodige dierproeven worden vermeden. Een mengsel wordt geacht bijtend voor de huid te zijn (huidcategorie 1) als het een pH-waarde van 2 of lager, dan wel van 11,5 of hoger heeft. Indien op basis van de zuur-/alkaliereserve wordt vermoed dat de stof ondanks de hoge of lage pH-waarde niet bijtend is, worden ter bevestiging aanvullende tests uitgevoerd (bij voorkeur een passende gevalideerde in-vitrotest).
- 3.2.3.2. *Indeling van mengsels wanneer geen gegevens over het mengsel als geheel beschikbaar zijn: extrapolatieprincipes*
- 3.2.3.2.1. Wanneer het mengsel zelf niet op huidirritatie/-corrosie is getest, maar wel voldoende gegevens over de afzonderlijke bestanddelen en over soortgelijke geteste mengsels beschikbaar zijn om de gevaren van het mengsel adequaat te typeren, worden deze gegevens gebruikt overeenkomstig de extrapolatieregels in punt 1.1.3.
- 3.2.3.3. *Indeling van mengsels wanneer gegevens over alle of sommige bestanddelen beschikbaar zijn*
- 3.2.3.3.1. Om bij de gevarenindeling voor huidirritatie/-corrosie van mengsels gebruik te kunnen maken van alle beschikbare gegevens, is het volgende uitgangspunt geformuleerd dat bij de gefaseerde aanpak in voorkomend geval wordt gevolgd:
- Uitgangspunt:* de „relevante bestanddelen” van een mengsel zijn de bestanddelen die in concentraties van ten minste 1 % (gewichtspersent voor vaste stoffen, vloeistoffen, stofdeeltjes, nevels en dampen; volumepersent voor gassen) aanwezig zijn, tenzij verondersteld wordt dat een bestanddeel dat in een lagere concentratie dan 1 % aanwezig is, toch relevant is voor de indeling van het mengsel voor huidirritatie/-corrosie (bv. bijtende bestanddelen).
- 3.2.3.3.2. Wanneer gegevens over de bestanddelen van een mengsel beschikbaar zijn, maar niet over het mengsel als geheel, wordt de indeling van het mengsel als irriterend of bijtend voor de huid in het algemeen gebaseerd op de somtheorie, dat wil zeggen dat elk bijtend of irriterend bestanddeel naar rato van zijn potentie en concentratie tot de algehele irriterende of bijtende eigenschappen van het mengsel bijdraagt. Een wegingsfactor van 10 wordt toegepast voor bijtende bestanddelen die in een concentratie onder de algemene concentratiegrens voor indeling in categorie 1 aanwezig zijn, maar wel in een concentratie die bijdraagt tot de indeling van het mengsel als irriterend. Het mengsel wordt als bijtend of irriterend ingedeeld als de som van de concentraties van dergelijke bestanddelen een concentratiegrens overschrijdt.
- 3.2.3.3.3. In tabel 3.2.3 zijn de algemene concentratiegrenzen vermeld voor de indeling van mengsels als irriterend of bijtend voor de huid.
- 3.2.3.3.4.1. Aan de indeling van bepaalde soorten mengsels, die stoffen als zuren en basen, anorganische zouten, aldehyden, fenolen en oppervlakreactieve stoffen bevatten, moet bijzondere zorg worden besteed. De aanpak die beschreven is in de punten 3.2.3.3.1 en 3.2.3.3.2, is mogelijk niet bruikbaar omdat dergelijke stoffen veelal bijtend of irriterend zijn bij concentraties van minder dan 1 %.
- 3.2.3.3.4.2. Voor mengsels die sterke zuren of basen bevatten, wordt de pH-waarde als indelingscriterium gebruikt (zie punt 3.2.3.1.2) omdat deze een betere indicator voor corrosie is dan de concentratiegrenzen van tabel 3.2.3.
- 3.2.3.3.4.3. Een mengsel dat bestanddelen bevat die bijtend of irriterend zijn voor de huid en dat niet volgens de somaanpak (tabel 3.2.3) kan worden ingedeeld omdat deze aanpak wegens chemische eigenschappen onwerkbaar is, wordt ingedeeld in bijtend voor de huid categorie 1A, 1B of 1C als het voor ten minste 1 % bestaat uit een bestanddeel dat is ingedeeld in respectievelijk categorie 1A, 1B of 1C, of in categorie 2 als het voor ten minste 3 % bestaat uit een irriterend bestanddeel. De indeling van mengsels met bestanddelen waarvoor de aanpak van tabel 3.2.3 ongeschikt is, is samengevat in tabel 3.2.4.

- 3.2.3.3.5. Het kan voorkomen dat betrouwbare gegevens uitwijzen dat het gevaar voor huidcorrosie/-irritatie van een bestanddeel zich niet voordoet wanneer het bestanddeel aanwezig is in een hoeveelheid boven de algemene concentratiegrenzen in de tabellen 3.2.3 en 3.2.4. In deze gevallen wordt het mengsel overeenkomstig die gegevens ingedeeld (zie ook de artikelen 10 en 11). In andere gevallen, wanneer verwacht wordt dat het gevaar voor huidcorrosie/-irritatie van een bestanddeel zich niet voordoet wanneer het bestanddeel aanwezig is in een hoeveelheid boven de algemene concentratiegrenzen in de tabellen 3.2.3 en 3.2.4, wordt overwogen het mengsel te testen. In deze gevallen wordt een gefaseerde strategie op basis van bewijskracht gevolgd, zoals beschreven in punt 3.2.2.5.
- 3.2.3.3.6. Als er gegevens zijn waaruit blijkt dat een of meer bestanddelen bijtend of irriterend zijn bij een concentratie van minder dan 1 % (bijtend) of minder dan 3 % (irriterend), wordt het mengsel dienovereenkomstig ingedeeld.

Tabel 3.2.3

**Generieke concentratielimieten van bestanddelen die zijn ingedeeld voor bijtend voor de huid/irriterend voor de huid (categorie 1 of 2) ten gevolge waarvan het mengsel wordt ingedeeld als bijtend/irriterend voor de huid**

Lijst van ingrediënten Mengsel ingedeeld in:	Concentratie waarbij het mengsel wordt ingedeeld voor:	
	Bijtend voor de huid	Irriterend voor de huid
	categorie 1 (zie onderstaande noot)	categorie 2
Huidcategorieën 1A, 1B, 1C (bijtend)	≥ 5 %	≥ 1 % maar < 5 %
Huidcategorie 2 (irriterend)		≥ 10 %
(10 x huidcategorie 1A, 1B, 1C) + (bijtend)		≥ 10 %
Huidcategorie 2 (irriterend)		

Noot:

De som van alle respectievelijk in huidcategorie 1A, 1B of 1C (bijtend) ingedeelde bestanddelen van een mengsel moet telkens 5 % of meer bedragen om het mengsel in respectievelijk huidcategorie 1A, 1B of 1C (bijtend) in te delen. Als de som van de bestanddelen in categorie 1A minder dan 5 % bedraagt, maar de som van de bestanddelen in de categorieën 1A + 1B 5 % of meer bedraagt, wordt het mengsel ingedeeld in categorie 1B. Als de som van de bestanddelen in de categorieën 1A + 1B minder dan 5 % bedraagt, maar de som van de bestanddelen in de categorieën 1A + 1B + 1C 5 % of meer bedraagt, wordt het mengsel ingedeeld in huidcategorie 1C (bijtend).

Tabel 3.2.4

**Algemene concentratiegrenzen voor bestanddelen van een mengsel waarvoor de somaanpak ongeschikt is, waarbij het mengsel wordt ingedeeld als bijtend/irriterend voor de huid**



Bestanddeel	Concentratie	Mengsel ingedeeld in: Huid
Zuur met $\text{pH} \leq 2$	≥ 1 %	categorie 1
Base met $\text{pH} \geq 11,5$	≥ 1 %	categorie 1
Andere bijtende bestanddelen (categorieën 1A, 1B, 1C) waarvoor de somaanpak ongeschikt is	≥ 1 %	categorie 1
Andere irriterende bestanddelen (categorie 2), waaronder zuren en basen, waarvoor de somaanpak ongeschikt is	≥ 3 %	categorie 2

3.2.4. **Voorlichting over de gevaren**

- 3.2.4.1. Voor stoffen en mengsels die aan de criteria voor indeling in deze gevarenklasse voldoen, worden de in tabel 3.2.5 vermelde etiketteringselementen gebruikt.

Tabel 3.2.5

**Etikettersingselementen voor stoffen en mengsels die bijtend of irriterend zijn voor de huid**

Indeling	Indeling Categorie 1A/1B/1C	categorie 2
GHS-pictogrammen		
Signaalwoord	Gevaarlijk	Waarschuwing
Gevarenaanduiding	H314: Veroorzaakt ernstige brandwonden en oogletsel	H315: Veroorzaakt huidirritatie
Voorzorgsmaatregelen i.v.m. reactie	P260 P264 P280	P264 P280
Voorzorgsmaatregelen i.v.m. reactie	P301 + P330 + P331 P303 + P361 + P353 P363 PP304 + P340 P310 P321 P305 + P351 + P338	P302 + P352 PP321 PP332 + P313 P362
Voorzorgsmaatregelen i.v.m. opslag	P405	
Voorzorgsmaatregelen i.v.m. reactie	P501	

**3.3. Ernstig oogletsel/oogirritatie****3.3.1. Definities**

- 3.3.1.1. Onder „ernstig oogletsel” wordt verstaan weefselbeschadiging in het oog of een ernstige fysieke gezichtsvermindering na het aanbrengen van een teststof op het oppervlak aan de voorzijde van het oog, die binnen 21 dagen na het aanbrengen niet volledig omkeerbaar is.

Onder „oogirritatie” worden verstaan veranderingen in het oog na het aanbrengen van een teststof op het oppervlak aan de voorzijde van het oog, die binnen 21 dagen na het aanbrengen volledig omkeerbaar zijn.

**3.3.2. Indelingscriteria voor stoffen**

- 3.3.2.1. Het indelingssysteem voor stoffen omvat een gefaseerde test- en evaluatieregeling, waarin bestaande informatie over ernstige oogweefselbeschadiging en over oogirritatie (waaronder gegevens over ervaring bij mens of dier in het verleden) alsook overwegingen betreffende (Q)SAR's en de output van gevalideerde in-vitrotests worden gecombineerd teneinde onnodige dierproeven te vermijden.

- 3.3.2.2. Alvorens in-vivotests in verband met ernstig oogletsel of oogirritatie worden uitgevoerd, moet alle bestaande informatie over een stof zijn beoordeeld. Op grond van bestaande gegevens kan vaak een voorlopige beslissing worden genomen over de vraag of een stof ernstig (d.w.z. onomkeerbaar) oogletsel veroorzaakt. Indien een stof op basis van deze gegevens kan worden ingedeeld, hoeven geen tests te worden uitgevoerd.

- 3.3.2.3. Bij de bepaling of een stof ernstig oogletsel of oogirritatie kan veroorzaken, worden diverse factoren in aanmerking genomen alvorens tests worden uitgevoerd. De analyse wordt in eerste instantie gebaseerd op de in de loop der tijd opgedane ervaring bij mens en dier, omdat deze informatie rechtstreeks van belang is voor de effecten op het oog. In sommige gevallen kan informatie over qua structuur verwante verbindingen volstaan om een beslissing over de gevaren te nemen. Ook kunnen extreme pH-waarden, zoals 2 en 11,5, ernstig oogletsel opleveren, met name als zij samengaan met een significante buffercapaciteit. Naar verwachting hebben dergelijke stoffen significante effecten op de ogen. Voordat een evaluatie van het

mogelijke ernstige oogletsel of de oogirritatie wordt gemaakt, moet eerst zijn beoordeeld of de stof bijtend is voor de huid, zodat voorkomen wordt dat stoffen die bijtend voor de huid zijn worden getest op plaatselijke effecten op de ogen. Stoffen die een bijtende uitwerking op de huid hebben, moeten geacht worden eveneens ernstige schade aan de ogen te veroorzaken (categorie 1), terwijl voor de huid irriterende stoffen geacht kunnen worden oogirritatie tot gevolg te hebben (categorie 2). Gevalideerde en aanvaarde in-vitroalternatieven kunnen als aanvullende gegevens worden gebruikt bij het nemen van de beslissing over de indeling (zie artikel 5).

- 3.3.2.4. Alle hierboven bedoelde beschikbare informatie over een stof wordt gebruikt om te bepalen of in-vivotests op oogirritatie nodig zijn. Hoewel binnen een fase informatie op de evaluatie van één parameter kan worden gebaseerd (bijvoorbeeld caustische alkaliën op grond van hun extreme pH-waarde als plaatselijk bijtende stoffen kunnen worden beschouwd), moet de totale hoeveelheid beschikbare informatie in aanmerking worden genomen bij het bepalen van de bewijskracht van alle informatie, in het bijzonder wanneer niet over alle parameters informatie beschikbaar is. Over het algemeen moet primair de nadruk liggen op de mening van deskundigen, die de ervaring met de stof bij mensen beoordelen, en vervolgens op de resultaten van huidirritatietests en van goed gevalideerde alternatieve methoden. Waar mogelijk moeten dierproeven met bijtende stoffen of mengsels worden vermeden.
- 3.3.2.5. Voor de evaluatie van de initiële informatie wordt in voorkomend geval overwogen een gefaseerde aanpak te volgen (zie figuur 3.2.1), waarbij erop wordt gelet dat in bepaalde gevallen niet alle elementen relevant kunnen zijn.
- 3.3.2.6. *Onomkeerbare effecten op ogen/ernstig oogletsel (categorie 1)*
- 3.3.2.6.1. Stoffen die ernstig oogletsel kunnen opleveren, worden ingedeeld in categorie 1 (onomkeerbare effecten op ogen). De indeling van stoffen in deze gevarencategorie wordt overeenkomstig de criteria in tabel 3.3.1 gebaseerd op de resultaten van dierproeven. Hierbij wordt gelet op vierdegraads letsel aan het hoornvlies en andere ernstige reacties (zoals vernietiging van het hoornvlies) op enig moment tijdens de test, persistente vertroebeling van het hoornvlies, verkleuring van het hoornvlies door een verfstof, verkleving, pannus en interferentie met de functie van de iris of andere effecten die het gezichtsvermogen schaden. In dit verband wordt met persistent letsel bedoeld letsel dat tijdens een observatieperiode van gewoonlijk 21 dagen niet volledig omkeerbaar is. Stoffen worden ook in categorie 1 ingedeeld als de ogentest van Draize bij konijnen een waarde van ten minste 3 oplevert voor vertroebeling van het hoornvlies of een waarde van meer dan 1,5 voor iritis, waarbij ervan uitgegaan wordt dat dergelijk ernstig letsel gewoonlijk niet binnen een observatieperiode van 21 dagen omkeerbaar is.

Tabel 3.3.1

**Categorie voor onomkeerbare oogeffecten**

Categorie	Criteria
Onomkeerbare effecten op ogen (categorie 1)	<p>Een stof die in het oog van een dier wordt aangebracht:</p> <ul style="list-style-type: none"> <li>— heeft ten minste bij één dier effecten op het hoornvlies, de iris of het oogbindvlies waarvan niet wordt verwacht dat zij omkeerbaar zijn of die niet binnen een observatieperiode van gewoonlijk 21 dagen volledig omkeerbaar zijn gebleken; en/of</li> <li>— levert bij ten minste 2 van 3 geteste dieren een positieve reactie op van: <ul style="list-style-type: none"> <li>— <math>\geq 3</math> voor vertroebeling van het hoornvlies en/of</li> <li>— <math>&gt; 1,5</math> voor iritis,</li> </ul> </li> </ul> <p>berekend als de gemiddelde waarde van metingen 24, 48 en 72 uur na aanbrengen van het testmateriaal.</p>

- 3.3.2.6.2. Het gebruik van gegevens over de mens wordt behandeld in de punten 3.3.2.1 en 3.3.2.4, alsmede in de punten 1.1.1.3, 1.1.1.4 en 1.1.1.5.
- 3.3.2.7. *Omkeerbare effecten op ogen (categorie 2)*
- 3.3.2.7.1. Stoffen die omkeerbare oogirritatie kunnen veroorzaken, worden ingedeeld in categorie 2 (irriterend voor de ogen).

Tabel 3.3.2

**Categorie voor omkeerbare oogeffecten**

Categorie	Criteria
Irriterend voor de ogen (categorie 2)	<p>Een stof die in het oog van een dier wordt aangebracht:</p> <ul style="list-style-type: none"> <li>— levert bij ten minste 2 van 3 geteste dieren een positieve reactie op van: <ul style="list-style-type: none"> <li>— <math>\geq 1</math> voor vertroebeling van het hoornvlies en/of</li> <li>— <math>\geq 1</math> voor iritis en/of</li> <li>— <math>\geq 2</math> voor conjunctivale roodheid en/of</li> <li>— <math>\geq 2</math> voor conjunctivaal oedeem (chemosis),</li> </ul> </li> <li>— berekend als de gemiddelde waarde van metingen 24, 48 en 72 uur na aanbrengen van het testmateriaal, en die binnen een periode van 21 dagen volledig omkeerbaar is.</li> </ul>

3.3.2.7.2. Is de reacties bij dieren sterk variëren, wordt bij de indeling rekening gehouden met deze informatie.

### 3.3.3. **Indelingscriteria voor mengsels**

3.3.3.1. *Indeling van mengsels wanneer gegevens over het mengsel als geheel beschikbaar zijn*

3.3.3.1.1. Een mengsel wordt ingedeeld aan de hand van de criteria voor stoffen, waarbij rekening wordt gehouden met de test- en evaluatiestrategieën voor het verzamelen van gegevens voor deze gevarenklassen.

3.3.3.1.2. Anders dan voor andere gevarenklassen, zijn er voor huidcorrosie alternatieve tests voor bepaalde soorten mengsels beschikbaar die een nauwkeurig, voor de indeling bruikbaar resultaat opleveren, en die tegelijkertijd eenvoudig en relatief goedkoop kunnen worden uitgevoerd. Wanneer wordt overwogen of een mengsel met het oog op indeling moet worden getest, wordt aangeraden een gefaseerde strategie op basis van bewijskracht te volgen, zoals beschreven in de indelingscriteria voor stoffen ten aanzien van huidcorrosie en ernstig oogletsel en oogirritatie, zodat de indeling nauwkeurig geschiedt en onnodige dierproeven worden vermeden. Een mengsel wordt geacht ernstig oogletsel te veroorzaken (categorie 1) als het een pH-waarde van 2,0 of lager, dan wel van 11,5 of hoger heeft. Indien op basis van de zuur-/alkaliereserve wordt vermoed dat het mengsel ondanks de hoge of lage pH-waarde geen ernstig oogletsel oplevert, wordt ter bevestiging een test uitgevoerd (bij voorkeur een passende gevalideerde in-vitrotest).

3.3.3.2. *Indeling van mengsels wanneer geen gegevens over het mengsel als geheel beschikbaar zijn: extrapolatieprincipes*

3.3.3.2.1. Wanneer het mengsel zelf niet op huidcorrosie of ernstig oogletsel of oogirritatie is getest, maar wel voldoende gegevens over de afzonderlijke bestanddelen en over soortgelijke geteste mengsels beschikbaar zijn om de gevaren van het mengsel adequaat te typeren, worden deze gegevens gebruikt overeenkomstig de extrapolatieregels in punt 1.1.3.

3.3.3.3. *Indeling van mengsels wanneer gegevens over alle of sommige bestanddelen beschikbaar zijn*

3.3.3.3.1. Om bij de gevarenindeling voor oogirritatie/ernstig oogletsel van mengsels gebruik te kunnen maken van alle beschikbare gegevens, is het volgende uitgangspunt geformuleerd dat bij de gefaseerde aanpak in voorkomend geval wordt gevolgd:

*Uitgangspunt:* De „relevante bestanddelen” van een mengsel zijn de bestanddelen die in concentraties van ten minste 1 % (gewichtspersent voor vaste stoffen, vloeistoffen, stofdeeltjes, nevels en dampen en volumepersent voor gassen) aanwezig zijn, tenzij verondersteld wordt dat een bestanddeel dat in een lagere concentratie dan 1 % aanwezig is, toch relevant is voor de indeling van het mengsel voor oogirritatie/ernstig oogletsel (bv. bijtende bestanddelen).

3.3.3.3.2. Wanneer gegevens over de bestanddelen van een mengsel beschikbaar zijn, maar niet over het mengsel als geheel, wordt de indeling van het mengsel als irriterend voor de ogen of ernstig oogletsel veroorzakend in het algemeen gebaseerd op de somtheorie, dat wil zeggen dat elk bijtend of irriterend bestanddeel naar rato van zijn potentie en concentratie tot de algehele irriterende of bijtende eigenschappen van het mengsel bijdraagt. Een wegingsfactor van 10 wordt toegepast voor bijtende bestanddelen die in een concentratie onder de algemene concentratiegrens voor indeling in categorie 1 aanwezig zijn, maar wel in een concentratie die bijdraagt tot de indeling van het mengsel als irriterend. Het mengsel wordt als ernstig oogletsel veroorzakend of als irriterend voor de ogen ingedeeld als de som van de concentraties van dergelijke bestanddelen een concentratiegrens overschrijdt.

- 3.3.3.3.3. In tabel 3.3.3 zijn de algemene concentratiegrenzen vermeld voor de indeling van mengsels als irriterend voor ogen of als ernstig oogletsel veroorzakend.
- 3.3.3.3.4.1. Aan de indeling van bepaalde soorten mengsels, die stoffen als zuren en basen, anorganische zouten, aldehyden, fenolen en oppervlakteactieve stoffen bevatten, moet bijzondere zorg worden besteed. De aanpak die beschreven is in de punten 3.3.3.3.1 en 3.3.3.3.2, is mogelijk niet bruikbaar omdat dergelijke stoffen veelal bijtend of irriterend zijn bij concentraties van minder dan 1 %.
- 3.3.3.3.4.2. Voor mengsels die sterke zuren of basen bevatten, wordt de pH-waarde als indelingscriterium gebruikt (zie punt 3.3.2.3) omdat deze een betere indicator voor ernstig oogletsel is dan de algemene concentratiegrenzen van tabel 3.3.3.
- 3.3.3.3.4.3. Een mengsel dat bestanddelen bevat die bijtend of irriterend zijn en dat niet volgens de somaanpak (tabel 3.3.3) kan worden ingedeeld omdat deze aanpak wegens chemische eigenschappen onwerkbaar is, wordt ingedeeld in categorie 1 voor effecten op ogen als het voor ten minste 1 % uit een bijtend bestanddeel bestaat, en in categorie 2 als het voor ten minste 3 % uit een irriterend bestanddeel bestaat. De indeling van mengsels met bestanddelen waarvoor de aanpak van tabel 3.3.3 ongeschikt is, is samengevat in tabel 3.3.4.
- 3.3.3.3.5. Het kan voorkomen dat betrouwbare gegevens uitwijzen dat de omkeerbare of onomkeerbare oogeffecten van een bestanddeel zich niet voordoen wanneer het bestanddeel aanwezig is in een hoeveelheid boven de algemene concentratiegrenzen in de tabellen 3.3.3 en 3.3.4. In deze gevallen wordt het mengsel overeenkomstig die gegevens ingedeeld. In andere gevallen, wanneer verwacht wordt dat het gevaar voor huidcorrosie/-irritatie of de omkeerbare of onomkeerbare oogeffecten van een bestanddeel zich niet voordoen wanneer het bestanddeel aanwezig is in een hoeveelheid boven de algemene concentratiegrenzen in de tabellen 3.3.3 en 3.3.4, wordt overwogen het mengsel te testen. In deze gevallen wordt een gefaseerde strategie op basis van bewijskracht gevolgd.
- 3.3.3.3.6. Als er gegevens zijn waaruit blijkt dat een of meer bestanddelen bijtend of irriterend kunnen zijn bij een concentratie van minder dan 1 % (bijtend) of minder dan 3 % (irriterend), wordt het mengsel dienovereenkomstig ingedeeld.

Tabel 3.3.3

**Algemene concentratiegrenzen voor in huidcategorie 1 en/of oogcategorie 1 of 2 ingedeelde bestanddelen van een mengsel waarbij het mengsel wordt ingedeeld voor oogeffecten (categorie 1 of 2)**

Som van bestanddelen ingedeeld in:	Concentratie waarbij het mengsel wordt ingedeeld voor:	
	Onomkeerbaar: Oogeffecten	Omkeerbaar Oogeffecten
	categorie 1	categorie 2
Oogcategorie 1 of huidcategorie 1A, 1B, 1C	≥ 3 %	≥ 1 % maar < 3 %
Oogcategorie 2		≥ 10 %
(10 × oogcategorie 1) + oogcategorie 2		≥ 10 %
Huidcategorie 1A, 1B, 1C + oogcategorie 1	≥ 3 %	≥ 1 % maar < 3 %
10 × (huidcategorie 1A, 1B, 1C + oogcategorie 1) + oogcategorie 2		≥ 10 %

Tabel 3.3.4

**Algemene concentratiegrenzen voor bestanddelen van een mengsel waarop de somaanpak niet van toepassing is, waarbij het mengsel wordt ingedeeld als gevaarlijk voor ogen**

Bestanddeel	Concentratie	Mengsel ingedeeld in: Ogen
Zuur met pH ≤ 2	≥ 1 %	categorie 1
Base met pH ≥ 11,5	≥ 1 %	categorie 1
Andere bestanddelen die bijtend zijn (categorie 1) en waarop de somaanpak niet van toepassing is	≥ 1 %	categorie 1



Bestanddeel	Concentratie	Mengsel ingedeeld in: Ogen
Andere irriterende bestanddelen (categorie 2), waaronder zuren en basen, waarop de somaanpak niet van toepassing is	≥ 3 %	categorie 2

### 3.3.4. **Voorlichting over de gevaren**

3.3.4.1. Voor stoffen en mengsels die aan de criteria voor indeling in deze gevarenklasse voldoen, worden de in tabel 3.3.5 vermelde etiketteringselementen gebruikt.

Tabel 3.3.5

#### Etiketteringselementen voor ernstig oogletsel/oogirritatie

Indeling	categorie 1	categorie 2
GHS-pictogrammen		
Signaalwoord	Gevaarlijk	Waarschuwing
Gevarenaanduiding	H318: Veroorzaakt ernstig oogletsel	H319: Veroorzaakt ernstige oogirritatie
Voorzorgsmaatregelen i.v.m. preventie	P280	P264 P280
Voorzorgsmaatregelen i.v.m. reactie	P305 + P351 + P338 P310	P305 + P351 + P338 P337 + P313
Voorzorgsmaatregelen i.v.m. opslag		
Voorzorgsmaatregelen i.v.m. verwijdering		

### 3.4. **Sensibilisatie van de luchtwegen of van de huid**

#### 3.4.1. **Definities en algemene overwegingen**

3.4.1.1. Onder „inhalatieallergenen” worden verstaan stoffen die bij inademing overgevoeligheid van de luchtwegen veroorzaken.

3.4.1.2. Onder „huidallergenen” worden verstaan stoffen die bij huidcontact een allergische reactie veroorzaken.

3.4.1.3. Voor de toepassing van punt 3.4 omvat de sensibilisatie twee fasen: de eerste fase betreft de inductie van een gespecialiseerd immunologisch geheugen bij een individu door blootstelling aan een allergeen. De tweede fase betreft de elicitatie, dat wil zeggen het opwekken van een celgemedieerde of antilichaamgemedieerde allergische reactie door blootstelling van een gesensibiliseerd individu aan een allergeen.

3.4.1.4. Het inductiepatroon waarop de elicitatiefase volgt, is voor sensibilisatie van de luchtwegen hetzelfde als voor huidsensibilisatie. Voor huidsensibilisatie is een inductiefase vereist waarin het immuunsysteem leert te reageren; vervolgens kunnen zich klinische symptomen voordoen wanneer de blootstelling voldoende is om een zichtbare huidreactie te bewerkstelligen (elicitatiefase). Voorspellende tests volgen dan ook gewoonlijk dit patroon, waarbij er eerst een inductiefase is, en vervolgens de respons op de inductie wordt gemeten in een genormaliseerde elicitatiefase, gewoonlijk met gebruikmaking van een patchtest. Een uitzondering hierop vormt de lokale lymfkliertest, waarbij de inductierespons rechtstreeks wordt gemeten. Bij mensen wordt de huidsensibilisatie gewoonlijk met een diagnostische patchtest gemeten.

3.4.1.5. Voor zowel huid- als luchtwegsensibilisatie zijn doorgaans lagere niveaus vereist voor de elicitatie dan voor de inductie. Punt 3.4.4 bevat bepalingen betreffende het waarschuwen van gesensibiliseerde individuen voor de aanwezigheid van een bepaald allergeen in een mengsel.

- 3.4.1.6. De gevarenklasse sensibilisatie van de luchtwegen of van de huid is onderverdeeld in:
- sensibilisatie van de luchtwegen;
  - sensibilisatie van de huid.

### 3.4.2. **Indelingscriteria voor stoffen**

#### 3.4.2.1. *Inhalatieallergenen*

Stoffen worden op grond van de in tabel 3.4.1 aangegeven criteria als inhalatieallergenen (categorie 1) ingedeeld:

Tabel 3.4.1

#### **Gevarencategorie voor inhalatieallergenen**

Categorie	Criteria
Categorie 1	Stoffen worden op grond van de volgende criteria als inhalatieallergenen (categorie 1) ingedeeld: a) gegevens bij de mens dat de stof specifieke overgevoeligheid van de luchtwegen kan veroorzaken en/of b) positieve resultaten van geschikte dierproeven.

#### 3.4.2.1.1. Gegevens bij de mens

3.4.2.1.1.1. Gegevens dat een stof specifieke overgevoeligheid van de luchtwegen kan veroorzaken, zullen gewoonlijk gebaseerd zijn op waarnemingen bij de mens. In deze context wordt bij overgevoeligheid doorgaans aan astma gedacht, maar ook andere overgevoeligheidsreacties, zoals rinitis/conjunctivitis en alveolitis, moeten worden beschouwd. De aandoening moet het klinisch karakter van een allergische reactie hebben. Immunologische mechanismen behoeven echter niet te worden aangetoond.

3.4.2.1.1.2. Bij de evaluatie van de gegevens bij de mens moet, alvorens een beslissing wordt genomen over de indeling van de stof, ook rekening worden gehouden met:

- a) de omvang van de blootgestelde populatie;
- b) de mate van blootstelling.

Het gebruik van gegevens over de mens wordt behandeld in punten 1.1.1.3, 1.1.1.4 en 1.1.1.5.

#### 3.4.2.1.1.3. Met bovengenoemde gegevens wordt bedoeld:

- a) klinische voorgeschiedenis en resultaten van geschikte longfunctieproeven met betrekking tot de blootstelling aan de stof, bevestigd door aanvullende bewijzen zoals:
  - i) immunologische *in-vivotests* (bv. huidprikken);
  - ii) immunologische *in-vitrotests* (bv. serologische analyse);
  - iii) wanneer immunologische werkingsmechanismen niet zijn aangetoond, studies die wijzen op andere specifieke overgevoeligheidsreacties, bv. herhaaldelijke beperkte irritatie, effecten van geneesmiddelen;
  - iv) een chemische structuur die verwant is aan de structuur van stoffen waarvan bekend is dat zij overgevoeligheid van de luchtwegen veroorzaken;
- b) resultaten van een of meer positieve bronchiale provocatietests met de stof, verricht overeenkomstig aanvaarde richtsnoeren voor de bepaling van specifieke overgevoeligheidsreacties.

3.4.2.1.1.4. De klinische voorgeschiedenis omvat zowel het medische als het beroepsverleden, zodat het verband kan worden vastgesteld tussen de blootstelling aan een specifieke stof en het ontstaan van overgevoeligheid van de luchtwegen. Tot de relevante informatie behoren eveneens verergerende factoren thuis en op het werk, het begin en het verloop van de ziekte, familiale voorgeschiedenis en medische voorgeschiedenis van de patiënt. In de medische voorgeschiedenis wordt ook vermeld of er vanaf de kinderjaren andere allergische reacties of aandoeningen van de luchtwegen zijn voorgekomen en of men roker is (geweest).



3.4.2.1.1.5. De resultaten van positieve bronchiale provocatieproeven worden op zich als voldoende bewijs voor de indeling beschouwd. In de praktijk zullen echter reeds een groot aantal van bovengenoemde tests zijn verricht.

#### 3.4.2.1.2. Dierproeven

3.4.2.1.2.1. Tot de gegevens van passende dierproeven <sup>(1)</sup> die indicatief kunnen zijn voor mogelijke overgevoeligheidsreacties van de mens <sup>(2)</sup> bij inademing, behoren de resultaten van:

- i) metingen van immunoglobuline E (IgE) en andere specifieke immunologische parameters bij muizen;
- ii) specifieke pulmonaire reacties bij cavia's.

#### 3.4.2.2. Huidallergenen

3.4.2.2.1. Stoffen worden op grond van de in tabel 3.4.2 aangegeven criteria als huidallergenen (categorie 1) ingedeeld:

Tabel 3.4.2

#### Gevarencategorie voor huidallergenen

Categorie	Criteria
Categorie 1	Stoffen worden op grond van de volgende criteria als huidallergenen (categorie 1) ingedeeld: <ul style="list-style-type: none"> <li>i) gegevens bij de mens dat de stof bij huidcontact bij een substantieel aantal personen sensibilisatie kan veroorzaken, of</li> <li>ii) positieve resultaten van geschikte dierproeven (zie specifieke criteria in punt 3.4.2.2.4.1).</li> </ul>

#### 3.4.2.2.2. Specifieke overwegingen

3.4.2.2.2.1. Voor indeling van een stof als huidallergeen zijn alle of een deel van de volgende gegevens vereist:

- a) positieve resultaten van patchtests, gewoonlijk verkregen in meer dan een dermatologische kliniek;
- b) epidemiologische studies waaruit blijkt dat de stof allergische contactdermatitis veroorzaakt. Situaties waarbij een groot deel van de blootgestelde personen karakteristieke symptomen vertoont, moeten met bijzondere aandacht worden bekeken, zelfs wanneer het aantal gevallen klein is;
- c) positieve resultaten van geschikte dierproeven;
- d) positieve resultaten van experimentele studies bij de mens (zie artikel 7, lid 3);
- e) goed gedocumenteerde gevallen van allergische contactdermatitis, gewoonlijk in meer dan een dermatologische kliniek.

Het gebruik van gegevens over de mens wordt behandeld in punten 1.1.1.3, 1.1.1.4 en 1.1.1.5.

3.4.2.2.2.2. De indeling wordt normaal gesproken gebaseerd op positieve effecten bij mens of dier. Gegevens van dierproeven (zie punt 3.4.2.2.4) zijn gewoonlijk veel betrouwbaarder dan gegevens over blootstelling van de mens. Wanneer echter gegevens uit beide bronnen beschikbaar zijn en deze elkaar tegenspreken, worden de kwaliteit en de betrouwbaarheid van de gegevens uit beide bronnen beoordeeld om per geval een besluit over de indeling te nemen. Normaal gesproken worden gegevens over de mens niet in gecontroleerde proeven met vrijwilligers gegenereerd met het oog op de gevarenindeling, maar om in het kader van de risicobeoordeling de resultaten van dierproeven waarin geen effecten werden vastgesteld, te bevestigen. Positieve gegevens over huidsensibilisatie bij de mens zijn dan ook gewoonlijk ontleend aan patiëntcontroleonderzoek of andere minder goed gedefinieerde studies. Gegevens over de mens moeten daarom met de nodige voorzichtigheid worden beoordeeld, aangezien in de frequentie van de gevallen niet alleen de intrinsieke eigenschappen van de stoffen tot uiting komen, maar ook factoren als de blootstellingssituatie, de biobeschikbaarheid, de individuele predispositie en de genomen preventieve maatregelen. Negatieve gegevens over de mens kunnen gewoonlijk niet worden gebruikt om positieve resultaten van dierproeven te ontcrachten.

<sup>(1)</sup> Momenteel zijn geen erkende diermodellen beschikbaar voor het testen van overgevoeligheid van de luchtwegen.

<sup>(2)</sup> De mechanismen waarmee stoffen astmasymptomen veroorzaken, zijn nog niet volledig bekend. Met het oog op preventieve maatregelen worden deze stoffen als inhalatieallergenen beschouwd. Als echter op grond van de gegevens kan worden aangetoond dat deze stoffen alleen bij mensen met bronchiale hyperreactiviteit astmasymptomen veroorzaken door irritatie, worden deze niet als inhalatieallergenen beschouwd.

3.4.2.2.3. Als aan geen van de bovengenoemde voorwaarden wordt voldaan, hoeft de stof niet te worden ingedeeld als huidallergeen. Dit besluit kan echter worden herzien op basis van twee of meer van de onderstaande indicatoren van huidsensibilisatie. Dit wordt per geval bekeken:

- a) geïsoleerde gevallen van allergische contactdermatitis;
- b) epidemiologische studies met beperkte bewijskracht, waarbij toeval, vertekening of verstoringen niet met redelijke zekerheid volledig kunnen worden uitgesloten;
- c) gegevens van volgens bestaande richtsnoeren uitgevoerde dierproeven die niet aan de in punt 3.4.2.2.4.1 beschreven criteria voor een positief resultaat voldoen, maar de limiet voldoende benaderen om als significant te kunnen worden beschouwd;
- d) niet met standaardmethoden verkregen positieve gegevens;
- e) positieve resultaten van stoffen met een nauw verwante structuur.

#### 3.4.2.2.3. Immunologische contacturticaria

3.4.2.2.3.1. Sommige stoffen die aan de criteria voor indeling als inhalatieallergeen voldoen, kunnen bovendien immunologische contacturticaria veroorzaken. Overwogen wordt of deze stoffen tevens als huidallergenen moeten worden ingedeeld en of op het etiket of op het veiligheidsinformatieblad passende waarschuwingen in verband met contacturticaria moeten worden opgenomen.

3.4.2.2.3.2. Als stoffen die niet aan de criteria voor indeling als inhalatieallergeen voldoen, verschijnselen van immunologische contacturticaria veroorzaken, wordt overwogen of deze als huidallergeen moeten worden ingedeeld. Er is geen erkend diermodel beschikbaar ter identificatie van stoffen die immunologische contacturticaria veroorzaken. De indeling wordt daarom doorgaans gebaseerd op gegevens bij de mens, en wel op soortgelijke wijze als in verband met huidsensibilisatie.

#### 3.4.2.2.4. Dierproeven

3.4.2.2.4.1. Wanneer een testmethode voor huidsensibilisatie met adjuvant bij cavia's wordt toegepast, wordt een reactie bij ten minste 30 % van de dieren als positief resultaat beschouwd. Wanneer een testmethode met cavia's zonder adjuvant wordt toegepast, wordt een reactie bij ten minste 15 % van de dieren als positief resultaat beschouwd. De testmethoden voor huidsensibilisatie die beschreven zijn in Verordening (EG) nr. 440/2008, die is aangenomen overeenkomstig artikel 13, lid 3, van Verordening (EG) nr. 1907/2006 („verordening testmethoden”), moeten worden toegepast; andere methoden mogen alleen worden toegepast wanneer zij naar behoren zijn gevalideerd en een wetenschappelijke verantwoording wordt gegeven.

#### 3.4.3. **Indelingscriteria voor mengsels**

3.4.3.1. *Indeling van mengsels wanneer gegevens over het mengsel als geheel beschikbaar zijn*

3.4.3.1.1. Wanneer voor het mengsel betrouwbare, kwalitatief goede gegevens op basis van ervaringen van mensen of passende dierproeven beschikbaar zijn, zoals beschreven in de criteria voor stoffen, kan het worden ingedeeld op grond van de bepaling van de bewijskracht van deze gegevens. Bij de evaluatie van de gegevens over mengsels wordt erop gelet dat de gebruikte dosis niet zodanig is dat de resultaten niet overtuigend zijn.

3.4.3.2. *Indeling van mengsels wanneer geen gegevens over het mengsel als geheel beschikbaar zijn: extrapolatieprincipes*

3.4.3.2.1. Wanneer een mengsel zelf niet op sensibiliserende eigenschappen is getest, maar wel voldoende gegevens over de afzonderlijke bestanddelen en over soortgelijke geteste mengsels beschikbaar zijn om de gevaren van het mengsel adequaat te typeren, worden deze gegevens gebruikt overeenkomstig de extrapolatieregels in punt 1.1.3.

3.4.3.3. *Indeling van mengsels wanneer gegevens over alle of sommige bestanddelen beschikbaar zijn*

3.4.3.3.1. Het mengsel wordt als inhalatie- of huidallergeen ingedeeld als ten minste één bestanddeel als inhalatie- of huidallergeen is ingedeeld en ten minste in een hoeveelheid van de in tabel 3.4.3 vermelde algemene concentratiegrens voor vaste/vloeibare stoffen en gassen in het mengsel aanwezig is.

3.4.3.3.2. Sommige als allergenen ingedeelde stoffen kunnen bij reeds voor de stof of het mengsel gesensibiliseerde personen een reactie bewerkstelligen wanneer zij in een mengsel aanwezig zijn in een hoeveelheid beneden de in tabel 3.4.1 vermelde concentraties (zie noot 1 bij tabel 3.4.3).

Tabel 3.4.3.

**Algemene concentratiegrenzen voor als huid- of inhalatieallergeen ingedeelde bestanddelen van een mengsel waarbij het mengsel wordt ingedeeld**

Bestanddeel ingedeeld als:	Concentratie waarbij het mengsel wordt ingedeeld als		
	Huidallergeen	Inhalatieallergeen	
	Alle fysische toestanden	Vaste/vloeibare stof	Gas
Huidallergeen	≥ 0,1 % (Noot 1)	—	—
	≥ 1,0 % (Noot 2)	—	—
Inhalatieallergeen	—	≥ 0,1 % (Noot 1)	≥ 0,1 % (Noot 1)
	—	≥ 1,0 % (Noot 3)	≥ 0,2 % (Noot 3)

Noot 1:

Deze concentratiegrens wordt in het algemeen gebruikt voor de toepassing van de speciale etiketteringsvoorschriften van bijlage II, punt 2.8, ter bescherming van reeds gesensibiliseerde personen. Voor mengsels die een bestanddeel bevatten in een hoeveelheid boven deze concentratie is een veiligheidsinformatieblad vereist.

Noot 2:

Deze concentratiegrens wordt gebruikt voor de indeling van een mengsel als huidallergeen.

Noot 3:



Deze concentratiegrens wordt gebruikt voor de indeling van een mengsel als inhalatieallergeen.

**3.4.4. Voorlichting over de gevaren**

3.4.4.1. Voor stoffen en mengsels die aan de criteria voor indeling in deze gevarenklasse voldoen, worden de in tabel 3.4.4 vermelde etiketteringselementen gebruikt.

Tabel 3.4.4

**Etiketteringselementen voor inhalatie- of huidallergenen**

Indeling	Inhalatieallergeen	Huidallergeen
	categorie 1	categorie 1
GHS-pictogrammen		
Signaalwoord:	Gevaarlijk	Waarschuwing
Gevarenaanduiding	H334: Kan bij inademing allergie- of astmasymptomen of ademhalingsmoeilijkheden veroorzaken	H317: Kan een allergische huidreactie veroorzaken
Voorzorgsmaatregelen i.v.m. preventie	P261 P285	P261 P272 P280

Indeling	Inhalatieallergeen	Huidallergeen
	categorie 1	categorie 1
Voorzorgsmaatregelen i.v.m. reactie	P304 + P341 P342+ P311	P302 + P352 P333 + P313 P321 P363
Voorzorgsmaatregelen i.v.m. opslag		
Voorzorgsmaatregelen i.v.m. verwijdering	P501	P501

### 3.5. Mutageniteit in geslachtscellen

#### 3.5.1. Definities en algemene overwegingen

3.5.1.1. Onder „mutatie” wordt verstaan een permanente verandering in de hoeveelheid of de structuur van het genetisch materiaal in een cel. Het begrip „mutatie” omvat zowel erfelijke genetische veranderingen die zich op het niveau van het fenotype kunnen manifesteren, als de onderliggende DNA-veranderingen, wanneer die bekend zijn (zoals veranderingen van specifieke basenparen en chromosomale translocaties). Het begrip „mutageen” wordt gebruikt voor stoffen die leiden tot een verhoogde frequentie van mutaties in populaties van cellen en/of organismen.

3.5.1.2. De algemenere begrippen „genotoxisch” en „genotoxiciteit” worden gebruikt voor stoffen of processen die de structuur, de informatie of de segregatie van DNA veranderen, waaronder ook stoffen en processen die DNA-beschadigingen opleveren doordat zij de normale replicatieprocessen beïnvloeden of die op niet-fysiologische wijze de DNA-replicatie (tijdelijk) veranderen. Resultaten van genotoxiciteitstests worden gewoonlijk beschouwd als indicatoren van mutagene effecten.

#### 3.5.2. Indelingscriteria voor stoffen

3.5.2.1. Onder deze gevarenklasse vallen voornamelijk stoffen die erfelijk overdraagbare mutaties in de geslachtscellen van mensen kunnen veroorzaken. Bij de indeling van stoffen en mengsels in deze gevarenklasse wordt echter ook rekening gehouden met de resultaten van tests op mutageniteit of genotoxiciteit die in vitro of in vivo in somatische en geslachtscellen van zoogdieren worden uitgevoerd.

3.5.2.2. Stoffen worden overeenkomstig tabel 3.5.1 in een van de twee categorieën voor mutageniteit in geslachtscellen ingedeeld.

Tabel 3.5.1

#### Gevarencategorieën voor mutagene stoffen in geslachtscellen

Categorieën	Criteria
CATEGORIE 1:	Stoffen waarvan bekend is dat zij erfelijke mutaties veroorzaken of die beschouwd moeten worden als stoffen die erfelijke mutaties veroorzaken in de geslachtscellen van mensen. Stoffen waarvan bekend is dat zij erfelijke mutaties in de geslachtscellen van mensen veroorzaken.
Categorie 1A:	De indeling in categorie 1A wordt gebaseerd op positieve bewijzen van epidemiologische studies bij mensen. Stoffen die beschouwd moeten worden als stoffen die erfelijke mutaties in de geslachtscellen van mensen veroorzaken.

Categorieën	Criteria
Categorie 1B:	<p>De indeling in categorie 1B wordt gebaseerd op:</p> <ul style="list-style-type: none"> <li>— een of meer positieve resultaten van in-vivotests op erfelijke mutageniteit in geslachtscellen van zoogdieren; of</li> <li>— een of meer positieve resultaten van in-vivotests op mutageniteit in somatische cellen van zoogdieren, in combinatie met enige bewijzen dat de stof mutaties van geslachtscellen kan veroorzaken. Dit ondersteunende bewijs kan ontleend worden aan in-vivotests op mutageniteit of genotoxiciteit in geslachtscellen, of berusten op het aantonen dat de stof of een of meer metabolieten ervan een interactie met het genetisch materiaal van geslachtscellen kunnen aangaan; of</li> <li>— positieve testresultaten die wijzen op mutagene effecten in de geslachtscellen van mensen, zonder dat aangetoond is dat deze erfelijk overdraagbaar zijn; bijvoorbeeld een toegenomen frequentie van aneuploidie in de spermacellen van blootgestelde personen.</li> </ul>
CATEGORIE 2:	<p>Stoffen die reden geven tot bezorgdheid voor de mens omdat zij mogelijk erfelijke mutaties in de geslachtscellen van mensen veroorzaken</p> <p>De indeling in categorie 2 wordt gebaseerd op:</p> <ul style="list-style-type: none"> <li>— positieve bewijzen op basis van proeven bij zoogdieren en/of in sommige gevallen op basis van in-vitroproeven, verkregen uit: <ul style="list-style-type: none"> <li>— in-vivotests op mutageniteit in somatische cellen van zoogdieren; of</li> <li>— andere in-vivotests op genotoxiciteit in somatische cellen die worden bevestigd door positieve resultaten van in-vitrotests op mutageniteit.</li> </ul> </li> </ul> <p>Noot: Stoffen die positief zijn bij in-vitrotests op mutageniteit bij zoogdieren en tevens een soortgelijke chemische structuur-activiteitsrelatie hebben als stoffen waarvan bekend is dat zij mutageen zijn in geslachtscellen, komen in aanmerking voor indeling als mutagene stoffen van categorie 2.</p>

3.5.2.3. *Specifieke overwegingen voor indeling als stof die mutageen is in geslachtscellen*

3.5.2.3.1. Voor de indeling worden de resultaten beoordeeld van proeven ter bepaling van de mutagene en/of genotoxische effecten in geslachtscellen en/of somatische cellen van blootgestelde dieren. Ook mutagene en/of genotoxische effecten die bij in-vitrotests zijn vastgesteld, worden in de beoordeling verwerkt.

3.5.2.3.2. Het systeem is gebaseerd op gevaren en deelt stoffen in op grond van hun intrinsieke vermogen om mutaties in geslachtscellen te veroorzaken. Dit betekent dat het niet bedoeld is voor de (kwantitatieve) risicobeoordeling van stoffen.

3.5.2.3.3. De indeling voor erfelijke effecten in menselijke geslachtscellen vindt plaats op basis van correct uitgevoerde, voldoende gevalideerde tests, bij voorkeur overeenkomstig Verordening (EG) nr. 440/2008 die is aangenomen overeenkomstig artikel 13, lid 3, van Verordening (EG) nr. 1907/2006 („verordening testmethoden”), zoals de in de volgende punten opgesomde tests. De testresultaten worden beoordeeld aan de hand van de mening van deskundigen, en alle beschikbare gegevens worden gewogen met het oog op de indeling.

3.5.2.3.4. In-vivotests op erfelijke mutageniteit in geslachtscellen zoals:

- dominant-letaal-mutatietest bij knaagdieren;
- overerfbare-translokatietest bij muizen;

3.5.2.3.5. In-vivotests op mutageniteit in somatische cellen zoals:

- test op chromosoomafwijkingen in beenmergcellen van zoogdieren;
- vlekentest bij muizen;
- micronucleustest bij erythrocyten van zoogdieren;

3.5.2.3.6. Mutageniteits/genotoxiciteitstests in geslachtscellen zoals:

- a) Mutageniteitstests:
- test op chromosoomafwijkingen in spermatogonia van zoogdieren;
  - spermatide micronucleustest;

- b) Genotoxiciteitstests:
- Zusterchromatiden-uitwisselingstest in spermatogonia
  - DNA-herstelsynthesetest (UDS) in zaadcellen

3.5.2.3.7. Genotoxiciteitstests in somatische cellen zoals:

- in-vivoherstelsynthesetest (UDS) in levercellen;
- zusterchromatiden-uitwisselingstest in beenmergcellen van zoogdieren (SCE);

3.5.2.3.8. In vitro mutageniteitstests zoals:

- in-vitrotest op chromosoomafwijkingen in zoogdiercellen;
- in-vitrogenmutatietest met zoogdiercellen;
- terugmutatietests met bacteriën.

3.5.2.3.9. De indeling van afzonderlijke stoffen wordt gebaseerd op de totale bewijskracht, aan de hand van de mening van deskundigen (zie punt 1.1.1). Wanneer één correct uitgevoerde test voor de indeling wordt gebruikt, moet deze duidelijke, ondubbelzinnige positieve resultaten hebben opgeleverd. Nieuwe, terdege gevalideerde tests mogen eveneens worden gebruikt in de totale in aanmerking te nemen bewijskracht. Er wordt ook rekening gehouden met de relevantie van de in de studie gebruikte blootstellingsroute ten opzichte van de route waarlangs de mens wordt blootgesteld.

3.5.3. **Indelingscriteria voor mengsels**

3.5.3.1. *Indeling van mengsels wanneer gegevens over alle of sommige bestanddelen beschikbaar zijn*

3.5.3.1.1. Het mengsel wordt als mutagene stof ingedeeld wanneer ten minste één bestanddeel als mutagene stof van categorie 1A, 1B of 2 is ingedeeld en ten minste in een hoeveelheid van de in tabel 3.5.2 vermelde algemene concentratiegrenzen voor respectievelijk categorie 1A, categorie 1B en categorie 2 aanwezig is.

Tabel 3.5.2

**Algemene concentratiegrenzen voor als mutageen in geslachtscellen ingedeelde bestanddelen van een mengsel waarbij het mengsel wordt ingedeeld**

Bestanddeel ingedeeld als:	Concentratiegrenzen waarbij het mengsel wordt ingedeeld als:		
	Mutageen, categorie 1A	Mutageen, categorie 1B	Mutageen categorie 2
Mutageen, categorie 1A	≥ 0,1 %	—	—
Mutageen, categorie 1B	—	≥ 0,1 %	—
Mutageen categorie 2	—	—	≥ 1,0 %

Noot:

De concentratiegrenzen in bovenstaande tabel zijn van toepassing op vaste stoffen en vloeistoffen (gewichtspersent) alsmede op gasen (volumepersent).



3.5.3.2. *Indeling van mengsels wanneer gegevens over het mengsel als geheel beschikbaar zijn*

3.5.3.2.1. De indeling van mengsels wordt gebaseerd op de beschikbare testgegevens over de afzonderlijke bestanddelen van het mengsel, met gebruikmaking van de concentratiegrenzen voor de bestanddelen die als mutageen in geslachtscellen zijn ingedeeld. Per geval kan worden overwogen testgegevens over mengsels voor de indeling te gebruiken wanneer die effecten aantonen die niet uit de beoordeling op basis van de afzonderlijke bestanddelen blijken. In dergelijke gevallen moet aangetoond zijn dat uit de testresultaten voor het mengsel als geheel een conclusie kan worden getrokken, rekening houdend met de dosis en andere factoren zoals duur, waarnemingen, gevoeligheid en statistische analyses van testsystemen voor mutageniteit in geslachtscellen. Passende documentatie die de indeling onderbouwt, wordt bewaard en op verzoek ter beschikking gesteld om te worden bestudeerd.

- 3.5.3.3. *Indeling van mengsels wanneer geen gegevens over het mengsel als geheel beschikbaar zijn: extrapolatieprincipes*
- 3.5.3.3.1. Wanneer het mengsel zelf niet op gevaar voor mutageniteit in geslachtscellen is getest, maar wel voldoende gegevens over de afzonderlijke bestanddelen en over soortgelijke geteste mengsels beschikbaar zijn (waarvoor punt 3.5.3.2.1 geldt) om de gevaren van het mengsel adequaat te typeren, worden deze gegevens gebruikt overeenkomstig de extrapolatieregels in punt 1.1.3.
- 3.5.4. **Voorlichting over de gevaren**
- 3.5.4.1. Voor stoffen en mengsels die aan de criteria voor indeling in deze gevarenklasse voldoen, worden de in tabel 3.5.3 vermelde etiketteringselementen gebruikt.

Tabel 3.5.3

**Etiketteringselementen voor mutageniteit in geslachtscellen**

Indeling	Categorie 1A of categorie 1B	Categorie 2
GHS-pictogrammen		
signaalwoord:	Gevaarlijk	Waarschuwing
Gevarenaanduiding	H340: Kan genetische schade veroorzaken (blootstellingsroute vermelden indien overtuigend bewezen is dat het gevaar bij andere blootstellingsroutes niet aanwezig is)	H341: Verdacht van het veroorzaken van genetische schade (blootstellingsroute vermelden indien overtuigend bewezen is dat het gevaar bij andere blootstellingsroutes niet aanwezig is)
Voorzorgsmaatregelen i.v.m. preventie	P201 P202 P281	P201 P202 P281
Voorzorgsmaatregelen i.v.m. reactie	P308 + P313	P308 + P313
Voorzorgsmaatregelen i.v.m. opslag	P405	P405
Voorzorgsmaatregelen i.v.m. verwijdering	P501	P501

3.5.5. **Aanvullende overwegingen bij de indeling**

Er wordt steeds algemener aanvaard dat het proces van door chemische stoffen geïnduceerde tumorvorming bij mensen en dieren leidt tot genetische veranderingen, bijvoorbeeld in proto-oncogenen en/of tumorsuppressorgenen van somatische cellen. Het aantonen in vivo van mutagene eigenschappen van stoffen in somatische en/of geslachtscellen bij zoogdieren kan dan ook gevolgen hebben voor de potentiële indeling van deze stoffen als kankerverwekkend (zie ook Kankerverwekkendheid, punt 3.6, punt 3.6.2.2.6).

3.6. **Kankerverwekkendheid**3.6.1. **Definitie**

- 3.6.1.1. Onder „kankerverwekkende stoffen” worden verstaan stoffen en mengsels die kanker veroorzaken of de incidentie van kanker doen toenemen. Ook stoffen die bij correct uitgevoerde dierproeven goed- en kwaadaardige tumoren hebben veroorzaakt, worden als kankerverwekkend voor mensen beschouwd, of ervan verdacht kankerverwekkend voor mensen te zijn, tenzij er sterke bewijzen zijn dat het mechanisme van tumorvorming voor de mens irrelevant is.

3.6.2. **Indelingscriteria voor stoffen**

- 3.6.2.1. Stoffen worden op basis van de bewijskracht en aanvullende overwegingen in een van de twee categorieën voor kankerverwekkendheid ingedeeld. In bepaalde gevallen kan een routespecifieke indeling gerechtvaardigd zijn, indien overtuigend kan worden bewezen dat het gevaar bij andere blootstellingsroutes niet aanwezig is.

Tabel 3.6.1

## Gevarencategorie voor kankerverwekkende stoffen

Categorieën	Criteria
CATEGORIE 1:	Stoffen waarvan bekend is of verondersteld wordt dat zij kankerverwekkend zijn voor mensen
Categorie 1A:	Een stof wordt in categorie 1 voor kankerverwekkendheid ingedeeld op basis van epidemiologische gegevens en/of gegevens van dierproeven.
Categorie 1B:	Een stof kan verder worden aangemerkt als behorende tot de categorie 1A, wanneer bekend is dat zij kankerverwekkend is voor mensen, waarbij de indeling grotendeels gebaseerd is op gegevens bij de mens, of als behorende tot de categorie 1B, wanneer verondersteld wordt dat zij kankerverwekkend is voor mensen, waarbij de indeling grotendeels gebaseerd is op gegevens bij dieren.
	De indeling in de categorieën 1A en 1B berust op bewijskracht, gecombineerd met aanvullende overwegingen (zie punt 3.6.2.2). De bewijzen kunnen ontleend zijn aan: <ul style="list-style-type: none"> <li>— studies bij mensen waarin een oorzakelijk verband tussen de blootstelling van de mens aan een stof en de ontwikkeling van kanker wordt vastgesteld (kankerverwekkende eigenschappen voor mensen bekend); of</li> <li>— dierproeven die voldoende <sup>(1)</sup> bewijzen dat een stof kankerverwekkend voor dieren is (kankerverwekkende eigenschappen voor mensen verondersteld).</li> </ul> Bovendien kan het per geval op wetenschappelijke gronden gerechtvaardigd zijn een besluit te nemen over veronderstelde kankerverwekkendheid voor mensen op basis van studies die beperkte bewijzen geven dat een stof kankerverwekkend voor mensen is, gecombineerd met beperkte bewijzen voor kankerverwekkendheid bij proefdieren.
CATEGORIE 2:	Stoffen die ervan verdacht worden kankerverwekkend voor mensen te zijn
	Een stof wordt in categorie 2 ingedeeld op basis van gegevens die ontleend zijn aan studies bij mensen en/of dieren, waarvan echter op grond van bewijskracht, gecombineerd met aanvullende overwegingen (zie punt 3.6.2.2), wordt vastgesteld dat zij onvoldoende overtuigend zijn om de stof in categorie 1A of 1B in te delen. De bewijzen kunnen ontleend zijn aan studies bij mensen of dieren die beperkte <sup>(1)</sup> bewijzen geven dat de stof kankerverwekkend is.

<sup>(1)</sup> Noot: zie 3.6.2.2.4.

### 3.6.2.2. Specifieke overwegingen voor indeling als kankerverwekkende stof

3.6.2.2.1. De indeling als kankerverwekkende stof vindt plaats op basis van met betrouwbare en aanvaardbare studies verkregen gegevens, en is bedoeld voor stoffen die intrinsieke eigenschappen hebben om kanker te veroorzaken. De evaluatie wordt gebaseerd op alle bestaande gegevens, collegiaal getoetste gepubliceerde studies en aanvullende gegevens die aanvaardbaar zijn.

3.6.2.2.2. Stoffen worden als kankerverwekkend ingedeeld, waarbij twee, met elkaar verband houdende, beslissingen worden genomen: de bewijskracht wordt bepaald en alle overige relevante informatie wordt beoordeeld om stoffen die mogelijk kankerverwekkend voor mensen zijn, in gevarencategorieën in te delen.

3.6.2.2.3. Bij de bepaling van de bewijskracht wordt gekeken hoeveel tumoren zich in studies bij mensen en dieren hebben ontwikkeld en in hoeverre deze statistisch significant zijn. Voldoende bewijs bij mensen houdt in dat een oorzakelijk verband tussen de blootstelling van de mens en de ontwikkeling van kanker wordt vastgesteld, terwijl voldoende bewijs bij dieren betekent dat een oorzakelijk verband tussen de stof en een toegenomen incidentie van tumoren wordt vastgesteld. Er is sprake van beperkte bewijzen bij mensen wanneer een positief verband tussen blootstelling en kanker wordt geconstateerd, maar geen oorzakelijk verband kan worden aangetoond. Er is sprake van beperkte bewijzen bij dieren wanneer de gegevens op een kankerverwekkende werking wijzen, maar onvoldoende zijn. De begrippen „voldoende bewijs” en „beperkte bewijzen” worden hier gebruikt zoals ze werden gedefinieerd door het International Agency for Research on Cancer (IARC), namelijk:

#### a) Kankerverwekkendheid bij mensen

De uit studies bij mensen afgeleide bewijzen van kankerverwekkendheid worden ingedeeld in de volgende categorieën:

- voldoende bewijs van kankerverwekkendheid: er werd een causaal verband vastgesteld tussen blootstelling aan de stof en kanker bij de mens. Er is immers een positieve relatie waargenomen tussen blootstelling en kanker in studies waarbij toeval, vertekening of verstoringen met redelijke zekerheid kunnen worden uitgesloten;



- beperkt bewijs van kankerverwekkendheid: er is een positief verband waargenomen tussen blootstelling aan de stof en kanker waarbij een causale interpretatie als geloofwaardig wordt beschouwd, maar waarbij toeval, vertekening of verstoringen niet met redelijke zekerheid kunnen worden uitgesloten.

b) Kankerverwekkendheid bij proefdieren

Kankerverwekkendheid bij proefdieren kan worden geëvalueerd met gebruikmaking van conventionele bioproeven, bioproeven met genetisch gemodificeerde dieren, en andere bioproeven in vivo waarbij men zich concentreert op een of meerdere van de kritieke fasen van de kankerverwekking. Indien gegevens van conventionele bioproeven op lange termijn of van proeven met neoplasia als eindpunt niet voorhanden zijn, dienen consistent positieve resultaten in diverse modellen met betrekking tot diverse fasen van het multifasenproces van kankerverwekking in aanmerking te worden genomen bij de evaluatie van de mate van bewijs van kankerverwekkendheid bij proefdieren. De bewijzen van kankerverwekkendheid bij proefdieren worden ingedeeld in de volgende categorieën:

- voldoende bewijs van kankerverwekkendheid: er werd een causaal verband vastgesteld tussen de stof en een toenemende incidentie van kwaadaardige neoplasma's of van een adequate combinatie van goedaardige en kwaadaardige neoplasma's in a) twee of meer soorten dieren of b) twee of meer onafhankelijke studies betreffende één soort, uitgevoerd op verschillende tijdstippen of in verschillende laboratoria of onder verschillende protocollen. Een toegenomen incidentie van tumoren bij beide geslachten van één soort in een goed uitgevoerde studie, die in ideale omstandigheden is verricht met toepassing van goede laboratoriumpraktijken, kan eveneens voldoende bewijs leveren. Eén enkele studie bij één enkel soort en één enkel geslacht kan voldoende bewijs van kankerverwekkendheid leveren wanneer kwaadaardige neoplasma's in ongewoon hoge mate voorkomen ten aanzien van incidentie, plaats, soort tumor of leeftijd bij het begin, of wanneer duidelijk tumoren op verschillende plaatsen zijn waargenomen.
- beperkt bewijs van kankerverwekkendheid: de gegevens wijzen op een kankerverwekkend effect maar zijn te beperkt om een definitieve evaluatie te maken, bijvoorbeeld a) het bewijs van kankerverwekkendheid is beperkt tot één enkel experiment; (b) er zijn onopgeloste vragen wat betreft de adequaatheid van de opzet, de wijze van uitvoering of de interpretatie van de studies; (c) de stof verhoogt alleen de incidentie van goedaardige neoplasma's of letsels met een onzeker neoplastisch potentieel; of d) het bewijs van kankerverwekkendheid is beperkt tot studies die alleen een bevordering van de activiteit aantonen in een beperkt aantal weefsels of organen.

3.6.2.2.4. Aanvullende overwegingen [in het kader van de bepaling van de bewijskracht (zie punt 1.1.1)]. Naast het bepalen van de bewijskracht voor kankerverwekkendheid moeten ook een aantal andere factoren in aanmerking worden genomen die van invloed zijn op de algehele waarschijnlijkheid dat een stof een kankerverwekkende werking bij mensen heeft. Het gaat om zeer veel factoren, waarvan hier slechts enkele van de belangrijkste aan de orde komen.

3.6.2.2.5. De factoren kunnen geacht worden de redenen tot bezorgdheid voor kankerverwekkendheid voor mensen te vergroten of te verkleinen. Het relatieve belang dat aan elke factor wordt toegekend, hangt af van de hoeveelheid en de coherentie van de bewijzen voor elke factor. Over het algemeen is meer informatie vereist voor factoren die de redenen tot bezorgdheid verkleinen, dan voor factoren die het gevaar vergroten. Per geval moeten bij de evaluatie van de bevindingen inzake tumoren en andere factoren aanvullende overwegingen worden gebruikt.

3.6.2.2.6. Enkele belangrijke factoren waarmee bij de beoordeling van de algehele redenen tot bezorgdheid rekening kan worden gehouden, zijn:

- a) tumortype en achtergrondincidentie;
- b) respons op verschillende locaties;
- c) progressie naar maligniteit;
- d) gereduceerde latentietijd van tumoren.
- e) respons bij één of beide geslachten;
- f) respons bij één of bij verschillende diersoorten;

- g) structurele verwantschap met een of meer stoffen waarvan de kankerverwekkendheid voldoende bewezen is;
- h) blootstellingsroutes,
- i) vergelijking van absorptie, distributie, metabolisme en excretie bij proefdieren en mensen;
- j) de mogelijkheid van een verstorend effect van excessieve toxiciteit bij testdoses;
- k) de werkwijze en de relevantie ervan voor mensen, zoals cytotoxiciteit met groeibevordering, mitogenese, immunosuppressie, mutageniteit.

Mutageniteit: Erkend wordt dat genetische gebeurtenissen een sleutelrol spelen in het algehele proces van kankerontwikkeling. Daarom kunnen in-vivobewijzen voor mutagene activiteit erop duiden dat een stof mogelijk kankerverwekkende effecten heeft.

3.6.2.2.7. Een stof die niet op kankerverwekkendheid is getest, kan in bepaalde gevallen in categorie 1A, 1B of 2 worden ingedeeld op basis van tumorgegevens voor een stof met een verwante structuur, gecombineerd met substantiële ondersteuning op grond van de overweging van andere belangrijke factoren, zoals de vorming van gemeenschappelijke belangrijke metabolieten, bijvoorbeeld in het geval van kleurstoffen op basis van benzidinecongeneren.

3.6.2.2.8. Bij de indeling wordt er rekening mee gehouden of de stof bij een of meer vermelde routes wordt geabsorbeerd; tevens wordt er rekening mee gehouden of er uitsluitend plaatselijke tumoren zijn op de plaats van toediening voor de geteste route(s), en of passende tests voor een of meer andere belangrijke routes uitwijzen dat de stof niet kankerverwekkend is.

3.6.2.2.9. Het is belangrijk dat bij de indeling alle bekende gegevens over de fysisch-chemische, toxicokinetische en toxicodynamische eigenschappen van de stoffen, alsook alle beschikbare relevante informatie over chemisch verwante stoffen (structuur-activiteitsrelaties) in overweging wordt genomen.

### 3.6.3. **Indelingscriteria voor mengsels**

3.6.3.1. *Indeling van mengsels wanneer gegevens over alle of sommige bestanddelen beschikbaar zijn*

3.6.3.1.1. Het mengsel wordt als kankerverwekkende stof ingedeeld wanneer ten minste één bestanddeel als kankerverwekkende stof van categorie 1A, 1B of 2 is ingedeeld en ten minste in een hoeveelheid van de in tabel 3.6.2 vermelde algemene concentratiegrens voor respectievelijk categorie 1A, categorie 1B en categorie 2 aanwezig is.

Tabel 3.6.2

#### **Algemene concentratiegrenzen voor als kankerverwekkend ingedeelde bestanddelen van een mengsel waarbij het mengsel wordt ingedeeld**

Bestanddeel ingedeeld als:	Algemene concentratiegrenzen waarbij het mengsel wordt ingedeeld als:		
	Kankerverwekkend, categorie 1A	Kankerverwekkend, categorie 1B	Kankerverwekkend categorie 2
Kankerverwekkend, categorie 1A	≥ 0,1 %	—	—
Kankerverwekkend, categorie 1B	—	≥ 0,1 %	—
Kankerverwekkend categorie 2	—	—	≥ 1,0 % [Noot 1]

Noot:

De concentratiegrenzen in bovenstaande tabel zijn van toepassing op vaste stoffen en vloeistoffen (gewichtspersent) alsmede op gassen (volumepercent).



Noot 1:

Als een kankerverwekkende stof van categorie 2 in een concentratie van ten minste 0,1 % in het mengsel aanwezig is, wordt op verzoek een veiligheidsinformatieblad voor het mengsel beschikbaar gesteld.

- 3.6.3.2. *Indeling van mengsels wanneer gegevens over het mengsel als geheel beschikbaar zijn*
- 3.6.3.2.1. De indeling van mengsels wordt gebaseerd op de beschikbare testgegevens over de afzonderlijke bestanddelen van het mengsel, met gebruikmaking van de concentratiegrenzen voor de bestanddelen die als kankerverwekkend zijn ingedeeld. Per geval kan worden overwogen testgegevens over mengsels voor de indeling te gebruiken wanneer die effecten aantonen die niet uit de beoordeling op basis van de afzonderlijke bestanddelen blijken. In dergelijke gevallen moet aangetoond zijn dat uit de testresultaten voor het mengsel als geheel een conclusie kan worden getrokken, rekening houdend met de dosis en andere factoren zoals duur, waarnemingen, gevoeligheid en statistische analyses van testsystemen voor kankerverwekkendheid. Passende documentatie die de indeling onderbouwt, wordt bewaard en op verzoek ter beschikking gesteld om te worden bestudeerd.
- 3.6.3.3. *Indeling van mengsels wanneer geen gegevens over het mengsel als geheel beschikbaar zijn: extrapolatieprincipes*
- 3.6.3.3.1. Wanneer het mengsel zelf niet op gevaar voor kankerverwekkendheid is getest, maar wel voldoende gegevens over de afzonderlijke bestanddelen en over soortgelijke geteste mengsels beschikbaar zijn (waarvoor punt 3.6.3.2.1 geldt) om de gevaren van het mengsel adequaat te typeren, worden deze gegevens gebruikt overeenkomstig de extrapolatieregels in punt 1.1.3.
- 3.6.4. **Voorlichting over de gevaren**
- 3.6.4.1. Voor stoffen en mengsels die aan de criteria voor indeling in deze gevarenklasse voldoen, worden de in tabel 3.6.3 vermelde etiketteringselementen gebruikt.

Tabel 3.6.3

**Etiketteringselementen voor kankerverwekkendheid**

Indeling	Categorie 1A of categorie 1B	Categorie 2
GHS-pictogrammen		
Signaalwoord:	Gevaarlijk	Waarschuwing
Gevarenaanduiding	H350: Kan kanker veroorzaken (blootstellingsroute vermelden indien overtuigend bewezen is dat het gevaar bij andere blootstellingsroutes niet aanwezig is)	H351: Verdacht van het veroorzaken van kanker (blootstellingsroute vermelden indien overtuigend bewezen is dat het gevaar bij andere blootstellingsroutes niet aanwezig is)
Voorzorgsmaatregelen i.v.m. preventie	P201 P202 P281	P201 P202 P281
Voorzorgsmaatregelen i.v.m. reactie	P308 + P313	P308 + P313
Voorzorgsmaatregelen i.v.m. opslag	P405	P405
Voorzorgsmaatregelen i.v.m. verwijdering	P501	P501

3.7. **Voortplantingstoxiciteit**3.7.1. **Definities en algemene overwegingen**

- 3.7.1.1. Onder „voortplantingstoxiciteit” worden verstaan alle schadelijke effecten op de seksuele functie en de vruchtbaarheid van volwassen mannen en vrouwen, alsmede ontwikkelingstoxiciteit bij het nageslacht. Onderstaande definities zijn afgeleid van de werkdefinities die overeengekomen zijn in IPCS/EHC-document nr. 225, Principles for Evaluating Health Risks to Reproduction Associated with Exposure to Chemicals. Genetische erfelijke effecten op het nageslacht vallen onder mutageniteit in geslachtscellen (punt 3.5), omdat het bij het huidige indelingssysteem beter wordt geacht deze effecten in een afzonderlijke gevarenklasse onder te brengen.

In dit indelingssysteem is voortplantingstoxiciteit onderverdeeld in:

- a) schadelijke effecten op de seksuele functie en de vruchtbaarheid;
- b) schadelijke effecten op de ontwikkeling van het nageslacht.

Van sommige reprotoxische effecten kan niet duidelijk worden bepaald of zij de seksuele functie en de vruchtbaarheid aantasten of ontwikkelingsstoornissen veroorzaken. Stoffen met dergelijke effecten, of mengsels die deze stoffen bevatten, worden ingedeeld als reprotoxische stoffen.

3.7.1.2. De gevarenklasse voortplantingstoxiciteit is met het oog op de indeling onderverdeeld in:

- Schadelijke effecten
  - op de seksuele functie en de vruchtbaarheid of
  - op de ontwikkeling;
- Effecten op of via lactatie

3.7.1.3. *Schadelijke effecten op de seksuele functie en de vruchtbaarheid*

Alle effecten van stoffen die de seksuele functie en de vruchtbaarheid kunnen aantasten. Hieronder vallen onder meer veranderingen aan het vrouwelijk en mannelijk voortplantingssysteem, schadelijke effecten op het begin van de puberteit, de productie en overdracht van geslachtscellen, de normale voortplantingscyclus, het seksuele gedrag, de vruchtbaarheid, de partus, de resultaten van de zwangerschap of premature voortplantingssenescentie of veranderingen in andere functies die afhankelijk zijn van de normale werking van de voortplantingssystemen.

3.7.1.4. *Schadelijke effecten op de ontwikkeling van het nageslacht*

Onder „ontwikkelingstoxiciteit” worden verstaan alle effecten, in de breedst mogelijke zin, op de normale ontwikkeling van het organisme, hetzij voor of na de geboorte, die voortvloeien uit blootstelling van een van beide ouders vóór de bevruchting, of van het zich ontwikkelende nageslacht tijdens de prenatale ontwikkeling of postnataal tot het tijdstip van geslachtelijke rijping. De indeling voor ontwikkelingstoxiciteit is echter primair bedoeld om zwangere vrouwen alsmede mannen en vrouwen met voortplantingscapaciteit te kunnen waarschuwen. Om pragmatische redenen met het oog op de indeling, worden onder ontwikkelingstoxiciteit daarom met name verstaan schadelijke effecten die optreden tijdens de zwangerschap of als gevolg van blootstelling van de ouders. Deze effecten kunnen zich op elk moment in het leven van het organisme manifesteren. De belangrijkste uitingen van ontwikkelingstoxiciteit zijn: (1) dood van het zich ontwikkelde organisme, 2) structurele afwijkingen, 3) afwijkende groei en 4) functiestoornissen.

3.7.1.5. Ook schadelijke effecten op of via lactatie vallen onder voortplantingstoxiciteit, maar deze worden bij de indeling afzonderlijk behandeld (zie tabel 3.7.1 (b)). De reden hiervoor is dat het wenselijk is stoffen specifiek te kunnen indelen voor schadelijke effecten op de lactatie, zodat moeders die borstvoeding geven specifiek kunnen worden gewaarschuwd voor deze effecten.

3.7.2. ***Indelingscriteria voor stoffen***

3.7.2.1. *Gevarencategorieën*

3.7.2.1.1. Stoffen worden in een van de twee categorieën voor voortplantingstoxiciteit ingedeeld. Binnen elke categorie worden effecten op de seksuele functie en de vruchtbaarheid enerzijds, en op de ontwikkeling anderzijds, afzonderlijk beschouwd. Voor effecten op lactatie is er een afzonderlijke gevarencategorie.

Tabel 3.7.1 (a)

**Gevarencategorieën voor reprotoxische stoffen**

Categorieën	Criteria
CATEGORIE 1	Stoffen waarvan bekend is of verondersteld wordt dat zij toxisch zijn voor de menselijke voortplanting
Categorie 1A	Stoffen worden in categorie 1 voor voortplantingstoxiciteit ingedeeld wanneer bekend is dat zij schadelijke effecten op de seksuele functie en de voortplanting of op de ontwikkeling van mensen hebben, of wanneer dierproefgegevens, eventueel in combinatie met andere informatie, leiden tot de sterke veronderstelling dat de stof de menselijke voortplanting kan beïnvloeden. De indeling wordt onderverdeeld aan de hand van de vraag of het bewijs hoofdzakelijk ontleend is aan gegevens over mensen (categorie 1A) of dieren (categorie 1B).
Categorie 1B	Stoffen waarvan bekend is dat zij toxisch zijn voor de menselijke voortplanting De indeling van een stof in categorie 1A berust hoofdzakelijk op gegevens over mensen. Stoffen waarvan verondersteld wordt dat zij toxisch zijn voor de menselijke voortplanting De indeling van een stof in categorie 1B berust hoofdzakelijk op dierproefgegevens. Deze gegevens tonen duidelijk aan dat de stof een schadelijk effect op de seksuele functie en de vruchtbaarheid of op de ontwikkeling heeft terwijl andere toxische effecten ontbreken, of als de stof ook andere toxische effecten heeft, dat het schadelijke effect op de voortplanting niet beschouwd wordt als niet-specifiek neveneffect van de andere toxische effecten. Als er echter mechanistische informatie is die twijfel doet rijzen omtrent de relevantie van het effect voor mensen, kan indeling in categorie 2 passender zijn.
CATEGORIE 2	Stoffen die ervan verdacht worden dat zij toxisch zijn voor de menselijke voortplanting Stoffen worden in categorie 2 voor voortplantingstoxiciteit ingedeeld wanneer er enige bewijzen bij mensen of proefdieren zijn, eventueel in combinatie met andere informatie, voor een schadelijk effect op de seksuele functie en de vruchtbaarheid of op de ontwikkeling, die echter onvoldoende overtuigend zijn om de stof in categorie 1 in te delen. Als de studie onvolkomenheden vertoont waardoor de kwaliteit van het bewijs minder overtuigend is, kan indeling in categorie 2 passender zijn. Dergelijke effecten kunnen zijn waargenomen terwijl andere toxische effecten ontbreken, of in combinatie met andere toxische effecten mits het schadelijke effect op de voortplanting niet beschouwd wordt als niet-specifiek neveneffect van die andere toxische effecten.

Tabel 3.7.1 (b)

**Gevarencategorie voor effecten op of via lactatie****EFFECTEN OP OF VIA LACTATIE**

Effecten op of via lactatie zijn ingedeeld in een afzonderlijke categorie. Voor veel stoffen is er geen informatie over de mogelijke schadelijke effecten op het nageslacht via lactatie. Bij stoffen die in het lichaam van de vrouw worden opgenomen en waarvan is aangetoond dat zij de lactatie beïnvloeden, of die (met inbegrip van metabolieten) in zodanige hoeveelheden in moedermelk aanwezig kunnen zijn dat er reden is tot bezorgdheid voor de gezondheid van het kind dat borstvoeding krijgt, wordt op het etiket vermeld dat zij schadelijk kunnen zijn via borstvoeding en worden de stoffen aldus ingedeeld. Deze indeling kan plaatsvinden op basis van:

- gegevens over mensen die erop wijzen dat baby's tijdens de lactatieperiode gevaar lopen; en/of
- resultaten van studies naar een of twee generaties dieren die duidelijk aantonen dat de stof een schadelijk effect heeft op het nageslacht doordat zij in de melk voorkomt of een schadelijk effect heeft op de kwaliteit van de melk; en/of
- studies naar de absorptie, het metabolisme, de distributie en de excretie die erop wijzen dat het waarschijnlijk is dat de stof in potentieel toxische concentraties in de moedermelk voorkomt.

3.7.2.2. *Indelingsgrondslag*

- De indeling vindt plaats op basis van de desbetreffende criteria, zoals hierboven beschreven, en een bepaling van de totale bewijskracht (zie punt 1.1.1). De indeling als reprotoxische stof is bedoeld voor stoffen die de intrinsieke, specifieke eigenschap hebben een schadelijk effect op de voortplanting uit te oefenen; stoffen worden niet als zodanig ingedeeld indien een dergelijk effect zich uitsluitend als niet-specifiek neveneffect van andere toxische effecten voordoet.

De indeling van een stof wordt op de gevarencategorieën gebaseerd, waarbij de volgende rangorde geldt: categorie 1A, categorie 1B, categorie 2 en de aanvullende categorie voor effecten op of via lactatie. Indien een stof voldoet aan de criteria voor indeling in beide van de hoofdcategorieën (bijvoorbeeld categorie 1B voor effecten op de seksuele functie en vruchtbaarheid en tevens categorie 2 voor ontwikkeling), dan worden beide gevarenclassificaties vermeld in de respectieve gevarenaanduidingen. Indeling in de aanvullende categorie voor effecten op of via lactatie wordt in aanmerking genomen ongeacht een indeling in categorie 1A, categorie 1B of categorie 2.

- 3.7.2.2.2. Het is belangrijk dat bij de evaluatie van de toxische effecten op de ontwikkeling van nageslacht rekening wordt gehouden met de mogelijke invloed van maternale toxiciteit (zie punt 3.7.2.4).
- 3.7.2.2.3. Gegevens over mensen kunnen alleen de primaire grondslag voor indeling in categorie 1A vormen indien er betrouwbare bewijzen zijn voor een schadelijk effect op de menselijke voortplanting. De voor de indeling gebruikte gegevens zijn idealiter afkomstig van correct uitgevoerde epidemiologische studies met passende controles en een evenwichtige beoordeling, waarbij naar behoren rekening is gehouden met vertekening en versturende factoren. Minder betrouwbare gegevens van studies bij mensen moeten worden ondersteund met adequate gegevens van dierproeven; indeling in categorie 1B moet worden overwogen.
- 3.7.2.3. *Bewijskracht*
- 3.7.2.3.1. De indeling als reprotoxische stof vindt plaats op basis van een bepaling van de totale bewijskracht (zie punt 1.1.1). Dit houdt in dat alle beschikbare informatie over de voortplantingstoxiciteit naast elkaar wordt gelegd, bijvoorbeeld epidemiologische studies en casusverslagen over mensen en specifieke voortplantingsstudies naast resultaten van subchronische, chronische en speciale studies bij dieren die relevante informatie opleveren over de toxiciteit voor de voortplantingsorganen en aanverwante endocriene organen. Ook kunnen chemisch verwante stoffen worden beoordeeld, met name wanneer de hoeveelheid informatie beperkt is. Het gewicht dat aan de beschikbare gegevens wordt toegekend, wordt beïnvloed door factoren als de kwaliteit van de studies, de consistentie van de resultaten, de aard en de ernst van de effecten, de aanwezigheid van maternale toxiciteit in dierproeven, de statistische significantie van verschillen binnen een groep, het aantal eindpunten waar effecten zijn geconstateerd, de relevantie van de toedieningsroute voor mensen en het ontbreken van vertekening. In de bepaling van de bewijskracht worden zowel de positieve als de negatieve resultaten betrokken. Een positieve studie, uitgevoerd volgens deugdelijke wetenschappelijke beginselen, met statistisch of biologisch significante positieve resultaten, kan de indeling rechtvaardigen (zie ook punt 3.7.2.2.3).
- 3.7.2.3.2. Toxicokinetische studies bij dieren en mensen, alsmede onderzoeksresultaten betreffende de werkingsplaats en het werkingsmechanisme of de werkingswijze, kunnen relevante informatie opleveren die de bezorgdheid over het gevaar voor de gezondheid van de mens verkleint of vergroot. Als de werkingsmechanismen of -wijzen duidelijk zijn bepaald en overtuigend aangetoond is dat zij niet relevant zijn voor mensen, of de toxicokinetische verschillen zo groot zijn dat vaststaat dat de gevaarlijke eigenschap niet bij mensen tot uiting komt, wordt een stof die bij proefdieren een schadelijk effect op de voortplanting heeft, niet ingedeeld.
- 3.7.2.3.3. Wanneer in enkele studies naar voortplantingstoxiciteit bij proefdieren uitsluitend effecten zijn waargenomen die van geringe of minimale toxicologische betekenis worden geacht, hoeft indeling niet per se noodzakelijk te zijn. Dit geldt onder meer voor kleine veranderingen in de spermaparameters of in de incidentie van spontane defecten bij de foetus, kleine veranderingen in de verhoudingen van gebruikelijke foetale varianten, zoals die worden waargenomen bij skeletonderzoek, of in het gewicht van de foetus, dan wel kleine verschillen in studies naar de postnatale ontwikkeling.
- 3.7.2.3.4. Dierproefgegevens tonen idealiter duidelijk specifieke voortplantingstoxiciteit aan, terwijl andere systemische toxische effecten afwezig zijn. Als bij het moederdier echter ontwikkelingstoxiciteit wordt geconstateerd in combinatie met andere toxische effecten, wordt de mogelijke invloed van de niet-specifieke schadelijke effecten zo goed mogelijk bepaald. Hierbij worden in het kader van de bepaling van de bewijskracht bij voorkeur eerst de schadelijke effecten voor het embryo/de foetus geëvalueerd, en vervolgens de maternale toxiciteit, samen met eventuele andere factoren die op deze effecten van invloed kunnen zijn. Over het algemeen worden de ontwikkelingseffecten die in maternale toxische dosis worden waargenomen niet automatisch buiten beschouwing gelaten. Ontwikkelingseffecten die in maternale toxische dosis worden waargenomen, kunnen uitsluitend per geval buiten beschouwing worden gelaten wanneer een oorzakelijk verband is aangetoond of weerlegd.
- 3.7.2.3.5. Indien relevante informatie beschikbaar is, moet geprobeerd worden te bepalen of de ontwikkelingstoxiciteit het gevolg is van een specifiek door de moeder overgedragen mechanisme of van een niet-specifiek secundair mechanisme, zoals maternale stress en verstoorde homeostase. Over het algemeen moet de aanwezigheid van maternale toxiciteit niet worden gebruikt om geconstateerde effecten op het embryo/de foetus te ontcrachten, tenzij duidelijk aangetoond kan worden dat deze effecten niet-specifieke neveneffecten zijn. Dit geldt in het bijzonder wanneer de effecten op het nageslacht significant zijn, bijvoorbeeld als het gaat om onomkeerbare effecten zoals structurele misvormingen. In sommige situaties, als de stof zo toxisch is dat de moederdieren niet voorspoedig groeien en ernstig uitgeput raken, niet in staat zijn hun jongen te zogen of verzwakt raken dan wel sterven, kan worden aangenomen dat de voortplantingstoxiciteit een neveneffect is van de maternale toxiciteit en kunnen de effecten buiten beschouwing worden gelaten.

#### 3.7.2.4. *Maternale toxiciteit*

- 3.7.2.4.1. De ontwikkeling van het nageslacht tijdens de dracht en in de vroege postnatale fase kan worden beïnvloed door toxische effecten bij de moeder; het kan hierbij gaan om hetzij niet-specifieke mechanismen in verband met stress en verstoring van de maternale homeostase, hetzij specifieke door de moeder overgedragen mechanismen. Het is belangrijk dat bij de interpretatie van de ontwikkelingsresultaten in het kader van het besluit over de indeling voor ontwikkelingseffecten, rekening wordt gehouden met de mogelijke invloed van maternale toxiciteit. Dit is een complex vraagstuk omdat er veel onzekerheid bestaat over het verband tussen maternale toxiciteit en de ontwikkelingsresultaten. Om bij de interpretatie van de indelingscriteria voor ontwikkelingseffecten te bepalen hoeveel invloed aan maternale toxiciteit moet worden toegeschreven, wordt gebruikgemaakt van de mening van deskundigen en wordt de bewijskracht bepaald van alle beschikbare studies. In het kader van de bepaling van de bewijskracht met het oog op het nemen van een besluit over de indeling worden eerst worden de schadelijke effecten voor het embryo/de foetus beoordeeld, en vervolgens de maternale toxiciteit, samen met eventuele andere factoren die waarschijnlijk op deze effecten van invloed zijn.
- 3.7.2.4.2. Praktische waarnemingen wijzen erop dat maternale toxiciteit, afhankelijk van de ernst, de ontwikkeling kan beïnvloeden via niet-specifieke secundaire mechanismen, die kunnen leiden tot effecten als een verminderd gewicht van de foetus, vertraagde ossificatie, en mogelijk resorpties en bepaalde misvormingen bij sommige stammen van bepaalde diersoorten. In het beperkte aantal studies naar het verband tussen ontwikkelingseffecten en algemene maternale toxiciteit is echter geen consistent, reproduceerbaar verband bij verschillende diersoorten aangetoond. Ook ontwikkelingseffecten die zich voordoen wanneer tevens sprake is van maternale toxiciteit, worden beschouwd als bewijs voor ontwikkelingstoxiciteit, tenzij per geval ondubbelzinnig kan worden aangetoond dat de ontwikkelingseffecten neveneffecten van de maternale toxiciteit zijn. Indeling moet bovendien worden overwogen wanneer een significant toxisch effect bij het nageslacht wordt waargenomen, bijvoorbeeld onomkeerbare effecten zoals structurele misvormingen, embryonale/foetale sterfte en significante postnatale functiestoornissen.
- 3.7.2.4.3. Voor stoffen waarbij ontwikkelingstoxiciteit alleen in combinatie met maternale toxiciteit voorkomt, wordt, ook als een specifiek door de moeder overgedragen mechanisme is aangetoond, niet automatisch afgezien van indeling. In dergelijke gevallen kan indeling in categorie 2 passender worden gevonden dan indeling in categorie 1. Wanneer een stof echter zo toxisch is dat zij leidt tot maternale sterfte of ernstige uitputting, of de moederdieren verzwakt raken en niet in staat zijn hun jongen te zogen, kan redelijkerwijs worden aangenomen dat de ontwikkelingstoxiciteit uitsluitend een neveneffect is van de maternale toxiciteit en kunnen de ontwikkelingseffecten buiten beschouwing worden gelaten. Kleine veranderingen in de ontwikkeling, zoals een iets verlaagd lichaamsgewicht van de foetus/het jong of vertraagde ossificatie, hoeven niet noodzakelijkerwijs tot indeling te leiden wanneer zij voorkomen in combinatie met maternale toxiciteit.
- 3.7.2.4.4. Hieronder worden enkele eindpunten voor de evaluatie van maternale effecten vermeld. Wanneer gegevens over deze eindpunten beschikbaar zijn, worden zij geëvalueerd in het licht van hun statistische of biologische significantie en de dosis-responsrelatie.

##### Maternale sterfte:

een hogere sterfte van behandelde moederdieren ten opzichte van de controlegroep wordt beschouwd als bewijs voor maternale toxiciteit indien de toename dosisgerelateerd is en aan de systemische toxiciteit van het testmateriaal kan worden toegeschreven. Een maternale sterfte van meer dan 10 % wordt beschouwd als excessief en de gegevens voor de desbetreffende dosis worden normaliter niet nader beoordeeld.

##### Paringsindex

(aantal dieren met seminale proppen of sperma/aantal dieren dat heeft gepaard x 100) <sup>(1)</sup>

##### Vruchtbaarheidsindex

(aantal dieren met innestelingen/aantal paringen x 100)

##### Drachtduur

(als partus wordt toegestaan)

##### Lichaamsgewicht en verandering van lichaamsgewicht:

Bij de evaluatie van de maternale toxiciteit wordt ook de verandering van het lichaamsgewicht van het moederdier en/of het aangepaste (gecorrigeerde) lichaamsgewicht van het moederdier in aanmerking genomen wanneer deze gegevens beschikbaar zijn. De berekening van de aangepaste (gecorrigeerde) gemiddelde lichaamsgewichtsverandering van het moederdier, die overeenkomt met het verschil tussen het

<sup>(1)</sup> Erkend wordt dat ook het mannetje invloed kan hebben op de paringsindex en de vruchtbaarheidsindex.

begin- en eindgewicht van het lichaam van het moederdier, verminderd met het gewicht van de baarmoeder tijdens de dracht (of bij wijze van alternatief het opgetelde gewicht van de foetusen), kan uitwijzen of het effect maternaal of intra-uterien is. Bij konijnen is de toename van het lichaamsgewicht mogelijk geen bruikbare indicator voor maternale toxiciteit, gezien de normale schommelingen in lichaamsgewicht tijdens de dracht.

Voedsel- en waterverbruik (indien relevant):

De waarneming van een significante daling van het gemiddelde voedsel- of waterverbruik bij behandelde moederdieren ten opzichte van de controlegroep is van belang voor de evaluatie van de maternale toxiciteit, met name wanneer het testmateriaal met het voedsel of het water wordt toegediend. Bij de bepaling of de waargenomen effecten met maternale toxiciteit samenhangen of slechts het gevolg zijn van de onaangename smaak van het in het voedsel of het water opgenomen testmateriaal, worden veranderingen in het voedsel- of waterverbruik in samenhang met het lichaamsgewicht van het moederdier geëvalueerd.

Klinische beoordelingen (waaronder studies naar klinische symptomen, markers, hematologie en klinische chemie):

De waarneming van een verhoogde incidentie van significante klinische symptomen van toxiciteit bij behandelde moederdieren ten opzichte van de controlegroep is van belang voor de evaluatie van de maternale toxiciteit. Als op basis hiervan de maternale toxiciteit wordt beoordeeld, moeten de aard, de incidentie, de ernst en de duur van de klinische symptomen in de studie zijn vermeld. Klinische symptomen van intoxicatie van het moederdier zijn onder meer: coma, verzwakking, hyperactiviteit, verlies van de oprichtreflex, ataxie of zware ademhaling.

Post-mortemgegevens:

Een verhoogde incidentie en/of ernst van post mortem vastgestelde feiten kan duiden op maternale toxiciteit. Het kan hierbij gaan om macro- of microscopische pathologische bevindingen of gegevens over het gewicht van organen, waaronder absoluut orgaangewicht, verhouding orgaangewicht/lichaamsgewicht of verhouding orgaangewicht/hersengewicht. Wanneer waargenomen wordt dat het gemiddelde gewicht van verdachte doelorganen van behandelde moederdieren significant afwijkt van de controlegroep, en bij de aangetaste organen tevens schadelijke histopathologische effecten zijn waargenomen, kan dit worden beschouwd als een bewijs voor maternale toxiciteit.

#### 3.7.2.5. *Gegevens over dieren en experimentele gegevens*

- 3.7.2.5.1. Er zijn een aantal internationaal aanvaarde testmethoden beschikbaar. Deze omvatten methoden voor ontwikkelingstoxiciteitsproeven (bijvoorbeeld OESO-testrichtsnoer 414) en methoden voor het testen van de toxiciteit in een of twee generaties (bijvoorbeeld OESO-testrichtsnoeren 415, 416).
- 3.7.2.5.2. De resultaten van screeningtests (bijvoorbeeld OESO-richtsnoeren 421 — voortplanting/ontwikkeling toxiciteitsscreeningtest, en 422 — gecombineerde herhaalde dosis-toxiciteitsstudie met voortplanting/ontwikkeling toxiciteitsscreeningtest), kunnen eveneens worden gebruikt om een indeling te rechtvaardigen, hoewel erkend wordt dat deze bewijzen minder betrouwbaar zijn dan die van volledige studies.
- 3.7.2.5.3. Schadelijke effecten of veranderingen die blijken uit toxiciteitsstudies met herhaalde blootstelling op korte of lange termijn, waarvan het waarschijnlijk wordt geacht dat zij de voortplantingsfunctie aantasten en die zich voordoen in afwezigheid van significante algehele intoxicatie, kunnen als basis voor indeling worden gebruikt, bijvoorbeeld in het geval van histopathologische veranderingen in de geslachtsklieren.
- 3.7.2.5.4. Gegevens van in-vitrotests of tests op niet-zoogdieren en over verwante stoffen met gebruikmaking van een structuur-activiteitsrelatie (SAR), kunnen tot de indelingsprocedure bijdragen. In dergelijke gevallen wordt altijd gebruikgemaakt van de mening van deskundigen om te beoordelen of de gegevens toereikend zijn. Ontoereikende gegevens mogen niet als primaire grondslag voor indeling worden gebruikt.
- 3.7.2.5.5. Het verdient de voorkeur dat bij de uitvoering van dierproeven toedieningsroutes worden gekozen die ook voor de mogelijke blootstelling van de mens van belang zijn. In de praktijk worden studies naar voortplantingstoxiciteit echter gewoonlijk oraal uitgevoerd, en dergelijke studies zijn normaliter geschikt om te beoordelen of de stof gevaarlijke reprotoxische eigenschappen heeft. Als de werkingsmechanismen of -wijzen duidelijk zijn bepaald en overtuigend kan worden aangetoond dat zij niet relevant zijn voor mensen, of de toxicokinetische verschillen zo groot zijn dat vaststaat dat de gevaarlijke eigenschap niet bij mensen tot uiting komt, wordt een stof die bij proefdieren een schadelijk effect op de voortplanting heeft, niet ingedeeld.
- 3.7.2.5.6. Studies waarbij toedieningsroutes als intraveneuze of intraperitoneale injecties worden gebruikt en waarbij de voortplantingsorganen aan onrealistisch hoge doses teststof worden blootgesteld of plaatselijke schade aan de voortplantingsorganen wordt veroorzaakt, waaronder irritatie, worden met zeer grote voorzichtigheid geïnterpreteerd en dienen normaliter niet op zichzelf als grondslag voor indeling.



- 3.7.2.5.7. Over het begrip limietdosis, waarboven het optreden van een schadelijk effect wordt beschouwd als vallend buiten de indelingscriteria, bestaat algemene overeenstemming, maar niet over de opname van een specifieke limietdosis in de criteria. Sommige richtsnoeren voor testmethoden vermelden echter wel een limietdosis en andere vermelden de limietdosis met het voorbehoud dat hogere doses nodig kunnen zijn als de verwachte blootstelling van de mens zodanig hoog is dat bij de genoemde limietdosis geen passende blootstellingsmarge wordt bereikt. Ook kan het vanwege toxicokinetische verschillen tussen mensen en dieren niet passend zijn een specifieke limietdosis vast te stellen wanneer mensen gevoeliger zijn dan het diemodel.
- 3.7.2.5.8. In beginsel leiden schadelijke effecten op de voortplanting die bij dierproeven uitsluitend bij zeer hoge doseringen worden waargenomen (bijvoorbeeld doses die leiden tot verzwakking, ernstige anorexie, buitensporige sterfte) in het algemeen niet tot indeling, tenzij andere, bijvoorbeeld toxicokinetische informatie beschikbaar is die uitwijst dat mensen mogelijk gevoeliger zijn dan dieren en dat de stof moet worden ingedeeld. Zie ook de sectie over maternale toxiciteit (3.7.2.4) voor verdere richtsnoeren op dit gebied.
- 3.7.2.5.9. De specificatie van de feitelijke „limietdosis” is echter afhankelijk van de testmethode waarmee de resultaten zijn verkregen, bijvoorbeeld in het OESO-richtsnoer voor herhaalde dosis-toxiciteitsstudies bij orale toediening wordt een maximale dosis van 1 000 mg/kg aanbevolen als limietdosis, tenzij de te verwachten reactie bij de mens een hogere dosering vergt.
- 3.7.3. **Indelingscriteria voor mengsels**
- 3.7.3.1. *Indeling van mengsels wanneer gegevens over alle of sommige bestanddelen beschikbaar zijn*
- 3.7.3.1.1. Het mengsel wordt als reprotoxische stof ingedeeld wanneer ten minste één bestanddeel als reprotoxische stof van categorie 1A, 1B of 2 is ingedeeld en ten minste in een hoeveelheid van de in tabel 3.7.2 vermelde algemene concentratiegrens voor respectievelijk categorie 1A, 1B en 2 aanwezig is.
- 3.7.3.1.2. Het mengsel wordt voor effecten op of via lactatie ingedeeld wanneer ten minste één bestanddeel is ingedeeld als stof die effecten op of via lactatie heeft en ten minste in een hoeveelheid van de in tabel 3.7.2 vermelde algemene concentratiegrens voor de aanvullende categorie voor effecten op of via lactatie aanwezig is.

Tabel 3.7.2

**Algemene concentratiegrenzen voor als reprotoxische stof of als stof met effecten op of via lactatie ingedeelde bestanddelen van een mengsel waarbij het mengsel wordt ingedeeld**

Bestanddeel ingedeeld als:	Algemene concentratiegrenzen waarbij het mengsel wordt ingedeeld als:			
	Reprotoxische stof van categorie 1A	Reprotoxische stof van categorie 1B	Reprotoxische stof van categorie 2	Aanvullende categorie voor effecten op of via lactatie
Reprotoxische stof van categorie 1A	≥ 0,3 % (Noot 1)			
Reprotoxische stof van categorie 1B		≥ 0,3 % (Noot 1)		
Reprotoxische stof van categorie 2			≥ 3,0 % (Noot 1)	
Aanvullende categorie voor effecten op of via lactatie				≥ 0,3 % (Noot 1)

Noot

De concentratiegrenzen in bovenstaande tabel zijn van toepassing op vaste stoffen en vloeistoffen (gewichtspersent) alsmede op gassen (volumepercent).

Noot 1

Als een reprotoxische stof van categorie 1 of categorie 2 of een stof die is ingedeeld in de aanvullende categorie voor effecten op of via lactatie in een concentratie van ten minste 0,1 % in het mengsel aanwezig is, wordt op verzoek een veiligheidsinformatieblad voor het mengsel beschikbaar gesteld.

3.7.3.2. *Indeling van mengsels wanneer gegevens over het mengsel als geheel beschikbaar zijn*

3.7.3.2.1. De indeling van mengsels wordt gebaseerd op de beschikbare testgegevens over de afzonderlijke bestanddelen van het mengsel, met gebruikmaking van de concentratiegrenzen voor de bestanddelen van het mengsel. Per geval kan worden overwogen testgegevens over mengsels voor de indeling te gebruiken wanneer die effecten aantonen die niet uit de beoordeling op basis van de afzonderlijke bestanddelen blijken. In dergelijke gevallen moet aangetoond zijn dat uit de testresultaten voor het mengsel als geheel een conclusie kan worden getrokken, rekening houdend met de dosis en andere factoren zoals duur, waarnemingen, gevoeligheid en statistische analyses van testsystemen voor voortplantingstoxiciteit. Passende documentatie die de indeling onderbouwt, wordt bewaard en op verzoek ter beschikking gesteld om te worden bestudeerd.

3.7.3.3. *Indeling van mengsels wanneer geen gegevens over het mengsel als geheel beschikbaar zijn: extrapolatieprincipes*



3.7.3.3.1. Behoudens punt 3.7.3.2.1 wordt, wanneer het mengsel zelf niet op voortplantingstoxiciteit is getest, maar wel voldoende gegevens over de afzonderlijke bestanddelen en over soortgelijke geteste mengsels beschikbaar zijn om de gevaren van het mengsel adequaat te typeren, deze gegevens gebruikt overeenkomstig de extrapolatieregels in punt 1.1.3.

3.7.4. **Voorlichting over de gevaren**

3.7.4.1. Voor stoffen en mengsels die aan de criteria voor indeling in deze gevarenklasse voldoen, worden de in tabel 3.7.3 vermelde etiketteringselementen gebruikt.

Tabel 3.7.3

**Etiketteringselementen voor voortplantingstoxiciteit**

Indeling	Categorie 1A of categorie 1B	Categorie 2	Aanvullende categorie voor effecten op of via lactatie
GHS-pictogrammen			Geen pictogram
Signaalwoord:	Gevaarlijk	Waarschuwing	Geen signaalwoord
Gevarenaanduiding	H360: Kan de vruchtbaarheid of het ongeboren kind schaden (specifiek effect vermelden als dit bekend is) (blootstellingsroute vermelden indien overtuigend bewezen is dat het gevaar bij andere blootstellingsroutes niet aanwezig is)	H361: Wordt ervan verdacht de vruchtbaarheid of het ongeboren kind te schaden (specifiek effect vermelden als dit bekend is) (blootstellingsroute vermelden indien overtuigend bewezen is dat het gevaar bij andere blootstellingsroutes niet aanwezig is)	H362: Kan schadelijk zijn via de borstvoeding
Voorzorgsmaatregelen i.v.m. preventie	P201 P202 P281	P201 P202 P281	P201 P260 P263 P264 P270
Voorzorgsmaatregelen i.v.m. reactie	P308 + P313	P308 + P313	P308 + P313
Voorzorgsmaatregelen i.v.m. opslag	P405	P405	
Voorzorgsmaatregelen i.v.m. verwijdering	P501	P501	

### 3.8. Specifieke doelorgaantoxiciteit bij eenmalige blootstelling

#### 3.8.1. Definities en algemene bepalingen

3.8.1.1. Onder „specifieke doelorgaantoxiciteit bij eenmalige blootstelling” wordt verstaan specifieke, niet-letale doelorgaantoxiciteit als gevolg van eenmalige blootstelling aan een stof of mengsel. Hieronder vallen alle significante gezondheidseffecten die lichaamsfuncties kunnen aantasten, ongeacht of zij omkeerbaar of onomkeerbaar zijn en onmiddellijk en/of vertraagd optreden, die niet specifiek behandeld zijn in de punten 3.1 tot en met 3.7 en punt 3.10 (zie ook punt 3.8.1.6).

3.8.1.2. Indeling betekent dat een stof of mengsel toxisch is voor specifieke doelorganen en derhalve schadelijke gezondheidseffecten bij blootgestelde mensen kan veroorzaken.

3.8.1.3. Onder deze schadelijke gezondheidseffecten bij eenmalige blootstelling vallen consistente, identificeerbare toxische effecten bij mensen, of toxicologisch significante, voor de gezondheid van de mens relevante verandering bij proefdieren die de functie of de morfologie van een weefsel of orgaan hebben aangetast of ernstige biochemische of hematologische veranderingen bij het organisme hebben veroorzaakt.

3.8.1.4. Bij de beoordeling wordt niet alleen rekening gehouden met significante veranderingen in één orgaan of biologisch systeem, maar ook met minder specifieke veranderingen van minder ernstige aard in verscheidene organen.

3.8.1.5. Specifieke doelorgaantoxiciteit kan optreden bij elke voor mensen relevante route, dat wil zeggen met name orale of dermale blootstelling of inademing.

3.8.1.6. Specifieke doelorgaantoxiciteit bij herhaalde blootstelling wordt ingedeeld overeenkomstig punt 3.9 (Specifieke doelorgaantoxiciteit bij herhaalde blootstelling) en valt niet onder punt 3.8. De hieronder vermelde andere specifieke toxische effecten worden afzonderlijk beoordeeld, en komen hier niet aan de orde:

- a) acute toxiciteit (punt 3.1);
- b) huidcorrosie/-irritatie (punt 3.2);
- c) ernstig oogletsel/oogirritatie (punt 3.3);
- d) sensibilisatie van de luchtwegen of van de huid (punt 3.4);
- e) mutageniteit in geslachtscellen (punt 3.5);
- f) kankerverwekkendheid (punt 3.6);
- g) voortplantingstoxiciteit (punt 3.7); en tevens
- h) aspiratietoxiciteit (punt 3.10).

3.8.1.7. De gevarenklassen specifieke doelorgaantoxiciteit bij eenmalig blootstelling is onderverdeeld in:

- specifieke doelorgaantoxiciteit bij eenmalige blootstelling, categorieën 1 en 2;
- specifieke doelorgaantoxiciteit bij eenmalige blootstelling, categorie 3;

Zie tabel 3.8.1.

Tabel 3.8.1

**Categorieën voor specifieke doelorgaantoxiciteit bij eenmalige blootstelling**

Categorieën	Criteria
categorie 1	<p>Stoffen die significante toxiciteit bij mensen hebben veroorzaakt of waarvan op grond van dierproefgegevens kan worden verondersteld dat zij significante toxiciteit bij mensen kunnen veroorzaken bij eenmalige blootstelling.</p> <p>Stoffen worden in categorie 1 voor specifieke doelorgaantoxiciteit bij eenmalige blootstelling ingedeeld op basis van:</p> <p>a) betrouwbare gegevens van goede kwaliteit over gevallen bij mensen of afkomstig van epidemiologische studies; of</p> <p>b) waarnemingen in passende dierproeven waaruit blijkt dat zich, over het algemeen bij lage blootstellingsconcentraties, significante en/of ernstige toxische effecten voordeden die voor de gezondheid van de mens van belang zijn. Hieronder worden richtwaarden voor doses/concentraties gegeven die bij het bepalen van de bewijskracht kunnen worden gebruikt (zie punt 3.8.2.1.9).</p>
categorie 2	<p>Stoffen waarvan op grond van dierproefgegevens kan worden verondersteld dat zij schadelijk kunnen zijn voor de gezondheid van de mens bij eenmalige blootstelling.</p> <p>Stoffen worden in categorie 2 voor specifieke doelorgaantoxiciteit bij eenmalige blootstelling ingedeeld op basis van waarnemingen in passende dierproeven waaruit blijkt dat zich, over het algemeen bij matige blootstellingsconcentraties, significante toxische effecten voordeden die voor de gezondheid van de mens van belang zijn. Hieronder worden richtwaarden voor doses/concentraties gegeven om de indeling te vergemakkelijken (zie punt 3.8.2.1.9).</p> <p>In uitzonderlijke gevallen kunnen ook gegevens bij de mens worden gebruikt om een stof in categorie 2 in te delen (zie punt 3.8.2.1.6).</p>
categorie 3	<p>Tijdelijke effecten op doelorganen</p> <p>Deze categorie omvat uitsluitend narcotische werking en irritatie van de luchtwegen. Dit zijn effecten op doelorganen waarbij een stof niet aan de criteria voor indeling in bovenstaande categorie 1 of 2 voldoet. Het betreft schadelijke effecten op menselijke functies die zich gedurende een korte periode na de blootstelling voordoen en waarvan mensen binnen een redelijke termijn kunnen herstellen zonder dat significante structuur- of functieveranderingen optreden. Stoffen worden overeenkomstig punt 3.8.2.2 specifiek voor deze effecten ingedeeld.</p>

Noot: Geprobeerd wordt te bepalen welk doelorgaan primair wordt aangetast en de stof dienovereenkomstig in te delen, bijvoorbeeld als levertoxische of neurotoxische stof. De gegevens worden nauwgezet geëvalueerd en zo mogelijk worden neveneffecten buitengesloten (zo kan een levertoxische stof neveneffecten in het zenuwstelsel of het maag-darmstelsel veroorzaken).

**3.8.2. Indelingscriteria voor stoffen****3.8.2.1. Stoffen van de categorieën 1 en 2**

3.8.2.1.1. Stoffen worden op basis van de bewijskracht van alle beschikbare gegevens afzonderlijk ingedeeld voor onmiddellijke of vertraagde effecten, waarbij gebruik wordt gemaakt van de mening van deskundigen (zie punt 1.1.1) en van de aanbevolen richtwaarden (zie punt 3.8.2.1.9). Afhankelijk van de aard en de ernst van de waargenomen effecten worden de stoffen vervolgens in categorie 1 of 2 ingedeeld (tabel 3.8.1).

3.8.2.1.2. Vastgesteld wordt langs welke blootstellingsroute(s) de ingedeelde stof schade veroorzaakt (zie punt 3.8.1.5).

3.8.2.1.3. De indeling vindt plaats op basis van de bewijskracht van alle beschikbare gegevens, waarbij gebruik wordt gemaakt van de mening van deskundigen (zie punt 1.1.1) en de onderstaande richtsnoeren.

3.8.2.1.4. Van alle gegevens, waaronder gegevens over incidenten bij mensen, epidemiologische studies en dierproeven, wordt de bewijskracht bepaald (zie punt 1.1.1) om toxische effecten op specifieke doelorganen te onderbouwen die indeling noodzakelijk maken.

3.8.2.1.5. De informatie die voor de evaluatie van de specifieke doelorgaantoxiciteit nodig is, betreft eenmalige blootstelling van mensen, zoals: thuis, op het werk of via het milieu, of is afkomstig van dierproeven. De standaarddierproeven bij ratten of muizen die deze informatie opleveren, zijn acute toxiciteitsstudies die klinische waarnemingen en gedetailleerd macro- en microscopisch onderzoek kunnen omvatten, waarmee de toxische effecten op de doelweefsels/-organen kunnen worden vastgesteld. Bij andere diersoorten uitgevoerde acute toxiciteitsstudies kunnen eveneens relevante informatie opleveren.

3.8.2.1.6. In uitzonderlijke gevallen is het passend bepaalde stoffen waarvoor doelorgaan toxiciteit blijkt uit gegevens bij de mens, op basis van de mening van deskundigen in categorie 2 in te delen:

- a) wanneer de bewijskracht van de gegevens bij de mens onvoldoende is voor indeling in categorie 1 en/of
- b) op grond van de aard en ernst van de effecten.

Bij de indeling wordt geen rekening gehouden met de doses/concentraties bij mensen en de eventueel beschikbare dierproefgegevens moeten consistent zijn met de indeling in categorie 2. Met andere woorden, als tevens dierproefgegevens over de stof beschikbaar zijn die indeling in categorie 1 rechtvaardigen, wordt de stof in categorie 1 ingedeeld.

3.8.2.1.7. Effecten die de indeling in categorie 1 of 2 kunnen ondersteunen

3.8.2.1.7.1. De indeling wordt ondersteund door gegevens die aantonen dat eenmalige blootstelling aan de stof een consistent en identificeerbaar toxisch effect veroorzaakt.

3.8.2.1.7.2. De gegevens over ervaringen/incidenten bij mensen betreffen gewoonlijk uitsluitend meldingen van gezondheidsschade, die veelal geen uitsluitend geven over de blootstellingsomstandigheden en minder gedetailleerde wetenschappelijke informatie opleveren dan correct uitgevoerde dierproeven.

3.8.2.1.7.3. Gegevens op basis van passende dierproeven kunnen veel meer details verschaffen op grond van klinische waarnemingen en macro- en microscopisch pathologisch onderzoek, waardoor veelal gevaren aan het licht kunnen komen die weliswaar niet levensbedreigend zijn, maar wel functieschade kunnen inhouden. Daarom moet bij de indeling rekening worden gehouden met alle beschikbare gegevens, alsmede met de relevantie voor de gezondheid van de mens, onder meer met de volgende effecten bij mensen en/of dieren:

- a) morbiditeit als gevolg van eenmalige blootstelling;
- b) significante niet-tijdelijke functieveranderingen in de luchtwegen, het centrale of perifere zenuwstelsel of andere organen of orgaansystemen, waaronder verschijnselen van depressie van het centrale zenuwstelsel en effecten op de zintuigen (zoals gezichtsvermogen, gehoor en reukvermogen);
- c) consistente en significante verslechtingen in de klinische biochemische, hematologische of urineparameters;
- d) significante orgaanschade die wordt waargenomen bij autopsie en/of bij het daarop volgende microscopisch onderzoek;
- e) multifocale of diffuse necrose, fibrose of granuloomvorming in vitale organen met regeneratief vermogen;
- f) morfologische veranderingen die mogelijk omkeerbaar zijn maar duidelijk op een uitgesproken orgaanstoornis wijzen;
- g) bewijzen voor aanzienlijke celdood (met inbegrip van celdegeneratie en vermindering van het aantal cellen) in vitale organen zonder regeneratief vermogen.

3.8.2.1.8. Effecten die de indeling in categorie 1 of 2 niet kunnen ondersteunen

Erkend wordt dat effecten kunnen worden waargenomen die geen indeling rechtvaardigen. Dergelijke effecten bij mensen en/of dieren zijn onder meer:

- a) klinische waarnemingen of kleine veranderingen in lichaamsgewichtstoename of voedsel- of waterverbruik, die enige toxicologische betekenis kunnen hebben maar op zichzelf niet wijzen op „significante” toxiciteit;
- b) kleine veranderingen in de klinische biochemische, hematologische of urineparameters en/of tijdelijke effecten, wanneer de toxicologische betekenis van deze veranderingen of effecten twijfelachtig of minimaal is;
- c) veranderingen in orgaangewicht zonder bewijzen voor orgaanstoornissen;
- d) adaptieve responsen die niet toxicologisch relevant worden geacht;
- e) door de stof veroorzaakte soortspecifieke toxiciteitsmechanismen, waarvan met redelijke zekerheid is aangetoond dat zij niet relevant zijn voor de gezondheid van de mens, kunnen indeling niet rechtvaardigen.

- 3.8.2.1.9. Richtwaarden om indeling op basis van dierproefgegevens in categorie 1 of 2 te vergemakkelijken
- 3.8.2.1.9.1. Om de beslissing over de indeling van een stof te vergemakkelijken, worden richtwaarden voor doses/concentraties gegeven die kunnen worden gebruikt bij de beoordeling van een dosis/concentratie waarbij significante gezondheidseffecten zijn waargenomen. De belangrijkste reden om dergelijke richtwaarden voor te stellen, is dat alle stoffen in potentie toxisch zijn, en dat er een redelijke dosis/concentratie moet zijn waarboven een zeker toxisch effect wordt erkend.
- 3.8.2.1.9.2. Wanneer bij dierproeven significante toxische effecten zijn waargenomen die tot indeling van de stof kunnen leiden, levert een vergelijking van de dosis/concentratie waarbij deze effecten zijn opgetreden met de voorgestelde richtwaarden nuttige informatie op die de beslissing over de vraag of de stof moet worden ingedeeld kan vergemakkelijken (omdat de toxische effecten een gevolg zijn van de gevaarlijke eigenschap(en) en tevens van de dosis/concentratie).
- 3.8.2.1.9.3. De in tabel 3.8.2 vermelde richtwaarden (C) voor eenmalige blootstelling waarbij een significant niet-letaal toxisch effect is opgetreden, zijn van toepassing op acute toxiciteitstests.

Tabel 3.8.2

**Richtwaarden voor eenmalige blootstelling<sup>a</sup>**

Blootstellingsroute	Eenheden	Richtwaarden voor		
		categorie 1	categorie 2	categorie 3
Oraal (ratten)	mg/kg lichaamsge- wicht	$C \leq 300$	$2\ 000 \geq C > 300$	Richtwaarden zijn niet van toe- passing <sup>b</sup>
Dermaal (ratten of konij- nen)	mg/kg lichaamsge- wicht	$C \leq 1\ 000$	$2\ 000 \geq C > 1\ 000$	
Inademing gas (ratten)	ppmV/4 uur	$C \leq 2\ 500$	$20\ 000 \geq C > 2\ 500$	
Inademing damp (ratten)	mg/l/4 uur	$C \leq 10$	$20 \geq C > 10$	
Inademing stofdeeltjes/ nevel/rook (ratten)	mg/l/4 uur	$C \leq 1,0$	$5,0 \geq C > 1,0$	

Noot:

- a) De in tabel 3.8.2 vermelde richtwaarden en bereiken zijn uitsluitend bedoeld als leidraad, dat wil zeggen om te worden gebruikt bij het bepalen van de bewijskracht en om het nemen van een beslissing over de indeling te vergemakkelijken. Zij zijn niet bedoeld als strikte grenswaarden.
- b) Er worden geen richtwaarden gegeven voor stoffen die in categorie 3 zijn ingedeeld, omdat deze indeling primair op gegevens over de mens wordt gebaseerd. Indien gegevens over dieren beschikbaar zijn, worden deze betrokken in de bepaling van de bewijskracht.

## 3.8.2.1.10. Andere overwegingen

- 3.8.2.1.10.1. Wanneer een stof uitsluitend op grond van gegevens over dieren wordt getypeerd (dit is de normale situatie voor nieuwe stoffen, maar het geldt ook voor veel bestaande stoffen), wordt bij de indeling verwezen naar richtwaarden voor doses/concentraties als een van de elementen die bijdragen tot de bepaling van de bewijskracht.
- 3.8.2.1.10.2. Wanneer goed onderbouwde gegevens over de mens beschikbaar zijn waaruit specifieke doelorgaan toxiciteit blijkt die met zekerheid kan worden toegeschreven aan een eenmalige blootstelling aan een stof, wordt die stof normaliter ingedeeld. Positieve gegevens over de mens prevaleren, ongeacht de waarschijnlijke dosis, boven gegevens over dieren. Dit betekent dat wanneer een stof niet is ingedeeld omdat de waargenomen specifieke doelorgaan toxiciteit niet relevant of significant voor mensen werd geacht en later gegevens over incidenten bij mensen beschikbaar komen waaruit een specifieke doelorgaan toxiciteit blijkt, de stof wordt ingedeeld.

3.8.2.1.10.3. Een stof die niet op specifieke doelorgaantoxiciteit is getest, wordt, wanneer dit passend is, ingedeeld op grond van gegevens van een gevalideerde structuur-activiteitsrelatie en extrapolatie, op basis van de mening van deskundigen, van een eerder ingedeelde stof met een verwante structuur, gecombineerd met substantiële ondersteuning op grond van de overweging van andere belangrijke factoren, zoals de vorming van gemeenschappelijke belangrijke metabolieten.

3.8.2.1.10.4. De verzadigde dampconcentratie wordt, wanneer dit passend is, als aanvullend element gebruikt om specifieke gezondheids- en veiligheidsmaatregelen te nemen.

3.8.2.2. *Stoffen van categorie 3: Tijdelijke effecten op doelorganen*

3.8.2.2.1. Criteria voor irritatie van de luchtwegen

De criteria voor de indeling van stoffen in categorie 3 voor irritatie van de luchtwegen zijn:

- a) er wordt rekening gehouden met irriterende effecten op de luchtwegen (die blijken uit lokale roodheid, oedeem, pruritus en/of pijn) die de functie aantasten, met symptomen als hoesten, pijn, verstikking en ademhalingsmoeilijkheden. Deze evaluatie wordt primair op gegevens over de mens gebaseerd.
- b) subjectieve waarnemingen bij mensen kunnen worden bevestigd door objectieve metingen van duidelijke irritatie van de luchtwegen (bv. elektrofysiologische respons, ontstekingsbiomarkers in nasale of bronchoalveolaire lavagevloeistof);
- c) de bij mensen waargenomen symptomen zijn typerend voor de blootgestelde populatie, en zijn geen geïsoleerde idiosyncratische reactie of respons die zich uitsluitend bij personen met overgevoelige luchtwegen voordoet. Meerduidige meldingen van „irritatie” als zodanig worden buiten beschouwing gelaten, aangezien dit begrip vaak wordt gebruikt voor zeer uiteenlopende zintuiglijke waarnemingen, zoals geur, onaangename smaak, kriebelend gevoel en droogte, waarop de indeling voor irritatie van de luchtwegen geen betrekking heeft;
- d) er zijn momenteel geen gevalideerde dierproeven die specifiek betrekking hebben op irritatie van de luchtwegen, maar de toxiciteitstests voor eenmalige en herhaalde inademing kunnen nuttige informatie opleveren. Zo kunnen dierproeven nuttige informatie verschaffen in de zin van klinische symptomen van toxiciteit (dyspneu, rhinitis, enz.) en histopathologie (bij voorbeeld hyperemie, oedeem, minimale ontsteking, verdikte slijmlaag) die omkeerbaar zijn en kunnen samenhangen met de kenmerkende hierboven beschreven klinische symptomen. Dergelijke dierproeven kunnen in aanmerking worden genomen bij het bepalen van de bewijskracht;
- e) deze bijzondere indeling vindt alleen plaats wanneer geen ernstigere effecten op organen, waaronder de luchtwegen, zijn waargenomen.

3.8.2.2.2. Criteria voor narcotische werking

De criteria voor de indeling van stoffen in categorie 3 voor narcotische werking zijn:

- a) er wordt rekening gehouden met depressie van het centrale zenuwstelsel, met inbegrip van narcotische werking bij mensen zoals slaperigheid, narcose, verminderde waakzaamheid, verlies van reflexen, gebrek aan coördinatie en duizeligheid. Deze effecten kunnen zich ook voordoen als ernstige hoofdpijn of misselijkheid, en kunnen leiden tot een verminderd beoordelingsvermogen, duizeligheid, geïrriteerdheid, vermoeidheid, aantasting van de geheugenfunctie, verminderde waarneming en coördinatie, reactietijd of slaperigheid;
- b) De narcotische werking die in dierproeven wordt waargenomen, kan betrekking hebben op lethargie, gebrek aan coördinatie, verlies van de oprichtreflex, en ataxie. Als deze effecten niet van tijdelijke aard zijn, dan worden zij geacht indeling in categorie 1 of 2, specifieke doelorgaantoxiciteit bij eenmalige blootstelling, te ondersteunen.

3.8.3. **Indelingscriteria voor mengsels**

3.8.3.1. Voor de indeling van mengsels worden dezelfde criteria gebruikt als voor stoffen, of wordt onderstaande procedure gevolgd. Mengsels worden, net als stoffen, ingedeeld voor specifieke doelorgaantoxiciteit bij eenmalige blootstelling.

3.8.3.2. *Indeling van mengsels wanneer gegevens over het mengsel als geheel beschikbaar zijn*

3.8.3.2.1. Wanneer voor het mengsel betrouwbare, kwalitatief goede gegevens op basis van ervaringen van mensen of passende dierproeven beschikbaar zijn, zoals beschreven in de criteria voor stoffen, wordt het ingedeeld op grond van de bepaling van de bewijskracht van deze gegevens (zie punt 1.1.1.4). Bij de evaluatie van de gegevens over mengsels wordt erop gelet dat de dosis, duur, waarneming of analyse niet zodanig is dat de resultaten niet overtuigend zijn.

- 3.8.3.3. *Indeling van mengsels wanneer geen gegevens over het mengsel als geheel beschikbaar zijn: extrapolatieprincipes*
- 3.8.3.3.1. Wanneer het mengsel zelf niet op specifieke doelorgaantoxiciteit is getest, maar wel voldoende gegevens over de afzonderlijke bestanddelen en over soortgelijke geteste mengsels beschikbaar zijn om de gevaren van het mengsel adequaat te typeren, worden deze gegevens gebruikt overeenkomstig de extrapolatieprincipes in punt 1.1.3.
- 3.8.3.4. *Indeling van mengsels wanneer gegevens over alle of sommige bestanddelen beschikbaar zijn*
- 3.8.3.4.1. Wanneer er geen betrouwbare bewijzen of testgegevens voor het specifieke mengsel zijn en de extrapolatieprincipes niet voor de indeling kunnen worden toegepast, wordt de indeling van het mengsel gebaseerd op de indeling van de samenstellende stoffen. In dat geval wordt het mengsel als toxisch voor specifieke (met name genoemde) doelorganen bij eenmalige blootstelling ingedeeld als ten minste één bestanddeel als toxisch voor specifieke doelorganen, categorie 1 of 2, is ingedeeld en ten minste in een hoeveelheid van de toepasselijke in tabel 3.8.3 vermelde algemene concentratiegrens voor respectievelijk categorie 1 of 2 in het mengsel aanwezig is.
- 3.8.3.4.2. Deze algemene concentratiegrenzen en de daaruit voortvloeiende indeling worden op passende wijze toegepast op stoffen toegepast die bij eenmalige blootstelling toxisch zijn voor specifieke doelorganen.
- 3.8.3.4.3. Mengsels worden onafhankelijk ingedeeld voor eenmalige of herhaalde blootstelling, of voor beide.

Tabel 3.8.3

**Algemene concentratiegrenzen voor als toxisch voor specifieke doelorganen ingedeelde bestanddelen van een mengsel die bepalen of het mengsel bij categorie 1 of 2 wordt ingedeeld**

Bestanddeel ingedeeld in:	Algemene concentratiegrenzen die bepalen of het mengsel wordt ingedeeld bij:	
	Categorie 1	Categorie 2
Categorie 1 toxisch voor specifieke doelorganen	Concentratie $\geq 10\%$	$1,0\% \leq \text{Concentratie} < 10\%$
Categorie 2 toxisch voor specifieke doelorganen		Concentratie $\geq 10\%$ [(Noot 1)]

*Noot 1:*

Als een stof die toxisch is voor specifieke doelorganen van categorie 2 in een concentratie  $\geq 1,0\%$  in het mengsel aanwezig is, dan moet op aanvraag een veiligheidsinformatieblad voor het mengsel beschikbaar zijn.

- 3.8.3.4.4. Wanneer toxische stoffen worden gecombineerd die meer dan een orgaansysteem aantasten, wordt zorgvuldig rekening gehouden met versterkende en synergistische interacties, omdat bepaalde stoffen bij een concentratie van minder dan 1% toxiciteit voor doelorganen kunnen veroorzaken wanneer andere bestanddelen van het mengsel de toxische effecten ervan versterken.
- 3.8.3.4.5. Zorgvuldigheid wordt betracht bij de extrapolatie van de toxiciteit van een mengsel dat een of meer bestanddelen van categorie 3 bevat. Een algemene concentratiegrens van 20% is passend; erkend moet echter worden dat deze concentratiegrens afhankelijk van de bestanddelen van categorie 3 hoger of lager kan zijn en dat sommige effecten, zoals irritatie van de luchtwegen, zich mogelijk niet onder een bepaalde concentratie voordoen, terwijl andere effecten, zoals een narcotische werking, zich wel onder deze grens van 20% kunnen voordoen. Hierbij wordt gebruikgemaakt van de mening van deskundigen.
- 3.8.4. **Voorlichting over de gevaren**
- 3.8.4.1. Voor stoffen en mengsels die aan de criteria voor indeling in deze gevarenklasse voldoen, worden de in tabel 3.8.4., vermelde etiketteringselementen gebruikt.



Tabel 3.8.4

**Etiketteringselementen voor specifieke doelorgaantoxiciteit na eenmalige blootstelling**

Indeling	Categorie 1	Categorie 2	Categorie 3
GHS-pictogrammen			
Signaalwoord	Gevaarlijk	Waarschuwing	Waarschuwing
Gevarenaanduiding	H370: Veroorzaakt schade aan organen (of alle betrokken organen vermelden indien bekend) (blootstellingsroute vermelden indien overtuigend bewezen is dat het gevaar bij andere blootstellingsroutes niet aanwezig is).	H371: Kan schade aan organen (of alle betrokken organen vermelden indien bekend) veroorzaken (blootstellingsroute vermelden indien overtuigend bewezen is dat het gevaar bij andere blootstellingsroutes niet aanwezig is).	H335: Kan irritatie van de luchtwegen veroorzaken; of H336: Kan slaperigheid of duizeligheid veroorzaken.
Voorzorgsmaatregelen i.v.m. preventie	P260 P264 P270	P260 P264 P270	P261 P271
Voorzorgsmaatregelen i.v.m. reactie	P307 + P311 P321	P309 + P311	P304 + P340 P312
Voorzorgsmaatregelen i.v.m. opslag	P405	P405	P403 + P233 P405
Voorzorgsmaatregelen i.v.m. reactie	P501	P501	P501

**3.9. Specifieke doelorgaantoxiciteit bij herhaalde blootstelling****3.9.1. Definities en algemene bepalingen**

- 3.9.1.1. Onder „doelorgaantoxiciteit bij herhaalde blootstelling” wordt verstaan specifieke doelorgaantoxiciteit als gevolg van herhaalde blootstelling aan een stof of mengsel. Hieronder vallen alle significante gezondheidseffecten die lichaamsfuncties kunnen aantasten, ongeacht of zij omkeerbaar of onomkeerbaar zijn en onmiddellijk en/of vertraagd optreden. Andere specifieke toxische effecten die specifiek behandeld zijn in de punten 3.1 tot en met 3.8 en punt 3.10, vallen hier echter niet onder.
- 3.9.1.2. Indeling voor doelorgaantoxiciteit bij herhaalde blootstelling betekent dat een stof toxisch is voor specifieke doelorganen en derhalve bij blootgestelde mensen schadelijke gezondheidseffecten kan veroorzaken.
- 3.9.1.3. Onder deze schadelijke gezondheidseffecten vallen consistente, identificeerbare toxische effecten bij mensen, of toxicologisch significante, voor de gezondheid van de mens relevante verandering bij proefdieren die de functie of de morfologie van een weefsel of orgaan hebben aangetast of ernstige biochemische of hematologische veranderingen bij het organisme hebben veroorzaakt.
- 3.9.1.4. Bij de beoordeling wordt niet alleen rekening gehouden met significante veranderingen in één orgaan of biologisch systeem, maar ook met minder specifieke veranderingen van minder ernstige aard in verscheidene organen.
- 3.9.1.5. Specifieke doelorgaantoxiciteit kan optreden bij elke voor mensen relevante route, dat wil zeggen met name orale of dermale blootstelling of inademing.
- 3.9.1.6. Niet-letale toxische effecten die na eenmalige blootstelling zijn waargenomen, worden ingedeeld overeenkomstig punt 3.8 (Specifieke doelorgaantoxiciteit bij eenmalige blootstelling) en vallen niet onder punt 3.9.

3.9.2. **Indelingscriteria voor stoffen**

- 3.9.2.1. Stoffen worden voor specifieke doelorgaantoxiciteit bij herhaalde blootstelling ingedeeld op basis van de bewijskracht van alle beschikbare gegevens (zie punt 1.1.1), waarbij gebruik wordt gemaakt van de mening van deskundigen en van de aanbevolen richtwaarden, die rekening houden met de blootstellingsduur en de dosis/concentratie waarbij de effecten optreden (zie punt 3.9.2.9), en worden afhankelijk van de aard en de ernst van de waargenomen effecten in een van beide categorieën ondergebracht (zie tabel 3.9.1).

Tabel 3.9.1

**Categorieën voor specifieke doelorgaantoxiciteit bij herhaalde blootstelling**

Categorieën	Criteria
Categorie 1	<p>Stoffen die significante toxiciteit bij mensen hebben veroorzaakt of waarvan op grond van dierproefgegevens kan worden verondersteld dat zij significante toxiciteit bij mensen kunnen veroorzaken bij herhaalde blootstelling.</p> <p>Stoffen worden in categorie 1 voor doelorgaantoxiciteit bij herhaalde blootstelling ingedeeld op basis van:</p> <ul style="list-style-type: none"> <li>— betrouwbare gegevens van goede kwaliteit over gevallen bij mensen of afkomstig van epidemiologische studies; of</li> <li>— waarnemingen in passende dierproeven waaruit blijkt dat zich, over het algemeen bij lage blootstellingsconcentraties, significante en/of ernstige toxische effecten voordeden die voor de gezondheid van de mens van belang zijn. Hieronder worden richtwaarden voor doses/concentraties gegeven die bij het bepalen van de bewijskracht kunnen worden gebruikt (zie punt 3.9.2.9).</li> </ul>
categorie 2	<p>Stoffen waarvan op grond van dierproefgegevens kan worden verondersteld dat zij schadelijk kunnen zijn voor de gezondheid van de mens bij herhaalde blootstelling.</p> <p>Stoffen worden in categorie 2 voor doelorgaantoxiciteit bij herhaalde blootstelling ingedeeld op basis van waarnemingen in passende dierproeven waaruit blijkt dat zich, over het algemeen bij matige blootstellingsconcentraties, significante toxische effecten voordeden die voor de gezondheid van de mens van belang zijn. Hieronder worden richtwaarden voor doses/concentraties gegeven om de indeling te vergemakkelijken (zie punt 3.9.2.9).</p> <p>In uitzonderlijke gevallen kunnen ook gegevens bij de mens worden gebruikt om een stof in categorie 2 in te delen (zie punt 3.9.2.6).</p>

*Noot:*

Geprobeerd wordt te bepalen welk doelorgaan primair wordt aangetast en de stof dienovereenkomstig in te delen, bijvoorbeeld als levertoxische of neurotoxische stof. De gegevens worden nauwgezet geëvalueerd en zo mogelijk worden neveneffecten buitengesloten (zo kan een levertoxische stof neveneffecten in het zenuwstelsel of het maag-darmstelsel veroorzaken).

- 3.9.2.2. Vastgesteld wordt langs welke blootstellingsroute(s) de ingedeelde stof schade veroorzaakt.
- 3.9.2.3. De indeling vindt plaats op basis van de bewijskracht van alle beschikbare gegevens, waarbij gebruik wordt gemaakt van de mening van deskundigen (zie punt 1.1.1) en de onderstaande richtsnoeren.
- 3.9.2.4. Van alle gegevens, waaronder gegevens over incidenten bij mensen, epidemiologische studies en dierproeven, wordt de bewijskracht bepaald (zie punt 1.1.1) om toxische effecten op specifieke doelorganen te onderbouwen die indeling noodzakelijk maken. Deze gegevens worden ontleend aan het aanzienlijke toxicologische gegevensbestand dat de industrie in de loop der jaren heeft opgebouwd. De evaluatie wordt gebaseerd op alle bestaande gegevens, met inbegrip van collegiaal getoetste gepubliceerde studies en aanvullende aanvaardbare gegevens.
- 3.9.2.5. De informatie die voor de evaluatie van de specifieke doelorgaantoxiciteit nodig is, betreft herhaalde blootstelling van mensen (bv. thuis, op het werk of via het milieu) of is afkomstig van dierproeven. De standaarddierproeven bij ratten of muizen die deze informatie opleveren, zijn studies met een duur van 28 dagen, 90 dagen of de volledige levensduur (maximaal 2 jaar), die hematologisch, klinisch-chemisch en gedetailleerd macro- en microscopisch onderzoek omvatten, waarmee de toxische effecten op de doelweefsels/-organen kunnen worden vastgesteld. Indien gegevens van op andere diersoorten uitgevoerde studies met herhaalde toediening beschikbaar zijn, worden die eveneens gebruikt. Andere studies met langdurige blootstelling, bijvoorbeeld in verband met kankerverwekkendheid, neurotoxiciteit of voortplantingstoxiciteit, kunnen ook bewijzen van specifieke doelorgaantoxiciteit opleveren die bij de beoordeling van de indeling kunnen worden gebruikt.

3.9.2.6. In uitzonderlijke gevallen is het passend bepaalde stoffen waarvoor specifieke doelorgaantoxiciteit blijkt uit gegevens bij de mens, op basis van de mening van deskundigen in categorie 2 in te delen:

- a) wanneer de bewijskracht van de gegevens bij de mens onvoldoende is voor indeling in categorie 1; en/of
- b) op grond van de aard en ernst van de effecten.

Bij de indeling wordt geen rekening gehouden met de doses/concentraties bij mensen en de eventueel beschikbare dierproefgegevens moeten consistent zijn met de indeling in categorie 2. Met andere woorden, als tevens dierproefgegevens over de stof beschikbaar zijn die indeling in categorie 1 rechtvaardigen, wordt de stof in categorie 1 ingedeeld.

3.9.2.7. *Effecten die de indeling voor specifieke doelorgaantoxiciteit bij herhaalde blootstelling kunnen ondersteunen*

3.9.2.7.1. De indeling wordt ondersteund door betrouwbare bewijzen die aantonen dat herhaalde blootstelling aan de stof een consistent en identificeerbaar toxisch effect veroorzaakt.

3.9.2.7.2. De gegevens over ervaringen/incidenten bij mensen betreffen gewoonlijk uitsluitend meldingen van gezondheidsschade, die veelal geen uitsluitel geven over de blootstellingsomstandigheden en minder gedetailleerde wetenschappelijke informatie opleveren dan correct uitgevoerde dierproeven.

3.9.2.7.3. Gegevens op basis van passende dierproeven kunnen veel meer details verschaffen op grond van klinische waarnemingen, hematologisch, klinisch-chemisch en macro- en microscopisch pathologisch onderzoek, waardoor veelal gevaren aan het licht kunnen komen die weliswaar niet levensbedreigend zijn, maar wel functieschade kunnen inhouden. Daarom moet bij de indeling rekening worden gehouden met alle beschikbare gegevens, alsmede met de relevantie voor de gezondheid van de mens, onder meer met de volgende toxische effecten bij mensen en/of dieren:

- a) morbiditeit of sterfte als gevolg van herhaalde of langdurige blootstelling. Bij herhaalde blootstelling kan, ook bij relatief lage doses/concentraties, morbiditeit of sterfte optreden door bioaccumulatie van de stof of metabolieten ervan en/of doordat de maximale detoxificatiecapaciteit als gevolg van de herhaalde blootstelling aan de stof of metabolieten ervan wordt overschreden;
- b) significante functieveranderingen in het centrale of perifere zenuwstelsel of andere orgaansystemen, waaronder verschijnselen van depressie van het centrale zenuwstelsel en effecten op de zintuigen (bv. gezichtsvermogen, gehoor en reukvermogen);
- c) consistente en significante verslechtingen in de klinische biochemische, hematologische of urineparameters;
- d) significante orgaanschade die wordt waargenomen bij autopsie en/of bij het daarop volgende microscopisch onderzoek;
- e) multifocale of diffuse necrose, fibrose of granuloomvorming in vitale organen met regeneratief vermogen;
- f) morfologische veranderingen die mogelijk omkeerbaar zijn maar duidelijk op een uitgesproken orgaanstoornis wijzen (bv. ernstige vetting van de lever);
- g) bewijzen voor aanzienlijke celdood (met inbegrip van celdegeneratie en vermindering van het aantal cellen) in vitale organen zonder regeneratief vermogen.

3.9.2.8. *Effecten die de indeling voor specifieke doelorgaantoxiciteit bij herhaalde blootstelling niet kunnen ondersteunen*

3.9.2.8.1. Erkend wordt dat effecten bij mensen en/of dieren kunnen worden waargenomen die geen indeling rechtvaardigen. Dergelijke effecten zijn onder meer:

- a) klinische waarnemingen of kleine veranderingen in lichaamsgewichtstoename of voedsel- of waterverbruik, die toxicologische betekenis hebben maar op zichzelf niet wijzen op „significante” toxiciteit;
- b) kleine veranderingen in de klinische biochemische, hematologische of urineparameters en/of tijdelijke effecten, wanneer de toxicologische betekenis van deze veranderingen of effecten twijfelachtig of minimaal is;
- c) veranderingen in orgaangewicht zonder bewijzen voor orgaanstoornissen;

- d) adaptieve responsen die niet toxicologisch relevant worden geacht;
- e) door de stof veroorzaakte soortspecifieke toxiciteitsmechanismen, waarvan met redelijke zekerheid is aangetoond dat zij niet relevant zijn voor de gezondheid van de mens, kunnen indeling niet rechtvaardigen.

### 3.9.2.9. Richtwaarden om indeling op basis van dierproefgegevens te vergemakkelijken

- 3.9.2.9.1. Wanneer bij dierproeven uitsluitend wordt gekeken naar de waargenomen effecten, zonder rekening te houden met de duur van de experimentele blootstelling en de dosis/concentratie, wordt voorbijgegaan aan een toxicologisch basisbeginsel, namelijk dat alle stoffen in potentie toxisch zijn, en dat de toxiciteit een functie is van de dosis/concentratie en de blootstellingsduur. Bij de meeste dierproeven wordt gebruikgemaakt van een in de testrichtsnoeren vermelde bovengrens voor de dosis.
- 3.9.2.9.2. Om de beslissing over de indeling van een stof te vergemakkelijken, worden richtwaarden voor doses/concentraties gegeven die kunnen worden gebruikt bij de beoordeling van een dosis/concentratie waarbij significante gezondheidseffecten zijn waargenomen. De belangrijkste reden om dergelijke richtwaarden voor te stellen, is dat alle stoffen in potentie toxisch zijn, en dat er een redelijke dosis/concentratie moet zijn waarboven een zeker toxisch effect wordt erkend. Bovendien worden dierproeven met herhaalde blootstelling, om de testdoelstelling te optimaliseren, zodanig opgezet dat bij de hoogste dosis toxiciteit wordt waargenomen; de meeste studies zullen dus ten minste bij de hoogste dosis enige toxische effecten opleveren. Daarom moet niet alleen worden gekeken naar de waargenomen effecten, maar ook naar de dosis/concentratie waarbij de effecten zijn waargenomen en naar de relevantie van de effecten voor mensen.
- 3.9.2.9.3. Wanneer bij dierproeven significante toxische effecten zijn waargenomen die tot indeling van de stof kunnen leiden, kan een vergelijking van de duur van de experimentele blootstelling en de dosis/concentratie waarbij deze effecten zijn opgetreden met de voorgestelde richtwaarden nuttige informatie opleveren die de beslissing over de vraag of de stof moet worden ingedeeld kan vergemakkelijken (omdat de toxische effecten een gevolg zijn van de gevaarlijke eigenschap(en) en tevens van blootstellingsduur en de dosis/concentratie).
- 3.9.2.9.4. De beslissing om een stof al dan niet in te delen kan worden beïnvloed door de richtwaarden voor de dosis/concentratie waarbij of waaronder een significant toxisch effect is waargenomen.
- 3.9.2.9.5. De richtwaarden betreffen effecten die zijn waargenomen in een standaardtoxiciteitsstudie van 90 dagen bij ratten. Zij kunnen als grondslag worden gebruikt om equivalente richtwaarden voor toxiciteitsstudies met een kortere of langere duur vast te stellen door middel van een dosis/blootstellingsduurextrapolatie overeenkomstig de Wet van Haber voor inademing, die erop neerkomt dat de effectieve dosis recht evenredig is met de blootstellingsconcentratie en de blootstellingsduur. Dit wordt per geval bekeken; onderstaande richtwaarden moeten voor een studie van 28 dagen met een factor drie worden verhoogd.
- 3.9.2.9.6. Wanneer in een dierproef met herhaalde blootstelling van 90 dagen significante toxische effecten worden waargenomen bij of onder de in tabel 3.9.2 vermelde richtwaarden (C), is indeling in categorie 1 van toepassing.

Tabel 3.9.2

#### Richtwaarden om indeling in categorie 1 te vergemakkelijken

Blootstellingsroute	Eenheden	Richtwaarden (dosis/concentratie)
Oraal (ratten)	mg/kg lichaamsgewicht/ dag	C ≤ 10
Dermaal (ratten of konijnen)	mg/kg lichaamsgewicht/ dag	C ≤ 20
Inademing gas (ratten)	ppmV/6 uur/dag	C ≤ 50
Inademing damp (ratten)	mg/liter/6 uur/dag	C ≤ 0,2
Inademing stofdeeltjes/nevel/rook (ratten)	mg/liter/6 uur/dag	C ≤ 0,02

- 3.9.2.9.7. Wanneer in een dierproef met herhaalde blootstelling van 90 dagen significante toxische effecten worden waargenomen binnen de in tabel 3.9.3 vermelde richtwaarden, is indeling in categorie 2 van toepassing.

Tabel 3.9.3

**Richtwaarden om indeling in categorie 2 te vergemakkelijken**

Blootstellingsroute	Eenheden	Richtwaarden (dosis/concentratie)
Oraal (ratten)	mg/kg lichaamsgewicht/dag	$10 < C \leq 100$
Dermaal (ratten of konijnen)	mg/kg lichaamsgewicht/dag	$20 < C \leq 200$
Inademing gas (ratten)	ppmV/6 uur/dag	$50 < C \leq 250$
Inademing damp (ratten)	mg/liter/6 uur/dag	$0,2 < C \leq 1,0$
Inademing stofdeeltjes/nevel/rook (ratten)	mg/liter/6 uur/dag	$0,02 < C \leq 0,2$

- 3.9.2.9.8. De in de punten 3.9.2.9.6 en 3.9.2.9.7 vermelde richtwaarden zijn uitsluitend bedoeld als leidraad, dat wil zeggen om te worden gebruikt bij het bepalen van de bewijskracht en om het nemen van een beslissing over de indeling te vergemakkelijken. Zij zijn niet bedoeld als strikte grenswaarden.
- 3.9.2.9.9. Het is bijgevolg denkbaar dat een specifiek toxiciteitsprofiel in dierproeven met herhaalde blootstelling zich voordoet bij een dosis/concentratie onder de richtwaarde, bijvoorbeeld  $< 100$  mg/kg lichaamsgewicht/dag bij orale blootstelling, maar dat vanwege de aard van het effect, bijvoorbeeld nefrotoxiciteit die alleen bij mannetjesratten van een bepaalde, voor dit effect vatbare stam is waargenomen, toch besloten wordt de stof niet in te delen. Anderzijds kan een specifiek toxiciteitsprofiel bij dierproeven worden waargenomen boven een richtwaarde, bijvoorbeeld  $\geq 100$  mg/kg lichaamsgewicht/dag bij orale blootstelling, terwijl aanvullende informatie uit andere bronnen, bijvoorbeeld andere studies met langdurige toediening of ervaringen bij mensen, de conclusie rechtvaardigt dat de stof in het licht van de bewijskracht voorzichtigheidshalve moet worden ingedeeld.
- 3.9.2.10. *Andere overwegingen*
- 3.9.2.10.1. Wanneer een stof uitsluitend op grond van gegevens over dieren wordt getypeerd (dit is de normale situatie voor nieuwe stoffen, maar het geldt ook voor veel bestaande stoffen), wordt bij de indeling verwezen naar richtwaarden voor doses/concentraties als een van de elementen die bijdragen tot de bepaling van de bewijskracht.
- 3.9.2.10.2. Wanneer goed onderbouwde gegevens over de mens beschikbaar zijn waaruit specifieke doelorgaan toxiciteit blijkt die met zekerheid kan worden toegeschreven aan een herhaalde of langdurige blootstelling aan een stof, wordt die stof normaliter ingedeeld. Positieve gegevens over de mens prevaleren, ongeacht de waarschijnlijke dosis, boven gegevens over dieren. Dit betekent dat wanneer een stof niet is ingedeeld omdat bij of onder de richtwaarde voor de dosis/concentratie voor dierproeven geen specifieke doelorgaan toxiciteit is waargenomen en later gegevens over incidenten bij mensen beschikbaar komen waaruit een specifieke doelorgaan toxiciteit blijkt, de stof wordt ingedeeld.
- 3.9.2.10.3. Een stof die niet op specifieke doelorgaan toxiciteit is getest, kan, wanneer dit passend is, ingedeeld worden op grond van gegevens van een gevalideerde structuur-activiteitsrelatie en extrapolatie, op basis van de mening van deskundigen, van een eerder ingedeelde stof met een verwante structuur, gecombineerd met substantiële ondersteuning op grond van de overweging van andere belangrijke factoren, zoals de vorming van gemeenschappelijke belangrijke metabolieten.
- 3.9.2.10.4. De verzadigde dampconcentratie wordt, wanneer dit passend is, als aanvullend element gebruikt om specifieke gezondheids- en veiligheidsmaatregelen te nemen.
- 3.9.3. **Indelingscriteria voor mengsels**
- 3.9.3.1. Voor de indeling van mengsels worden dezelfde criteria gebruikt als voor stoffen, of wordt onderstaande procedure gevolgd. Mengsels worden, net als stoffen, ingedeeld voor specifieke doelorgaan toxiciteit bij herhaalde blootstelling.
- 3.9.3.2. *Indeling van mengsels wanneer gegevens over het mengsel als geheel beschikbaar zijn*
- 3.9.3.2.1. Wanneer voor het mengsel betrouwbare, kwalitatief goede gegevens op basis van ervaringen van mensen of passende dierproeven beschikbaar zijn, zoals beschreven in de criteria voor stoffen (zie punt 1.1.1.4), dan wordt het ingedeeld op grond van de bepaling van de bewijskracht van deze gegevens. Bij de evaluatie van de gegevens over mengsels wordt erop gelet dat de dosis, duur, waarneming of analyse niet zodanig is dat de resultaten niet overtuigend zijn.

- 3.9.3.3. *Indeling van mengsels wanneer geen gegevens over het mengsel als geheel beschikbaar zijn: extrapolatieprincipes*
- 3.9.3.3.1. Wanneer het mengsel zelf niet op specifieke doelorgaantoxiciteit is getest, maar wel voldoende gegevens over de afzonderlijke bestanddelen en over soortgelijke geteste mengsels beschikbaar zijn om de gevaren van het mengsel adequaat te typeren, worden deze gegevens gebruikt overeenkomstig de extrapolatieprincipes in punt 1.1.3.
- 3.9.3.4. *Indeling van mengsels wanneer gegevens over alle of sommige bestanddelen beschikbaar zijn*
- 3.9.3.4.1. Wanneer er geen betrouwbare bewijzen of testgegevens voor het specifieke mengsel zijn en de extrapolatieprincipes niet voor de indeling kunnen worden toegepast, wordt de indeling van het mengsel gebaseerd op de indeling van de samenstellende stoffen. In dat geval wordt het mengsel als toxisch voor specifieke (met name genoemde) doelorganen bij eenmalige en/of herhaalde blootstelling ingedeeld als ten minste één bestanddeel als toxisch voor specifieke doelorganen, categorie 1 of 2, is ingedeeld en ten minste in een hoeveelheid van de toepasselijke in tabel 3.9.4 vermelde algemene concentratiegrens voor respectievelijk categorie 1 of 2 in het mengsel aanwezig is.

Tabel 3.9.4.

**Algemene concentratiegrenzen voor als toxisch voor specifieke doelorganen ingedeelde bestanddelen van een mengsel waarbij het mengsel wordt ingedeeld**

Bestanddeel ingedeeld in:	Algemene concentratiegrenzen die bepalen of het mengsel wordt ingedeeld bij:	
	Categorie 1	Categorie 2
Categorie 1 toxisch voor specifieke doelorganen	Concentratie $\geq 10\%$	$1,0\% \leq \text{Concentratie} < 10\%$
Categorie 2 toxisch voor specifieke doelorganen		Concentratie $\geq 10\%$ [(Noot 1)]

## Noot 1

Als een stof die toxisch is voor specifieke doelorganen van categorie 2 in een concentratie  $\geq 1,0\%$  in het mengsel aanwezig is, dan moet op aanvraag een veiligheidsinformatieblad voor het mengsel beschikbaar zijn.

- 3.9.3.4.2. Deze algemene concentratiegrenzen en de daaruit voortvloeiende indeling zijn van toepassing op stoffen die bij herhaalde blootstelling toxisch zijn voor specifieke doelorganen.
- 3.9.3.4.3. Mengsels worden onafhankelijk ingedeeld voor eenmalige of herhaalde blootstelling, of voor beide.
- 3.9.3.4.4. Wanneer toxische stoffen worden gecombineerd die meer dan een orgaansysteem aantasten, wordt zorgvuldig rekening gehouden met versterkende en synergistische interacties, omdat bepaalde stoffen bij een concentratie van minder dan  $1\%$  toxiciteit voor doelorganen kunnen veroorzaken wanneer andere bestanddelen van het mengsel de toxische effecten ervan versterken.

3.9.4. **Voorlichting over de gevaren**

- 3.9.4.1. Voor stoffen en mengsels die aan de criteria voor indeling in deze gevarenklasse voldoen, worden de in tabel 3.9.5 vermelde etiketteringselementen gebruikt.

Tabel 3.9.5

**Etiketteringselementen voor specifieke doelorgaantoxiciteit bij herhaalde blootstelling**

Indeling	Categorie 1	Categorie 2
GHS-pictogrammen		
Signaalwoord	Gevaarlijk	Waarschuwing

Indeling	Categorie 1	Categorie 2
Gevarenaanduiding	H372: Verorzaakt schade aan organen (of alle betrokken organen vermelden indien bekend) bij langdurige of herhaalde blootstelling (blootstellingsroute vermelden indien overtuigend bewezen is dat het gevaar bij andere blootstellingsroutes niet aanwezig is).	H373: Kan schade aan organen (of alle betrokken organen vermelden indien bekend) veroorzaken bij langdurige of herhaalde blootstelling (blootstellingsroute vermelden indien overtuigend bewezen is dat het gevaar bij andere blootstellingsroutes niet aanwezig is).
Voorzorgsmaatregelen i.v.m. reactie	P260 P264 P270	P260
Voorzorgsmaatregelen i.v.m. reactie	P314	P314
Voorzorgsmaatregelen i.v.m. opslag		
Voorzorgsmaatregelen i.v.m. reactie	P501	P501

### 3.10. Aspiratiegevaar

#### 3.10.1. Definities en algemene bepalingen

3.10.1.1. Aan de hand van deze criteria kunnen stoffen of mengsels worden ingedeeld die wegens aspiratietoxiciteit mogelijk een gevaar voor mensen vormen.

3.10.1.2. Onder „aspiratie” wordt verstaan het in de luchtpijp en de onderste luchtwegen binnendringen van vloeibare of vaste stoffen of mengsels, hetzij rechtstreeks via de mond- of neusholte, hetzij indirect door braken.

3.10.1.3. Onder „aspiratietoxiciteit” vallen ernstige acute effecten, zoals chemische longontsteking, uiteenlopende graden van longschade of dood als gevolg van aspiratie.

3.10.1.4. De aspiratie begint op het moment van inademing, in de tijd die nodig is om één keer adem te halen, wanneer het veroorzakende materiaal zich in de laryngofaryngale zone bevindt ter hoogte van het punt waar de bovenste luchtwegen op het spijsverteringskanaal aansluiten.

3.10.1.5. Een stof of mengsel kan worden geaspireerd bij braken na opname door de mond. Dit heeft gevolgen voor de etikettering, in het bijzonder wanneer in verband met acute toxiciteit wordt overwogen aan te bevelen na opname door de mond braken op te wekken. Als de stof of het mengsel echter tevens wegens aspiratietoxiciteit een gevaar vormt, wordt de aanbeveling om braken op te wekken gewijzigd.

#### 3.10.1.6. Specifieke overwegingen

3.10.1.6.1. Uit de medische literatuur over chemische aspiratie blijkt dat sommige koolwaterstoffen (aardoliedestillaten) en bepaalde chloorkoolwaterstoffen een aspiratiegevaar voor mensen vormen.

3.10.1.6.2. In de indelingscriteria wordt verwezen naar kinematische viscositeit. Met de volgende formule kan dynamische viscositeit worden omgerekend naar kinematische viscositeit:

$$\frac{\text{Dynamische viscositeit (mPa/s)}}{\text{Dichtheid (g/cm}^3\text{)}} = \text{Kinematische viscositeit (mm}^2\text{/s)}$$

#### 3.10.1.6.3. Indeling van producten in aerosol- of nevelvorm

Aerosol- en nevelvormen van stoffen of mengsels (producten) worden gewoonlijk gedistribueerd in houders zoals houders onder constante druk en trekker- en pomp spuitbussen. Het belangrijkste indelingscriterium voor deze producten vormt de vraag of zich in de mond een vloeibare productmassa kan vormen, die vervolgens kan worden geaspireerd. Als de nevel of de aerosol uit een houder onder druk fijn is, kan zich geen vloeibare massa vormen. Als de houder onder druk het product echter in een stroom vrijgeeft, kan zich wel een vloeibare massa vormen, die vervolgens kan worden geaspireerd. Trekker- en pomp spuitbussen produceren gewoonlijk een grove nevel, waardoor zich een vloeibare massa kan vormen, die vervolgens kan worden geaspireerd. Wanneer het pompmechanisme kan worden verwijderd en de inhoud door de mond kan worden opgenomen, dan moet worden overwogen de stof of het mengsel in te delen.

3.10.2. **Indelingscriteria voor stoffen**

Tabel 3.10.1

**Gevarencategorie voor aspiratietoxiciteit**

Categorie	Criteria
Categorie 1	Stoffen waarvan bekend is dat zij wegens aspiratietoxiciteit een gevaar voor mensen vormen of die als dergelijke stoffen moeten worden beschouwd Een stof wordt ingedeeld in categorie 1: a) op basis van betrouwbare, kwalitatief goede gegevens over mensen; of b) wanneer het een koolwaterstof betreft die bij 40 °C een kinematische viscositeit van 20,5 mm <sup>2</sup> /s of minder heeft.

Noot:

Stoffen die in categorie 1 worden ingedeeld, zijn onder meer bepaalde koolwaterstoffen, terpentijnolie en pijnolie.

3.10.3. **Indelingscriteria voor mengsels**3.10.3.1. *Indeling wanneer gegevens over het mengsel als geheel beschikbaar zijn*

Een mengsel wordt op basis van betrouwbare gegevens van goede kwaliteit over mensen in categorie 1 ingedeeld.

3.10.3.2. *Indeling wanneer geen gegevens over het mengsel als geheel beschikbaar zijn: extrapolatieprincipes*

3.10.3.2.1. Wanneer het mengsel zelf niet op aspiratietoxiciteit is getest, maar wel voldoende gegevens over de afzonderlijke bestanddelen en over soortgelijke geteste mengsels beschikbaar zijn om de gevaren van het mengsel adequaat te typeren, worden deze gegevens gebruikt overeenkomstig de extrapolatieprincipes in punt 1.1.3. Wanneer het extrapolatieprincipe voor verdunning wordt toegepast, moet de concentratie van de stof(fen) met aspiratietoxiciteit 10 % of meer zijn.

3.10.3.3. *Indeling wanneer gegevens over alle of sommige bestanddelen beschikbaar zijn*3.10.3.3.1. **Categorie 1**

3.10.3.3.1.1. Een mengsel dat voor ten minste 10 % bestaat uit een of meer stoffen die in categorie 1 zijn ingedeeld en dat bij 40 °C een kinematische viscositeit van 20,5 mm<sup>2</sup>/s of minder heeft, wordt in categorie 1 ingedeeld.


3.10.3.3.1.2. Een mengsel dat uiteenvalt in twee of meer afzonderlijke lagen, waarvan er een voor ten minste 10 % bestaat uit een of meer stoffen die in categorie 1 zijn ingedeeld en dat bij 40 °C een kinematische viscositeit van 20,5 mm<sup>2</sup>/s of minder heeft, wordt in categorie 1 ingedeeld.

3.10.4. **Voorlichting over de gevaren**

3.10.4.1. Voor stoffen en mengsels die aan de criteria voor indeling in deze gevarenklasse voldoen, worden de in tabel 3.10.2 vermelde etiketteringselementen gebruikt.

Tabel 3.10.2.

**Etiketteringselementen voor aspiratietoxiciteit**

Indeling	categorie 1
GHS-pictogram	
Signaalwoord	Gevaarlijk
Gevarenaanduiding	H304: Kan dodelijk zijn als de stof bij inslikken in de luchtwegen terechtkomt



Indeling	categorie 1
Vorzorgsmaatregelen i.v.m. reactie	
Vorzorgsmaatregelen i.v.m. reactie	P301 + P310 P331
Vorzorgsmaatregelen i.v.m. opslag	P405
Vorzorgsmaatregelen i.v.m. reactie	P501

4. DEEL 4: MILIEUGEVAAREN

4.1. **Gevaar voor het aquatisch milieu**

4.1.1. **Definities en algemene overwegingen**

4.1.1.1. *Definities*

Onder „acute aquatische toxiciteit” wordt verstaan de intrinsieke eigenschap van een stof om bij korte blootstelling schade aan een organisme te berokkenen.

Onder de „beschikbaarheid” van een stof wordt verstaan de mate waarin de stof een oplosbare of afsplitsbare vorm krijgt. Voor metalen is dit de mate waarin het metaalion van de metaalverbinding ( $M^0$ ) zich van de rest van de verbinding (het molecuul) kan losmaken.

Onder „biobeschikbaarheid” (of „biologische beschikbaarheid”) wordt verstaan de mate waarin een stof door een organisme wordt opgenomen en zich in een deel van het organisme verspreidt. Dit is afhankelijk van de fysisch-chemische eigenschappen van de stof, de anatomie en fysiologie van het organisme, de farmacokinetiek en de blootstellingsroute. Beschikbaarheid is geen voorwaarde voor biobeschikbaarheid.

Onder „bioaccumulatie” wordt verstaan het nettoresultaat van de opname, transformatie en eliminatie van een stof in een organisme als gevolg van alle blootstellingsroutes (d.w.z. lucht, water, sediment/bodem en voedsel).

Onder „bioconcentratie” wordt verstaan het nettoresultaat van de opname, transformatie en eliminatie van een stof in een organisme als gevolg van blootstelling via water.

Onder „chronische aquatische toxiciteit” worden verstaan de intrinsieke schadelijke eigenschap van een stof voor blootgestelde aquatische organismen, vastgesteld in relatie tot de levenscyclus van het organisme.

Onder „afbraak” wordt verstaan de ontbinding van organische moleculen in kleinere moleculen en uiteindelijk in koolstofdioxide, water en zouten.

4.1.1.2. *Basiselementen*

4.1.1.2.0. De gevarenklasse gevaar voor het aquatisch milieu is onderverdeeld in:

- acuut aquatisch gevaar;
- Chronisch aquatisch gevaar (lange termijn).

4.1.1.2.1. De basiselementen voor de indeling voor aquatisch milieugevaar zijn:

- acute aquatische toxiciteit;
- potentiële of feitelijke bioaccumulatie;
- (biotische of abiotische) afbraak van organische chemische stoffen; en tevens
- chronische aquatische toxiciteit.

4.1.1.2.2. De gegevens worden bij voorkeur verkregen volgens de in artikel 8, lid 3, bedoelde gestandaardiseerde testmethoden. In de praktijk moeten ook met andere gestandaardiseerde testmethoden, zoals nationale methoden, verkregen gegevens worden gebruikt wanneer deze methoden gelijkwaardig worden geacht. Bij de indeling wordt rekening gehouden met de beschikbare valide gegevens die met niet-standaardmethoden of zonder testmethoden zijn verkregen, mits deze aan de voorschriften van punt 1 van bijlage XI bij Verordening (EG) nr. 1907/2006 voldoen. Over het algemeen worden zowel toxiciteitsgegevens voor zoetwaterdieren en zeedieren beschouwd als geschikt voor gebruik bij de indeling, op voorwaarde dat de gebruikte testmethode gelijkwaardig is. Wanneer dergelijke gegevens niet beschikbaar zijn, wordt de indeling gebaseerd op de beste beschikbare gegevens. Zie ook deel 1.

4.1.1.3. *Andere overwegingen*

4.1.1.3.1. Voor de milieugevaarindeling van stoffen en mengsels moet worden vastgesteld welke gevaren zij vormen voor het aquatisch milieu. Het aquatisch milieu wordt beschouwd aan de hand van de in het water levende organismen en het aquatische ecosysteem waarvan zij deel uitmaken. Het gevaar wordt derhalve bepaald aan de hand van de aquatische toxiciteit van de stof of het mengsel, hoewel in voorkomend geval ook rekening wordt gehouden met nadere informatie over de afbraak en de bioaccumulatie.

- 4.1.1.3.2. Het indelingssysteem is van toepassing op alle stoffen en mengsels, maar het Agentschap zal richtsnoeren publiceren voor bijzondere gevallen.
- 4.1.2. **Indelingscriteria voor stoffen**
- 4.1.2.1. Het basisindelingssysteem voor stoffen omvat één categorie voor acute toxiciteit en drie categorieën voor chronische toxiciteit. De categorieën voor acute en chronische toxiciteit worden onafhankelijk van elkaar toegepast. De indelingscriteria voor de categorie voor acute toxiciteit berusten uitsluitend op gegevens over de acute aquatische toxiciteit (EC<sub>50</sub> of LC<sub>50</sub>). De indelingscriteria voor de categorieën voor chronische toxiciteit berusten op twee soorten informatie: gegevens over de acute aquatische toxiciteit en gegevens over de lotgevallen in het milieu (afbraak- en bioaccumulatiegegevens).
- 4.1.2.2. Het systeem omvat bovendien een „vangnet” (categorie 4 voor chronische toxiciteit) dat kan worden gebruikt wanneer op grond van de beschikbare gegevens geen indeling volgens de formele criteria mogelijk is, maar er niettemin redenen tot bezorgdheid zijn (zie voorbeeld in tabel 4.1.0).
- 4.1.2.3. Het indelingssysteem gaat ervan uit dat het belangrijkste intrinsieke gevaar voor aquatische organismen tot uiting komt in de acute en chronische toxiciteit van een stof. Voor deze eigenschappen zijn afzonderlijke gevarencategorieën gedefinieerd, die in gradatie verschillen naar gelang de ernst van het geconstateerde gevaar. Normaliter wordt bij de bepaling van de gevarencategorie(ën) de laagste van de beschikbare toxiciteitswaarden gebruikt. In bepaalde omstandigheden is het echter passend de bewijskracht van de beschikbare gegevens te bepalen.
- 4.1.2.4. Het voornaamste gevaar van een stof met „gevaar voor het aquatisch milieu” komt tot uiting in de chronische toxiciteit, hoewel ook acute toxiciteit met L(E)C<sub>50</sub>-waarden van  $\leq 1$  mg/l of minder gevaarlijk wordt geacht. De indeling van stoffen in categorieën voor chronische toxiciteit (lange termijn) vindt plaats aan de hand van de afbreekbaarheid en/of de bioconcentratiefactor (BCF) van de stof, in combinatie met de acute toxiciteit.
- 4.1.2.5. Stoffen die acuut toxisch zijn bij aanzienlijk lagere waarden dan 1 mg/l, dragen ook bij een lage concentratie bij tot de toxiciteit van het mengsel en bij de toepassing van de optelmethode wordt hieraan normaliter een groter gewicht toegekend (zie noot 1 bij tabel 4.1.0 en punt 4.1.3.5.5).
- 4.1.2.6. De indelingscriteria voor de gevarenklasse gevaar voor het aquatisch milieu zijn samengevat in tabel 4.1.0.

Tabel 4.1.0

**Categorieën voor gevaar voor het aquatisch milieu**

Acuut aquatisch gevaar (korte termijn)		
Categorie 1 voor acute toxiciteit	(noot 1)	
96 uur-LC <sub>50</sub> (voor vissen)	$\leq 1$ mg/l en/of	
48 uur-EC <sub>50</sub> (voor schaaldieren)	$\leq 1$ mg/l en/of	
72 of 96 uur-ErC <sub>50</sub> (voor algen of andere waterplanten)	$\leq 1$ mg/l	(noot 2)
Chronisch aquatisch gevaar (lange termijn)		
Categorie 1 voor chronische toxiciteit	(noot 1)	
96 uur-LC <sub>50</sub> (voor vissen)	$\leq 1$ mg/l en/of	
48 uur-EC <sub>50</sub> (voor schaaldieren)	$\leq 1$ mg/l en/of	
72 of 96 uur-ErC <sub>50</sub> (voor algen of andere waterplanten)	$\leq 1$ mg/l	(noot 2)
en de stof is niet snel afbreekbaar en/of de proefondervindelijk bepaalde BCF bedraagt ten minste 500 (of, indien deze ontbreekt, de log K <sub>ow</sub> bedraagt ten minste 4).		
Categorie 2 voor chronische toxiciteit		
96 uur-LC <sub>50</sub> (voor vissen)	$> 1$ en $\leq 10$ mg/l en/of	
48 uur-EC <sub>50</sub> (voor schaaldieren)	$> 1$ en $\leq 10$ mg/l en/of	
72 of 96 uur-ErC <sub>50</sub> (voor algen of andere waterplanten)	$\leq 10$ mg/l	(noot 2)
en de stof is niet snel afbreekbaar en/of de proefondervindelijk bepaalde BCF bedraagt ten minste 500 (of, indien deze ontbreekt, de log K <sub>ow</sub> bedraagt ten minste 4), tenzij de NOEC voor chronische toxiciteit groter is dan 1 mg/l.		

Categorie 3 voor chronische toxiciteit	
96 uur-LC <sub>50</sub> (voor vissen)	> 10 en ≤ 100 mg/l en/of
48 uur-EC <sub>50</sub> (voor schaaldieren)	> 10 en ≤ 100 mg/l en/of
72 of 96 uur-ErC <sub>50</sub> (voor algen of andere waterplanten)	> 10 tot ≤ 100 mg/ (noot 2)
en de stof is niet snel afbreekbaar en/of de proefondervindelijk bepaalde BCF bedraagt ten minste 500 (of, indien deze ontbreekt, de log K <sub>ow</sub> bedraagt ten minste 4), tenzij de NOEC voor chronische toxiciteit groter is dan 1 mg/l.	
„Vangnet” voor aquatisch gevaar	
Categorie 4 voor chronische toxiciteit	
Op grond van de beschikbare gegevens is indeling volgens bovenstaande criteria niet mogelijk, maar er zijn niettemin redenen tot bezorgdheid. Bedoeld zijn bijvoorbeeld slecht oplosbare stoffen waarvoor geen acute toxiciteit is vastgesteld bij concentraties tot de oplosbaarheid in water (noot 3), die niet snel afbreekbaar zijn en waarvan de proefondervindelijk bepaalde BCF ten minste 500 bedraagt (of, indien deze ontbreekt, de log K <sub>ow</sub> ten minste 4 bedraagt) met het vermogen tot bioaccumulatie, worden in deze categorie ingedeeld tenzij er andere wetenschappelijke bewijzen zijn waaruit blijkt dat indeling niet nodig is. Dergelijke bewijzen zijn bijvoorbeeld een Noec voor chronische toxiciteit die groter is dan de oplosbaarheid in water of groter is dan 1 mg/l, of bewijzen voor snelle afbraak in het milieu.	

#### Noot 1

Wanneer stoffen in categorie 1 voor acute en/of chronische toxiciteit worden ingedeeld, moet ook een passende vermenigvuldigingsfactor M worden aangegeven (zie tabel 4.1.3).

#### Noot 2

De indeling wordt gebaseerd op de ErC<sub>50</sub> [=EC<sub>50</sub> (groeisnelheid)]. Wanneer de grondslag van de EC<sub>50</sub> niet is vermeld of geen ErC<sub>50</sub> is vastgelegd, wordt de indeling gebaseerd op de laagste EC<sub>50</sub> die beschikbaar is.

#### Noot 3

Met „geen acute toxiciteit” wordt bedoeld dat de L(E)C<sub>50</sub> hoger is/zijn dan de oplosbaarheid in water. Dit geldt ook voor slecht oplosbare stoffen (oplosbaarheid in water < 1 mg/l), wanneer er bewijzen zijn dat de acute toxiciteitstest geen goede meting van de intrinsieke toxiciteit oplevert.

#### 4.1.2.7. Aquatische toxiciteit

4.1.2.7.1. De acute aquatische toxiciteit wordt normaliter bepaald met een LC<sub>50</sub>-test op vissen van 96 uur, een EC<sub>50</sub>-test op schaaldieren van 48 uur en/of een EC<sub>50</sub>-test op algen van 72 of 96 uur. Deze soorten dekken uiteenlopende trofische niveaus en taxa en worden beschouwd als indicatoren voor alle waterorganismen. Gegevens over andere soorten (bv. Lemna spp.) worden ook in aanmerking genomen, mits geschikte testmethoden zijn toegepast. De groeiremmingstest voor waterplanten worden normaal beschouwd als chronische toxiciteitstests, maar de EC<sub>50</sub> worden met het oog op de indeling beschouwd als een waarde voor acute toxiciteit (zie noot 2).

4.1.2.7.2. Gegevens die verkregen zijn volgens de in artikel 8, lid 3, bedoelde gestandaardiseerde testmethoden, alsmede resultaten die verkregen zijn volgens andere gevalideerde, internationaal aanvaarde testmethoden, worden aanvaard om de chronische aquatische toxiciteit met het oog op de indeling te bepalen. Er wordt gebruikgemaakt van de Noec of een andere gelijkwaardige L(E)C<sub>x</sub> (bv. EC<sub>10</sub>).

#### 4.1.2.8. Bioaccumulatie

4.1.2.8.1. Door bioaccumulatie van stoffen in waterorganismen kunnen ook bij lage feitelijke concentraties in het water, op lange termijn toxische effecten optreden. Voor organische stoffen wordt de potentiële bioaccumulatie normaliter bepaald aan de hand van de octanol/waterverdelingscoëfficiënt (gewoonlijk weergegeven als log K<sub>ow</sub>). In de wetenschappelijke literatuur wordt het verband tussen de log K<sub>ow</sub> en de bioconcentratie van een organische stof, gemeten met de bioconcentratiefactor (BCF) in vissen, breed gesteund. Er wordt een ondergrens van log K<sub>ow</sub> ≥ 4 toegepast om uitsluitend stoffen met een reëel vermogen tot bioconcentratie in te delen. Hoewel dit duidt op potentiële bioaccumulatie, is een proefondervindelijk bepaalde BCF een betere maatstaf; wanneer deze beschikbaar is, moet deze dan ook bij voorkeur worden gebruikt. Een BCF bij vissen van ≥ 500 is een aanwijzing voor vermogen tot bioconcentratie voor de indeling.

- 4.1.2.9. *Snelle afbreekbaarheid van organische stoffen*
- 4.1.2.9.1. Stoffen die snel afbreken, kunnen in korte tijd uit het milieu worden verwijderd. De effecten van dergelijke stoffen die zich met name bij lekkages of ongevallen kunnen voordoen, zullen lokaal zijn en van korte duur. Wanneer een stof niet snel afbreekt in het milieu, kan de toxiciteit zich via het water over een groot gebied verspreiden en zich langdurig voordoen.
- 4.1.2.9.2. Snelle afbraak kan onder meer worden aangetoond met de screeningtests voor biodegradatie die zijn ontwikkeld om te bepalen of een organische stof „gemakkelijk biologisch afbreekbaar” is. Wanneer dergelijke gegevens niet beschikbaar zijn, wordt een BZV (vijf dagen)/CZV-quotiënt van ten minste 0,5 beschouwd als aanwijzing voor snelle afbraak. Stoffen die aan de eisen van deze screeningtest voldoen, worden beschouwd als waarschijnlijk snel biologisch afbreekbaar in het aquatisch milieu en niet persistent. Als een stof niet aan de eisen van de screeningtest voldoet, betekent dit echter niet noodzakelijkerwijs dat zij niet snel in het milieu afbreekbaar is. Daarom kan ook rekening worden gehouden met andere bewijzen voor snelle afbraak in het milieu; deze zijn van bijzonder belang voor stoffen die de microbiële activiteit remmen bij de concentraties die in de standaardtests worden gebruikt. Er wordt een extra indelingscriterium opgenomen, zodat gegevens kunnen worden gebruikt die aantonen dat de stof in 28 dagen voor meer dan 70 % feitelijk biotisch of abiotisch afbreekt in het aquatisch milieu. Als de afbraak onder realistische milieumomstandigheden is aangetoond, wordt aan het criterium van „snelle afbreekbaarheid” voldaan.
- 4.1.2.9.3. Afbraakgegevens zijn veelal beschikbaar in de vorm van halfwaardetijden; deze gegevens kunnen worden gebruikt om te beoordelen of een stof snel afbreekt, mits de stof totaal biologisch afbreekt (volledige mineralisatie). Gegevens over primaire biologische afbraak zijn normaliter niet voldoende voor de beoordeling van de snelle afbreekbaarheid, tenzij kan worden aangetoond dat de afbraakproducten niet aan de indelingscriteria voor gevaar voor het aquatisch milieu voldoen.
- 4.1.2.9.4. Uit de gehanteerde criteria blijkt dat de afbraak in het milieu biotisch of abiotisch kan zijn. Er kan rekening worden gehouden met hydrolyse als de hydrolyseproducten niet aan de indelingscriteria voor gevaar voor het aquatisch milieu voldoen.
- 4.1.2.9.5. Stoffen worden als snel afbreekbaar in het milieu beschouwd wanneer zij aan een van de de volgende criteria voldoen:
- a) in studies naar gemakkelijke biologische afbreekbaarheid van 28 dagen worden ten minste de volgende afbraakniveaus bereikt:
    - i) tests op basis van opgeloste organische koolstof: 70 %
    - ii) tests op basis van zuurstofdepletie of koolstofdioxideontwikkeling: 60 % van het theoretische maximum.

Deze biologische afbraakniveaus worden bereikt binnen tien dagen na het begin van de afbraak, dat wordt gesteld als het moment waarop 10 % van de stof is afgebroken; of
  - b) als uitsluitend BZV- en CZV-gegevens beschikbaar zijn, bedraagt de BZV5/CZV-quotiënt ten minste 0,5; of
  - c) er is ander overtuigend wetenschappelijk bewijs beschikbaar dat aantoont dat de stof in 28 dagen voor meer dan 70 % in het aquatisch milieu (biotisch en/of abiotisch) kan worden afgebroken.
- 4.1.2.10. *Anorganische verbindingen en metalen*
- 4.1.2.10.1. Voor anorganische verbindingen en metalen is het begrip afbreekbaarheid, zoals toegepast op organische verbindingen, van weinig of geen betekenis. Bij de transformatie van dergelijke stoffen als gevolg van normale milieuprocessen kan de biobeschikbaarheid van toxische stoffen namelijk zowel toe- als afnemen. Ook het gebruik van bioaccumulatiegegevens moet met de nodige voorzichtigheid gebeuren <sup>(1)</sup>.
- 4.1.2.10.2. Slecht oplosbare anorganische verbindingen en metalen kunnen acuut of chronisch toxisch zijn in het aquatisch milieu naar gelang de intrinsieke toxiciteit van de biobeschikbare anorganische stoffen en de snelheid waarmee en de hoeveelheid waarin deze stoffen oplossen.

<sup>(1)</sup> Het Agentschap zal specifieke richtsnoeren verstrekken voor het gebruik van deze gegevens voor dergelijke stoffen om aan de eisen van de delingscriteria te voldoen.

#### 4.1.3. **Indelingscriteria voor mengsels**

4.1.3.1. Het indelingssysteem voor mengsels omvat dezelfde categorieën als voor stoffen worden gebruikt, namelijk categorie 1 voor acute toxiciteit en de categorieën 1 tot en met 4 voor chronische toxiciteit. Om bij de gevarieerde indeling voor aquatisch milieugevaar van mengsels gebruik te kunnen maken van alle beschikbare gegevens, wordt in voorkomend geval uitgegaan van het volgende:

De „relevante bestanddelen” van een mengsel zijn de bestanddelen die in categorie 1 voor acute of chronische toxiciteit zijn ingedeeld en in een concentratie van ten minste 0,1 % (gewichtspersent) aanwezig zijn, alsook de bestanddelen die in categorie 2, 3 of 4 voor chronische toxiciteit zijn ingedeeld en in een concentratie van ten minste 1 % (gewichtspersent) aanwezig zijn, tenzij verondersteld wordt (zoals in het geval van zeer toxische bestanddelen; zie punt 4.1.3.5.5) dat een bestanddeel dat in een lagere concentratie aanwezig is, toch relevant is voor de indeling van het mengsel voor aquatisch milieugevaar. In het algemeen is voor stoffen die in categorie 1 voor acute of chronische toxiciteit zijn ingedeeld, de concentratie waarmee rekening moet worden gehouden (0,1/M) %. (De vermenigvuldigingsfactor M wordt toegelicht in punt 4.1.3.5.5).


4.1.3.2. De indeling voor aquatisch milieugevaar vindt plaats volgens een gefaseerde aanpak, afhankelijk van het soort informatie dat over het mengsel en de bestanddelen beschikbaar is. De procedure is weergegeven in figuur 4.1.2.

De gefaseerde aanpak omvat de volgende elementen:

- indeling op basis van geteste mengsels;
- indeling op basis van de extrapolatieprincipes;
- toepassing van de „optelmethode voor ingedeelde bestanddelen” en/of van een „somformule”.

Figuur 4.1.2

#### Gefaseerde aanpak voor de indeling van mengsels op basis van acuut en chronisch gevaar (lange termijn) voor het aquatisch milieu

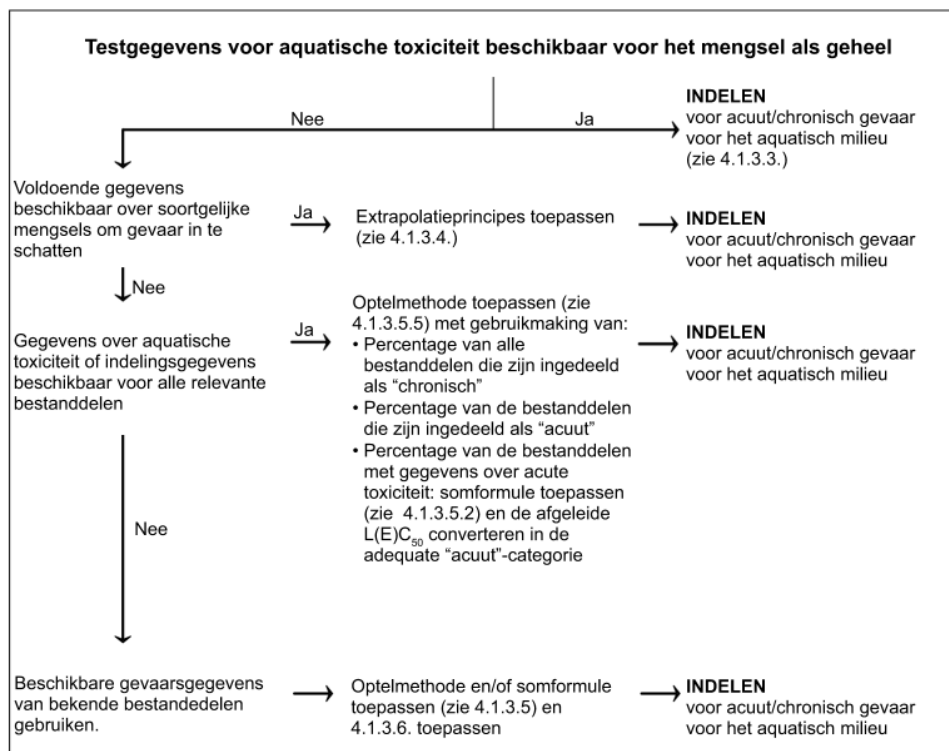

4.1.3.3. *Indeling van mengsels wanneer gegevens over het mengsel als geheel beschikbaar zijn*

4.1.3.3.1. Wanneer het mengsel als geheel op aquatische toxiciteit is getest, wordt het ingedeeld overeenkomstig de voor stoffen overeengekomen criteria, maar uitsluitend voor acuut gevaar. De indeling wordt normaliter gebaseerd op de gegevens voor vissen, schaaldieren en algen/planten. Indeling van mengsels aan de hand van LC<sub>50</sub>- of EC<sub>50</sub>-gegevens voor het mengsel als geheel is voor de categorieën voor chronische toxiciteit niet mogelijk

omdat daarvoor zowel gegevens over toxiciteit als gegevens over de lotgevallen in het milieu vereist zijn, en er geen afbraak- en bioaccumulatiegegevens voor mengsels als geheel zijn. De indelingscriteria voor chronische toxiciteit kunnen niet worden toegepast omdat de gegevens van afbreekbaarheids- en bioaccumulatiegegevens van mengsels niet kunnen worden geïnterpreteerd; deze zijn alleen voor afzonderlijke stoffen van betekenis.

- 4.1.3.3.2. Wanneer gegevens van acute toxiciteitstest ( $LC_{50}$  of  $EC_{50}$ ) voor het mengsel als geheel beschikbaar zijn, worden deze gegevens, evenals informatie over de indeling voor chronisch gevaar (op lange termijn) van bestanddelen, op de hierna beschreven wijze gebruikt om de indeling van geteste stoffen aan te vullen. Wanneer ook chronische toxiciteitsgegevens (Noec) beschikbaar zijn, worden deze eveneens gebruikt:
- a)  $L(E)C_{50}$  ( $LC_{50}$  of  $EC_{50}$ ) van het geteste mengsel  $\leq 100$  mg/l en Noec van het geteste mengsel  $\leq 1$  mg/l of onbekend:
    - mengsel indelen in categorie 1 voor acuut gevaar ( $LC_{50}$  of  $EC_{50}$  van het geteste mengsel  $\leq 1$  mg/l) of indeling voor acute toxiciteit niet nodig ( $LC_{50}$  en  $EC_{50}$  van het geteste mengsel  $> 1$  mg/l);
    - optelmethode toepassen (zie punt 4.1.3.5.5) voor de indeling voor chronische toxiciteit (categorie 1, 2, 3 of 4 voor chronische toxiciteit of indeling voor chronische toxiciteit niet nodig);
  - b)  $L(E)C_{50}$  van het geteste mengsel  $\leq 100$  mg/l en Noec van het geteste mengsel  $> 1$  mg/l:
    - indeling voor acuut gevaar niet nodig;
    - optelmethode toepassen (zie punt 4.1.3.5.5) voor de indeling in categorie 1 voor chronische toxiciteit. Als het mengsel niet in categorie 1 voor chronische toxiciteit wordt ingedeeld, is indeling voor chronische toxiciteit niet nodig;
  - c)  $L(E)C_{50}(s)$  van het geteste mengsel  $> 100$  mg/l of hoger dan de oplosbaarheid in water, en NOEC van het geteste mengsel  $\leq 1$  mg/l of onbekend:
    - indeling voor acuut gevaar niet nodig;
    - optelmethode toepassen (zie punt 4.1.3.5.5) voor de indeling voor chronische toxiciteit (categorie 4 voor chronische toxiciteit of indeling voor chronische toxiciteit niet nodig);
  - d)  $L(E)C_{50}(s)$  van het geteste mengsel  $> 100$  mg/l of hoger dan de oplosbaarheid in water, en NOEC van het geteste mengsel  $> 1$  mg/l:
    - indeling voor acuut of chronisch gevaar (op lange termijn) niet nodig.
- 4.1.3.4. *Indeling van mengsels wanneer geen gegevens over het mengsel als geheel beschikbaar zijn: extrapolatieprincipes*
- 4.1.3.4.1. Wanneer een mengsel zelf niet op gevaar voor het aquatisch milieu is getest, maar wel voldoende gegevens over de afzonderlijke bestanddelen en over soortgelijke geteste mengsels beschikbaar zijn om de gevaren van het mengsel adequaat te typeren, worden deze gegevens gebruikt overeenkomstig de extrapolatieprincipes in punt 1.1.3. In verband met het extrapolatieprincipe voor verdunning worden de punten 4.1.3.4.2 en 4.1.3.4.3 toegepast.
- 4.1.3.4.2. Verdunning: als een mengsel is gevormd door een wegens gevaar voor het aquatisch milieu ingedeeld ander mengsel of een wegens gevaar voor het aquatisch milieu ingedeelde stof te verdunnen met een verdunningsmiddel waarvan de indeling wegens gevaar voor het aquatisch milieu gelijk is aan of lager is dan die van het minst toxische oorspronkelijke bestanddeel en waarvan niet verwacht wordt dat het het gevaar voor het aquatisch milieu van andere bestanddelen beïnvloedt, kan het mengsel in dezelfde categorie als het oorspronkelijke mengsel of de oorspronkelijke stof worden ingedeeld.
- 4.1.3.4.3. Als een mengsel is gevormd door een ander ingedeeld mengsel of een ingedeelde stof te verdunnen met water of ander volledig niet-toxisch materiaal, kan de toxiciteit van het mengsel worden berekend op basis van het oorspronkelijke mengsel of de oorspronkelijke stof.
- 4.1.3.5. *Indeling van mengsels wanneer gegevens over alle of sommige bestanddelen beschikbaar zijn*
- 4.1.3.5.1. Het mengsel wordt ingedeeld door de indeling van de bestanddelen op te tellen. Het percentage van de wegens acute of chronische toxiciteit ingedeelde bestanddelen wordt rechtstreeks gebruikt in de optelmethode. De details van de optelmethode zijn beschreven in punt 4.1.3.5.5.

- 4.1.3.5.2. Wanneer een mengsel bestaat uit bestanddelen die (nog) niet zijn ingedeeld (in categorie 1 voor acute toxiciteit en/of categorie 1, 2, 3 of 4 voor chronische toxiciteit), wordt rekening gehouden met de beschikbare adequate gegevens voor die bestanddelen. Wanneer voor meer dan een bestanddeel van het mengsel adequate toxiciteitsgegevens beschikbaar zijn, wordt de gecombineerde toxiciteit van die bestanddelen berekend met de volgende somformule; aan de hand van de aldus berekende toxiciteit wordt dat gedeelte van het mengsel ingedeeld in een categorie voor acute toxiciteit, die vervolgens wordt gebruikt bij de toepassing van de optelmethode:

$$\frac{\sum C_i}{L(E)C_{50m}} = \sum \frac{C_i}{L(E)C_{50i}}$$

waarin:

- $C_i$  = de concentratie van bestanddeel  $i$  (gewichtsperscentage);  
 $L(E)C_{50i}$  =  $LC_{50}$  of  $EC_{50}$  (mg/l) voor bestanddeel  $i$ ;  
 $\eta$  = aantal bestanddelen;  
 $L(E)C_{50m}$  =  $L(E)C_{50}$  van het gedeelte van het mengsel waarvoor testgegevens beschikbaar zijn.

- 4.1.3.5.3. Wanneer de somformule voor een gedeelte van het mengsel wordt toegepast, wordt de toxiciteit van dit gedeelte van het mengsel bij voorkeur berekend op basis van toxiciteitsgegevens die op één taxonomische groep betrekking hebben (bv. vissen, dafnia's, algen of gelijkwaardige organismen) en wordt vervolgens de hoogste verkregen toxiciteit (de laagste waarde) gebruikt (dat wil zeggen de gegevens voor de gevoeligste van de drie taxonomische groepen). Wanneer echter niet voor elk bestanddeel toxiciteitsgegevens voor dezelfde taxonomische groep beschikbaar zijn, wordt de toxiciteitswaarde voor elk bestanddeel geselecteerd op dezelfde wijze als de toxiciteitswaarden voor de indeling van stoffen, dat wil zeggen dat de hoogste toxiciteitsgegevens worden gebruikt (voor het gevoeligste testorganisme). De berekende acute toxiciteit wordt vervolgens gebruikt om te beoordelen of dit gedeelte van het mengsel aan de hand van de beschreven criteria voor stoffen in categorie 1 voor acute toxiciteit moet worden ingedeeld.

- 4.1.3.5.4. Als een mengsel op meer dan een wijze wordt ingedeeld, wordt de methode toegepast die de voorzichtigste indeling oplevert.

#### 4.1.3.5.5. Optelmethode

##### 4.1.3.5.5.1. Achtergrond

- 4.1.3.5.5.1.1. Bij categorie 1 voor acute toxiciteit en de categorieën 1 tot en met 3 voor chronische toxiciteit van stoffen verschillen de onderliggende toxiciteitscriteria een factor 10 met die van de hogere of lagere categorie. Dit betekent dat stoffen die in een hoge toxiciteitscategorie zijn ingedeeld, bijdragen tot de indeling van een mengsel in een lagere categorie. Bij de berekening van de indeling moet daarom rekening worden gehouden met de totale bijdrage van alle stoffen die in categorie 1 voor acute of chronische toxiciteit, categorie 2 voor chronische toxiciteit en categorie 3 voor chronische toxiciteit zijn ingedeeld.

- 4.1.3.5.5.1.2. Wanneer een mengsel bestanddelen bevat die in categorie 1 voor acute of chronische toxiciteit zijn ingedeeld, moet er rekening mee worden gehouden dat deze bestanddelen, wanneer zij acuut toxisch zijn bij lagere waarden dan 1 mg/l, ook bij een lage concentratie tot de toxiciteit van het mengsel kunnen bijdragen. Werkzame bestanddelen van bestrijdingsmiddelen hebben vaak een dergelijke hoge aquatische toxiciteit, maar dit geldt ook voor sommige andere stoffen, zoals organometaalverbindingen. Wanneer in dergelijke gevallen de normale algemene concentratiegrenzen worden toegepast, leidt dit tot een te lage indeling van het mengsel. Daarom worden overeenkomstig punt 4.1.3.5.5.5 vermenigvuldigingsfactoren toegepast voor zeer toxische bestanddelen.

##### 4.1.3.5.5.2. Indelingsprocedure

- 4.1.3.5.5.2.1. Over het algemeen heeft een strengere indeling voor mengsels voorrang op een minder strengere indeling, zo heeft een indeling in categorie 1 voor chronische toxiciteit voorrang op een indeling in categorie 2 voor chronische toxiciteit. In dit voorbeeld kan de indelingsprocedure reeds worden beëindigd bij een indeling in categorie 1 voor chronische toxiciteit. Dit is de strengste categorie voor chronische toxiciteit. Daarom hoeft de indelingsprocedure niet te worden voortgezet.

##### 4.1.3.5.5.3. Indeling in categorie 1 voor acute toxiciteit

- 4.1.3.5.5.3.1. Eerst worden alle bestanddelen in aanmerking genomen die in categorie 1 voor acute toxiciteit zijn ingedeeld. Als de som van deze bestanddelen groter is dan 25 %, wordt het mengsel als geheel ingedeeld in categorie 1 voor acute toxiciteit.



- 4.1.3.5.5.3.2. De indeling van mengsels voor acuut gevaar door optelling van de ingedeelde bestanddelen is samengevat in tabel 4.1.1.

Tabel 4.1.1

**Indeling van een mengsel voor acuut gevaar door optelling van de ingedeelde bestanddelen**

Som van bestanddelen ingedeeld in:	Mengsel wordt ingedeeld in:
Categorie 1 voor acute toxiciteit $\times M^{(*)} \geq 25\%$	Categorie 1 voor acute toxiciteit

(\*) De M-factor wordt toegelicht in punt 4.1.3.5.5.5.

- 4.1.3.5.5.4. Indeling in de categorieën 1, 2, 3 en 4 voor chronische toxiciteit

- 4.1.3.5.5.4.1. Eerst worden alle bestanddelen in aanmerking genomen die in categorie 1 voor chronische toxiciteit zijn ingedeeld. Als de som van deze bestanddelen vermenigvuldigd met hun overeenkomstige M-factoren gelijk is aan of groter dan 25 %, wordt het mengsel ingedeeld als categorie 1 voor chronische toxiciteit. Als de uitkomst van de berekening is dat het mengsel in categorie 1 voor chronische toxiciteit wordt ingedeeld, wordt de indelingsprocedure beëindigd.
- 4.1.3.5.5.4.2. Wanneer het mengsel niet in categorie 1 voor chronische toxiciteit wordt ingedeeld, wordt beoordeeld of het mengsel in categorie 2 voor chronische toxiciteit moet worden ingedeeld. Een mengsel wordt in categorie 2 voor chronische toxiciteit ingedeeld als de uitkomst van  $10 \times$  de som van alle in categorie 1 voor chronische toxiciteit ingedeelde bestanddelen vermenigvuldigd met hun overeenkomstige M-factoren, plus de som van alle in categorie 2 voor chronische toxiciteit ingedeelde bestanddelen, gelijk aan of groter is dan 25 %. Als de uitkomst van de berekening is dat het mengsel in categorie 2 voor chronische toxiciteit wordt ingedeeld, wordt de indelingsprocedure beëindigd.
- 4.1.3.5.5.4.3. Wanneer het mengsel niet in categorie 1, noch in categorie 2 voor chronische toxiciteit wordt ingedeeld, wordt beoordeeld of het mengsel in categorie 3 voor chronische toxiciteit moet worden ingedeeld. Een mengsel wordt in categorie 3 voor chronische toxiciteit ingedeeld als de uitkomst van  $100 \times$  de som van alle in categorie 1 voor chronische toxiciteit ingedeelde bestanddelen vermenigvuldigd met hun overeenkomstige M-factoren, plus  $10 \times$  de som van alle in categorie 2 voor chronische toxiciteit ingedeelde bestanddelen, plus de som van alle in categorie 3 voor chronische toxiciteit ingedeelde bestanddelen, ten minste 25 % bedraagt.
- 4.1.3.5.5.4.4. Als het mengsel dan nog niet in categorie 1, 2 of 3 voor chronische toxiciteit is ingedeeld, wordt overwogen of het mengsel in categorie 4 voor chronische toxiciteit moet worden ingedeeld. Een mengsel wordt in categorie 4 voor chronische toxiciteit ingedeeld als de som van de percentages van de in de categorieën 1, 2, 3 en 4 voor chronische toxiciteit ingedeelde bestanddelen gelijk aan of groter is dan 25 %.
- 4.1.3.5.5.4.5. De indeling van mengsels voor chronisch gevaar (lange termijn) door optelling van de ingedeelde bestanddelen is samengevat in tabel 4.1.2.

Tabel 4.1.2

**Indeling van een mengsel voor chronisch gevaar (lange termijn) door optelling van de ingedeelde bestanddelen**

Som van bestanddelen ingedeeld in:	Mengsel wordt ingedeeld in:
Categorie 1 voor chronische toxiciteit $\times M^{(*)} \geq 25\%$	Categorie 1 voor chronische toxiciteit
$(M \times 10 \times$ categorie 1 voor chronische toxiciteit) + categorie 2 voor chronische toxiciteit $\geq 25\%$	Categorie 2 voor chronische toxiciteit
$(M \times 10 \times$ categorie 1 voor chronische toxiciteit) + $(10 \times$ categorie 2 voor chronische toxiciteit) + categorie 3 voor chronische toxiciteit $\geq 25\%$	Categorie 3 voor chronische toxiciteit
Categorie 1 voor chronische toxiciteit + categorie 2 voor chronische toxiciteit + categorie 3 voor chronische toxiciteit + categorie 4 voor chronische toxiciteit $\geq 25\%$	Categorie 4 voor chronische toxiciteit

(\*) De M-factor wordt toegelicht in punt 4.1.3.5.5.5.

## 4.1.3.5.5. Mengsels met zeer toxische bestanddelen

4.1.3.5.5.1. Bestanddelen die tot categorie 1 voor acute of chronische toxiciteit behoren en toxisch zijn bij lagere waarden dan 1 mg/l, dragen bij tot de toxiciteit van het mengsel, zelfs in lage concentratie, en hieraan wordt bij de toepassing van de optelmethode normaal een groter gewicht toegekend. Wanneer een mengsel bestanddelen bevat die in categorie 1 voor acute of chronische toxiciteit zijn ingedeeld, wordt een van de volgende werkwijzen gevolgd:

- de in de punten 4.1.3.5.5.3 en 4.1.3.5.5.4 beschreven gefaseerde aanpak wordt gevolgd, waarbij een gewogen som wordt berekend door de concentraties van de bestanddelen in categorie 1 voor acute en chronische toxiciteit met een factor te vermenigvuldigen, en worden de concentraties niet gewoon bij elkaar opgeteld. Dit betekent dat de concentratie van „categorie 1 voor acute toxiciteit” in de linkerkolom van tabel 4.1.1 en de concentratie voor „categorie 1 voor chronische toxiciteit” in de linkerkolom van tabel 4.1.2 worden vermenigvuldigd met een passende vermenigvuldigingsfactor. Deze factor hangt overeenkomstig tabel 4.1.3 af van de toxiciteitswaarde. Om een mengsel met bestanddelen van categorie 1 voor acute of chronische toxiciteit met behulp van de optelmethode te kunnen indelen, moet de waarde van de M-factor dus bekend zijn;
- de somformule (zie punt 4.1.3.5.2) wordt toegepast, mits toxiciteitsgegevens beschikbaar zijn voor alle zeer toxische bestanddelen van het mengsel en er overtuigend bewijs is dat alle andere bestanddelen, waaronder die waarvoor geen specifieke gegevens over de acute toxiciteit beschikbaar zijn, weinig of niet toxisch zijn en niet significant tot het milieugevaar van het mengsel bijdragen.

Tabel 4.1.3

**Vermenigvuldigingsfactoren voor zeer toxische bestanddelen van mengsels**

L(E)C <sub>50</sub>	Vermenigvuldigingsfactor (M)
0,1 < L(E)C <sub>50</sub> ≤ 1	1
0,01 < L(E)C <sub>50</sub> ≤ 0,1	10
0,001 < L(E)C <sub>50</sub> ≤ 0,01	100
0,0001 < L(E)C <sub>50</sub> ≤ 0,001	1 000
0,00001 < L(E)C <sub>50</sub> ≤ 0,0001	10 000
(verder met intervalfactor 10)	

4.1.3.6. *Indeling van mengsels met bestanddelen waarover geen bruikbare informatie beschikbaar is*


4.1.3.6.1. Wanneer voor een of meer relevante bestanddelen geen bruikbare informatie over het acute en/of chronische (lange termijn) gevaar voor het aquatisch milieu beschikbaar is, wordt geconstateerd dat het mengsel niet definitief kan worden ingedeeld in een of meer gevarencategorieën. Het mengsel wordt dan uitsluitend op basis van de bekende bestanddelen ingedeeld, met de volgende toevoeging op het veiligheidsinformatieblad: „bevat x procent bestanddelen waarvan het gevaar voor het aquatisch milieu niet bekend is”.

4.1.4. **Voorlichting over de gevaren**



4.1.4.1. Voor stoffen en mengsels die aan de criteria voor indeling in deze gevarenklasse voldoen, worden de in tabel 4.1.4 vermelde etiketteringselementen gebruikt.

Tabel 4.1.4

**Etiketteringselementen voor gevaar voor het aquatisch milieu**

ACUTE TOXICITEIT	
GHS-pictogram	Categorie 1 
Signaalwoord	Waarschuwing
Gevarenaanduiding	H400: Zeer giftig voor in het water levende organismen

ACUTE TOXICITEIT	
	Categorie 1
Voorzorgsmaatregelen i.v.m. reactie	P273
Voorzorgsmaatregelen i.v.m. reactie	P391
Voorzorgsmaatregelen i.v.m. opslag	
Voorzorgsmaatregelen i.v.m. reactie	P501

CHRONISCHE TOXICITEIT				
	Categorie 1	Categorie 2	Categorie 3	Categorie 4
GHS-pictogrammen			Geen pictogram	Geen pictogram
Signaalwoord	Waarschuwing	Geen signaalwoord	Geen signaalwoord	Geen signaalwoord
Gevarenaanduiding	H410: Zeer giftig voor in het water levende organismen, met langdurige gevolgen	H411: Giftig voor in het water levende organismen, met langdurige gevolgen	H412: Schadelijk voor in het water levende organismen, met langdurige gevolgen	H413: Kan langdurige gevolgen voor in het water levende organismen hebben
Voorzorgsmaatregelen i.v.m. reactie	P273	P273	P273	P273
Voorzorgsmaatregelen i.v.m. reactie	P391	P391		
Voorzorgsmaatregelen i.v.m. opslag				
Voorzorgsmaatregelen i.v.m. reactie	P501	P501	P501	P501

5. DEEL 5: AANVULLENDE GEVARENKLASSE VAN DE EU
- 5.1. **Gevaar voor de ozonlaag**
- 5.1.1. **Definities en algemene overwegingen**
- 5.1.1.1. Onder „stoffen die gevaarlijk zijn voor de ozonlaag” worden verstaan stoffen die op basis van de beschikbare gegevens over hun eigenschappen en hun voorspelde of waargenomen gedrag en uiteindelijke plaats en vorm in het milieu een gevaar kunnen vormen voor de structuur en/of werking van de ozonlaag. Hieronder vallen de stoffen die zijn opgenomen in bijlage I bij Verordening (EG) nr. 2037/2000 van het Europees Parlement en de Raad van 29 juni 2000 betreffende de ozonlaag afbrekende stoffen <sup>(1)</sup> en de wijzigingen daarvan.
- 5.1.2. **Indelingscriteria voor stoffen**
- 5.1.2.1. Stoffen worden ingedeeld als gevaarlijk voor de ozonlaag wanneer de beschikbare gegevens over hun eigenschappen en hun voorspelde of waargenomen gedrag en uiteindelijke plaats en vorm in het milieu uitwijzen dat zij een gevaar kunnen vormen voor de structuur en/of werking van de ozonlaag.
- 5.1.3. **Indelingscriteria voor mengsels**
- 5.1.3.1. Mengsels worden overeenkomstig tabel 5.1 ingedeeld als gevaarlijk voor de ozonlaag op basis van de afzonderlijke concentratie van de als gevaarlijk voor de ozonlaag ingedeeld stoffen die zij bevatten.

Tabel 5.1

**Algemene concentratiegrenzen voor als gevaarlijk voor de ozonlaag ingedeelde stoffen (in een mengsel) waarbij het mengsel als gevaarlijk voor de ozonlaag wordt ingedeeld**

Indeling van de stof	Indeling van het mengsel
Gevaarlijk voor de ozonlaag	C ≥ 0,1 %

- 5.1.4. **Voorlichting over de gevaren**
- 5.1.4.1. Voor stoffen en mengsels die aan de criteria voor indeling in deze gevarenklasse voldoen, worden de in tabel 5.2 vermelde etiketteringselementen gebruikt.

Tabel 5.2

**Etiketteringselementen voor gevaar voor de ozonlaag**

Symbool/pictogram	
Signaalwoord	Gevaarlijk
Gevarenaanduiding	EUH059: Gevaarlijk voor de ozonlaag
Voorzorgsmaatregelen	P273 P501

<sup>(1)</sup> PB L 244 van 29.9.2000, blz. 1

## BIJLAGE II

**SPECIALE VOORSCHRIFTEN VOOR DE ETIKETTERING EN VERPAKKING VAN BEPAALDE STOFFEN EN MENGSELS**

De bijlage bestaat uit vijf delen.

- deel 1 bevat speciale voorschriften voor de etikettering van bepaalde ingedeelde stoffen en mengsels;
- deel 2 bevat de voorschriften voor nadere gevarenaanduidingen die op het etiket van bepaalde mengsels moeten worden aangebracht
- deel 3 bevat speciale voorschriften voor de verpakking;
- deel 4 bevat een speciaal voorschrift voor de etikettering van gewasbeschermingsmiddelen.
- deel 5 bevat een lijst van gevaarlijke stoffen en mengsels waarop artikel 29, lid 3, van toepassing is.

1. DEEL 1: AANVULLENDE GEVARENINFORMATIE

De aanduidingen in de punten 1.1 en 1.2 worden overeenkomstig artikel 25, lid 1, toegekend aan stoffen en mengsels die vanwege materiële, gezondheids- of milieugevaren worden ingedeeld.

1.1. **Materiële eigenschappen**

1.1.1. **EUH001 — „In droge toestand ontplofbaar”**

In de handel gebrachte ontplofbare stoffen en mengsels als bedoeld in bijlage I, punt 2.1, die vochtig worden gemaakt met water of alcohol of met andere stoffen worden verdund om hun explosieve eigenschappen te onderdrukken.

1.1.2. **EUH006 — „Ontplofbaar met en zonder lucht”**

Stoffen en mengsels die bij kamertemperatuur niet stabiel zijn, bijvoorbeeld acetyleen.

1.1.3. **EUH014 — „Reageert heftig met water”**

Stoffen en mengsels die heftig met water reageren, bijvoorbeeld acetylchloride, alkalimetalen, titaantetrachloride.

1.1.4. **EUH018 — „Kan bij gebruik een ontvlambaar/ontplofbaar damp-luchtmengsel vormen”**

Stoffen en mengsels die zelf niet als ontvlambaar zijn ingedeeld maar die ontvlambare/ontplofbare damp-luchtmengsels kunnen vormen. Voor stoffen kan dit het geval zijn bij gehalogeneerde koolwaterstoffen en voor mengsels kan dit het geval zijn als gevolg van een vluchtig ontvlambaar bestanddeel of als gevolg van het ontsnappen van een vluchtig niet-ontvlambaar bestanddeel.

1.1.5. **EUH019 — „Kan ontplofbare peroxiden vormen”**

Stoffen en mengsels die tijdens opslag peroxiden kunnen vormen, bijvoorbeeld diethylether, 1,4-dioxaan.

1.1.6. **EUH044 — „Ontploffingsgevaar bij verwarming in afgesloten toestand”**

Stoffen en mengsels, als zodanig volgens punt 2.1 van bijlage I niet als ontplofbaar ingedeeld, die echter in de praktijk bij verhitting in voldoende afgesloten toestand explosief gedrag kunnen vertonen. Zo zullen met name bepaalde stoffen die bij verhitting in een stalen vat explosief ontleden, dit in een minder stevige verpakking niet doen.

**1.2. Gezondheidseigenschappen****1.2.1. EUH029 — „Vormt giftig gas in contact met water”**

Stoffen en mengsels die in contact met water of vochtige lucht een mogelijkerewijs gevaarlijke hoeveelheid gas dat voor acute toxiciteit is ingedeeld in categorie 1, 2 of 3 ontwikkelen, bijvoorbeeld aluminiumfosfide, fosforpentasulfide.

**1.2.2. EUH031 — „Vormt giftig gas in contact met zuren”**

Stoffen en mengsels die met zuren reageren en daarbij een gevaarlijke hoeveelheid gas dat voor acute toxiciteit is ingedeeld in categorie 3 ontwikkelen, bijvoorbeeld natriumhypochloriet, bariumpolysulfide.

**1.2.3. EUH032 — „Vormt zeer giftig gas in contact met zuren”**

Stoffen en mengsels die met zuren reageren en daarbij een gevaarlijke hoeveelheid gas dat voor acute toxiciteit is ingedeeld in categorie 1 of 2 ontwikkelen, bijvoorbeeld cyaniden, natriumazide.

**1.2.4. EUH066 — „Herhaalde blootstelling kan een droge of een gebarsten huid veroorzaken”**

Stoffen en preparaten die reden kunnen geven tot bezorgdheid als gevolg van droge huid, schilferen of kloven maar niet voldoen aan de criteria voor huidirritatie in bijlage I, punt 3.2, op basis van:

- waarnemingen, of
- relevante aanwijzingen betreffende hun voorspelde effecten op de huid.

**1.2.5. EUH070 — „Giftig bij oogcontact”**

Stoffen of mengsels waarbij een oogirritatietest duidelijk wijst op systemische toxiciteit of leidt tot sterfte bij de proefdieren en dit waarschijnlijk wordt veroorzaakt door opname van de stof of het mengsel via de slijmvliezen van de ogen. De vermelding wordt ook gebruikt als er aanwijzingen zijn voor het optreden van systemische toxiciteit na oogcontact bij mensen.

De vermelding wordt ook gebruikt als een stof of mengsel een andere stof bevat die hiervoor is geëtiketteerd, als de concentratie van deze stof gelijk is aan of groter dan 0,1 %, tenzij anders aangegeven in deel 3 van bijlage VI.

**1.2.6. EUH071 — „Bijtend voor de luchtwegen”**

Stoffen en mengsels waarvoor gegevens beschikbaar zijn waaruit blijkt dat de toxiciteit, naast de indeling voor toxiciteit bij inademing, berust op een bijtende werking, overeenkomstig bijlage I, punt 3.1.2.3.3 en noot 1 van tabel 3.1.3.

Stoffen en mengsels waarvoor, naast de indeling voor huidcorrosie, geen testgegevens over acute toxiciteit bij inademing beschikbaar zijn en die kunnen worden ingeademd.

**2. DEEL 2: SPECIALE VOORSCHRIFTEN VOOR AANVULLENDE ETIKETTERINGSELEMENTEN VOOR BEPAALDE MENGSELS**

De vermeldingen in de punten 2.1 tot en met 2.10 worden toegekend aan mengsels overeenkomstig artikel 25, lid 6.

**2.1. Loodhoudende mengsels**

Op het etiket van de verpakking van verven en vernissen met een volgens ISO-norm 6503/1984 vastgesteld totaal loodgehalte van meer dan 0,15 % (uitgedrukt in gewicht van het metaal) van het totale gewicht van het mengsel, wordt de volgende vermelding aangebracht:

EUH201 — „Bevat lood. Mag niet worden gebruikt voor voorwerpen waarin kinderen kunnen bijten of waaraan kinderen kunnen zuigen.”

Bij verpakkingen met een inhoud van minder dan 125 ml luidt de vermelding als volgt:

EUH201A — „Let op! Bevat lood.”.

**2.2. Mengsels die cyanoacrylaat bevatten**

Op het etiket van de verpakking die lijm op basis van cyanoacrylaat direct omsluit, wordt de volgende vermelding aangebracht:

EUH202 — „Cyanoacrylaat. Gevaarlijk. Kleeft binnen enkele seconden huid en oogleden aan elkaar. Buiten het bereik van kinderen houden.”.

Bij de verpakking dienen passende veiligheidsaanbevelingen te worden gevoegd.

**2.3. Cement en cementmengsels**

Tenzij cement of cementmengsels al zijn ingedeeld en geëtiketteerd als sensibiliserende stof met de gevarenaanduiding H317, „Kan een allergische huidreactie veroorzaken”, wordt op het etiket van de verpakking van cement en cementmengsels met een hoeveelheid oplosbaar zeswaardig chroom van meer dan 0,0002 % van het totale drooggewicht van het cement de volgende vermelding aangebracht:

EUH203 — „Bevat zeswaardig chroom. Kan een allergische reactie veroorzaken.”

Indien reductiemiddelen worden gebruikt, wordt op de verpakking van het cement of de cementmengsels de verpakkingsdatum vermeld en informatie gegeven over de juiste opslagomstandigheden en opslagduur om de activiteit van het reductiemiddel in stand te houden en het gehalte aan oplosbaar zeswaardig chroom onder de 0,0002 % te houden.

**2.4. Mengsels die isocyanaten bevatten**

Tenzij dit al op het etiket van de verpakking van mengsels die isocyanaten (monomeer, oligomeer, prepolymeer enz., als zodanig of in een mengsel) bevatten, is aangegeven, wordt de volgende vermelding aangebracht:

EUH204 — „Bevat isocyanaten. Kan een allergische reactie veroorzaken.”

**2.5. Mengsels die epoxyverbindingen met een gemiddeld molecuulgewicht van ten hoogste 700 bevatten**

Tenzij dit al op het etiket van de verpakking van mengsels die epoxyverbindingen met een gemiddeld molecuulgewicht van 700 of lager bevatten, is aangegeven, wordt de volgende vermelding aangebracht:

EUH205 — „Bevat epoxyverbindingen. Kan een allergische reactie veroorzaken.”

**2.6. Aan het grote publiek verkochte mengsels die actief chloor bevatten**

Op het etiket van de verpakking van preparaten die meer dan 1 % actief chloor bevatten, wordt de volgende vermelding aangebracht:

EUH206 — „Let op! Niet in combinatie met andere producten gebruiken; er kunnen gevaarlijke gassen (chloor) vrijkomen.”

**2.7. Mengsels die cadmium(legeringen) bevatten en die bestemd zijn om te worden gebruikt voor het lassen en solderen**

Op het etiket van de verpakking van dergelijke mengsels wordt de volgende vermelding aangebracht:

EUH207 — „Let op! Bevat cadmium. Bij het gebruik ontwikkelen zich gevaarlijke dampen. Zie de aanwijzingen van de fabrikant. Neem de veiligheidsvoorschriften in acht.”

**2.8. Niet als sensibiliserend ingedeelde mengsels die ten minste één sensibiliserende stof bevatten**

Op het etiket van de verpakking van mengsels die ten minste één als sensibiliserend ingedeelde stof bevatten in een concentratie gelijk aan of groter dan 0,1 % of in een concentratie gelijk aan of groter dan die welke in een specifieke noot betreffende deze stof in bijlage VI, deel 3, is aangegeven, wordt de volgende vermelding aangebracht:

EUH208 — „Bevat (naam van de sensibiliserende stof). Kan een allergische reactie veroorzaken.”

## 2.9. Vloeibare mengsels die gehalogeneerde koolwaterstoffen bevatten

Op het etiket van de verpakking van vloeibare mengsels die geen vlammpunt of een vlammpunt tussen 60 en 93 °C hebben en die een gehalogeneerde koolwaterstof en meer dan 5 % licht ontvlambare of ontvlambare stoffen bevatten, wordt een van de volgende vermeldingen aangebracht, al naar gelang het om licht ontvlambare of ontvlambare stoffen gaat:

EUH209 — „Kan bij gebruik licht ontvlambaar worden” of

EUH209A — „Kan bij gebruik ontvlambaar worden”

## 2.10. Niet voor het grote publiek bestemde mengsels

Op het etiket van mengsels die niet als gevaarlijk zijn ingedeeld maar die de volgende stoffen bevatten:

- 0,1 % of meer van een stof die is ingedeeld als gevoelig voor de huid categorie 1, sensibiliserend voor de luchtwegen categorie 1 of kankerverwekkend van categorie 2; of
- 0,1 % of meer van een stof die is ingedeeld als giftig voor de voortplanting van categorie 1A, 1B of 2, of voor effecten op of via lactatie; of
- een of meer stoffen in een afzonderlijke concentratie van  $\geq 1$  gewichtsprocent voor niet-gasvormige mengsels en van  $\geq 0,2$  volumepercent voor gasvormige mengsels die
  - zijn ingedeeld wegens andere gevaren voor de gezondheid of het milieu; of
  - waarvoor in de Gemeenschap grenswaarden voor beroepsmatige blootstelling zijn vastgesteld.

wordt de volgende vermelding aangebracht:

EUH210 — „Veiligheidsinformatieblad op verzoek verkrijgbaar”.

## 2.11. Aerosolen

Opgemerkt zij dat aerosolen ook onderworpen zijn aan de bepalingen voor het kenmerken overeenkomstig punt 2.2 en punt 2.3 van de bijlage bij Richtlijn 75/324/EEG.

## 3. DEEL 3: SPECIALE VERPAKKINGSVOORSCHRIFTEN

### 3.1. Voorschriften voor kinderveilige sluitingen

#### 3.1.1. Verpakkingen die van een kinderveilige sluiting voorzien moeten zijn

- 3.1.1.1. Verpakkingen van welke inhoud ook die een stof of een mengsel bevatten die voor het grote publiek bestemd zijn en ingedeeld zijn voor acute toxiciteit van de categorieën 1 t/m 3, STOT bij eenmalige blootstelling van categorie 1, STOT bij herhaalde blootstelling van categorie 1 of huidcorrosie van categorie 1, worden van een kinderveilige sluiting voorzien.
- 3.1.1.2. Verpakkingen van welke inhoud ook die een stof of een mengsel bevatten die voor het grote publiek bestemd zijn en die aspiratiegevaar opleveren en zijn ingedeeld overeenkomstig bijlage I, punt 3.10.2 en 3.10.3, en geëtiketteerd overeenkomstig bijlage I, deel 3, punt 3.10.4.1, met uitzondering van stoffen en mengsels die in een spuitbus of in een houder met een vaste verstuiver in de handel worden gebracht, worden voorzien van een kinderveilige sluiting.
- 3.1.1.3. Als in een stof of een mengsel een of meer van de hieronder genoemde stoffen voorkomen in een concentratie gelijk aan of groter dan de voor elke stof vermelde maximumconcentratie, en deze stof of dit mengsel voor het grote publiek bestemd is, wordt de verpakking, van welke inhoud ook, van een kinderveilige sluiting voorzien.

Nr.	Identificatie van de stof			Maximumconcentratie
	CAS-nr.	Naam	EG-nr.	
1	67-56-1	methanol	200-659-6	$\geq 3$ %
2	75-09-2	dichloormethaan	200-838-9	$\geq 1$ %



### 3.1.2. **Hersluitbare verpakkingen**

Kinderveilige sluitingen van hersluitbare verpakkingen moeten voldoen aan EN ISO-norm 8317, zoals gewijzigd, inzake „Kinderveilige verpakkingen — Eisen en beproevingsmethoden ten aanzien van hersluitbare verpakkingen”, vastgesteld door het Europees Comité voor Normalisatie (CEN) en de Internationale Organisatie voor Normalisatie (ISO).

### 3.1.3. **Niet-hersluitbare verpakkingen**

Kinderveilige sluitingen van niet-hersluitbare verpakkingen moeten voldoen aan CEN-norm EN-862, zoals gewijzigd, inzake „Verpakkingen — Kinderveilige verpakkingen — Eisen en beproevingsmethoden ten aanzien van niet-hersluitbare verpakkingen voor niet-farmaceutische producten”, vastgesteld door het Europees Comité voor Normalisatie (CEN).

### 3.1.4. **Opmerkingen**

3.1.4.1. Alleen laboratoria die aan de norm EN ISO/IEC 17025, met wijzigingen, voldoen, zijn bevoegd na te gaan of aan bovenstaande normen is voldaan.

#### 3.1.4.2. *Specifieke gevallen*

Indien het duidelijk is dat een verpakking in voldoende mate veilig is voor kinderen omdat kinderen niet bij de inhoud ervan kunnen komen zonder de hulp van een stuk gereedschap, hoeft de test als bedoeld in onder punt 3.1.2 of 3.1.3 niet te worden uitgevoerd.

In alle andere gevallen en indien er voldoende redenen zijn om aan de doeltreffendheid van de kinderveilige sluiting te twijfelen, kan de nationale instantie van degene die verantwoordelijk is voor het in de handel brengen, een certificaat eisen dat is afgegeven door een laboratorium als bedoeld onder punt 3.1.4.1, waarin wordt verklaard dat:

- het toegepaste type sluiting zodanig is dat het niet noodzakelijk is om de onder punt 3.1.2 of 3.1.3 bedoelde test uit te voeren, of
- de sluiting beproefd en in overeenstemming met bovengenoemde normen bevonden is.

## 3.2. **Tastbare gevarenaanduidingen**

### 3.2.1. **Verpakkingen die van een tastbare gevarenaanduiding voorzien moeten zijn**

Als stoffen of mengsels voor het grote publiek bestemd zijn en ingedeeld zijn voor acute toxiciteit, huidcorrosie, mutageniteit in geslachtscellen van categorie 2, kankerverwekkendheid van categorie 2, voortplantingstoxiciteit van categorie 2, sensibilisatie van luchtwegen, STOT van categorie 1 en 2, aspiratiegevaar of omdat het ontvlambare gassen, vloeistoffen of vaste stoffen van de categorieën 1 en 2 zijn, wordt de verpakking, van welke inhoud ook, van een tastbare gevarenaanduiding voorzien.

### 3.2.2. **Bepalingen betreffende tastbare gevaarsaanduidingen**

3.2.2.1. Deze bepaling is niet van toepassing op aerosolen die alleen maar als „zeer licht ontvlambare aerosol” of „licht ontvlambare aerosol” ingedeeld en geëtiketteerd zijn.

3.2.2.2. De technische specificaties voor tastbare gevarenaanduidingen moeten voldoen aan EN ISO-norm 11683, zoals gewijzigd, inzake „Verpakkingen — Tastbare gevaarsaanduidingen — Eisen”.

## 4. DEEL 4: SPECIAAL VOORSCHRIFT VOOR DE ETIKETTERING VAN GEWASBESCHERMINGSMIDDELEN

Onverminderd de overeenkomstig artikel 16 van Richtlijn 91/414/EEG en bijlage V bij die richtlijn te verstrekken informatie moet in de etikettering van onder die richtlijn vallende gewasbeschermingsmiddelen de volgende zin worden opgenomen:

EUH401 — „Volg de gebruiksaanwijzing om gevaar voor de menselijke gezondheid en het milieu te voorkomen”.

## 5. DEEL 5: LIJST VAN GEVAARLIJKE STOFFEN EN MENGSELS WAAROP ARTIKEL 29, LID 3, VAN TOEPASSING IS

- gemengd cement klaar voor gebruik en beton in natte toestand

## BIJLAGE III

## LIJST VAN GEVARENAANDUIDINGEN, AANVULLENDE GEVARENAANDUIDINGEN EN AANVULLENDE ETIKETTERINGSELEMENTEN

## 1. Deel 1: gevarenaanduidingen

De gevarenaanduidingen worden gebruikt overeenkomstig de delen 2, 3 en 4 van bijlage I.

Tabel 1.1

## Gevarenaanduidingen voor materiële gevaren

H200 <sup>(1)</sup>	Taal	2.1 — Ontplobbare stoffen, instabiel
	BG	Нестабилен експлозив.
	ES	Explosivo inestable.
	CS	Nestabilní výbušnina.
	DA	Ustabilt eksplosiv.
	DE	Instabil, explosiv.
	ET	Ebarüisiv lõhkeaine.
	EL	Ασταθή εκρηκτικά.
	EN	Unstable explosives.
	FR	Explosif instable.
	GA	Pléascáin éagobhsaí.
	IT	Esplosivo instabile.
	LV	Nestabili sprādzienbīstami materiāli.
	LT	Nestabilios sprogiuos medžiagos.
	HU	Instabil robbanóanyagok.
	MT	Splussivi instabbli.
	NL	Instabiele ontplofbare stof.
	PL	Materiały wybuchowe niestabilne.
	PT	Explosivo instável.
	RO	Exploziv instabil.
	SK	Nestabilné výbušniny.
	SL	Nestabilni eksplozivi.
	FI	Epästabiili räjähdde.
	SV	Instabilt explosivt.

<sup>(1)</sup> Het coderingssysteem voor gevarenaanduidingen van het GHS is nog onderwerp van discussie in de VN-commissie van deskundigen en zal dus wellicht nog worden gewijzigd.

H201	Taal	2.1 — Ontplobbare stoffen, subklasse 1.1
	BG	Експлозив; опасност от масова експлозия.
	ES	Explosivo; peligro de explosión en masa.
	CS	Výbušnina; nebezpečí masivního výbuchu.

H201	Taal	2.1 — Ontplobbare stoffen, subklasse 1.1
	DA	Eksplosiv, masseeksplosionsfare.
	DE	Explosiv, Gefahr der Massenexplosion.
	ET	Plahvatusohtlik; massiplahvatusoht.
	EL	Εκρηκτικό· κίνδυνος μαζικής έκρηξης.
	EN	Explosive; mass explosion hazard.
	FR	Explosif; danger d'explosion en masse.
	GA	Pléascach; guais mhórphléasctha.
	IT	Esplosivo; pericolo di esplosione di massa.
	LV	Sprādzienbīstams; masveida sprādzienbīstamība.
	LT	Sprogios medžiagos, kelia masinio sprogimo pavojų.
	HU	Robbanóanyag; teljes tömeg felrobbanásának veszélye.
	MT	Splussiv; periklu li jisplođu kollha f'daqqa.
	NL	Ontplobbare stof; gevaar voor massa-explosie.
	PL	Materiał wybuchowy; zagrożenie wybuchem masowym.
	PT	Explosivo; perigo de explosão em massa.
	RO	Exploziv; pericol de explozie în masă.
	SK	Výbušnina, nebezpečenstvo rozsiahleho výbuchu.
	SL	Eksplozivno; nevarnost eksplozije v masi.
	FI	Räjähde; massaräjähdysvaara.
	SV	Explosivt. Fara för massexplosion.

H202	Taal	2.1 — Ontplobbare stoffen, subklasse 1.2
	BG	Експлозив; сериозна опасност от разпръскване.
	ES	Explosivo; grave peligro de proyección.
	CS	Výbušnina; vážné nebezpečí zasažení částicemi.
	DA	Eksplosiv, alvorlig fare for udslyngning af fragmenter.
	DE	Explosiv; große Gefahr durch Splitter, Spreng- und Wurfstücke.
	ET	Plahvatusohtlik; suur laialipaiskumisoht.
	EL	Εκρηκτικό· σοβαρός κίνδυνος εκτόξευσης.
	EN	Explosive, severe projection hazard.
	FR	Explosif; danger sérieux de projection.
	GA	Pléascach, guais throm teilgin.
	IT	Esplosivo; grave pericolo di proiezione.
	LV	Sprādzienbīstams; augsta izmetes bīstamība.
	LT	Sprogios medžiagos, kelia didelį išsvaidymo pavojų.
	HU	Robbanóanyag; kivetés súlyos veszélye.
	MT	Splussiv, periklu serju ta' projezzjoni.
	NL	Ontplobbare stof, ernstig gevaar voor scherfwerking.

H202	Taal	2.1 — Ontploffbare stoffen, subklasse 1.2
	PL	Materiał wybuchowy, poważne zagrożenie rozrzutem.
	PT	Explosivo, perigo grave de projecções.
	RO	Exploziv; pericol grav de proiectare.
	SK	Výbušnina, závažné nebezpečenstvo rozletenia úlomkov.
	SL	Eksplzivno, velika nevarnost za nastanek drobcev.
	FI	Räjähde; vakava sirpalevaara.
	SV	Explosivt. Allvarlig fara för splitter och kaststycken.
H203	Taal	2.1 — Ontploffbare stoffen, subklasse 1.3
	BG	Експлозив; опасност от пожар, взрив или разпръскване.
	ES	Explosivo; peligro de incendio, de onda expansiva o de proyección.
	CS	Výbušnina; nebezpečí požáru, tlakové vlny nebo zasažení částicemi.
	DA	Eksplisiv, fare for brand, eksplosion eller udslyngning af fragmenter.
	DE	Explosiv; Gefahr durch Feuer, Luftdruck oder Splitter, Spreng- und Wurfstücke.
	ET	Plahvatusohtlik; süttimis-, plahvatus- või laialipaiskumisoht.
	EL	Εκρηκτικό κίνδυνος πυρκαγιάς, ανατίναξης ή εκτόξευσης.
	EN	Explosive; fire, blast or projection hazard.
	FR	Explosif; danger d'incendie, d'effet de souffle ou de projection.
	GA	Pléascach; guais dóiteáin, phléasctha nó teilgin.
	IT	Esplosivo; pericolo di incendio, di spostamento d'aria o di proiezione.
	LV	Sprādzienbīstams; uguns, triecienviļņa vai izmetes bīstamība.
	LT	Sprogios medžiagos, kelia gaisro, sprogimo arba išsvaidymo pavojų.
	HU	Robbanóanyag; tűz, robbanás vagy kivetés veszélye.
	MT	Splussiv; periklu ta' nar, blast jew projezzjoni.
	NL	Ontploffbare stof; gevaar voor brand, luchtdrukwerking of scherfwerking.
	PL	Materiał wybuchowy; zagrożenie pożarem, wybuchem lub rozrzutem.
	PT	Explosivo; perigo de incêndio, sopro ou projecções.
	RO	Exploziv; pericol de incendiu, detonare sau proiectare.
	SK	Výbušnina, nebezpečenstvo požiaru, výbuchu alebo rozletenia úlomkov.
	SL	Eksplzivno; nevarnost za nastanek požara, udarnega vala ali drobcev.
	FI	Räjähde; palo-, räjähdys- tai sirpalevaara.
	SV	Explosivt. Fara för brand, tryckvåg eller splitter och kaststycken.
H204	Taal	2.1 — Ontploffbare stoffen, subklasse 1.4
	BG	Опасност от пожар или разпръскване.
	ES	Peligro de incendio o de proyección.
	CS	Nebezpečí požáru nebo zasažení částicemi.
	DA	Fare for brand eller udslyngning af fragmenter.

H204	Taal	2.1 — Ontplobbare stoffen, subklasse 1.4
	DE	Gefahr durch Feuer oder Splitter, Spreng- und Wurfstücke.
	ET	Süttimis- või laialipaiskumisoht.
	EL	Κίνδυνος πυρκαγιάς ή εκτόξευσης.
	EN	Fire or projection hazard.
	FR	Danger d'incendie ou de projection.
	GA	Guais dóiteáin nó teilgin.
	IT	Pericolo di incendio o di proiezione.
	LV	Uguns vai izmetes bīstamība.
	LT	Gaisro arba išsvaidymo pavojus.
	HU	Tűz vagy kivetés veszélye.
	MT	Periklu ta' nar jew ta' projezzjoni.
	NL	Gevaar voor brand of scherfwerking.
	PL	Zagrożenie pożarem lub rozrzutem.
	PT	Perigo de incêndio ou projecções.
	RO	Pericol de incendiu sau de proiectare.
	SK	Nebezpečnosť požiaru alebo rozletenia úlomkov.
	SL	Nevarnost za nastanek požara ali drobcev.
	FI	Palo- tai sirpalevaara.
	SV	Fara för brand eller splitter och kaststycken.
H205	Taal	2.1 — Ontplobbare stoffen, subklasse 1.5
	BG	Може да предизвика масова експлозия при пожар.
	ES	Peligro de explosión en masa en caso de incendio.
	CS	Při požáru může způsobit masivní výbuch.
	DA	Fare for masseeksplosion ved brand.
	DE	Gefahr der Massenexplosion bei Feuer.
	ET	Süttimise korral massiplahvatusoht.
	EL	Κίνδυνος μαζικής έκρηξης σε περίπτωση πυρκαγιάς.
	EN	May mass explode in fire.
	FR	Danger d'explosion en masse en cas d'incendie.
	GA	D'fhéadfadh sé go mbeadh mórfhléascadh i dtine.
	IT	Pericolo di esplosione di massa in caso d'incendio.
	LV	Ugunī var masveidā eksplodēt.
	LT	Per gaisrą gali sukelti masinį sproginimą.
	HU	Tűz hatására a teljes tömeg felrobbanhat.
	MT	Jista' jispłodi f'daqqa fin-nar.
	NL	Gevaar voor massa-explosie bij brand.
	PL	Może wybuchać masowo w przypadku pożaru.

H205	Taal	2.1 — Ontplobbare stoffen, subklasse 1.5
	PT	Perigo de explosão em massa em caso de incêndio.
	RO	Pericol de explozie în masă în caz de incendiu.
	SK	Nebezpečnosť rozsiahleho výbuchu pri požiari.
	SL	Pri požaru lahko eksplodira v masi.
	FI	Koko massa voi räjähtää tulessa.
	SV	Fara för massexplosion vid brand.
H220	Taal	2.2 — Ontvlambare gassen, gevarencategorie 1
	BG	Изключително запалим газ.
	ES	Gas extremadamente inflamable.
	CS	Extrémně hořlavý plyn.
	DA	Yderst brandfarlig gas.
	DE	Extrem entzündbares Gas.
	ET	Eriti tuleohtlik gaas.
	EL	Εξαιρετικά εύφλεκτο αέριο.
	EN	Extremely flammable gas.
	FR	Gaz extrêmement inflammable.
	GA	Gás fíor-inadhainte.
	IT	Gas altamente infiammabile.
	LV	Īpaši viegli uzliesmojoša gāze.
	LT	Ypač degios dujos.
	HU	Rendkívül tűzveszélyes gáz.
	MT	Gass li jaqbad malajr hafna.
	NL	Zeer licht ontvlambaar gas.
	PL	Skrajnie łatwopalny gaz.
	PT	Gás extremamente inflamável.
	RO	Gaz extrem de inflamabil.
	SK	Mimoriadne horľavý plyn.
	SL	Zelo lahko vnetljiv plin.
	FI	Erittäin helposti syttyvä kaasu.
	SV	Extremt brandfarlig gas.
H221	Taal	2.2 — Ontvlambare gassen, gevarencategorie 2
	BG	Запалим газ.
	ES	Gas inflamable.
	CS	Hořlavý plyn.
	DA	Brandfarlig gas.
	DE	Entzündbares Gas.

H221	Taal	2.2 — Ontvlambare gassen, gevarencategorie 2
	ET	Tuleohtlik gaas.
	EL	Εύφλεκτο αέριο.
	EN	Flammable gas.
	FR	Gaz inflammable.
	GA	Gás inadhainte.
	IT	Gas infiammabile.
	LV	Uzliesmojoša gāze.
	LT	Degios dujos.
	HU	Tűzveszélyes gáz.
	MT	Gass li jaqbad.
	NL	Ontvlambaar gas.
	PL	Gaz łatwopalny.
	PT	Gás inflamável.
	RO	Gaz inflamabil.
	SK	Horľavý plyn.
	SL	Vnetljiv plin.
	FI	Syttyvä kaasu.
	SV	Brandfarlig gas.

H222	Taal	2.3 — Ontvlambare aerosolen, gevarencategorie 1
	BG	Изключително запалим аерозол.
	ES	Aerosol extremadamente inflamable.
	CS	Extrémně hořlavý aerosol.
	DA	Yderst brandfarlig aerosol.
	DE	Extrem entzündbares Aerosol.
	ET	Eriti tuleohtlik aerosool.
	EL	Εξαιρετικά εύφλεκτο αερόλυμα.
	EN	Extremely flammable aerosol.
	FR	Aérosol extrêmement inflammable.
	GA	Aerasól fíor-inadhainte.
	IT	Aerosol altamente infiammabile.
	LV	Īpaši viegli uzliesmojošs aerosols.
	LT	Ypač degus aerosolis.
	HU	Rendkívül tűzveszélyes aeroszol.
	MT	Aerosol li jaqbad malajr hafna.
	NL	Zeer licht ontvlambare aerosol.
	PL	Skrajnie łatwopalny aerosol.
	PT	Aerossol extremamente inflamável.

H222	Taal	2.3 — Ontvlambare aerosolen, gevarencategorie 1
	RO	Aerosol extrem de inflamabil.
	SK	Mimoriadne horľavý aerosól.
	SL	Zelo lahko vnetljiv aerosol.
	FI	Erittäin helposti syttyvä aerosoli.
	SV	Extremt brandfarlig aerosol.

H223	Taal	2.3 — Ontvlambare aerosolen, gevarencategorie 2
	BG	Запалим аерозол.
	ES	Aerosol inflamable.
	CS	Hořlavý aerosol.
	DA	Brandfarlig aerosol.
	DE	Entzündbares Aerosol.
	ET	Tulehtlik aerosool.
	EL	Εύφλεκτο αερόλυμα.
	EN	Flammable aerosol.
	FR	Aérosol inflammable.
	GA	Aerasól inadhaite.
	IT	Aerosol infiammabile.
	LV	Uzliesmojošs aerosols.
	LT	Degus aerosolis.
	HU	Tűzveszélyes aeroszol.
	MT	Aerosol li jaqbad.
	NL	Ontvlambare aerosol.
	PL	Aerozol łatwopalny.
	PT	Aerossol inflamável.
	RO	Aerosol inflamabil.
	SK	Horľavý aerosól.
	SL	Vnetljiv aerosol.
	FI	Syttyvä aerosoli.
	SV	Brandfarlig aerosol.

H224	Taal	2.6 — Ontvlambare vloeistoffen, gevarencategorie 1
	BG	Изключително запалими течност и пари.
	ES	Líquido y vapores extremadamente inflamables.
	CS	Extrémně hořlavá kapalina a páry.
	DA	Yderst brandfarlig væske og damp.
	DE	Flüssigkeit und Dampf extrem entzündbar.
	ET	Eriti tulehtlik vedelik ja aur.



H224	Taal	2.6 — Ontvlambare vloeistoffen, gevarencategorie 1
	EL	Υγρό και ατμοί εξαιρετικά εύφλεκτα.
	EN	Extremely flammable liquid and vapour.
	FR	Liquide et vapeurs extrêmement inflammables.
	GA	Leacht fíor-inadhainte agus gal fhíor-inadhainte.
	IT	Liquido e vapori altamente infiammabili.
	LV	Īpaši viegli uzliesmojošs šķidrums un tvaiki.
	LT	Ypač degūs skystis ir garai.
	HU	Rendkívül tűzveszélyes folyadék és gőz.
	MT	Likwidu u fwar li jaqbdu malajr hafna.
	NL	Zeer licht ontvlambare vloeistof en damp.
	PL	Skrajnie łatwopalna ciecz i pary.
	PT	Líquido e vapor extremamente inflamáveis.
	RO	Lichid și vapori extrem de inflamabili.
	SK	Mimoriadne horľavá kvapalina a pary.
	SL	Zelo lahko vnetljiva tekočina in hlapi.
	FI	Erittäin helposti syttyvä neste ja höyry.
	SV	Extremt brandfarlig vätska och ånga.
H225	Taal	2.6 — Ontvlambare vloeistoffen, gevarencategorie 2
	BG	Силно запалими течност и пари.
	ES	Líquido y vapores muy inflamables.
	CS	Vysoce hořlavá kapalina a páry.
	DA	Meget brandfarlig væske og damp.
	DE	Flüssigkeit und Dampf leicht entzündbar.
	ET	Väga tuleohtlik vedelik ja aur.
	EL	Υγρό και ατμοί πολύ εύφλεκτα.
	EN	Highly flammable liquid and vapour.
	FR	Liquide et vapeurs très inflammables.
	GA	Leacht an-inadhainte agus gal an-inadhainte.
	IT	Liquido e vapori facilmente infiammabili.
	LV	Viegli uzliesmojošs šķidrums un tvaiki.
	LT	Labai degūs skystis ir garai.
	HU	Fokozottan tűzveszélyes folyadék és gőz.
	MT	Likwidu u fwar li jaqbdu malajr hafna.
	NL	Licht ontvlambare vloeistof en damp.
	PL	Wysoce łatwopalna ciecz i pary.
	PT	Líquido e vapor facilmente inflamáveis.
	RO	Lichid și vapori foarte inflamabili.

H225	Taal	2.6 — Ontvlambare vloeistoffen, gevarencategorie 2
	SK	Velmi horľavá kvapalina a pary.
	SL	Lahko vnetljiva tekočina in hlapi.
	FI	Helposti syttyvä neste ja höyry.
	SV	Mycket brandfarlig vätska och ånga.

H226	Taal	2.6 — Ontvlambare vloeistoffen, gevarencategorie 3
	BG	Запалими течност и пари.
	ES	Líquidos y vapores inflamables.
	CS	Hořlavá kapalina a páry.
	DA	Brandfarlig væske og damp.
	DE	Flüssigkeit und Dampf entzündbar.
	ET	Tulehtlik vedelik ja aur.
	EL	Υγρό και ατμοί εύφλεκτα.
	EN	Flammable liquid and vapour.
	FR	Liquide et vapeurs inflammables.
	GA	Leacht inadhainte agus gal inadhainte.
	IT	Liquido e vapori infiammabili.
	LV	Uzliesmojošs šķidrums un tvaiki.
	LT	Degūs skystis ir garai.
	HU	Tűzveszélyes folyadék és gőz.
	MT	Likwidu u fwar li jaqbdu.
	NL	Ontvlambare vloeistof en damp.
	PL	Łatwopalna ciecz i pary.
	PT	Líquido e vapor inflamáveis.
	RO	Lichid și vapori inflamabili.
	SK	Horľavá kvapalina a pary.
	SL	Vnetljiva tekočina in hlapi.
	FI	Syttyvä neste ja höyry.
	SV	Brandfarlig vätska och ånga.

H228	Taal	2.7 — Ontvlambare vaste stoffen, gevarencategorie 1 en 2
	BG	Запалимо твърдо вещество.
	ES	Sólido inflamable.
	CS	Hořlavá tuhá látka.
	DA	Brandfarligt fast stof.
	DE	Entzündbarer Feststoff.
	ET	Tulehtlik tahke aine.
	EL	Εύφλεκτο στερεό.

H228	Taal	2.7 — Ontvlambare vaste stoffen, gevarencategorie 1 en 2
	EN	Flammable solid.
	FR	Matière solide inflammable.
	GA	Solad inadhainte.
	IT	Solido infiammabile.
	LV	Uzliesmojoša cieta viela.
	LT	Degi kietoji medžiaga.
	HU	Tűzveszélyes szilárd anyag.
	MT	Solidu li jaqbad.
	NL	Ontvlambare vaste stof.
	PL	Substancja stała łatwopalna.
	PT	Sólido inflamável.
	RO	Solid inflamabil.
	SK	Horľavá tuhá látka.
	SL	Vnetljiva trdna snov.
	FI	Syttyvä kiinteä aine.
	SV	Brandfarligt fast ämne.
H240	Taal	2.8 — Zelfontledende stoffen en mengsels, type A 2.15 — Organische peroxiden, type A
	BG	Може да предизвика експлозия при нагряване.
	ES	Peligro de explosión en caso de calentamiento.
	CS	Zahřívání může způsobit výbuch.
	DA	Eksplodingsfare ved opvarmning.
	DE	Erwärmung kann Explosion verursachen.
	ET	Kuumenemisel võib plahvatada.
	EL	Η θέρμανση μπορεί να προκαλέσει έκρηξη.
	EN	Heating may cause an explosion.
	FR	Peut exploser sous l'effet de la chaleur.
	GA	D'fhéadfadh téamh a bheith ina chúis le pléascadh.
	IT	Rischio di esplosione per riscaldamento.
	LV	Sakaršana var izraisīt eksploziju.
	LT	Kaitinant gali sprogti.
	HU	Hő hatására robbanhat.
	MT	It-tiżhin jista' jikkawża splużjoni.
	NL	Ontploffingsgevaar bij verwarming.
	PL	Ogrzanie grozi wybuchem.
	PT	Risco de explosão sob a acção do calor.
	RO	Pericol de explozie în caz de încălzire.

H240	Taal	2.8 — Zelfontledende stoffen en mengsels, type A 2.15 — Organische peroxiden, type A
	SK	Zahrievanie môže spôsobiť výbuch.
	SL	Segrevanje lahko povzroči eksplozijo.
	FI	Räjähdysvaarallinen kuumennettaessa.
	SV	Explosivt vid uppvärmning.
H241	Taal	2.8 — Zelfontledende stoffen en mengsels, type B 2.15 — Organische peroxiden, type B
	BG	Може да предизвика пожар или експлозия при нагряване.
	ES	Peligro de incendio o explosión en caso de calentamiento.
	CS	Zahřívání může způsobit požár nebo výbuch.
	DA	Brand- eller eksplosionsfare ved opvarmning.
	DE	Erwärmung kann Brand oder Explosion verursachen.
	ET	Kuumenemisel võib süttida või plahvatada.
	EL	Η θέρμανση μπορεί να προκαλέσει πυρκαγιά ή έκρηξη.
	EN	Heating may cause a fire or explosion.
	FR	Peut s'enflammer ou exploser sous l'effet de la chaleur.
	GA	D'fhéadfadh téamh a bheith ina chúis le dóiteán nó le pléascadh.
	IT	Rischio d'incendio o di esplosione per riscaldamento.
	LV	Sakaršana var izraisīt degšanu vai eksploziju.
	LT	Kaitinant gali sukelti gaisrą arba sprogti.
	HU	Hő hatására meggyulladhat vagy robbanhat.
	MT	It-tishin jista' jikkawża nar jew splużjoni.
	NL	Brand- of ontploffingsgevaar bij verwarming.
	PL	Ogrzanie może spowodować pożar lub wybuch.
	PT	Risco de explosão ou de incêndio sob a acção do calor.
	RO	Pericol de incendiu sau de explozie în caz de încălzire.
	SK	Zahrievanie môže spôsobiť požiar alebo výbuch.
	SL	Segrevanje lahko povzroči požar ali eksplozijo.
	FI	Räjähdys- tai palovaarallinen kuumennettaessa.
	SV	Brandfarligt eller explosivt vid uppvärmning.
H242	Taal	2.8 — Zelfontledende stoffen en mengsels, type C, D, E en F 2.15 — Organische peroxiden, type C, D, E en F
	BG	Може да предизвика пожар при нагряване.
	ES	Peligro de incendio en caso de calentamiento.
	CS	Zahřívání může způsobit požár.
	DA	Brandfare ved opvarmning.
	DE	Erwärmung kann Brand verursachen.
	ET	Kuumenemisel võib süttida.

H242	Taal	2.8 — Zelfontledende stoffen en mengsels, type C, D, E en F 2.15 — Organische peroxiden, type C, D, E en F
	EL	Η θέρμανση μπορεί να προκαλέσει πυρκαγιά.
	EN	Heating may cause a fire.
	FR	Peut s'enflammer sous l'effet de la chaleur.
	GA	D'fhéadfadh téamh a bheith ina chúis le dóiteán.
	IT	Rischio d'incendio per riscaldamento.
	LV	Sakaršana var izraisīt degšanu.
	LT	Kaitinant gali sukelti gaisrą.
	HU	Hő hatására meggyulladhat.
	MT	It-tishin jista' jikkawża nar.
	NL	Brandgevaar bij verwarming.
	PL	Ogrzanie może spowodować pożar.
	PT	Risco de incêndio sob a acção do calor.
	RO	Pericol de incendiu în caz de încălzire.
	SK	Zahrievanie môže spôsobiť požiar.
	SL	Segrevanje lahko povzroči požar.
	FI	Palovaarallinen kuumennettaessa.
	SV	Brandfarligt vid uppvärmning.
H250	Taal	2.9 — Pyrofore vloeistoffen, gevarencategorie 1 2.10 — Pyrofore vaste stoffen, gevarencategorie 1
	BG	Самозапалава се при контакт с въздух.
	ES	Se inflama espontáneamente en contacto con el aire.
	CS	Při styku se vzduchem se samovolně vznítí.
	DA	Selvantænder ved kontakt med luft.
	DE	Entzündet sich in Berührung mit Luft von selbst.
	ET	Kokkupuutel õhuga süttib iseenesest.
	EL	Αυταναφλέγεται εάν εκτεθεί στον αέρα.
	EN	Catches fire spontaneously if exposed to air.
	FR	S'enflamme spontanément au contact de l'air.
	GA	Téann trí thine go spontáineach má nochtar don aer.
	IT	Spontaneamente infiammabile all'aria.
	LV	Spontāni aizdegas saskarē ar gaisu.
	LT	Veikiami oro savaimė užsidega.
	HU	Levegővel érintkezve önmagától meggyullad.
	MT	Jiehu n-nar spontanjament jekk ikun espost għall-arja.
	NL	Vat spontaan vlam bij blootstelling aan lucht.
	PL	Zapala się samorzutnie w przypadku wystawienia na działanie powietrza.
	PT	Risco de inflamação espontânea em contacto com o ar.

H250	Taal	2.9 — Pyrofore vloeistoffen, gevarencategorie 1 2.10 — Pyrofore vaste stoffen, gevarencategorie 1
	RO	Se aprinde spontan, în contact cu aerul.
	SK	Pri kontakte so vzduchuom sa spontánne vznieti.
	SL	Samodejno se vžge na zraku.
	FI	Sytyy itsestään palamaan joutuessaan kosketuksiin ilman kanssa.
	SV	Spontanantänder vid kontakt med luft.
H251	Taal	2.11 — Voor zelfverhitting vatbare stoffen en mengsels, gevarencategorie 1
	BG	Самонагрывашо се: може да се запали.
	ES	Se calienta espontáneamente; puede inflamarse.
	CS	Samovolně se zahřívá: může se vznítit.
	DA	Selvopvarmende, kan selvantænde.
	DE	Selbsterhitzungsfähig; kann in Brand geraten.
	ET	Isekuumenev, võib süttida.
	EL	Αυτοθερμαίνεται: μπορεί να αναφλεγεί.
	EN	Self-heating: may catch fire.
	FR	Matière auto-échauffante; peut s'enflammer.
	GA	Féintéamh: d'fhéadfadh sé dul trí thine.
	IT	Autoriscaldante; può infiammarsi.
	LV	Pašasilstošs; var aizdegties.
	LT	Savaime kaistančios, gali užsidegti.
	HU	Önmelegedő: meggyulladhat.
	MT	Jiſhon waħdu: jista' jieħu n-nar.
	NL	Vatbaar voor zelfverhitting; kan vlam vatten.
	PL	Substancja samonagrzewająca się: może się zapalić.
	PT	Susceptível de auto-aquecimento: risco de inflamação.
	RO	Se autoîncălzește, pericol de aprindere.
	SK	Samovol'ne sa zahrieva; môže sa vznietiť.
	SL	Samosegrevanje: lahko povzroči požar.
	FI	Itsestään kuumeneva; voi syttyä palamaan.
	SV	Självupphettande. Kan börja brinna.
H252	Taal	2.11 — Voor zelfverhitting vatbare stoffen en mengsels, gevarencategorie 2
	BG	Самонагрывашо се в големи количества; може да се запали.
	ES	Se calienta espontáneamente en grandes cantidades; puede inflamarse.
	CS	Ve velkém množství se samovolně zahřívá; může se vznítit.
	DA	Selvopvarmende i store mængder, kan selvantænde.
	DE	In großen Mengen selbsterhitzungsfähig; kann in Brand geraten.
	ET	Suurtes kogustes isekuumenev, võib süttida.

H252	Taal	2.11 — Voor zelfverhitting vatbare stoffen en mengsels, gevarencategorie 2
	EL	Σε μεγάλες ποσότητες αυτοθερμαίνεται: μπορεί να αναφλεγεί.
	EN	Self-heating in large quantities; may catch fire.
	FR	Matière auto-échauffante en grandes quantités; peut s'enflammer.
	GA	Féintéamh ina mhórchainníochtaí; d'fhéadfadh sé dul trí thine.
	IT	Autoriscaldante in grandi quantità; può infiammarsi.
	LV	Lielos apjomos pašasilstošs; var aizdegties.
	LT	Laikant dideliais kiekiais savaimė kaista, gali užsidegti.
	HU	Nagy mennyiségben önmelegedő; meggyulladhat.
	MT	Jiżhon waħdu f'kwantitajiet kbar; jista' jieħu n-nar.
	NL	In grote hoeveelheden vatbaar voor zelfverhitting; kan vlam vatten.
	PL	Substancja samonagrzewająca się w dużych ilościach; może się zapalić.
	PT	Susceptível de auto-aquecimento em grandes quantidades: risco de inflamação.
	RO	Se autoîncălzește, în cantități mari pericol de aprindere.
	SK	Vo veľkých množstvách sa samovoľne zahrieva; môže sa vznietiť.
	SL	Samosegrevanje v velikih količinah; lahko povzroči požar.
	FI	Suurina määrinä itsestään kuumeneva; voi syttyä palamaan.
	SV	Självpufftande i stora mängder. Kan börja brinna.
H260	Taal	2.12 — Stoffen en mengsels die in contact met water ontvlambare gassen ontwikkelen, gevarencategorie 1
	BG	При контакт с вода отделя запалими газове, които могат да се самозапалят.
	ES	En contacto con el agua desprende gases inflamables que pueden inflamarse espontáneamente.
	CS	Při styku s vodou uvolňuje hořlavé plyny, které se mohou samovolně vznítit.
	DA	Ved kontakt med vand udvikles brandfarlige gasser, som kan selvantænde.
	DE	In Berührung mit Wasser entstehen entzündbare Gase, die sich spontan entzünden können.
	ET	Kokkupuutel veega eraldab tuleohtlikke gaase, mis võivad iseenesest süttida.
	EL	Σε επαφή με το νερό ελευθερώνει εύφλεκτα αέρια τα οποία μπορούν να αυτοαναφλεγούν.
	EN	In contact with water releases flammable gases which may ignite spontaneously.
	FR	Dégage au contact de l'eau des gaz inflammables qui peuvent s'enflammer spontanément.
	GA	I dteagmháil le huisce scaoiltear gáis inadhainte a d'fhéadfadh uathadhaint.
	IT	A contatto con l'acqua libera gas infiammabili che possono infiammarsi spontaneamente.
	LV	Nonākot saskarē ar ūdeni, izdala uzliesmojošas gāzes, kas var spontāni aizdegties.
	LT	Kontaktuodami su vandeniu išskiria degias dujas, kurios gali savaimė užsidegti.
	HU	Vízzel érintkezve öngyulladásra hajlamos tűzveszélyes gázokat bocsát ki.
	MT	Meta jmiss ma' l-ilma jerhi gassijiet li jaqbdu li jistgħu jieħdu n-nar spontanjament.
	NL	In contact met water komen ontvlambare gassen vrij die spontaan kunnen ontbranden.
	PL	W kontakcie z wodą uwalniają łatwopalne gazy, które mogą ulegać samozapaleniu.
	PT	Em contacto com a água liberta gases que se podem inflamar espontaneamente.

H260	Taal	2.12 — Stoffen en mengsels die in contact met water ontvlambare gassen ontwikkelen, gevarencategorie 1
	RO	În contact cu apa degajă gaze inflamabile care se pot aprinde spontan.
	SK	Pri kontakte s vodou uvoľňuje horľavé plyny, ktoré sa môžu spontánne zapáliť.
	SL	V stiku z vodo se sproščajo vnetljivi plini, ki se lahko samodejno vžgejo.
	FI	Kehittää itsestään syttyviä kaasuja veden kanssa.
	SV	Vid kontakt med vatten utvecklas brandfarliga gaser som kan självantända.
H261	Taal	2.12 — Stoffen en mengsels die in contact met water ontvlambare gassen ontwikkelen, gevarencategorieën 2 en 3
	BG	При контакт с вода отделя запалими газове.
	ES	En contacto con el agua desprende gases inflamables.
	CS	Při styku s vodou uvolňuje hořlavé plyny.
	DA	Ved kontakt med vand udvikles brandfarlige gasser.
	DE	In Berührung mit Wasser entstehen entzündbare Gase.
	ET	Kokkupuutel veega eraldab tuleohtlikke gaase.
	EL	Σε επαφή με το νερό ελευθερώνει εύφλεκτα αέρια.
	EN	In contact with water releases flammable gases.
	FR	Dégage au contact de l'eau des gaz inflammables.
	GA	I dteagmháil le huisce scaoiltear gáis inadhainte.
	IT	A contatto con l'acqua libera gas infiammabili.
	LV	Nonākot saskarē ar ūdeni, izdala uzliesmojošu gāzi.
	LT	Kontaktuodami su vandeniu išskiria degias dujas
	HU	Vízzel érintkezve tűzveszélyes gázokat bocsát ki.
	MT	Meta jmiss ma' l-ilma jerhi gassijiet li jaqbd.
	NL	In contact met water komen ontvlambare gassen vrij.
	PL	W kontakcie z wodą uwalnia łatwopalne gazy.
	PT	Em contacto com a água liberta gases inflamáveis.
	RO	În contact cu apa degajă gaze inflamabile.
	SK	Pri kontakte s vodou uvoľňuje horľavé plyny.
	SL	V stiku z vodo se sproščajo vnetljivi plini.
	FI	Kehittää syttyviä kaasuja veden kanssa.
	SV	Vid kontakt med vatten utvecklas brandfarliga gaser.
H270	Taal	2.4 — Oxiderende gassen, gevarencategorie 1
	BG	Може да предизвика или усилва пожар; окислител.
	ES	Puede provocar o agravar un incendio; comburente.
	CS	Může způsobit nebo zesílit požár; oxidant.
	DA	Kan forårsage eller forstærke brand, brandnærende.
	DE	Kann Brand verursachen oder verstärken; Oxidationsmittel.



H270	Taal	2.4 — Oxiderende gassen, gevarencategorie 1
	ET	Võib põhjustada süttimise või soodustada põlemist; oksüdeerija.
	EL	Μπορεί να προκαλέσει ή να αναζωπυρώσει πυρκαγιά· οξειδωτικό.
	EN	May cause or intensify fire; oxidiser.
	FR	Peut provoquer ou aggraver un incendie; comburant.
	GA	D'fhéadfadh sé a bheith ina chúis le tine nó cur le tine; ocsaídeoir.
	IT	Può provocare o aggravare un incendio; comburente.
	LV	Var izraisīt vai pastiprināt degšanu, oksidētājs.
	LT	Gali sukelti arba padidinti gaisrą, oksidatorius.
	HU	Tűzet okozhat vagy fokozhatja a tűz intenzitását, oxidáló hatású.
	MT	Jista' jikkawża jew iżid in-nar; ossidant.
	NL	Kan brand veroorzaken of bevorderen; oxiderend.
	PL	Może spowodować lub intensyfikować pożar; utleniacz.
	PT	Pode provocar ou agravar incêndios; comburente.
	RO	Poate provoca sau agrava un incendiu; oxidant.
	SK	Môže spôsobiť alebo prispieť k rozvoju požiaru; oxidačné činidlo.
	SL	Lahko povzroči ali okrepi požar; oksidativna snov.
	FI	Aiheuttaa tulipalon vaaran tai edistää tulipaloa; hapettava.
	SV	Kan orsaka eller intensifiera brand. Oxiderande.
H271	Taal	2.13 — Oxiderende vloeistoffen, gevarencategorie 1 2.14 — Oxiderende vaste stoffen, gevarencategorie 1
	BG	Може да предизвика пожар или експлозия; силен окислител.
	ES	Puede provocar un incendio o una explosión; muy comburente.
	CS	Může způsobit požár nebo výbuch; silný oxidant.
	DA	Kan forårsage brand eller eksplosion, stærkt brandnærende.
	DE	Kann Brand oder Explosion verursachen; starkes Oxidationsmittel.
	ET	Võib põhjustada süttimise või plahvatuse; tugev oksüdeerija.
	EL	Μπορεί να προκαλέσει πυρκαγιά ή έκρηξη· ισχυρό οξειδωτικό.
	EN	May cause fire or explosion; strong oxidiser.
	FR	Peut provoquer un incendie ou une explosion; comburant puissant.
	GA	D'fhéadfadh sé a bheith ina chúis le tine nó le pléascadh; an-ocsáideoir.
	IT	Può provocare un incendio o un'esplosione; molto comburente.
	LV	Var izraisīt degšanu vai eksploziju, oksidētājs.
	LT	Gali sukelti gaisrą arba sprogimą, stiprus oksidatorius.
	HU	Tűzet vagy robbanást okozhat; erősen oxidáló hatású.
	MT	Jista' jikkawża nar jew splużjoni; ossidant qawwi.
	NL	Kan brand of ontploffingen veroorzaken; sterk oxiderend.
	PL	Może spowodować pożar lub wybuch; silny utleniacz.

H271	Taal	2.13 — Oxiderende vloeistoffen, gevarencategorie 1 2.14 — Oxiderende vaste stoffen, gevarencategorie 1
	PT	Risco de incêndio ou de explosão; muito comburente.
	RO	Poate provoca un incendiu sau o explozie; oxidant puternic.
	SK	Môže spôsobiť požiar alebo výbuch; silné oxidačné činidlo.
	SL	Lahko povzroči požar ali eksplozijo; močna oksidativna snov.
	FI	Aiheuttaa tulipalo- tai räjähdysvaaran; voimakkaasti hapettava.
	SV	Kan orsaka brand eller explosion. Starkt oxiderande.
H272	Taal	2.13 — Oxiderende vloeistoffen, gevarencategorie 2 en 3 2.14 — Oxiderende vaste stoffen, gevarencategorie 2 en 3
	BG	Може да усили пожара; окислител.
	ES	Puede agravar un incendio; comburente.
	CS	Může zesílit požár; oxidant.
	DA	Kan forstærke brand, brandnærende.
	DE	Kann Brand verstärken; Oxidationsmittel.
	ET	Võib soodustada põlemist; oksüdeerija.
	EL	Μπορεί να αναζωπυρώσει την πυρκαγιά· οξειδωτικό.
	EN	May intensify fire; oxidiser.
	FR	Peut aggraver un incendie; comburant.
	GA	D'fhéadfadh sé cur le tine; ocsaídeoir.
	IT	Può aggravare un incendio; comburente.
	LV	Var pastiprināt degšanu; oksidētājs.
	LT	Gali padidinti gaisrą, oksidatorius.
	HU	Fokozhatja a tűz intenzitását; oxidáló hatású.
	MT	Jista' jżid in-nar; ossidant.
	NL	Kan brand bevorderen; oxiderend.
	PL	Może intensyfikować pożar; utleniacz.
	PT	Pode agravar incêndios; comburente.
	RO	Poate agrava un incendiu; oxidant.
	SK	Môže prispieť k rozvoju požiaru; oxidačné činidlo.
	SL	Lahko okrepi požar; oksidativna snov.
	FI	Voi edistää tulipaloa; hapettava.
	SV	Kan intensifiera brand. Oxiderande.
H280	Taal	2.5 — Gassen onder druk: samengeperst gas vloeibaar gas opgelost gas
	BG	Съдържа газ под налягане; може да експлодира при нагряване.
	ES	Contiene gas a presión; peligro de explosión en caso de calentamiento.

H280	Taal	2.5 — Gassen onder druk: samengeperst gas vloeibaar gas opgelost gas
	CS	Obsahuje plyn pod tlakem; při zahřívání může vybuchnout.
	DA	Indeholder gas under tryk, kan eksplodere ved opvarmning.
	DE	Enthält Gas unter Druck; kann bei Erwärmung explodieren.
	ET	Sisaldab rõhu all olevat gaasi, kuumenemisel võib plahvatada.
	EL	Περιέχει αέριο υπό πίεση· εάν θερμανθεί, μπορεί να εκραγεί.
	EN	Contains gas under pressure; may explode if heated.
	FR	Contient un gaz sous pression; peut exploser sous l'effet de la chaleur.
	GA	Gás istigh ann, faoi bhrú; d'fhéadfadh sé pléascadh, má théitear.
	IT	Contiene gas sotto pressione; può esplodere se riscaldato.
	LV	Satur gāzi zem spiediena; karstumā var eksplodēt.
	LT	Turi slėgio veikiamų dujų, kaitinant gali sprogti.
	HU	Nyomás alatt lévő gázt tartalmaz; hő hatására robbanhat.
	MT	Fih gass taht pressjoni; jista' jisplodi jekk jissahhan.
	NL	Bevat gas onder druk; kan ontploffen bij verwarming.
	PL	Zawiera gaz pod ciśnieniem; ogrzanie grozi wybuchem.
	PT	Contém gás sob pressão; risco de explosão sob a ação do calor.
	RO	Conține un gaz sub presiune; pericol de explozie în caz de încălzire.
	SK	Obsahuje plyn pod tlakom, pri zahriatí môže vybuchnúť.
	SL	Vsebuje plin pod tlakom; segrevanje lahko povzroči eksplozijo.
	FI	Sisältää paineen allaista kaasua; voi räjähtää kuumennettaessa.
	SV	Innehåller gas under tryck. Kan explodera vid uppvärmning.
H281	Taal	2.5 — Gassen onder druk: sterk gekoeld vloeibaar gas
	BG	Съдържа охладен газ; може да причини криогенни изгаряния или наранявания.
	ES	Contiene un gas refrigerado; puede provocar quemaduras o lesiones criogénicas.
	CS	Obsahuje zchlazený plyn; může způsobit omrzliny nebo poškození chladem.
	DA	Indeholder nedkølet gas, kan forårsage kuldeskader.
	DE	Enthält tiefkaltes Gas; kann Kälteverbrennungen oder -Verletzungen verursachen.
	ET	Sisaldab külmutatud gaasi; võib põhjustada külmapõletusi või -kahjustusi.
	EL	Περιέχει αέριο υπό ψύξη· μπορεί να προκαλέσει εγκαύματα ψύχους ή τραυματισμούς.
	EN	Contains refrigerated gas; may cause cryogenic burns or injury.
	FR	Contient un gaz réfrigéré; peut causer des brûlures ou blessures cryogéniques.
	GA	Gás cuisnithe istigh ann; d'fhéadfadh sé a bheith ina chúis le dónna criógineacha nó le díobháil chríógineach.
	IT	Contiene gas refrigerato; può provocare ustioni o lesioni criogeniche.
	LV	Satur atdzesētu gāzi; var radīt kriogēnus apdegumus vai ievainojumus.
	LT	Turi atšaldytų dujų, gali sukelti kriogeninius nušalimus arba pažeidimus.

H281	Taal	2.5 — Gassen onder druk: sterk gekoeld vloeibaar gas
	HU	Mélyhűtött gázt tartalmaz; fagymarást vagy sérülést okozhat.
	MT	Fih gass imkessah; jista' jikkawza hruq jew dannu minn temperaturi baxxi.
	NL	Bevat sterk gekoeld gas; kan cryogene brandwonden of letsel veroorzaken.
	PL	Zawiera schłodzony gaz; może spowodować oparzenia kriogeniczne lub obrażenia.
	PT	Contém gás refrigerado; pode provocar queimaduras ou lesões criogénicas.
	RO	Conține un gaz răcit; poate cauza arsuri sau leziuni criogenice.
	SK	Obsahuje schladený plyn; môže spôsobiť kryogénne popáleniny alebo poranenia.
	SL	Vsebuje ohlajen utekočinjen plin; lahko povzroči ozebljine ali poškodbe.
	FI	Sisältää jäähdytettyä kaasua; voi aiheuttaa jäätymisvamman.
	SV	Innehåller kylld gas. Kan orsaka svåra köldskador.
H290	Taal	2.16 — Bijtend voor metalen, gevarencategorie 1
	BG	Може да бъде корозивно за металите.
	ES	Puede ser corrosivo para los metales.
	CS	Může být korozivní pro kovy.
	DA	Kan ætse metaller.
	DE	Kann gegenüber Metallen korrosiv sein.
	ET	Võib söövitada metalle.
	EL	Μπορεί να διαβρώσει μέταλλα.
	EN	May be corrosive to metals.
	FR	Peut être corrosif pour les métaux.
	GA	D'fhéadfadh sé a bheith creimneach do mhiotail.
	IT	Può essere corrosivo per i metalli.
	LV	Var kodīgi iedarboties uz metāliem.
	LT	Gali ėsdinti metalus.
	HU	Fémekre korrozív hatású lehet.
	MT	Jista' jkun korruziv għall-metalli.
	NL	Kan bijtend zijn voor metalen.
	PL	Może powodować korozję metali.
	PT	Pode ser corrosivo para os metais.
	RO	Poate fi corosiv pentru metale.
	SK	Môže byť korozívna pre kovy.
	SL	Lahko je jedko za kovine.
	FI	Voi syövyttää metalleja.
	SV	Kan vara korrosivt för metaller.

Tabel 1.2.

## Gevarenaanduidingen voor gezondheidsgevaren

H300	Taal	3.1 — Acute orale toxiciteit, gevarencategorie 1 en 2
	BG	Смъртоносно при поглъщане.
	ES	Mortal en caso de ingestión.
	CS	Smrtelně nebezpečný při požití.
	DA	Livsfarlig ved indtagelse.
	DE	Lebensgefahr bei Verschlucken.
	ET	Allaneelamisel surmav.
	EL	Θανατηφόρο σε περίπτωση κατάποσης.
	EN	Fatal if swallowed.
	FR	Mortel en cas d'ingestion.
	GA	Marfach má shlogtar.
	IT	Mortale se ingerito.
	LV	Norijot iestājas nāve.
	LT	Prarijus baigiasi mirtimi.
	HU	Lenyelve halálos.
	MT	Fatali jekk jinbela'.
	NL	Dodelijk bij inslikken.
	PL	Pożłknięcie grozi śmiercią.
	PT	Mortal por ingestão.
	RO	Mortal în caz de înghițire.
	SK	Smrteľne nebezpečný po požití.
	SL	Smrtno pri zaužitju.
	FI	Tappavaa nieltynä.
	SV	Dödligt vid förtäring.
H301	Taal	3.1 — Acute orale toxiciteit, gevarencategorie 3
	BG	Токсично при поглъщане.
	ES	Tóxico en caso de ingestión.
	CS	Toxický při požití.
	DA	Giftig ved indtagelse.
	DE	Giftig bei Verschlucken.
	ET	Allaneelamisel mürgine.
	EL	Τοξικό σε περίπτωση κατάποσης.
	EN	Toxic if swallowed.
	FR	Toxique en cas d'ingestion.
	GA	Tocsaineach má shlogtar.

H301	Taal	3.1 — Acute orale toxiciteit, gevarencategorie 3
	IT	Tossico se ingerito.
	LV	Toksisks, ja norij.
	LT	Toksiška prarijus.
	HU	Lenyelve mérgező.
	MT	Tossiku jekk jinbela'.
	NL	Giftig bij inslikken.
	PL	Działa toksycznie po połknięciu.
	PT	Tóxico por ingestão.
	RO	Toxic în caz de înghițire.
	SK	Toxický po požití.
	SL	Strupeno pri zaužitju.
	FI	Myrkyllistä nieltynä.
	SV	Giftigt vid förtäring.
H302	Taal	3.1 — Acute orale toxiciteit, gevarencategorie 4
	BG	Вредно при поглъщане.
	ES	Nocivo en caso de ingestión.
	CS	Zdraví škodlivý při požití.
	DA	Farlig ved indtagelse.
	DE	Gesundheitsschädlich bei Verschlucken.
	ET	Allaneelamisel kahjulik.
	EL	Επιβλαβές σε περίπτωση κατάποσης.
	EN	Harmful if swallowed.
	FR	Nocif en cas d'ingestion.
	GA	Díobhálach má shlogtar.
	IT	Nocivo se ingerito.
	LV	Kaitīgs, ja norij.
	LT	Kenksminga prarijus.
	HU	Lenyelve ártalmas.
	MT	Jagħmel il-ħsara jekk jinbela'.
	NL	Schadelijk bij inslikken.
	PL	Działa szkodliwie po połknięciu.
	PT	Nocivo por ingestão.
	RO	Nociv în caz de înghițire.
	SK	Škodlivý po požití.
	SL	Zdravju škodljivo pri zaužitju.
	FI	Haitallista nieltynä.
	SV	Skadligt vid förtäring.

H304	Taal	3.10 — Aspiratiegevaar, gevarencategorie 1
	BG	Може да бъде смъртоносно при поглъщане и навлизане в дихателните пътища.
	ES	Puede ser mortal en caso de ingestión y de penetración en las vías respiratorias.
	CS	Při požití a vniknutí do dýchacích cest může být smrtelně nebezpečný.
	DA	Kan være livsfarligt, hvis det sluges og kommer i luftvejene.
	DE	Kann bei Verschlucken und Eindringen in die Atemwege tödlich sein.
	ET	Allaneelamisel või hingamisteedesse sattumisel võib olla surmav.
	EL	Μπορεί να προκαλέσει θάνατο σε περίπτωση κατάποσης και εισόδου στις αναπνευστικές οδούς.
	EN	May be fatal if swallowed and enters airways.
	FR	Peut être mortel en cas d'ingestion et de pénétration dans les voies respiratoires.
	GA	D'fhéadfadh a bheith marfach má shlogtar é agus má théann sé isteach sna haerbhealaí.
	HU	Lenyelve és a légutakba kerülve halálos lehet.
	IT	Può essere mortale in caso di ingestione e di penetrazione nelle vie respiratorie.
	LV	Var izraisīt nāvi, ja norij vai iekļūst elpvados.
	LT	Prarijus ir patekus į kvėpavimo takus, gali sukelti mirtį
	MT	Jista' jkun fatali jekk jinbela' u jidhol fil-pajpijiet tan-nifs.
	NL	Kan dodelijk zijn als de stof bij inslikken in de luchtwegen terecht komt.
	PL	Połknięcie i dostanie się przez drogi oddechowe może grozić śmiercią.
	PT	Pode ser mortal por ingestão e penetração nas vias respiratórias.
	RO	Poate fi mortal în caz de înghițire și de pătrundere pe căile respiratorii.
	SK	Môže byť smrteľne nebezpečná po požití a vniknutí do dýchacích ciest.
	SL	Pri zaužitju in vstopu v dihalne poti je lahko smrtno.
	FI	Voi olla tappavaa nieltynä ja joutuessaan hengitysteihin.
	SV	Kan vara dödligt vid förtäring om det kommer ner i luftvägarna.
H310	Taal	3.1 — Acute dermale toxiciteit, gevarencategorie 1 en 2
	BG	Смъртоносно при контакт с кожата.
	ES	Mortal en contacto con la piel.
	CS	Smrtelně nebezpečný při styku s kůží.
	DA	Livsfarlig ved kontakt med huden.
	DE	Lebensgefahr bei Hautkontakt.
	ET	Nahale sattumisel surmav.
	EL	Θανατηφόρο σε επαφή με το δέρμα.
	EN	Fatal in contact with skin.
	FR	Mortel par contact cutané.
	GA	Marfach i dtadhall leis an gcaiceann.
	HU	Bőrrel érintkezve halálos.
	IT	Mortale a contatto con la pelle.

H310	Taal	3.1 — Acute dermale toxiciteit, gevarencategorie 1 en 2
	LV	Nonākot saskarē ar ādu, iestājas nāve.
	LT	Patekusi ant odos sukelia mirtį.
	MT	Fatali jekk imiss mal-ġilda.
	NL	Dodelijk bij contact met de huid.
	PL	Kontakt ze skórą grozi śmiercią.
	PT	Mortal em contacto com a pele.
	RO	Mortal în contact cu pielea.
	SK	Smrteľne nebezpečný pri kontakte s pokožkou.
	SL	Smrtno v stiku s kožo.
	FI	Tappavaa joutuessaan iholle.
	SV	Dödligt vid hudkontakt.
H311	Taal	3.1 — Acute dermale toxiciteit, gevarencategorie 3
	BG	Токсично при контакт с кожата.
	ES	Tóxico en contacto con la piel.
	CS	Toxický při styku s kůží.
	DA	Giftig ved kontakt med huden.
	DE	Giftig bei Hautkontakt.
	ET	Nahale sattumisel mürgine.
	EL	Τοξικό σε επαφή με το δέρμα.
	EN	Toxic in contact with skin.
	FR	Toxique par contact cutané.
	GA	Tocsaineach i dtadhall leis an gcaiceann.
	IT	Tossico a contatto con la pelle.
	LV	Toksisks, ja nonāk saskarē ar ādu.
	LT	Toksiška patekusi ant odos.
	HU	Bőrrel érintkezve mérgező.
	MT	Tossiku meta jmiss mal-ġilda.
	NL	Giftig bij contact met de huid.
	PL	Działa toksycznie w kontakcie ze skórą.
	PT	Tóxico em contacto com a pele.
	RO	Toxic în contact cu pielea.
	SK	Toxický pri kontakte s pokožkou.
	SL	Strupeno v stiku s kožo.
	FI	Myrkyllistä joutuessaan iholle.
	SV	Giftigt vid hudkontakt.



H312	Taal	3.1 — Acute dermale toxiciteit, gevarencategorie 4
	BG	Вредно при контакт с кожата.
	ES	Nocivo en contacto con la piel.
	CS	Zdraví škodlivý při styku s kůží.
	DA	Farlig ved kontakt med huden.
	DE	Gesundheitsschädlich bei Hautkontakt.
	ET	Nahale sattumisel kahjulik.
	EL	Επιβλαβές σε επαφή με το δέρμα.
	EN	Harmful in contact with skin.
	FR	Nocif par contact cutané.
	GA	Díobhálach i dtadhall leis an gcaiceann.
	IT	Nocivo a contatto con la pelle.
	LV	Kaitīgs, ja nonāk saskarē ar ādu.
	LT	Kenksminga patekusi ant odos.
	HU	Bőrrel érintkezve ártalmas.
	MT	Jagħmel hsara meta jmiss mal-ġilda.
	NL	Schadelijk bij contact met de huid.
	PL	Działa szkodliwie w kontakcie ze skórą.
	PT	Nocivo em contacto com a pele.
	RO	Nociv în contact cu pielea.
	SK	Škodlivý pri kontakte s pokožkou.
	SL	Zdravju škodljivo v stiku s kožo.
	FI	Haitallista joutuessaan iholle.
	SV	Skadligt vid hudkontakt.
H314	Taal	3.2 — Huidcorrosie/-irritatie, gevarencategorie 1A, 1B en 1C
	BG	Причинява сериозни изгаряния на кожата.
	ES	Provoca quemaduras graves en la piel.
	CS	Způsobuje těžké popálení kůže.
	DA	Forårsager alvorlige hudforbrændinger.
	DE	Verursacht schwere Verätzungen der Haut.
	ET	Põhjustab raskeid nahapõletusi.
	EL	Προκαλεί σοβαρά δερματικά εγκαύματα.
	EN	Causes severe skin burns.
	FR	Provoque de graves brûlures de la peau.
	GA	Ina chúis le dónna tromchúiseacha craicinn.
	IT	Provoca gravi ustioni cutanee.
	LV	Izraisa smagus ādas apdegumus.

H314	Taal	3.2 — Huidcorrosie/-irritatie, gevarencategorie 1A, 1B en 1C
	LT	Sukelia rimtus odos nudegimus.
	HU	Súlyos égési sérüléstokoz.
	MT	Jagħmel hruq serju lill-ġilda.
	NL	Veroorzaakt ernstige brandwonden.
	PL	Powoduje poważne oparzenia skóry.
	PT	Provoca queimaduras graves na pele.
	RO	Provoacă arsuri grave ale pielii.
	SK	Spôsobuje závažné popáleniny pokožky.
	SL	Povzroča hude opekline kože.
	FI	Voimakkaasti ihoa syövyttävää.
	SV	Orsakar allvarliga frätskador på hud.
H315	Taal	3.2 — Huidcorrosie/-irritatie, gevarencategorie 2
	BG	Причинява дразнене на кожата.
	ES	Provoca irritación cutánea.
	CS	Dráždí kůži.
	DA	Forårsager hudirritation.
	DE	Verursacht Hautreizungen.
	ET	Põhjustab nahaärritust.
	EL	Προκαλεί ερεθισμό του δέρματος.
	EN	Causes skin irritation.
	FR	Provoque une irritation cutanée.
	GA	Ina chúis le greannaithe craicinn.
	IT	Provoca irritazione cutanea.
	LV	Kairina ādu.
	LT	Dirgina odą.
	HU	Bőrirritáló hatású.
	MT	Jagħmel irritazzjoni tal-ġilda.
	NL	Veroorzaakt huidirritatie.
	PL	Powoduje podrażnienie skóry.
	PT	Provoca irritação cutânea.
	RO	Provoacă iritarea pielii.
	SK	Spôsobuje podráždenie kože.
	SL	Povzroča draženje kože.
	FI	Ärsyttää ihoa.
	SV	Irriterar huden.

H317	Taal	3.4 — Huidsensibilisatie, gevarencategorie 1
	BG	Може да причини алергична кожна реакция.
	ES	Puede provocar una reacción alérgica cutánea.
	CS	Může způsobit alergickou kožní reakci.
	DA	Kan udløse allergisk hudreaktion.
	DE	Kann allergische Hautreaktionen verursachen.
	ET	Võib põhjustada allergilist nahareaktsiooni.
	EL	Μπορεί να προκαλέσει αλλεργική δερματική αντίδραση.
	EN	May cause an allergic skin reaction.
	FR	Peut provoquer une allergie cutanée.
	GA	D'fhéadfadh a bheith ina chúis fhrithghnímh ailléirgigh craicinn.
	IT	Può provocare una reazione allergica della pelle.
	LV	Var izraisīt alergisku ādas reakciju.
	LT	Gali sukelti alerginę odos reakciją.
	HU	Allergiás bőrreakciót válthat ki.
	MT	Jista' jagħmel reazzjoni allerġika tal-ġilda.
	NL	Kan een allergische huidreactie veroorzaken.
	PL	Może powodować reakcję alergiczną skóry.
	PT	Pode provocar uma reacção alérgica cutânea.
	RO	Poate provoca o reacție alergică a pielii.
	SK	Môže spôsobiť alergickú reakciu pokožky.
	SL	Lahko povzroči alergijski odziv kože.
	FI	Voi aiheuttaa allergisen ihoreaktion.
	SV	Kan orsaka en allergisk hudreaktion.
H318	Taal	3.3 — Ernstig oogletsel/oogirritatie, gevarencategorie 1
	BG	Причинява сериозно увреждане на очите.
	ES	Provoca lesiones oculares graves.
	CS	Způsobuje vážné poškození očí.
	DA	Forårsager alvorlige øjenskader.
	DE	Verursacht schwere Augenschäden.
	ET	Põhjustab raskeid silmakahjustusi.
	EL	Προκαλεί σοβαρή οφθαλμική βλάβη.
	EN	Causes serious eye damage.
	FR	Provoque des lésions oculaires graves.
	GA	Ina chúis damáiste thromchúisigh don tsúil.
	IT	Provoca gravi lesioni oculari.
	LV	Izraisa nopietnus acu bojājumus.

H318	Taal	3.3 — Ernstig oogletsel/oogirritatie, gevarencategorie 1
	LT	Sukelia rimtą akių pažeidimą.
	HU	Súlyos szemkárosodást okoz.
	MT	Jagħmel hsara serja lill-għajnejn.
	NL	Veroorzaakt ernstig oogletsel.
	PL	Powoduje poważne uszkodzenie oczu.
	PT	Provoca lesões oculares graves.
	RO	Provoacă leziuni oculare grave.
	SK	Spôsobuje vážne poškodenie očí.
	SL	Povzroča hude poškodbe oči.
	FI	Vaurioittaa vakavasti silmiä.
	SV	Orsakar allvarliga ögonskador.
H319	Taal	3.3 — Ernstig oogletsel/oogirritatie, gevarencategorie 2A
	BG	Причинява сериозно дразнене на очите.
	ES	Provoca irritación ocular grave.
	CS	Způsobuje vážné podráždění očí.
	DA	Forårsager alvorlig øjenirritation.
	DE	Verursacht schwere Augenreizung.
	ET	Põhjustab tugevat silmade ärritust.
	EL	Προκαλεί σοβαρό οφθαλμικό ερεθισμό.
	EN	Causes serious eye irritation.
	FR	Provoque une grave irritation oculaire.
	GA	Ina chúis ghreannaithe thromchúisigh don tsúil.
	IT	Provoca grave irritazione oculare.
	LV	Izraisa nopietnu acu kairinājumu.
	LT	Smarkiai dirgina akis.
	HU	Súlyos szemirritációt okoz.
	MT	Jagħmel irritazzjoni serja ta' l-għajnejn.
	NL	Veroorzaakt ernstige oogirritatie.
	PL	Powoduje poważne podrażnienie oczu.
	PT	Provoca irritação ocular grave.
	RO	Provoacă o iritație gravă a ochilor.
	SK	Spôsobuje vážne podráždenie očí.
	SL	Povzroča hudo draženje oči.
	FI	Ärsyttää voimakkaasti silmiä.
	SV	Orsakar allvarlig ögonirritation.

H330	Taal	3.1 — Acute toxiciteit bij inademing, gevarencategorie 1 en 2
	BG	Смъртоносно при инхалация.
	ES	Mortal en caso de inhalación.
	CS	Smrtelně nebezpečný při vdechování.
	DA	Livsfarlig ved indånding.
	DE	Lebensgefahr bei Einatmen.
	ET	Sissehingamisel surmav.
	EL	Θανατηφόρο σε περίπτωση εισπνοής.
	EN	Fatal if inhaled.
	FR	Mortel par inhalation.
	GA	Marfach má ionanálaítear.
	IT	Mortale se inalato.
	LV	Ieelpojot, iestājas nāve.
	LT	Įkvėpus baigiasi mirtimi.
	HU	Belélegezve halálos.
	MT	Fatali jekk jinxtamm.
	NL	Dodelijk bij inademing.
	PL	Wdychanie grozi śmiercią.
	PT	Mortal por inalação.
	RO	Mortal în caz de inhalare.
	SK	Smrteľne nebezpečná pri vdychovaní.
	SL	Smrtno pri vdihavanju.
	FI	Tappavaa hengitettynä.
	SV	Dödligt vid inandning.
H331	Taal	3.1 — Acute toxiciteit bij inademing, gevarencategorie 3
	BG	Токсично при инхалация.
	ES	Tóxico en caso de inhalación.
	CS	Toxický při vdechování.
	DA	Giftig ved indånding.
	DE	Giftig bei Einatmen.
	ET	Sissehingamisel mürgine.
	EL	Τοξικό σε περίπτωση εισπνοής.
	EN	Toxic if inhaled.
	FR	Toxique par inhalation.
	GA	Tocsaineach má ionanálaítear.
	IT	Tossico se inalato.
	LV	Toksisks ieelpojot.

H331	Taal	3.1 — Acute toxiciteit bij inademing, gevarencategorie 3
	LT	Įkvėpus toksiška.
	HU	Belélegezve mérgező.
	MT	Tossiku jekk jinxtamm.
	NL	Giftig bij inademing.
	PL	Działa toksycznie przy wdychaniu.
	PT	Tóxico por inalação.
	RO	Toxic în caz de inhalare.
	SK	Toxická pri vdychovaní.
	SL	Strupeno pri vdihavanju.
	FI	Myrkyllistä hengitettynä.
	SV	Giftigt vid inandning.
H332	Taal	3.1 — Acute toxiciteit bij inademing, gevarencategorie 4
	BG	Вредно при инхалация.
	ES	Nocivo en caso de inhalación.
	CS	Zdraví škodlivý při vdechování.
	DA	Farlig ved indånding.
	DE	Gesundheitsschädlich bei Einatmen.
	ET	Sissehingamisel kahjulik.
	EL	Επιβλαβές σε περίπτωση εισπνοής.
	EN	Harmful if inhaled.
	FR	Nocif par inhalation.
	GA	Díobhálach má ionanálaítear.
	IT	Nocivo se inalato.
	LV	Kaitīgs ieelpojot.
	LT	Kenksminga įkvėpus.
	HU	Belélegezve ártalmas.
	MT	Jagħmel il-hsara jekk jinxtamm.
	NL	Schadelijk bij inademing.
	PL	Działa szkodliwie przy wdychaniu.
	PT	Nocivo por inalação.
	RO	Nociv în caz de inhalare.
	SK	Škodlivá pri vdychovaní.
	SL	Zdravju škodljivo pri vdihavanju.
	FI	Haitallista hengitettynä.
	SV	Skadligt vid inandning.

H334	Taal	3.4 — Sensibilisatie van de luchtwegen, gevarencategorie 1
	BG	Може да причини алергични или астматични симптоми или затруднения в дишането при вдишване.
	ES	Puede provocar síntomas de alergia o asma o dificultades respiratorias en caso de inhalación.
	CS	Při vdechování může vyvolat příznaky alergie nebo astmatu nebo dýchací potíže.
	DA	Kan udløse allergi- eller astmasymptomer eller give åndenød ved indtagelse.
	DE	Kann bei Einatmen Allergie, asthmaartige Symptome oder Atembeschwerden verursachen.
	ET	Sissehingamisel võib põhjustada allergiat, astma sümptomeid või hingamisraskusi.
	EL	Μπορεί να προκαλέσει αλλεργία ή συμπτώματα άσθματος ή δύσπνοια σε περίπτωση εισπνοής.
	EN	May cause allergy or asthma symptoms or breathing difficulties if inhaled.
	FR	Peut provoquer des symptômes allergiques ou d'asthme ou des difficultés respiratoires par inhalation.
	GA	D'fhéadfadh a bheith ina chúis chomharthaí ailléirge nó asma nó deacrachtaí anáilthe má ionanálaítear é.
	IT	Può provocare sintomi allergici o asmatici o difficoltà respiratorie se inalato.
	LV	Ja ieelpo, var izraisīt alerģiju vai astmas simptomus, vai apgrūtināt elpošanu.
	LT	Įkvėpus gali sukelti alerginę reakciją, astmos simptomus arba apsunkinti kvėpavimą.
	HU	Belélegezve allergiás és asztmás tüneteket, és nehéz légzést okozhat.
	MT	Jista' jikkawża l-allergija jew sintomi ta' l-ażma jew problemi biex jiehu n-nifs jekk jinxtamm.
	NL	Kan bij inademing allergie- of astmasymptomen of ademhalingsmoeilijkheden veroorzaken.
	PL	Może wywoływać objawy alergii lub astmy lub trudności w oddychaniu w następstwie wdychania.
	PT	Quando inalado, pode provocar sintomas de alergia ou de asma ou dificuldades respiratórias.
	RO	Poate provoca simptome de alergie sau astm sau dificultăți de respirație în caz de inhalare.
	SK	Pri vdychovaní môže vyvolať alergiu alebo príznaky astmy, alebo dýchacie ťažkosti.
	SL	Lahko povzroči simptome alergije ali astme ali težave z dihanjem pri vdihavanju.
	FI	Voi aiheuttaa hengitettynä allergia- tai astmaoireita tai hengitysvaikeuksia.
	SV	Kan orsaka allergi- eller astmasymtom eller andningssvårigheter vid inandning.
H335	Taal	3.8 — Specifieke doelorgaan toxiciteit bij eenmalige blootstelling, gevarencategorie 3, irritatie van de luchtwegen
	BG	Може да причини дразнене на дихателните пътища.
	ES	Puede irritar las vías respiratorias.
	CS	Může způsobit podráždění dýchacích orgánů.
	DA	Kan irritere luftvejene.
	DE	Kann die Atemwege reizen.
	ET	Võib põhjustada hingamisteede ärritust.
	EL	Μπορεί να προκαλέσει ερεθισμό της αναπνευστικής οδού.
	EN	May cause respiratory irritation.
	FR	Peut irriter les voies respiratoires.

H335	Taal	3.8 — Specifieke doelorgaantoxiciteit bij eenmalige blootstelling, gevarencategorie 3, irritatie van de luchtwegen
	GA	D'fhéadfadh a bheith ina chúis ghreannaithe riospráide.
	IT	Può irritare le vie respiratorie.
	LV	Var izraisīt elpvadu kairinājumu.
	LT	Gali dirginti kvėpavimo takus.
	HU	Légúti irritációt okozhat.
	MT	Jista' jikkawża irritazzjoni respiratorja.
	NL	Kan irritatie van de luchtwegen veroorzaken.
	PL	Może powodować podrażnienie dróg oddechowych.
	PT	Pode provocar irritação das vias respiratórias.
	RO	Poate provoca iritarea căilor respiratorii.
	SK	Môže spôsobiť podráždenie dýchacích ciest.
	SL	Lahko povzroči draženje dihalnih poti.
	FI	Saattaa aiheuttaa hengitysteiden ärsytystä.
	SV	Kan orsaka irritation i luftvägarna.
H336	Taal	3.8 — Specifieke doelorgaantoxiciteit bij eenmalige blootstelling, gevarencategorie 3, narcotische werking
	BG	Може да причини сънливост или световъртеж.
	ES	Puede provocar somnolencia o vértigo.
	CS	Může způsobit ospalost a závratě.
	DA	Kan forårsage døsighed eller svimmelhed.
	DE	Kann Schläfrigkeit und Benommenheit verursachen.
	ET	Võib põhjustada unisust või peapööritust.
	EL	Μπορεί να προκαλέσει υπνηλία ή ζάλη.
	EN	May cause drowsiness or dizziness.
	FR	Peut provoquer somnolence et des vertiges.
	GA	D'fhéadfadh a bheith ina chúis chodlatachta nó mheadhráin.
	IT	Può provocare sonnolenza o vertigini.
	LV	Var izraisīt miegainību vai reiboņus.
	LT	Gali sukelti mieguistumą arba galvos svaigimą.
	HU	Álmoságot vagy szédülést okozhat.
	MT	Jista' jikkawża hedla jew sturdament.
	NL	Kan slaperigheid of duizeligheid veroorzaken.
	PL	Może wywoływać uczucie senności lub zawroty głowy.
	PT	Pode provocar sonolência ou vertigens.
	RO	Poate provoca somnolență sau amețală.
	SK	Môže spôsobiť ospalosť alebo závraty.
	SL	Lahko povzroči zaspanost ali omotico.



H336	Taal	3.8 — Specifieke doelorgaan toxiciteit bij eenmalige blootstelling, gevarencategorie 3, narcotische werking
	FI	Saattaa aiheuttaa uneliaisuutta ja huimausta.
	SV	Kan göra att man blir dåsig och omtöcknad.
H340	Taal	3.5 — Mutageniteit in geslachtsellen, gevarencategorie 1A en 1B
	BG	Може да причини генетични дефекти < да се посочи пътят на експозицията, ако категорично е доказано, че няма друг път на експозиция, който води до същата опасност >.
	ES	Puede provocar defectos genéticos <Indíquese la vía de exposición si se ha demostrado concluyentemente que ninguna otra vía es peligrosa>.
	CS	Může vyvolat poškození dědičných vlastností <uvedte cestu expozice, je-li přesvědčivě prokázáno, že ostatní cesty expozice nejsou nebezpečné>.
	DA	Kan forårsage genetiske defekter <angiv eksponeringsvej, hvis det er endeligt påvist, at faren ikke kan frembringes ad nogen anden eksponeringsvej>.
	DE	Kann genetische Defekte verursachen <Expositionsweg angeben, sofern schlüssig belegt ist, dass diese Gefahr bei keinem anderen Expositionsweg besteht>.
	ET	Võib põhjustada geneetilisi defekte <märkida kokkupuuteviisi, kui on veenvalt tõestatud, et muud kokkupuuteviisid ei ole ohtlikud>.
	EL	Μπορεί να προκαλέσει γενετικά ελαττώματα < αναφέρεται η οδός έκθεσης αν έχει αποδειχθεί αδιαμφισβήτητα ότι δεν υπάρχει κίνδυνος από τις άλλες οδούς έκθεσης >.
	EN	May cause genetic defects <state route of exposure if it is conclusively proven that no other routes of exposure cause the hazard>.
	FR	Peut induire des anomalies génétiques <indiquer la voie d'exposition s'il est formellement prouvé qu'aucune autre voie d'exposition ne conduit au même danger>.
	GA	D'fhéadfadh a bheith ina chúis éalang géiniteach <tabhair an bealach nochta má tá sé cruthaithe go cinntitheach nach bealach nochta ar bith eile is cúis leis an nguais>.
	IT	Può provocare alterazioni genetiche <indicare la via di esposizione se è accertato che nessun'altra via di esposizione comporta il medesimo pericolo>.
	LV	Var izraisīt ģenētiskus bojājumus <norādīt iedarbības ceļu, ja ir nepārprotami pierādīts, ka citi iedarbības ceļi nerada apdraudējumu>.
	LT	Gali sukelti genetinius defektus <nurodyti veikimo būdą, jeigu įtikinamai nustatyta, kad kiti veikimo būdai nepavojingi>.
	HU	Genetikai károsodást okozhat < meg kell adni az expozíciós útvonalat, ha meggyőzően bizonyított, hogy más expozíciós útvonal nem okozza a veszélyt >.
	MT	Jista' jikkawża difetti ġenetiċi <semmi l-mod ta' espożizzjoni jekk ikun pruvat b'mod konklużiv li l-ebda mod ta' espożizzjoni ieħor ma jikkawża l-periklu>.
	NL	Kan genetische schade veroorzaken <blootstellingsroute vermelden indien afdoende bewezen is dat het gevaar bij andere blootstellingsroutes niet aanwezig is>.
	PL	Może powodować wady genetyczne <podać drogę narażenia, jeżeli definitywnie udowodniono, że inna droga narażenia nie powoduje zagrożenia>.
	PT	Pode provocar anomalias genéticas <indicar a via de exposição se existirem provas concludentes de que o perigo não decorre de nenhuma outra via de exposição>.
	RO	Poate provoca anomalii genetice <indicați calea de expunere dacă există probe concludente că nicio altă cale de expunere nu provoacă acest pericol>.
	SK	Môže spôsobovať genetické poškodenie <uvedte spôsob expozície, ak sa presvedčivo preukáže, že žiadne iné spôsoby expozície nevyvolávajú nebezpečenstvo>.
	SL	Lahko povzroči genetske okvare <navesti način izpostavljenosti, če je prepričljivo dokazano, da noben drug način izpostavljenosti ne povzroča takšne nevarnosti>.
	FI	Saattaa aiheuttaa perimävaurioita <mainitaan altistumisreitti, jos on kiistatta osoitettu, että vaara ei voi aiheutua muiden altistumisreittien kautta>.
	SV	Kan orsaka genetiska defekter <ange exponeringsväg om det är definitivt bevisat att faran inte kan orsakas av några andra aktuella exponeringsvägar>.

H341	Taal	3.5 — Mutageniteit in geslachtscellen, gevarencategorie 2
	BG	Предполага се, че причинява генетични дефекти < да се посочи пътят на експозицията, ако категорично е доказано, че няма друг път на експозиция, който води до същата опасност >.
	ES	Se sospecha que provoca defectos genéticos <Indíquese la vía de exposición si se ha demostrado concluyentemente que ninguna otra vía es peligrosa>.
	CS	Podežrení na poškození dědičných vlastností <uveďte cestu expozice, je-li přesvědčivě prokázáno, že ostatní cesty expozice nejsou nebezpečné>.
	DA	Mistænkt for at forårsage genetiske defekter <angiv eksponeringsvej, hvis det er endeligt påvist, at faren ikke kan frembringes ad nogen anden eksponeringsvej>.
	DE	Kann vermutlich genetische Defekte verursachen <Expositionsweg angeben, sofern schlüssig belegt ist, dass diese Gefahr bei keinem anderen Expositionsweg besteht>.
	ET	Arvatavalt põhjustab geneetilisi defekte <märkida kokkupuuteviisi, kui on veenvalt tõestatud, et muud kokkupuuteviisid ei ole ohtlikud>.
	EL	Υποπτο για πρόκληση γενετικών ελαττωμάτων <αναφέρεται η οδός έκθεσης αν έχει αποδειχθεί αδιαμφισβήτητα ότι δεν υπάρχει κίνδυνος από τις άλλες οδούς έκθεσης>.
	EN	Suspected of causing genetic defects <state route of exposure if it is conclusively proven that no other routes of exposure cause the hazard>.
	FR	Susceptible d'induire des anomalies génétiques <indiquer la voie d'exposition s'il est formellement prouvé qu'aucune autre voie d'exposition ne conduit au même danger>.
	GA	Ceaptar go bhféadfadh a bheith ina chúis éalang géiniteach <tabhair an bealach nochta má tá sé cruthaithe go cinntitheach nach bealach nochta ar bith eile is cúis leis an ngnais>.
	IT	Sospettato di provocare alterazioni genetiche <indicare la via di esposizione se è accertato che nessun'altra via di esposizione comporta il medesimo pericolo>.
	LV	Ir aizdomas, ka var izraisīt ģenētiskus bojājumus <norādīt iedarbības ceļu, ja ir nepārprotami pierādīts, ka citi iedarbības ceļi nerada apdraudējumu>.
	LT	Įtariama, kad gali sukelti genetinius defektus <nurodyti veikimo būdą, jeigu įtikinamai nustatyta, kad kiti veikimo būdai nepavojingi>.
	HU	Feltehetően genetikai károsodást okoz < meg kell adni az expozíciós útvonalat, ha meggyőződen bizonyított, hogy más expozíciós útvonal nem okozza a veszélyt >.
	MT	Suspettat li jikkawża difetti ġenetiċi <semmi l-mod ta' espożizzjoni jekk ikun pruvat b'mod konkluziv li l-ebda mod ta' espożizzjoni iehor ma jikkawża l-periklu>.
	NL	Verdacht van het veroorzaken van genetische schade <blootstellingsroute vermelden indien afdoende bewezen is dat het gevaar bij andere blootstellingsroutes niet aanwezig is>.
	PL	Podjeżrzenia, że powoduje wady genetyczne <podać drogę narażenia, jeżeli definitywnie udowodniono, że inna droga narażenia nie powoduje zagrożenia>.
	PT	Suspeito de provocar anomalias genéticas <indicar a via de exposição se existirem provas concludentes de que o perigo não decorre de nenhuma outra via de exposição>.
	RO	Susceptibil de a provoca anomalii genetice < indicați calea de expunere dacă există probe concludente că nicio altă cale de expunere nu provoacă acest pericol>.
	SK	Podozrenie, že spôsobuje genetické poškodenie <uveďte spôsob expozície, ak sa presvedčivo preukáže, že žiadne iné spôsoby expozície nevyvolávajú nebezpečenstvo>.
	SL	Sum povzročitve genetskih okvar <navesti način izpostavljenosti, če je prepričljivo dokazano, da noben drug način izpostavljenosti ne povzroča takšne nevarnosti>.
	FI	Epäillään aiheuttavan perimävaurioita <mainitaan altistumisreitti, jos on kiistatta osoitettu, että vaara ei voi aiheutua muiden altistumisreittien kautta>.
	SV	Misstänks kunna orsaka genetiska defekter <ange exponeringsväg om det är definitivt bevisat att faran inte kan orsakas av några andra aktuella exponeringsvägar>.
H350	Taal	3.6 — Kankerverwekkendheid, gevarencategorie 1A en 1B
	BG	Може да причини рак < да се посочи пътят на експозицията, ако категорично е доказано, че няма друг път на експозиция, който води до същата опасност >.
	ES	Puede provocar cáncer <indíquese la vía de exposición si se ha demostrado concluyentemente que ninguna otra vía es peligrosa>.

H350	Taal	3.6 — Kankerverwekkendheid, gevarencategorie 1A en 1B
	CS	Může vyvolat rakovinu <uvedte cestu expozice, je-li přesvědčivě prokázáno, že ostatní cesty expozice nejsou nebezpečné>.
	DA	Kan fremkalde kræft <angiv eksponeringsvej, hvis det er endeligt påvist, at faren ikke kan frembringes ad nogen anden eksponeringsvej>.
	DE	Kann Krebs verursachen <Expositionsweg angeben, sofern schlüssig belegt ist, dass diese Gefahr bei keinem anderen Expositionsweg besteht>.
	ET	Võib põhjustada vähktõbe <märkida kokkupuuteviisi, kui on veenvalt tõestatud, et muud kokkupuuteviisid ei ole ohtlikud>.
	EL	Μπορεί να προκαλέσει καρκίνο <αναφέρεται η οδός έκθεσης αν έχει αποδειχθεί αδιαμφισβήτητα ότι δεν υπάρχει κίνδυνος από τις άλλες οδούς έκθεσης>.
	EN	May cause cancer <state route of exposure if it is conclusively proven that no other routes of exposure cause the hazard>.
	FR	Peut provoquer le cancer <indiquer la voie d'exposition s'il est formellement prouvé qu'aucune autre voie d'exposition ne conduit au même danger>.
	GA	D'fhéadfadh a bheith ina chúis ailse <tabhair an bealach nochta má tá sé cruthaithe go cinntitheach nach bealach nochta ar bith eile is cúis leis an nguais>.
	IT	Può provocare il cancro <indicare la via di esposizione se è accertato che nessun'altra via di esposizione comporta il medesimo pericolo>.
	LV	Var izraisīt vēzi <norādīt iedarbības ceļu, ja ir nepārprotami pierādīts, ka citi iedarbības ceļi nerada apdraudējumu>.
	LT	Gali sukelti vėžį <nurodyti veikimo būdą, jeigu įtikinamai nustatyta, kad kiti veikimo būdai nepavojingi>.
	HU	Rákot okozhat < meg kell adni az expozíciós útvonalat, ha meggyőzően bizonyított, hogy más expozíciós útvonal nem okozza a veszélyt >.
	MT	Jista' jikkawża l-kanċer <semmi l-mod ta' espożizzjoni jekk ikun pruvat b'mod konkluziv li l-ebda mod ta' espożizzjoni iehor ma jikkawża l-periklu>.
	NL	Kan kanker veroorzaken <blootstellingsroute vermelden indien afdoende bewezen is dat het gevaar bij andere blootstellingsroutes niet aanwezig is>
	PL	Może powodować raka <podać drogę narażenia, jeżeli definitywnie udowodniono, że inna droga narażenia nie powoduje zagrożenia>.
	PT	Pode provocar cancro <indicar a via de exposição se existirem provas concludentes de que o perigo não decorre de nenhuma outra via de exposição>.
	RO	Poate provoca cancer <indicați calea de expunere dacă există probe concludente că nicio altă cale de expunere nu provoacă acest pericol>.
	SK	Môže spôsobiť rakovinu <uvedte spôsob expozície, ak sa presvedčivo preukáže, že žiadne iné spôsoby expozície nevyvolávajú nebezpečenstvo>.
	SL	Lahko povzroči raka <navesti način izpostavljenosti, če je prepričljivo dokazano, da noben drug način izpostavljenosti ne povzroča takšne nevarnosti>.
	FI	Saattaa aiheuttaa syöpää <mainitaan altistumisreitti, jos on kiistatta osoitettu, että vaara ei voi aiheutua muiden altistumisreittien kautta>.
	SV	Kan orsaka cancer <ange exponeringsväg om det är definitivt bevisat att faran inte kan orsakas av några andra aktuella exponeringsvägar>.
H351	Taal	3.6 — Kankerverwekkendheid, gevarencategorie 2
	BG	Предполага се, че причинява рак < да се посочи пътят на експозицията, ако категорично е доказано, че няма друг път на експозиция, който води до същата опасност >.
	ES	Se sospecha que provoca cáncer <indíquese la vía de exposición si se se ha demostrado concluyentemente que ninguna otra vía es peligrosa>.
	CS	Podežření na vyvolání rakoviny <uvedte cestu expozice, je-li přesvědčivě prokázáno, že ostatní cesty expozice nejsou nebezpečné>.

H351	Taal	3.6 — Kankerverwekkendheid, gevarencategorie 2
	DA	Mistænkt for at fremkalde kræft <angiv eksponeringsvej, hvis det er endeligt påvist, at faren ikke kan frembringes ad nogen anden eksponeringsvej>.
	DE	Kann vermutlich Krebs verursachen <Expositionsweg angeben, sofern schlüssig belegt ist, dass diese Gefahr bei keinem anderen Expositionsweg besteht>.
	ET	Arvavalt põhjustab vähktõbe <märkida kokkupuuteviisi, kui on veenvalt tõestatud, et muud kokkupuuteviisid ei ole ohtlikud>.
	EL	Υποπτο για πρόκληση καρκίνου <αναφέρεται η οδός έκθεσης αν έχει αποδειχθεί αδιαμφισβήτητα ότι δεν υπάρχει κίνδυνος από τις άλλες οδούς έκθεσης>.
	EN	Suspected of causing cancer <state route of exposure if it is conclusively proven that no other routs of exposure cause the hazard>.
	FR	Susceptible de provoquer le cancer <indiquer la voie d'exposition s'il est formellement prouvé qu'aucune autre voie d'exposition ne conduit au même danger>.
	GA	Ceaptar go bhféadfadh sé a bheith ina chúis ailse <tabhair an bealach nochta má tá sé cruthaithe go cinntitheach nach bealach nochta ar bith eile is cúis leis an nguais>.
	IT	Sospettato di provocare il cancro <indicare la via di esposizione se è accertato che nessun'altra via di esposizione comporta il medesimo pericolo>.
	LV	Ir aizdomas, ka var izraisīt vēzi <norādīt iedarbības ceļu, ja ir nepārprotami pierādīts, ka citi iedarbības ceļi nerada apdraudējumu>.
	LT	Įtariama, kad sukelia vėžį <nurodyti veikimo būdą, jeigu įtikinamai nustatyta, kad kiti veikimo būdai nepavojingi>.
	HU	Feltehetően rákot okoz < meg kell adni az expozíciós útvonalat, ha meggyőzően bizonyított, hogy más expozíciós útvonal nem okozza a veszélyt >.
	MT	Suspettat li jikkawża l-kanċer <ara l-mod ta' espożizzjoni jekk ikun pruvat b'mod konkluziv li l-ebda modi ta' espożizzjoni ohra ma jikkawżaw il-periklu>.
	NL	Verdacht van het veroorzaken van kanker <blootstellingsroute vermelden indien afdoende bewezen is dat het gevaar bij andere blootstellingsroutes niet aanwezig is>.
	PL	Podejrzewa się, że powoduje raka <podać drogę narażenia, jeżeli definitywnie udowodniono, że inna droga narażenia nie powoduje zagrożenia>.
	PT	Suspeito de provocar cancro <indicar a via de exposição se existirem provas concludentes de que o perigo não decorre de nenhuma outra via de exposição>.
	RO	Susceptibil de a provoca cancer <indicați calea de expunere dacă există probe concludente că nicio altă cale de expunere nu provoacă acest pericol>.
	SK	Podозrenie, že spôsobuje rakovinu <uveďte spôsob expozície, ak sa presvedčivo preukáže, že žiadne iné spôsoby expozície nevyvolávajú nebezpečenstvo>.
	SL	Sum povzročitve raka <navesti način izpostavljenosti, če je prepričljivo dokazano, da noben drug način izpostavljenosti ne povzroča takšne nevarnosti>.
	FI	Epäillään aiheuttavan syöpää <mainitaan altistumisreitti, jos on kiistatta osoitettu, että vaara ei voi aiheutua muiden altistumisreittien kautta>.
	SV	Misstänks kunna orsaka cancer <ange exponeringsväg om det är definitivt bevisat att faran inte kan orsakas av några andra aktuella exponeringsvägar>.
H360	Taal	3.7 — Voortplantingstoxiciteit, gevarencategorie 1A en 1B
	BG	Може да окаже вредно въздействие върху плодовитостта или плода < да се посочи конкретното въздействие, ако е известно > < да се посочи пътят на експозицията, ако категорично е доказано, че няма друг път на експозиция, който води до същата опасност >.
	ES	Puede perjudicar la fertilidad o dañar al feto <indíquese el efecto específico si se conoce> <indíquese la vía de exposición si se ha demostrado concluyentemente que ninguna otra vía es peligrosa>.
	CS	Může poškodit reprodukční schopnost nebo plod v těle matky <uveďte specifický účinek, je-li znám> <uveďte cestu expozice, je-li přesvědčivě prokázáno, že ostatní cesty expozice nejsou nebezpečné>.

H360	Taal	3.7 — Voortplantingstoxiciteit, gevarencategorie 1A en 1B
	DA	Kan forringe forplantningsevnen eller skade det ufødte barn <angiv specifik effekt, hvis denne kendes> <angiv eksponeringsvej, hvis det er endeligt påvist, at faren ikke kan frembringes ad nogen anden eksponeringsvej>.
	DE	Kann die Fruchtbarkeit beeinträchtigen oder das Kind im Mutterleib schädigen <sofern bekannt, konkrete Wirkung angeben> <Expositionsweg angeben, sofern schlüssig belegt ist, dass die Gefährdung bei keinem anderen Expositionsweg besteht>.
	ET	Võib kahjustada viljakust või loodet <märkida spetsiifiline toime, kui see on teada> <märkida kokkupuuteviisi, kui on veenvalt tõestatud, et muud kokkupuuteviisid ei ole ohtlikud>.
	EL	Μπορεί να βλάψει τη γονιμότητα ή το έμβρυο <αναφέρεται η ειδική επίπτωση εάν είναι γνωστή> <αναφέρεται η οδός έκθεσης αν έχει αποδειχθεί αδιαμφισβήτητα ότι δεν υπάρχει κίνδυνος από τις άλλες οδούς έκθεσης>.
	EN	May damage fertility or the unborn child <state specific effect if known > <state route of exposure if it is conclusively proven that no other routes of exposure cause the hazard>.
	FR	Peut nuire à la fertilité ou au fœtus <indiquer l'effet spécifique s'il est connu> <indiquer la voie d'exposition s'il est formellement prouvé qu'aucune autre voie d'exposition ne conduit au même danger>.
	GA	D'fhéadfadh damáiste a dhéanamh do thorthúlacht nó don leanbh gan bhreith <tabhair an tsainéifeacht más eol > <tabhair an bealach nochta má tá sé cruthaithe go cinntitheach nach bealach nochta ar bith eile is cúis leis an nguais>.
	IT	Può nuocere alla fertilità o al feto <indicare l'effetto specifico, se noto><indicare la via di esposizione se è accertato che nessun'altra via di esposizione comporta il medesimo pericolo>.
	LV	Var kaitēt auglībai vai nedzimušajam bērnam <norādīt īpašo ietekmi, ja tā ir zināma> <norādīt iedarbības ceļu, ja ir nepārprotami pierādīts, ka citi iedarbības ceļi nerada apdraudējumu>.
	LT	Gali pakenkti vaisingumui arba negimusiam kūdikiui <nurodyti konkretų poveikį, jeigu žinomas> <nurodyti veikimo būdą, jeigu įtikinamai nustatyta, kad kiti veikimo būdai nepavojingi>.
	HU	Károsíthatja a fertilitást vagy a születendő gyermeket < ha ismert, meg kell adni a konkrét hatást > < meg kell adni az expozíciós útvonalat, ha meggyőzően bizonyított, hogy más expozíciós útvonal nem okozza a veszélyt >.
	MT	Jista' jagħmel hsara lill-fertilità jew lit-tarbija li għadha fil-ġuf <semmi l-effett speċifiku jekk ikun magħruf> <semmi l-mod ta' espożizzjoni jekk ikun pruvat b'mod konklużiv li l-ebda mod ta' espożizzjoni ieħor ma jikkawża l-periklu>.
	NL	Kan de vruchtbaarheid of het ongeboren kind schaden <specifiek effect vermelden indien bekend> <blootstellingsroute vermelden indien afdoende bewezen is dat het gevaar bij andere blootstellingsroutes niet aanwezig is>.
	PL	Może działać szkodliwie na płodność lub na dziecko w łonie matki <podać szczególniey skutek, jeżeli jest znany> <podać drogę narażenia, jeżeli definitywnie udowodniono, że inne drogi narażenia nie stwarzają zagrożenia>.
	PT	Pode afectar a fertilidade ou o nascituro <indicar o efeito específico se este for conhecido> <indicar a via de exposição se existirem provas concludentes de que o perigo não decorre de nenhuma outra via de exposição>.
	RO	Poate dăuna fertilității sau fătului <indicați efectul specific dacă este cunoscut><indicați calea de expunere dacă există probe concludente că nicio altă cale de expunere nu provoacă acest pericol>.
	SK	Môže spôsobiť poškodenie plodnosti alebo nenarodeného dieťaťa <uveďte konkrétny účinok, ak je známy > <uveďte spôsob expozície, ak je preukázané, že žiadne iné spôsoby expozície nevyvolávajú nebezpečenstvo>.
	SL	Lahko škoduje plodnosti ali nerojenemu otroku <navesti posebni učinek, če je znan> <navesti način izpostavljenosti, če je prepričljivo dokazano, da noben drug način izpostavljenosti ne povzroča takšne nevarnosti>.
	FI	Saattaa heikentää hedelmällisyyttä tai vaurioittaa sikiötä <mainitaan tiedetty spesifinen vaikutus> <mainitaan altistumisreitti, jos on kiistatta osoitettu, että vaara ei voi aiheutua muiden altistumisreittien kautta>.
	SV	Kan skada fertiliteten eller det ofödda barnet <ange specifik effekt om denna är känd> <ange exponeringsväg om det är definitivt bevisat att faran inte kan orsakas av några andra aktuella exponeringsvägar>.

H361	Taal	3.7 — Voortplantingstoxiciteit, gevarencategorie 2
	BG	Предполага се, че оказва вредно въздействие върху плодovitостта или плода < да се посочи конкретното въздействие, ако е известно > < да се посочи пътят на експозицията, ако категорично е доказано, че няма друг път на експозиция, който води до същата опасност >.
	ES	Se sospecha que perjudica la fertilidad o daña al feto <indíquese el efecto específico si se conoce> <indíquese la vía de exposición si se ha demostrado concluyentemente que ninguna otra vía es peligrosa>.
	CS	Podezření na poškození reprodukční schopnosti nebo plodu v těle matky <uvedte specifický účinek, je-li znám> <uvedte cestu expozice, je-li přesvědčivě prokázáno, že ostatní cesty expozice nejsou nebezpečné>.
	DA	Mistænkes for at forringe forplantningsevnen eller skade det ufødte barn <angiv specifik effekt, hvis denne kendes> <angiv eksponeringsvej, hvis det er endeligt påvist, at faren ikke kan frembringes ad nogen anden eksponeringsvej>.
	DE	Kann vermutlich die Fruchtbarkeit beeinträchtigen oder das Kind im Mutterleib schädigen <sofern bekannt, konkrete Wirkung angeben> <Expositionsweg angeben, sofern schlüssig belegt ist, dass die Gefährdung bei keinem anderen Expositionsweg besteht>.
	ET	Arvatavalt kahjustab viljakust või loodet <märkida spetsifiline toime, kui see on teada> <märkida kokkupuuteviisi, kui on veenvalt tõestatud, et muud kokkupuuteviisid ei ole ohtlikud>.
	EL	Υποπτο για πρόκληση βλάβης στη γονιμότητα ή στο έμβρυο <αναφέρεται η ειδική επίπτωση εάν είναι γνωστή> <αναφέρεται η οδός έκθεσης αν έχει αποδειχθεί αδιαμφισβήτητα ότι δεν υπάρχει κίνδυνος από τις άλλες οδούς έκθεσης>.
	EN	Suspected of damaging fertility or the unborn child <state specific effect if known> <state route of exposure if it is conclusively proven that no other routes of exposure cause the hazard>.
	FR	Susceptible de nuire à la fertilité ou au fœtus <indiquer l'effet spécifique s'il est connu> <indiquer la voie d'exposition s'il est formellement prouvé qu'aucune autre voie d'exposition ne conduit au même danger>.
	GA	Ceaptar go bhféadfadh damáiste a dhéanamh do thorthúlacht nó don leanbh gan bhreith <tabhair an tsainéifeacht más eol > <tabhair an bealach nochta má tá sé cruthaithe go cinntitheach nach bealach nochta ar bith eile is cúis leis an nguais>.
	IT	Sospettato di nuocere alla fertilità o al feto <indicare l'effetto specifico, se noto> <indicare la via di esposizione se è accertato che nessun'altra via di esposizione comporta il medesimo pericolo>.
	LV	Ir aizdomas, ka var kaitēt auglībai vai nedzimušajam bērnam <norādīt īpašo ietekmi, ja tā ir zināma> <norādīt iedarbības ceļu, ja ir nepārprotami pierādīts, ka citi iedarbības ceļi nerada apdraudējumu>.
	LT	Įtariama, kad kenkia vaisingumui arba negimusiam kūdikiui <nurodyti konkretų poveikį, jeigu žinomas> <nurodyti veikimo būdą, jeigu įtikinamai nustatyta, kad kiti veikimo būdai nepavojingi>.
	HU	Feltehetően károsítja a fertilitást vagy a születendő gyermeket < ha ismert, meg kell adni a konkrét hatást > < meg kell adni az expozíciós útvonalat, ha meggyőzően bizonyított, hogy más expozíciós útvonal nem okozza a veszélyt >.
	MT	Suspettat li jagħmel hsara lill-fertilità jew lit-tarbija li għadha fil-ġuf <semmi l-effett specifiku jekk ikun magħruf> <semmi l-mod ta' espożizzjoni jekk ikun pruvat b'mod konklużiv li l-ebda modi oħra ta' espożizzjoni ma jikkawżaw il-periklu>.
	NL	Kan mogelijk de vruchtbaarheid of het ongeboren kind schaden <specifiek effect vermelden indien bekend> <blootstellingsroute vermelden indien afdoende bewezen is dat het gevaar bij andere blootstellingsroutes niet aanwezig is>.
	PL	Podjezwewa się, że działa szkodliwie na płodność lub na dziecko w łonie matki <podać szczególny skutek, jeżeli jest znany> <podać drogę narażenia, jeżeli definitywnie udowodniono, że inne drogi narażenia nie stwarzają zagrożenia>.
	PT	Suspeito de afectar a fertilidade ou o nascituro <indicar o efeito específico se este for conhecido> <indicar a via de exposição se existirem provas concludentes de que o perigo não decorre de nenhuma outra via de exposição>.
	RO	Susceptibil de a dăuna fertilității sau fătului <indicați efectul specific dacă este cunoscut><indicați calea de expunere dacă există probe concludente că nicio altă cale de expunere nu provoacă acest pericol>.
	SK	Podozrenie, že spôsobuje poškodenie plodnosti alebo nenarodeného dieťaťa <uvedte konkrétny účinok, ak je známy > <uvedte spôsob expozície, ak sa presvedčivo preukáže, že žiadne iné spôsoby expozície nevyvolávajú nebezpečenstvo>.

H361	Taal	3.7 — Voortplantingstoxiciteit, gevarencategorie 2
	SL	Sum škodljivosti za plodnost ali nerojenega otroka <navesti posebni učinek, če je znan> <navesti način izpostavljenosti, če je prepričljivo dokazano, da noben drug način izpostavljenosti ne povzroča takšne nevarnosti>.
	FI	Epäillään heikentävän hedelmällisyyttä tai vaurioittavan sikiötä <mainitaan tiedetty spesifinen vaikutus> <mainitaan altistumisreitti, jos on kiistatta osoitettu, että vaara ei voi aiheutua muiden altistumisreittien kautta>.
	SV	Misstänks kunna skada fertiliteten eller det ofödda barnet <ange specifik effekt om denna är känd> <ange exponeringsväg om det är definitivt bevisat att faran inte kan orsakas av några andra aktuella exponeringsvägar>.
H362	Taal	3.7 — Voortplantingstoxiciteit, aanvullende categorie, effecten op en via lactatie
	BG	Може да бъде вредно за кърмачета.
	ES	Puede ser nocivo para los lactantes.
	CS	Může poškodit kojene dítě.
	DA	Kan være sundhedsskadeligt for brystbørn.
	DE	Kann Säuglinge über die Muttermilch schädigen.
	ET	Võib kahjustada rinnaga toidetavat last.
	EL	Μπορεί να βλάψει τα βρέφη που τρέφονται με μητρικό γάλα.
	EN	May cause harm to breast-fed children.
	FR	Peut être nocif pour les bébés nourris au lait maternel.
	GA	D'fhéadfadh sé díobháil a dhéanamh do leanaí cíche.
	IT	Può essere nocivo per i lattanti allattati al seno.
	LV	Var radīt kaitējumu ar krūti barotam bērnam.
	LT	Gali pakenkti krūtimi maitinamam kūdikiui.
	HU	A szoptatott gyermeket károsíthatja.
	MT	Jista' taghmel hsara lit-tfal li jitreddghu.
	NL	Kan schadelijk zijn via de borstvoeding.
	PL	Może działać szkodliwie na dzieci karmione piersią.
	PT	Pode causar danos nas crianças alimentadas com leite materno.
	RO	Poate dăuna copiilor alăptați la sân.
	SK	Môže spôsobiť poškodenie u dojčených detí.
	SL	Lahko škoduje dojenim otrokom.
	FI	Saattaa aiheuttaa haittaa rintaruokinnassa oleville lapsille.
	SV	Kan skada spädbarn som ammas.
H370	Taal	3.8 — Specifieke doelorgaan toxiciteit bij eenmalige blootstelling, gevarencategorie 1
	BG	Причинява увреждане на органите < или да се посочат всички засегнати органи, ако са известни> < да се посочи пътят на експозицията, ако категорично е доказано, че няма друг път на експозиция, който води до същата опасност >.
	ES	Provoca daños en los órganos <o indiquense todos los órganos afectados, si se conocen> <indíquese la vía de exposición si se ha demostrado concluyentemente que ninguna otra vía es peligrosa>.
	CS	Způsobuje poškození orgánů <nebo uvést všechny postižené orgány, jsou-li známy> <uvedte cestu expozice, je-li přesvědčivě prokázáno, že ostatní cesty expozice nejsou nebezpečné>.

H370	Taal	3.8 — Specifieke doelorgaantoxiciteit bij eenmalige blootstelling, gevarencategorie 1
	DA	Forårsager organskader <eller angiv alle påvirkede organer, hvis de kendes> <angiv eksponeringsvej, hvis det er endeligt påvist, at faren ikke kan frembringes ad nogen anden eksponeringsvej>.
	DE	Schädigt die Organe <oder alle betroffenen Organe nennen, sofern bekannt> <Expositionsweg angeben, sofern schlüssig belegt ist, dass diese Gefahr bei keinem anderen Expositionsweg besteht>.
	ET	Kahjustab elundeid <või märkida kõik mõjutatud elundid, kui need on teada> <märkida kokkupuuteviisi, kui on veenvalt tõestatud, et muud kokkupuuteviisid ei ole ohtlikud>.
	EL	Προκαλεί βλάβες στα όργανα <ή αναφέρονται όλα τα όργανα που βλάπτονται, εάν είναι γνωστά> < αναφέρεται η οδός έκθεσης αν έχει αποδειχθεί αδιαμφισβήτητα ότι δεν υπάρχει κίνδυνος από τις άλλες οδούς έκθεσης >.
	EN	Causes damage to organs <or state all organs affected, if known> <state route of exposure if it is conclusively proven that no other routes of exposure cause the hazard>.
	FR	Provoque des lésions aux organes <ou indiquer tous les organes affectés, s'ils sont connus> <indiquer la voie d'exposition s'il est formellement prouvé qu'aucune autre voie d'exposition ne conduit au même danger>.
	GA	Déanann damáiste d'orgáin <nó tabhair na horgáin go léir a bhualtear, más eol> <tabhair an bealach nochta má tá sé cruthaithe go cinnitheach nach bealach nochta ar bith eile is cúis leis an nguais>.
	IT	Provoca danni agli organi <o indicare tutti gli organi interessati, se noti> <indicare la via di esposizione se è accertato che nessun'altra via di esposizione comporta il medesimo pericolo>.
	LV	Rada orgānu bojājumus <vai norādīt visus skartos orgānus, ja tie ir zināmi> <norādīt iedarbības ceļu, ja ir nepārprotami pierādīts, ka citi iedarbības ceļi nerada apdraudējumu>.
	LT	Kenkia organams <arba nurodyti visus veikianus organus, jeigu žinoma> <nurodyti veikimo būdą, jeigu įtikinamai nustatyta, kad kiti veikimo būdai nepavojingi>.
	HU	Károsítja a szerveket < vagy meg kell adni az összes érintett szervet, ha ismertek > < meg kell adni az expozíciós útvonalat, ha meggyőzően bizonyított, hogy más expozíciós útvonal nem okozza a veszélyt >.
	MT	Jagħmel hsara lill-organi <jew semmi l-organi kollha affettwati, jekk ikunu maġhrufa> <semmi l-mod ta' espożizzjoni jekk ikun pruvat b'mod konklużiv li l-ebda modi ta' espożizzjoni oħra ma jikkawżaw il-periklu>.
	NL	Veroorzaakt schade aan organen <of alle betrokken organen vermelden indien bekend> <blootstellingsroute vermelden indien afdoende bewezen is dat het gevaar bij andere blootstellingsroutes niet aanwezig is>.
	PL	Powoduje uszkodzenie narządów <podać szczególny skutek, jeśli jest znany> <podać drogę narażenia, jeżeli udowodniono, że inne drogi narażenia nie stwarzają zagrożeń>.
	PT	Afecta os órgãos <ou indicar todos os órgãos afectados, se forem conhecidos> <indicar a via de exposição se existirem provas concludentes de que o perigo não decorre de nenhuma outra via de exposição>.
	RO	Dăunează organelor <sau indicați toate organele afectate, dacă sunt cunoscute> <indicați calea de expunere dacă există probe concludente că nicio altă cale de expunere nu provoacă acest pericol>.
	SK	Spôsobuje poškodenie orgánov <alebo uveďte všetky zasiahnuté orgány, ak sú známe> <uveďte spôsob expozície, ak sa presvedčivo preukáže, že žiadne iné spôsoby expozície nevyvolávajú nebezpečenstvo>.
	SL	Škoduje organom <ali navesti vse organe, na katere vpliva, če je znano> <navesti način izpostavljenosti, če je prepričljivo dokazano, da noben drug način izpostavljenosti ne povzroča takšne nevarnosti>.
	FI	Vahingoittaa elimiä <tai mainitaan kaikki tiedetyt kohde-elimet> <mainitaan altistumisreitti, jos on kiistatta osoitettu, että vaara ei voi aiheutua muiden altistumisreittien kautta>.
	SV	Orsakar organskador <eller ange vilka organ som påverkas om detta är känt> <ange exponeringsväg om det är definitivt bevisat att faran inte kan orsakas av några andra aktuella exponeringsvägar>.
H371	Taal	3.8 — Specifieke doelorgaantoxiciteit bij eenmalige blootstelling, gevarencategorie 2
	BG	Може да причини увреждане на органите < или да се посочат всички засегнати органи, ако са известни > < да се посочи пътят на експозицията, ако категорично е доказано, че няма друг път на експозиция, който води до същата опасност >.



H371	Taal	3.8 — Specifieke doelorgaantoxiciteit bij eenmalige blootstelling, gevarencategorie 2
	ES	Puede provocar daños en los órganos <o indiquense todos los órganos afectados, si se conocen> <indíquese la vía de exposición si se ha demostrado concluyentemente que ninguna otra vía es peligrosa>.
	CS	Může způsobit poškození orgánů <nebo uvést všechny postižené orgány, jsou-li známy> <uvedte cestu expozice, je-li přesvědčivě prokázáno, že ostatní cesty expozice nejsou nebezpečné>.
	DA	Kan forårsage organskader<eller angiv alle påvirkede organer, hvis de kendes> <angiv eksponeringsvej, hvis det er endeligt påvist, at faren ikke kan frembringes ad nogen anden eksponeringsvej>.
	DE	Kann die Organe schädigen <oder alle betroffenen Organe nennen, sofern bekannt> <Expositionsweg angeben, sofern schlüssig belegt ist, dass diese Gefahr bei keinem anderen Expositionsweg besteht>.
	ET	Võib kahjustada elundeid <või märkida kõik mõjutatud elundid, kui need on teada> <märkida kokkupuuteviisi, kui on veenvalt tõestatud, et muud kokkupuuteviisiid ei ole ohtlikud>.
	EL	Μπορεί να προκαλέσει βλάβες στα όργανα <ή αναφέρονται όλα τα όργανα που βλάπτονται, εάν είναι γνωστά> <αναφέρεται η οδός έκθεσης αν έχει αποδειχθεί αδιαμφισβήτητα ότι δεν υπάρχει κίνδυνος από τις άλλες οδούς έκθεσης>.
	EN	May cause damage to organs <or state all organs affected, if known> <state route of exposure if it is conclusively proven that no other routes of exposure cause the hazard>.
	FR	Peut provoquer des lésions aux organes <ou indiquer tous les organes affectés, s'ils sont connus> <indiquer la voie d'exposition s'il est formellement prouvé qu'aucune autre voie d'exposition ne conduit au même danger>.
	GA	D'fhéadfadh damáiste a dhéanamh d'orgáin <nó tabhair na horgáin go léir a bhualítear, más eol> <tabhair an bealach nochta má tá sé cruthaithe go cinntitheach nach bealach nochta ar bith eile is cúis leis an nguais>.
	IT	Può provocare danni agli organi <o indicare tutti gli organi interessati, se noti> <indicare la via di esposizione se è accertato che nessun'altra via di esposizione comporta il medesimo pericolo>.
	LV	Var izraisīt orgānu bojājumus <vai norādīt visus skartos orgānus, ja tie ir zināmi> <norādīt iedarbības ceļu, ja ir nepārprotami pierādīts, ka citi iedarbības ceļi nerada apdraudējumu>.
	LT	Gali pakenkti organams <arba nurodyti visus veikiamus organus, jeigu žinoma> <nurodyti veikimo būdą, jeigu įtikinamai nustatyta, kad kiti veikimo būdai nepavojingi>.
	HU	Károsíthatja a szerveket < vagy meg kell adni az összes érintett szervet, ha ismertek > < meg kell adni az expozíciós útvonalat, ha meggyőzően bizonyított, hogy más expozíciós útvonal nem okozza a veszélyt >.
	MT	Jista' jikkawża hsara lill-organi <jew semmi l-organi kollha affettwati, jekk ikunu magħrufa> <semmi l-mod ta' espożizzjoni jekk ikun pruvat b'mod konklużiv li l-ebda modi ta' espożizzjoni oħra ma jikkawżaw il-periklu>.
	NL	Kan schade aan organen <of alle betrokken organen vermelden indien bekend> veroorzaken <blootstellingsroute vermelden indien afdoende bewezen is dat het gevaar bij andere blootstellingsroutes niet aanwezig is>.
	PL	Może powodować uszkodzenie narządów <podać wszystkie znane narządy, których to dotyczy> <podać drogę narażenia, jeżeli udowodniono, że inne drogi narażenia nie stwarzają zagrożenia>.
	PT	Pode afectar os órgãos <ou indicar todos os órgãos afectados, se forem conhecidos> <indicar a via de exposição se existirem provas concludentes de que o perigo não decorre de nenhuma outra via de exposição>.
	RO	Poate dăuna organelor <sau indicați toate organele afectate, dacă sunt cunoscute> <indicați calea de expunere dacă există probe concludente că nicio altă cale de expunere nu provoacă acest pericol>.
	SK	Môže spôsobiť poškodenie orgánov <alebo uvedte všetky zasiahnuté orgány, ak sú známe> <uvedte spôsob expozície, ak sa presvedčivo preukáže, že žiadne iné spôsoby expozície nevyvolávajú nebezpečenstvo>.
	SL	Lahko škoduje organom <ali navesti vse organe, na katere vpliva, če je znano> <navesti način izpostavljenosti, če je prepričljivo dokazano, da noben drug način izpostavljenosti ne povzroča takšne nevarnosti>.
	FI	Saattaa vahingoittaa elimiä <tai mainitaan kaikki tiedetyt kohde-elimet> <mainitaan altistumisreitti, jos on kiistatta osoitettu, että vaara ei voi aiheutua muiden altistumisreittien kautta>.

H371	Taal	3.8 — Specifieke doelorgaantoxiciteit bij eenmalige blootstelling, gevarencategorie 2
	SV	Kan orsaka organskador <eller ange vilka organ som påverkas om detta är känt> <ange exponeringsväg om det är definitivt bevisat att faran inte kan orsakas av några andra aktuella exponeringsvägar>.
H372	Taal	3.9 — Specifieke doelorgaantoxiciteit bij herhaalde blootstelling, gevarencategorie 1
	BG	Причинява увреждане на органите < или да се посочат всички засегнати органи, ако са известни > посредством продължителна или многократна експозиция < да се посочи пътят на експозицията, ако категорично е доказано, че няма друг път на експозиция, който води до същата опасност >.
	ES	Provoca daños en los órganos <indíquense todos los órganos afectados, si se conocen> tras exposiciones prolongadas o repetidas <indíquese la vía de exposición si se ha demostrado concluyentemente que ninguna otra vía es peligrosa>.
	CS	Při prodloužené nebo opakované expozici způsobuje poškození orgánů <nebo uvést všechny postižené orgány, jsou-li známy><uvěďte cestu expozice, je-li přesvědčivě prokázáno, že ostatní cesty expozice nejsou nebezpečné>.
	DA	Forårsager organskader<eller angiv alle påvirkede organer, hvis de kendes>ved længerevarende eller gentagen eksponering<angiv eksponeringsvej, hvis det er endeligt påvist, at faren ikke kan frembringes ad nogen anden eksponeringsvej>.
	DE	Schädigt die Organe <alle betroffenen Organe nennen> bei längerer oder wiederholter Exposition <Expositionsweg angeben, wenn schlüssig belegt ist, dass diese Gefahr bei keinem anderen Expositionsweg besteht>.
	ET	Kahjustab elundeid <või märkida kõik mõjutatud elundid, kui need on teada> pikaajalisel või korduval kokkupuutel <märkida kokkupuuteviisi, kui on veenvalt tõestatud, et muud kokkupuuteviisid ei ole ohtlikud>.
	EL	Προκαλεί βλάβες στα όργανα <ή αναφέρονται όλα τα όργανα που βλάπτονται, εάν είναι γνωστά> ύστερα από παρατεταμένη ή επανειλημμένη έκθεση < αναφέρεται η οδός έκθεσης αν έχει αποδειχθεί αδιαμφισβήτητα ότι δεν υπάρχει κίνδυνος από τις άλλες οδούς έκθεσης >.
	EN	Causes damage to organs <or state all organs affected, if known> through prolonged or repeated exposure <state route of exposure if it is conclusively proven that no other routes of exposure cause the hazard>.
	FR	Provoque des lésions aux organes <indiquer tous les organes affectés, s'ils sont connus> à la suite d'expositions répétées ou d'une exposition prolongée <indiquer la voie d'exposition s'il est formellement prouvé qu'aucune autre voie d'exposition ne conduit au même danger>.
	GA	Déanann damáiste d'orgáin <nó tabhair na horgáin go léir a bhualtear, más eol> trí nochtadh fada nó nochtadh arís agus arís eile <tabhair an bealach nochta má tá sé cruthaithe go cinntitheach nach bealach nochta ar bith eile is cúis leis an nguais>.
	IT	Provoca danni agli organi <o indicare tutti gli organi interessati, se noti> in caso di esposizione prolungata o ripetuta <indicare la via di esposizione se è accertato che nessun'altra via di esposizione comporta il medesimo pericolo>.
	LV	Izraisa orgānu bojājumus <vai norādīt visus skartos orgānus, ja tie ir zināmi> ilgstošas vai atkārtotas iedarbības rezultātā <norādīt iedarbības ceļu, ja ir nepārprotami pierādīts, ka citi iedarbības ceļi nerada apdraudējumu>.
	LT	Kenkia organams <arba nurodyti visus veikiamus organus, jeigu žinoma>, jeigu medžiaga veikia ilgai arba dažnai <nurodyti veikimo būdą, jeigu įtikinamai nustatyta, kad kiti veikimo būdai nepavojingi>.
	HU	Ismétlődő vagy hosszabb expozíció esetén < meg kell adni az expozíciós útvonalat, ha meggyőzően bizonyított, hogy más expozíciós útvonal nem okozza a veszélyt > károsítja a szerveket < vagy meg kell adni az összes érintett szervet, ha ismertek >.
	MT	Jikkawża hsara lill-organi <jew semmi l-organi kollha affettwati, jekk ikunu magħrufa> permezz ta' espożizzjoni fit-tul jew ripetuta <semmi l-mod ta' espożizzjoni jekk ikun pruvat b'mod konkluziv li l-ebda modi ta' espożizzjoni ohra ma jikkawżaw il-periklu>.
	NL	Veroorzaakt schade aan organen <of alle betrokken organen vermelden indien bekend> bij langdurige of herhaalde blootstelling <blootstellingsroute vermelden indien afdoende bewezen is dat het gevaar bij andere blootstellingsroutes niet aanwezig is>.
	PL	Powoduje uszkodzenie narządów <podać wszystkie znane narządy, których to dotyczy > poprzez długotrwałe lub wielokrotne narażenie <podać drogę narażenia, jeżeli udowodniono, że inne drogi narażenia nie stwarzają zagrożenia>.

H372	Taal	3.9 — Specifieke doelorgaantoxiciteit bij herhaalde blootstelling, gevarencategorie 1
	PT	Afecta os órgãos <ou indicar todos os órgãos afectados, se forem conhecidos> após exposição prolongada ou repetida <indicar a via de exposição se existirem provas concludentes de que o perigo não decorre de nenhuma outra via de exposição>.
	RO	Dăunează organelor <sau indicați toate organele afectate, dacă sunt cunoscute> prin expunere prelungită sau repetată <indicați calea de expunere dacă există probe concludente că nicio altă cale de expunere nu provoacă acest pericol>.
	SK	Spôsobuje poškodenie orgánov <alebo uveďte všetky zasiahnuté orgány, ak sú známe> pri dlhšej alebo opakovanej expozícii <uveďte spôsob expozície, ak sa presvedčivo preukáže, že žiadne iné spôsoby expozície nevyvolávajú nebezpečenstvo>.
	SL	Škoduje organom <ali navesti vse organe, na katere vpliva, če je znano> pri dolgotrajni ali ponavljajoči se izpostavljenosti <navesti način izpostavljenosti, če je prepričljivo dokazano, da noben drug način izpostavljenosti ne povzroča takšne nevarnosti>.
	FI	Vahingoittaa elimiä <tai mainitaan kaikki tiedetyt kohde-elimet> pitkäaikaisessa tai toistuvassa altistumisessa <mainitaan altistumisreitti, jos on kiistatta osoitettu, että vaara ei voi aiheutua muiden altistumisreittien kautta>.
	SV	Orsakar organskador <eller ange vilka organ som påverkas om detta är känt> genom lång eller upprepad exponering <ange exponeringsväg om det är definitivt bevisat att faran inte kan orsakas av några andra aktuella exponeringsvägar>.
H373	Taal	3.9 — Specifieke doelorgaantoxiciteit bij herhaalde blootstelling, gevarencategorie 2
	BG	Може да причини увреждане на органите < или да се посочат всички засегнати органи, ако са известни > при продължителна или многократна експозиция < да се посочи пътят на експозицията, ако категорично е доказано, че няма друг път на експозиция, който води до същата опасност >.
	ES	Puede provocar daños en los órganos <indíquense todos los órganos afectados, si se conocen> tras exposiciones prolongadas o repetidas <indíquese la vía de exposición si se ha demostrado concluyentemente que ninguna otra vía es peligrosa>.
	CS	Při prodloužené nebo opakované expozici může způsobit poškození orgánů <nebo uvést všechny postižené orgány, jsou-li známy><uveďte cestu expozice, je-li přesvědčivě prokázáno, že ostatní cesty expozice nejsou nebezpečné>.
	DA	Kan forårsage organskader<eller angiv alle påvirkede organer, hvis de kendes>ved længe-revarende eller gentagen eksponering<angiv eksponeringsvej, hvis det er endeligt påvist, at faren ikke kan frembringes ad nogen anden eksponeringsvej>.
	DE	Kann bei längerer oder wiederholter Exposition die Organe schädigen <alle betroffenen Organe nennen> <Expositionsweg angeben, wenn schlüssig belegt ist, dass diese Gefahr bei keinem anderen Expositionsweg besteht>.
	ET	Võib kahjustada elundeid <või märkida kõik mõjutatud elundid, kui need on teada> pikaajalisel või korduval kokkupuutel <märkida kokkupuuteviisi, kui on veenvalt tõestatud, et muud kokkupuuteviisid ei ole ohtlikud>.
	EL	Μπορεί να προκαλέσει βλάβες στα όργανα <ή αναφέρονται όλα τα όργανα που βλάπτονται, εάν είναι γνωστά> ύστερα από παρατεταμένη ή επανειλημμένη έκθεση <αναφέρεται η οδός έκθεσης αν έχει αποδειχθεί αδιαμφισβήτητα ότι δεν υπάρχει κίνδυνος από τις άλλες οδούς έκθεσης>.
	EN	May cause damage to organs <or state all organs affected, if known> through prolonged or repeated exposure <state route of exposure if it is conclusively proven that no other routes of exposure cause the hazard>.
	FR	Peut provoquer des lésions aux organes <ou indiquer tous les organes affectés, s'ils sont connus> à la suite d'expositions répétées ou d'une exposition prolongée <indiquer la voie d'exposition s'il est formellement prouvé qu'aucune autre voie d'exposition ne conduit au même danger>.
	GA	D'fhéadfadh damáiste a dhéanamh d'orgáin <nó tabhair na horgáin go léir a bhualtear, más eol> trí nochtadh fada nó nochtadh arís agus arís eile <tabhair an bealach nochta má tá sé cruthaithe go cinntitheach nach bealach nochta ar bith eile is cúis leis an nguais>.
	IT	Può provocare danni agli organi <o indicare tutti gli organi interessati, se noti> in caso di esposizione prolungata o ripetuta <indicare la via di esposizione se è accertato che nessun'altra via di esposizione comporta il medesimo pericolo>.
	LV	Var izraisīt orgānu bojājumus <vai norādīt visus skartos orgānus, ja tie ir zināmi> ilgstošas vai atkārtotas iedarbības rezultātā <norādīt iedarbības ceļu, ja ir nepārprotami pierādīts, ka citi iedarbības ceļi nerada apdraudējumu>.

H373	Taal	3.9 — Specifieke doelorgaan toxiciteit bij herhaalde blootstelling, gevarencategorie 2
	LT	Gali pakenkti organams <arba nurodyti visus veikiamus organus, jeigu žinoma>, jeigu medžiaga veikia ilgai arba dažnai <nurodyti veikimo būdą, jeigu įtikinamai nustatyta, kad kiti veikimo būdai nepavojingi>.
	HU	Ismétlődő vagy hosszabb expozíció esetén < meg kell adni az expozíciós útvonalat, ha meggyőzően bizonyított, hogy más expozíciós útvonal nem okozza a veszélyt > károsíthatja a szerveket > vagy meg kell adni az összes érintett szervet, ha ismertek >.
	MT	Jista' jikkawża hsara lill-organi <jew semmi l-organi kollha affettwati, jekk ikunu maghrufa> permezz ta' espożizzjoni fit-tul jew ripetuta <semmi l-mod ta' espożizzjoni jekk ikun privat b'mod konklużiv li l-ebda modi oħra ta' espożizzjoni ma jikkawżaw il-periklu>.
	NL	Kan schade aan organen <of alle betrokken organen vermelden indien bekend> veroorzaken bij langdurige of herhaalde blootstelling <blootstellingsroute vermelden indien afdoende bewezen is dat het gevaar bij andere blootstellingsroutes niet aanwezig is>.
	PL	Może powodować uszkodzenie narządów <podać wszystkie znane organy, których to dotyczy > poprzez długotrwałe lub wielokrotne narażenie <podać drożę narażenia, jeśli udowodniono, że inne drogi narażenia nie stwarzają zagrożenia>.
	PT	Pode afectar os órgãos <ou indicar todos os órgãos afectados, se forem conhecidos> após exposição prolongada ou repetida <indicar a via de exposição se existirem provas concludentes de que o perigo não decorre de nenhuma outra via de exposição>.
	RO	Poate dăuna organelor <sau indicați toate organele afectate, dacă sunt cunoscute> prin expunere prelungită sau repetată <indicați calea de expunere dacă există probe concludente că nicio altă cale de expunere nu provoacă acest pericol>.
	SK	Môže spôsobiť poškodenie orgánov <alebo uvedte všetky zasiahnuté orgány, ak sú známe> pri dlhšej alebo opakovanej expozícii <uvedte spôsob expozície, ak sa presvedčivo preukáže, že žiadne iné spôsoby expozície nevyvolávajú nebezpečenstvo>.
	SL	Lahko škoduje organom <ali navesti vse organe, na katere vpliva, če je znano> pri dolgotrajni ali ponavljajoči se izpostavljenosti <navesti način izpostavljenosti, če je prepričljivo dokazano, da noben drug način izpostavljenosti ne povzroča takšne nevarnosti>.
	FI	Saattaa vahingoittaa elimiä <tai mainitaan kaikki tiedetyt kohde-elimet> pitkäaikaisessa tai toistuvassa altistumisessa <mainitaan altistumisreitti, jos on kiistatta osoitettu, että vaara ei voi aiheutua muiden altistumisreittien kautta>
	SV	Kan orsaka organskador <eller ange vilka organ som påverkas om detta är känt> genom lång eller upprepad exponering <ange exponeringsväg om det är definitivt bevisat att faran inte kan orsakas av några andra aktuella exponeringsvägar>.

Tabel 1.3

## Gevarenaanduidingen voor milieugevaren

H400	Taal	4.1 — Acuut gevaar voor het aquatisch milieu, gevarencategorie 1
	BG	Много токсично за водните организми.
	ES	Muy tóxico para los organismos acuáticos.
	CS	Vysoce toxický pro život ve vodách.
	DA	Meget giftig for vandlevende organismer.
	DE	Sehr giftig für Wasserorganismen.
	ET	Väga mürgine veeorganismidele.
	EL	Πολύ τοξικό για τους υδρόβιους οργανισμούς.
	EN	Very toxic to aquatic life.
	FR	Très toxique pour les organismes aquatiques.
	GA	An-tocsaineach don saol uisceach.
	IT	Molto tossico per gli organismi acquatici.
	LV	Ļoti toksisks ūdens organismiem.

H400	Taal	4.1 — Acuut gevaar voor het aquatisch milieu, gevarencategorie 1
	LT	Labai toksiška vandens gyvūnijai ir augalijai.
	HU	Nagyon mérgező a vízi élővilágra.
	MT	Tossiku ħafna għall-organizmi li jgħixu fl-ilma.
	NL	Zeer giftig voor in het water levende organismen.
	PL	Działa bardzo toksycznie na organizmy wodne.
	PT	Muito tóxico para os organismos aquáticos.
	RO	Foarte toxic pentru mediul acvatic.
	SK	Veľmi toxická pre vodné organizmy.
	SL	Zelo strupeno za vodne organizme.
	FI	Erittäin myrkyllistä vesieliöille.
	SV	Mycket giftigt för vattenlevande organismer.
H410	Taal	4.1 — Chronisch gevaar voor het aquatisch milieu, gevarencategorie 1
	BG	Много токсично за водните организми, с дълготраен ефект.
	ES	Muy tóxico para los organismos acuáticos, con efectos nocivos duraderos.
	CS	Vysoce toxický pro život ve vodách s dlouhotrvajícími účinky.
	DA	Meget giftig med langvarige virkninger for vandlevende organismer.
	DE	Sehr giftig für Wasserorganismen, Langzeitwirkung.
	ET	Väga mürgine veeorganismidele, pikaajalise toimega.
	EL	Πολύ τοξικό για τους υδρόβιους οργανισμούς, με μακροχρόνιες επιπτώσεις.
	EN	Very toxic to aquatic life with long lasting effects.
	FR	Très toxique pour les organismes aquatiques, avec des effets à long terme.
	GA	An-tocsaineach don saol uisceach, le héifeachtaí fadtréimhseacha.
	IT	Molto tossico per gli organismi acquatici con effetti di lunga durata.
	LV	Ļoti toksisks ūdens organismiem ar ilgstošām sekām.
	LT	Labai toksiška vandens gyvūnijai ir augalijai, turi ilgalaikį poveikį.
	HU	Nagyon mérgező a vízi élővilágra, hosszan tartó károsodást okoz.
	MT	Tossiku ħafna għall-organizmi li jgħixu fl-ilma b'mod li jħalli effetti dejjiema.
	NL	Zeer giftig voor in het water levende organismen, met langdurige gevolgen.
	PL	Działa bardzo toksycznie na organizmy wodne, powodując długotrwałe skutki.
	PT	Muito tóxico para os organismos aquáticos com efeitos duradouros.
	RO	Foarte toxic pentru mediul acvatic cu efecte pe termen lung.
	SK	Veľmi toxická pre vodné organizmy, s dlhodobými účinkami.
	SL	Zelo strupeno za vodne organizme, z dolgotrajnimi učinki.
	FI	Erittäin myrkyllistä vesieliöille, pitkäaikaisia haittavaikutuksia.
	SV	Mycket giftigt för vattenlevande organismer med långtidseffekter.

H411	Taal	4.1 — Chronisch gevaar voor het aquatisch milieu, gevarencategorie 2
	BG	Токсично за водните организми, с дълготраен ефект.
	ES	Tóxico para los organismos acuáticos, con efectos nocivos duraderos.
	CS	Toxický pro život ve vodách s dlouhotrvajícími účinky.
	DA	Giftig med langvarige virkninger for vandlevende organismer.
	DE	Giftig für Wasserorganismen, Langzeitwirkung.
	ET	Mürgine veeorganismidele, pikaajalise toimega.
	EL	Τοξικό για τους υδρόβιους οργανισμούς, με μακροχρόνιες επιπτώσεις.
	EN	Toxic to aquatic life with long lasting effects.
	FR	Toxique pour les organismes aquatiques, avec des effets à long terme.
	GA	Tocsaineach don saol uisceach, le héifeachtaí fadtréimhseacha.
	IT	Tossico per gli organismi acquatici con effetti di lunga durata.
	LV	Toksisks ūdens organismiem ar ilgstošām sekām.
	LT	Toksiška vandens gyvūnijai ir augalijai, turi ilgalaikį poveikį.
	HU	Mérgező a vízi élővilágra, hosszan tartó károsodást okoz.
	MT	Tossiku għall-organizmi li jghixu fl-ilma b'mod li jhalli effetti dejjiema.
	NL	Giftig voor in het water levende organismen, met langdurige gevolgen.
	PL	Działa toksycznie na organizmy wodne, powodując długotrwałe skutki.
	PT	Tóxico para os organismos aquáticos com efeitos duradouros.
	RO	Toxic pentru mediul acvatic cu efecte pe termen lung.
	SK	Toxická pre vodné organizmy, s dlhodobými účinkami.
	SL	Strupeno za vodne organizme, z dolgotrajnimi učinki.
	FI	Myrkyllistä vesieliölle, pitkäaikaisia haittavaikutuksia.
	SV	Giftigt för vattenlevande organismer med långtidseffekter.
H412	Taal	4.1 — Chronisch gevaar voor het aquatisch milieu, gevarencategorie 3
	BG	Вредно за водните организми, с дълготраен ефект.
	ES	Nocivo para los organismos acuáticos, con efectos nocivos duraderos.
	CS	Škodlivý pro život ve vodách s dlouhotrvajícími účinky.
	DA	Skadelig med langvarige virkninger for vandlevende organismer.
	DE	Schädlich für Wasserorganismen, Langzeitwirkung.
	ET	Ohtlik veeorganismidele, pikaajalise toimega.
	EL	Επιβλαβές για τους υδρόβιους οργανισμούς, με μακροχρόνιες επιπτώσεις.
	EN	Harmful to aquatic life with long lasting effects.
	FR	Nocif pour les organismes aquatiques, avec des effets à long terme.
	GA	Díobhálach don saol uisceach, le héifeachtaí fadtréimhseacha.
	IT	Nocivo per gli organismi acquatici con effetti di lunga durata.
	LV	Kaitīgs ūdens organismiem ar ilgstošām sekām.
	LT	Kenksminga vandens gyvūnijai ir augalijai, turi ilgalaikį poveikį.

H412	Taal	4.1 — Chronisch gevaar voor het aquatisch milieu, gevarencategorie 3
	HU	Ártalmas a vízi élővilágra, hosszan tartó károsodást okoz.
	MT	Jagħmel hsara lill-organizmi li jghixu fl-ilma b'mod li jhalli effetti dejjiema.
	NL	Schadelijk voor in het water levende organismen, met langdurige gevolgen.
	PL	Działa szkodliwie na organizmy wodne, powodując długotrwałe skutki.
	PT	Nocivo para os organismos aquáticos com efeitos duradouros.
	RO	Nociv pentru mediul acvatic cu efecte pe termen lung.
	SK	Škodlivá pre vodné organizmy, s dlhodobými účinkami.
	SL	Škodljivo za vodne organizme, z dolgotrajnimi učinki.
	FI	Haitallista vesieliöille, pitkäaikaisia haittavaikutuksia.
	SV	Skadliga långtidseffekter för vattenlevande organismer.
H413	Taal	4.1 — Chronisch gevaar voor het aquatisch milieu, gevarencategorie 4
	BG	Може да причини дълготраен вреден ефект за водните организми.
	ES	Puede ser nocivo para los organismos acuáticos, con efectos nocivos duraderos.
	CS	Může vyvolat dlouhotrvající škodlivé účinky pro život ve vodách.
	DA	Kan forårsage langvarige skadelige virkninger for vandlevende organismer.
	DE	Kann für Wasserorganismen schädlich sein, Langzeitwirkung.
	ET	Võib avaldada veeorganismidele pikaajalist kahjulikku toimet.
	EL	Μπορεί να προκαλέσει μακροχρόνιες επιπτώσεις στους υδρόβιους οργανισμούς.
	EN	May cause long lasting harmful effects to aquatic life.
	FR	Peut être nocif à long terme pour les organismes aquatiques.
	GA	D'fhéadfadh a bheith ina chúis éifeachtaí fadtréimhseacha díobhálacha ar an saol uisceach.
	IT	Può essere nocivo per gli organismi acquatici con effetti di lunga durata.
	LV	Var radīt ilgstošas kaitīgas sekas ūdens organismiem.
	LT	Gali turėti ilgalaikį kenksmingą poveikį vandens gyvūnijai ir augalijai.
	HU	Hosszan tartó ártalmas hatást gyakorolhat a vízi élővilágra.
	MT	Jista' jikkawża effetti dejjiema li jagħmlu hsara lill-organizmi li jghixu fl-ilma.
	NL	Kan langdurige schadelijke gevolgen voor in het water levende organismen hebben.
	PL	Może powodować długotrwałe szkodliwe skutki dla organizmów wodnych.
	PT	Pode provocar efeitos nocivos duradouros nos organismos aquáticos.
	RO	Poate avea efecte nocive pe termen lung pentru mediul acvatic.
	SK	Na vodné organizmy môže mať dlhodobé škodlivé účinky.
	SL	Lahko ima dolgotrajne škodljive učinke na vodne organizme.
	FI	Voi aiheuttaa pitkäaikaisia haittavaikutuksia vesieliöille.
	SV	Kan ge skadliga långtidseffekter på vattenlevande organismer.

## 2. Deel 2: aanvullende gevareninformatie

Tabel 2.1

## Materiële eigenschappen

EUH 001	Taal	
	BG	Експлозивно в сухо състояние.
	ES	Explosivo en estado seco.
	CS	Výbušný v suchém stavu.
	DA	Ekspløst i tør tilstand.
	DE	In trockenem Zustand explosionsgefährlich.
	ET	Plahvatusohtlik kuivana.
	EL	Εκρηκτικό σε ξηρή κατάσταση.
	EN	Explosive when dry.
	FR	Explosif à l'état sec.
	GA	Pléascach agus é tirim.
	IT	Esplosivo allo stato secco.
	LV	Sprādzienbīstams sausā veidā.
	LT	Sausoje būsenoje gali sprogti.
	HU	Száraz állapotban robbanásveszélyes.
	MT	Jisplodi meta jinxef.
	NL	In droge toestand ontplofbaar.
	PL	Produkt wybuchowy w stanie suchym.
	PT	Explosivo no estado seco.
	RO	Exploziv în stare uscată.
	SK	V suchom stave výbušný.
	SL	Ekspløzivno v suhem stanju.
	FI	Räjätävää kuivana.
	SV	Ekspløst i torrt tillstånd.
EUH 006	Taal	
	BG	Експлозивно в или без контакт с въздуха.
	ES	Peligro de explosión, en contacto o sin contacto con el aire.
	CS	Výbušný za přístupu i bez přístupu vzduchu.
	DA	Ekspløst ved og uden kontakt med luft.
	DE	Mit und ohne Luft explosionsfähig.
	ET	Plahvatusohtlik õhuga kokkupuutel või kokkupuuteta.
	EL	Εκρηκτικό σε επαφή ή χωρίς επαφή με τον αέρα.
	EN	Explosive with or without contact with air.
	FR	Danger d'explosion en contact ou sans contact avec l'air.



EUH 006	Taal	
	GA	Pléascach i dtadhall le haer nó gan é.
	IT	Esplosivo a contatto o senza contatto con l'aria.
	LV	Sprādzienbīstams gaisa un bezgaisa vidē.
	LT	Gali sprogti kontaktuodamas su oru arba be tokio kontakto.
	HU	Levegővel érintkezve vagy anélkül is robbanásveszélyes.
	MT	Jista' jisploidi b'kuntatt jew bla kuntatt ma' l-ajra.
	NL	Ontplofbaar met en zonder lucht.
	PL	Produkt wybuchowy z dostępem lub bez dostępu powietrza.
	PT	Perigo de explosão com ou sem contacto com o ar.
	RO	Pericol de explozie în contact sau în lipsa contactului cu aerul.
	SK	Výbušný pri kontakte alebo bez kontaktu so vzduchom.
	SL	Eksplozivno v stiku z zrakom ali brez stika z zrakom.
	FI	Räjähävää sellaisenaan tai ilman kanssa.
	SV	Explosivt vid eller utan kontakt med luft.

EUH 014	Taal	
	BG	Реагира бурно с вода.
	ES	Reacciona violentamente con el agua.
	CS	Prudce reaguje s vodou.
	DA	Reagerer voldsomt med vand.
	DE	Reagiert heftig mit Wasser.
	ET	Reageerib ägedalt veega.
	EL	Αντιδρά βίαια με νερό.
	EN	Reacts violently with water.
	FR	Réagit violemment au contact de l'eau.
	GA	Imoibríonn go foirtíl le huisce.
	IT	Reagisce violentemente con l'acqua.
	LV	Aktīvi reaģē ar ūdeni.
	LT	Smarkiai reaguoja su vandeniu.
	HU	Vízzel hevesen reagál.
	MT	Jirreaġixxi bil-qawwa meta jmiss l-ilma.
	NL	Reageert heftig met water.
	PL	Reaguje gwałtownie z wodą.
	PT	Reage violentamente em contacto com a água.
	RO	Reacționează violent în contact cu apa.
	SK	Prudko reaguje s vodou.
	SL	Burno reagira z vodo.

EUH 014	Taal	
	FI	Reagoi voimakkaasti veden kanssa.
	SV	Reagerar häftigt med vatten.
EUH 018	Taal	
	BG	При употреба може да образува запалима/експлозивна паровъздушна смес.
	ES	Al usarlo pueden formarse mezclas aire-vapor explosivas o inflamables.
	CS	Při používání může vytvářet hořlavé nebo výbušné směsi par se vzduchem.
	DA	Kan danne brandbare dampe/eksplosive damp-luftblandinger ved brug.
	DE	Kann bei Verwendung explosionsfähige/entzündbare Dampf/Luft-Gemische bilden.
	ET	Kasutamisel võib moodustuda tule-/plahvatusohtlik auru-õhu segu.
	EL	Κατά τη χρήση μπορεί να σχηματίσει εύφλεκτα/εκρηκτικά μείγματα ατμού-αέρος.
	EN	In use may form flammable/explosive vapour-air mixture.
	FR	Lors de l'utilisation, formation possible de mélange vapeur-air inflammable/explosif.
	GA	Agus é á úsáid d'fhéadfaí meascán inadhainte/pléascach gaile-aeir a chruthú.
	IT	Durante l'uso può formarsi una miscela vapore-aria esplosiva/infiammabile.
	LV	Izmantojot var veidot uzliesmojošu vai sprādzienbīstamu tvaiku un gaisa maisījumu.
	LT	Naudojama gali sudaryti degius (sprogius) garų — oro mišinius.
	HU	A használat során tűzveszélyes/robbanásveszélyes gőz/levegő elegy keletkezhet.
	MT	Meta jintuża jista' jifforma tahlitiet espussivi jew li jaqbdu jekk jithallat ma' l-arja.
	NL	Kan bij gebruik een ontvlambaar/ontploffbaar damp-luchtmengsel vormen.
	PL	Podczas stosowania mogą powstawać łatwopalne lub wybuchowe mieszaniny par z powietrzem.
	PT	Pode formar mistura vapor-ar explosiva/inflamável durante a utilização.
	RO	Poate forma un amestec inflamabil/exploziv de aer-vapori în timpul utilizării.
	SK	Pri použití může vytvářet horlavé/výbušné zmesi pár so vzduchom.
	SL	Pri uporabi lahko tvori vnetljivo/eksplozivno zmes hlapi-zrak.
	FI	Käytössä voi muodostua syttyvä/räjähävä höyry-ilmaseos.
	SV	Vid användning kan brännbara/explosiva ång-luftblandningar bildas.
EUH 019	Taal	
	BG	Може да образува експлозивни пероксиди.
	ES	Puede formar peróxidos explosivos.
	CS	Může vytvářet výbušné peroxidy.
	DA	Kan danne eksplosive peroxider.
	DE	Kann explosionsfähige Peroxide bilden.
	ET	Võib moodustada plahvatusohtlikke peroksiide.
	EL	Μπορεί να σχηματίσει εκρηκτικά υπεροξειδία.
	EN	May form explosive peroxides.
	FR	Peut former des peroxydes explosifs.

EUH 019	Taal	
	GA	D'fhéadfadh sárocsaídí pléascacha a chruthú.
	IT	Può formare perossidi esplosivi.
	LV	Var veidot sprādzienbīstamus peroksidus.
	LT	Gali sudaryti sprogstamuosius peroksidus.
	HU	Robbanásveszélyes peroxidokat képezhet.
	MT	Jista' jiforma perossidi esplussivi.
	NL	Kan ontplofbare peroxiden vormen.
	PL	Może tworzyć wybuchowe nadtlenki.
	PT	Pode formar peróxidos explosivos.
	RO	Poate forma peroxizi explozivi.
	SK	Môže vytvárat' výbušné peroxidy.
	SL	Lahko tvori eksplozivne perokside.
	FI	Saattaa muodostaa räjähtäviä peroksideja.
	SV	Kan bilda explosiva peroxider.
EUH 044	Taal	
	BG	Риск от експлозия при нагряване в ограничено пространство.
	ES	Riesgo de explosión al calentarlo en ambiente confinado.
	CS	Nebezpečí výbuchu při zahřátí v uzavřeném obalu.
	DA	Eksplotionsfarlig ved opvarmning under indeslutning.
	DE	Explosionsgefahr bei Erhitzen unter Einschluss.
	ET	Plahvatusohtlik kuumutamisel kinnises mahutis.
	EL	Κίνδυνος εκρήξεως εάν θερμανθεί υπό περιορισμό.
	EN	Risk of explosion if heated under confinement.
	FR	Risque d'explosion si chauffé en ambiance confinée.
	GA	Baol pléasctha arna théamh i spás comhdhúnta.
	IT	Rischio di esplosione per riscaldamento in ambiente confinato.
	LV	Sprādziena draudi, karsējot slēgtā vidē.
	LT	Gali sprogti, jei kaitinama sandariai uždaryta.
	HU	Zárt térben hő hatására robbanhat.
	MT	Riskju ta' splużjoni jekk jissahhan fil-magħluq.
	NL	Ontploffingsgevaar bij verwarming in afgesloten toestand.
	PL	Zagrożenie wybuchem po ogrzaniu w zamkniętym pomieszczeniu.
	PT	Risco de explosão se aquecido em ambiente fechado.
	RO	Pericol de explozie la încălzirea în mediu izolat.
	SK	Riziko výbuchu pri zahrievaní v uzavretom priestore.
	SL	Nevarnost eksplozije ob segrevanju v zaprtem prostoru.

EUH 044	Taal	
	FI	Räjähdysvaara kuumennettaessa suljetussa astiassa.
	SV	Explosionsrisk vid uppvärmning i sluten behållare.

Tabel 2.2

**Gezondheidseigenschappen**

EUH 029	Taal	
	BG	При контакт с вода се отделя токсичен газ.
	ES	En contacto con agua libera gases tóxicos.
	CS	Uvolňuje toxický plyn při styku s vodou.
	DA	Udvikler giftig gas ved kontakt med vand.
	DE	Entwickelt bei Berührung mit Wasser giftige Gase.
	ET	Kokkupuutel veega eraldub mürgine gaas.
	EL	Σε επαφή με το νερό ελευθερώνονται τοξικά αέρια.
	EN	Contact with water liberates toxic gas.
	FR	Au contact de l'eau, dégage des gaz toxiques.
	GA	I dtadhall le huisce scaoiltear gás tocsaineach.
	IT	A contatto con l'acqua libera un gas tossico.
	LV	Saskaroties ar ūdeni, izdala toksiskas gāzes.
	LT	Kontaktuodamas su vandeniu išskiria toksiškas dujas.
	HU	Vízzel érintkezve mérgező gázok képződnek.
	MT	Jitfa' gass tossiku meta jmiss l-ilma.
	NL	Vormt giftig gas in contact met water.
	PL	W kontakcie z wodą uwalnia toksyczne gazy.
	PT	Em contacto com a água liberta gases tóxicos.
	RO	În contact cu apa, degajă gaze toxice.
	SK	Pri kontakte s vodou uvolňuje jedovatý plyn.
	SL	V stiku z vodo se sprošča strupen plin.
	FI	Kehittää myrkyllistä kaasua veden kanssa.
	SV	Utvecklar giftig gas vid kontakt med vatten.

EUH 031	Taal	
	BG	При контакт с киселини се отделя токсичен газ.
	ES	En contacto con ácidos libera gases tóxicos.
	CS	Uvolňuje toxický plyn při styku s kyselinami.
	DA	Udvikler giftig gas ved kontakt med syre.
	DE	Entwickelt bei Berührung mit Säure giftige Gase.
	ET	Kokkupuutel hapetega eraldub mürgine gaas.

EUH 031	Taal	
	EL	Σε επαφή με οξέα ελευθερώνονται τοξικά αέρια.
	EN	Contact with acids liberates toxic gas.
	FR	Au contact d'un acide, dégage un gaz toxique.
	GA	I dtadhall le haigéid scaoiltear gás tocsaineach.
	IT	A contatto con acidi libera un gas tossico.
	LV	Saskaroties ar skābēm, izdala toksiskas gāzes.
	LT	Kontaktuodama su rūgštimis išskiria toksiškas dujas.
	HU	Savval érintkezve mérgező gázok képződnek.
	MT	Jitfa' gass tossiku meta jmiss l-acidi.
	NL	Vormt giftig gas in contact met zuren.
	PL	W kontakcie z kwasami uwalnia toksyczne gazy.
	PT	Em contacto com ácidos liberta gases tóxicos.
	RO	În contact cu un acid, degajă gaze toxice.
	SK	Pri kontakte s kyselinami uvoľňuje jedovatý plyn.
	SL	V stiku s kisljinami se sprošča strupen plin.
	FI	Kehittää myrkyllistä kaasua hapon kanssa.
	SV	Utvecklar giftig gas vid kontakt med syra.
EUH 032	Taal	
	BG	При контакт с киселини се отделя силно токсичен газ.
	ES	En contacto con ácidos libera gases muy tóxicos.
	CS	Uvolňuje vysoce toxický plyn při styku s kyselinami.
	DA	Udvikler meget giftig gas ved kontakt med syre.
	DE	Entwickelt bei Berührung mit Säure sehr giftige Gase.
	ET	Kokkupuutel hapetega eraldub väga mürgine gaas.
	EL	Σε επαφή με οξέα ελευθερώνονται πολύ τοξικά αέρια.
	EN	Contact with acids liberates very toxic gas.
	FR	Au contact d'un acide, dégage un gaz très toxique.
	GA	I dtadhall le haigéid scaoiltear gás an-tocsaineach.
	IT	A contatto con acidi libera un gas molto tossico.
	LV	Saskaroties ar skābēm, izdala ļoti toksiskas gāzes.
	LT	Kontaktuodama su rūgštimis išskiria labai toksiškas dujas.
	HU	Savval érintkezve nagyon mérgező gázok képződnek.
	MT	Jitfa' gass tossiku hafna meta jmiss l-acidi.
	NL	Vormt zeer giftig gas in contact met zuren.
	PL	W kontakcie z kwasami uwalnia bardzo toksyczne gazy.
	PT	Em contacto com ácidos liberta gases muito tóxicos.
	RO	În contact cu acizi, degajă gaze foarte toxice.

EUH 032	Taal	
	SK	Pri kontakte s kyselinami uvolňuje veľmi jedovatý plyn.
	SL	V stiku s kislinami se sprošča zelo strupen plin.
	FI	Kehittää erittäin myrkyllistä kaasua hapon kanssa.
	SV	Utvecklar mycket giftig gas vid kontakt med syra.
EUH 066	Taal	
	BG	Повтарящата се експозиция може да причини изсушаване или напукване на кожата.
	ES	La exposición repetida puede provocar sequedad o formación de grietas en la piel.
	CS	Opakovaná expozice může způsobit vysušení nebo popraskání kůže
	DA	Gentagen kontakt kan give tør eller revnet hud.
	DE	Wiederholter Kontakt kann zu spröder oder rissiger Haut führen.
	ET	Korduv kokkupuude võib põhjustada naha kuivust või lõhenemist.
	EL	Παρατεταμένη έκθεση μπορεί να προκαλέσει ξηρότητα δέρματος ή σκάσιμο.
	EN	Repeated exposure may cause skin dryness or cracking.
	FR	L'exposition répétée peut provoquer dessèchement ou gerçures de la peau.
	GA	D'fhéadfadh tirimeacht chraicinn nó scoilt chraicinn a bheidh mar thoradh i gcás nochtá arís agus arís eile.
	IT	L'esposizione ripetuta può provocare secchezza o screpolature della pelle.
	LV	Atkārtota iedarbība var radīt sausu ādu vai izraisīt tās sprēgāšanu.
	LT	Pakartotinas poveikis gali sukelti odos džiuvimą arba skilinę- jimą.
	HU	Ismétlődő expozíció a bőr kiszáradását vagy megrepedezését okozhatja.
	MT	Esposizzjoni ripetuta tista' tikkaġuna nxif jew qsim tal-ġilda.
	NL	Herhaalde blootstelling kan een droge of een gebarsten huid veroorzaken.
	PL	Powtarzające się narażenie może powodować wysuszenie lub pęknięcie skóry.
	PT	Pode provocar secura da pele ou fissuras, por exposição repetida.
	RO	Expunerea repetată poate provoca uscarea sau crăparea pielii.
	SK	Opakovaná expozícia môže spôsobiť vysušenie alebo popraskanie pokožky.
	SL	Ponavljajoča izpostavljenost lahko povzroči nastanek suhe ali razpokane kože.
	FI	Toistuva altistus voi aiheuttaa ihon kuivumista tai halkeilua.
	SV	Upprepad kontakt kan ge torr hud eller hudsprickor.
EUH 070	Taal	
	BG	Токсичен при контакт с очите.
	ES	Tóxico en contacto con los ojos.
	CS	Toxický při styku s očima.
	DA	Giftig ved kontakt med øjnene.
	DE	Giftig bei Kontakt mit den Augen.
	ET	Silma sattumisel mürgine.
	EL	Τοξικό όταν έρθει σε επαφή με τα μάτια.

EUH 070	Taal	
	EN	Toxic by eye contact.
	FR	Toxique par contact oculaire.
	GA	Tocsaineach trí thadhall leis an tsúil.
	IT	Tossico per contatto oculare.
	LV	Toksisks saskarē ar acīm.
	LT	Patekusi į akis toksiška.
	HU	Szembe kerülve mérgező.
	MT	Tossiku meta jmiss ma' l-ghajnejn.
	NL	Giftig bij oogcontact.
	PL	Działa toksycznie w kontakcie z oczami.
	PT	Tóxico por contacto com os olhos.
	RO	Toxic în contact cu ochii.
	SK	Toxický pri kontakte s očami.
	SL	Strupeno ob stiku z očmi.
	FI	Myrkyllistä joutuessaan silmään.
	SV	Giftigt vid kontakt med ögonen.
EUH 071	Taal	
	BG	Разяждащо за дихателните пътища.
	ES	Corrosivo para las vías respiratorias.
	CS	Leptá dýchací orgány.
	DA	Ætsende for luftvejene.
	DE	Ätzend für die Atemwege.
	ET	Söövitav hingamiselunditele.
	EL	Διαβρωτικό της αναπνευστικής οδού.
	EN	Corrosive to the respiratory tract.
	FR	Corrosif pour les voies respiratoires.
	GA	Creimneach don chonair riospráide.
	IT	Corrosivo per le vie respiratorie.
	LV	Kodīgs elpceļiem.
	LT	Ėsdina kvėpavimo takus.
	HU	Maró hatású a légutakra.
	MT	Korruziv għas-sistema respiratorja.
	NL	Bijtend voor de luchtwegen.
	PL	Działa żrąco na drogi oddechowe.
	PT	Corrosivo para as vias respiratórias.
	RO	Corosiv pentru căile respiratorii.
	SK	Žieravá pre dýchacie cesty.

EUH 071	Taal	
	SL	Jedko za dihalne poti.
	FI	Hengityselimiä syövyttävää.
	SV	Frätande på luftvägarna.

Tabel 2.3

**Milieu-eigenschappen**

EUH 059	Taal	Aanvullende EU-gevarenklasse
	BG	Опасно за озоновия слой.
	ES	Peligroso para la capa de ozono.
	CS	Nebezpečný pro ozonovou vrstvu.
	DA	Skadeligt for ozonlaget.
	DE	Schädigt die Ozonschicht.
	ET	Ohtlik osoonikihile.
	EL	Επικίνδυνο για τη στιβάδα του όζοντος.
	EN	Hazardous to the ozone layer.
	FR	Dangereux pour la couche d'ozone.
	GA	Guaiseach don chiseal ózón.
	IT	Pericoloso per lo strato di ozono.
	LV	Bīstams ozona slānim.
	LT	Pavojinga ozono sluoksniui.
	HU	Veszélyes az ózonszféra számára.
	MT	Perikoluż għas-saff ta' l-ożonu.
	NL	Gevaarlijk voor de ozonlaag.
	PL	Niebezpieczne dla warstwy ozonowej.
	PT	Perigoso para a camada de ozono.
	RO	Periculos pentru stratul de ozon.
	SK	Nebezpečný pre ozónovú vrstvu.
	SL	Nevarno za ozonski plašč.
	FI	Otsonikerrokselle vaarallinen.
	SV	Farligt för ozonskiktet.

**3. Deel 3: aanvullende etiketteringselementen/informatie over bepaalde stoffen of mengsels**

EUH 201/ 201A	Taal	
201 201A	BG	Съдържа олово. Да не се използва върху повърхност, която евентуално може да се дъвче или смуче от деца. Внимание! Съдържа олово.



EUH 201/ 201A	Taal	
201 201A	ES	Contiene plomo. No utilizar en superficies que los niños puedan masticar o chupar. ¡Atención! Contiene plomo.
201 201A	CS	Obsahuje olovo. Nemá se používat na povrchy, které mohou okusovat nebo olizovat děti. Pozor! Obsahuje olovo.
201 201A	DA	Indeholder bly. Må ikke anvendes på genstande, som børn kan tygge eller sutte på. Advarsel! Indeholder bly.
201 201A	DE	Enthält Blei. Nicht auf Gegenständen verwenden, die von Kindern gekaut oder gelutscht werden könnten. Warnung! Enthält Blei.
201 201A	ET	Sisaldab pliid. Mitte kasutada pindadel, mida lapsed võivad närida või imeda. Ettevaatust! Sisaldab pliid.
201 201A	EL	Περιέχει μόλυβδο. Να μη χρησιμοποιείται σε επιφάνειες τις οποίες είναι πιθανόν να μασήσουν ή να πιπιλίσουν τα παιδιά. Προσοχή! Περιέχει μόλυβδο.
201 201A	EN	Contains lead. Should not be used on surfaces liable to be chewed or sucked by children. Warning! Contains lead.
201 201A	FR	Contient du plomb. Ne pas utiliser sur les objets susceptibles d'être mâchés ou sucés par des enfants. Attention! Contient du plomb.
201 201A	GA	Luaidhe ann. Níor chóir a úsáid ar dhromchlaí a d'fhéadfadh a bheith á gcogaint nó á sú ag leanaí. Rabhadh! Luaidhe ann.
201 201A	IT	Contiene piombo. Non utilizzare su oggetti che possono essere masticati o succhiati dai bambini. Attenzione! Contiene piombo.
201 201A	LV	Satur svīnu. Nedrīkst lietot uz virsmām, kuras var nonākt bērnam mutē. Brīdinājums! Satur svīnu.
201 201A	LT	Sudėtyje yra švino. Neturėtų būti naudojama paviršiams, kuriuos galėtų kramtyti arba čiulpti vaikai. Dėmesio! Sudėtyje yra švino.
201 201A	HU	Ólmot tartalmaz. Tilos olyan tárgyakon használni, amelyeket gyermekek megrághatnak, megnyalhatnak, szájukba vehetnek. Figyelem! Ólmot tartalmaz.
201 201A	MT	Fih iċ-ċomb. M'għandux jintuża' fuq uċuħ li x'aktarx jomoghduhom jew jerdgħuħom it-ftal. Twissija! Fih iċ-ċomb.
201 201A	NL	Bevat lood. Mag niet worden gebruikt voor voorwerpen waarin kinderen kunnen bijten of waaraan kinderen kunnen zuigen. Let op! Bevat lood.
201 201A	PL	Zawiera ołów. Nie należy stosować na powierzchniach, które mogą być gryzione lub ssane przez dzieci. Uwaga! Zawiera ołów.
201 201A	PT	Contém chumbo. Não utilizar em superfícies que possam ser mordidas ou chupadas por crianças. Atenção! Contém chumbo.
201 201A	RO	Conține plumb. A nu se utiliza pe obiecte care pot fi mestecate sau supte de copii. Atenție! Conține plumb.
201 201A	SK	Obsahuje olovo. Nemala by sa nanašať na povrchy, ktoré by mohli žuť alebo oblizovať deti. Pozor! Obsahuje olovo.
201 201A	SL	Vsebuje svinec. Ne sme se nanašati na površine, ki bi jih lahko žvečili ali sesali otroci. Pozor! Vsebuje svinec.

EUH 201/ 201A	Taal	
201 201A	FI	Sisältää lyijyä. Ei saa käyttää pintoihin, joita lapset voivat pureskella tai imeä. Varoitus! Sisältää lyijyä.
201 201A	SV	Innehåller bly. Bör inte användas på ytor där barn kan komma åt att tugga eller suga. Varning! Innehåller bly.
EUH 202	Taal	
	BG	Цианоакрилат. Опасно. Залепва кожата и очите за секунди. Дръжте далеч от обсега на деца.
	ES	Cianoacrilato. Peligro. Se adhiere a la piel y a los ojos en pocos segundos. Manténgase fuera del alcance de los niños.
	CS	Kyanakrylát. Nebezpečí. Okamžitě lepí kůži a oči. Uchovávejte mimo dosah dětí.
	DA	Cyanocrylat. Farligt. Klæber til huden og øjnene på få sekunder. Opbevares utilgængeligt for børn.
	DE	Cyanacrylat. Gefahr. Klebt innerhalb von Sekunden Haut und Augenlider zusammen. Darf nicht in die Hände von Kindern gelangen.
	ET	Tsüanoakrülaad. Ohtlik. Liimib naha ja silmad hetkega. Hoida lastele kättesaamatus kohas.
	EL	Κυανοακρυλική ένωση. Κίνδυνος. Κollάει στην επιδερμίδα και στα μάτια μέσα σε δευτερόλεπτα. Να φυλάσσεται μακριά από παιδιά.
	EN	Cyanoacrylate. Danger. Bonds skin and eyes in seconds. Keep out of the reach of children.
	FR	Cyanoacrylate. Danger. Colle à la peau et aux yeux en quelques secondes. À conserver hors de portée des enfants.
	GA	Cianaicrioláit. Dainséar. Nascann craiceann agus súile laistigh de shoicindí. Coimeád as aimsiú leanaí.
	IT	Cianoacrilato. Pericolo. Si incolla alla pelle e agli occhi in pochi secondi. Tenere fuori dalla portata dei bambini.
	LV	Ciānakrilāts. Bīstami. Iedarbība uz acīm un ādu tūlītēja. Sargāt no bērniem.
	LT	Cianakrilatas. Pavojus. Suklijuoja odą ir akis per kelias sekundes. Laikyti vaikams nepasiekiamoje vietoje.
	HU	Cianoakrilát. Veszély! Néhány másodperc alatt a bőrre és a szembe ragad. Gyermekektől elzárva tartandó.
	MT	Cyanoacrylate. Periklu. Iwahhal il-ġilda u l-ġhajnejn f'sekondi. Żommu 'l bogħod minn fejn jistgħu jilhqūh it-tfal.
	NL	Cyanoacrylaad. Gevaarlijk. Kleeft binnen enkele seconden aan huid en oogleden. Buiten het bereik van kinderen houden.
	PL	Cyjanoakrylan. Niebezpieczeństwo. Spaja skórę i oczy w przeciągu sekund. Chronić przed dziećmi.
	PT	Cianoacrilato. Perigo. Cola à pele e aos olhos em poucos segundos. Manter fora do alcance das crianças.
	RO	Cianoacrilat. Pericol. Se lipește de piele și ochi în câteva secunde. A nu se lăsa la îndemâna copiilor.
	SK	Kyanoakrylát. Nebezpečnostvo. V priebehu niekoľkých sekúnd zlepi pokožku a oči. Uchovávať mimo dosahu detí.
	SL	Cianoakrilat. Nevarno. Kožo in oči zlepi v nekaj sekundah. Hraniti zunaj dosega otrok.
	FI	Syanoakrylaattia. Vaara. Liimaa ihon ja silmät hetkessä. Säilytettävä lasten ulottumattomissa.
	SV	Cyanoakrylat. Fara. Fäster snabbt. Farligt för hud och ögon. Förvaras oåtkomligt för barn.

EUH 203	Taal	
	BG	Съдържа хром (VI). Може да причини алергична реакция.
	ES	Contiene cromo (VI). Puede provocar una reacción alérgica.
	CS	Obsahuje chrom (VI). Může vyvolat alergickou reakci.
	DA	Indeholder krom (VI). Kan udløse allergisk reaktion.
	DE	Enthält Chrom (VI). Kann allergische Reaktionen hervorrufen.
	ET	Sisaldab kroomi (VI). Võib esile kutsuda allergilise reaktsiooni.
	EL	Περιέχει χρώμιο (VI). Μπορεί να προκαλέσει αλλεργική αντίδραση.
	EN	Contains chromium (VI). May produce an allergic reaction.
	FR	Contient du chrome (VI). Peut déclencher une réaction allergique.
	GA	Cróimiam ann (VI). D'fhéadfadh a bheith ina chúis fhrithghnímh ailléirigh.
	IT	Contiene cromo (VI). Può provocare una reazione allergica.
	LV	Satur hromu (VI). Var izraisīt alerģisku reakciju.
	LT	Sudėtyje yra chromo (VI). Gali sukelti alerginę reakciją.
	HU	Krómot (VI) tartalmaz. Allergiás reakciót válthat ki.
	MT	Fih il-kromju (VI). Jista' joħloq reazzjoni allergika.
	NL	Bevat zeswaardig chroom. Kan een allergische reactie veroorzaken.
	PL	Zawiera chrom (VI). Może wywoływać reakcję alergiczną.
	PT	Contém crómio (VI). Pode provocar uma reacção alérgica.
	RO	Conține crom (VI). Poate provoca o reacție alergică.
	SK	Obsahuje chróm (VI). Môže vyvolať alergickú reakciu.
	SL	Vsebuje krom (VI). Lahko povzroči alergijski odziv.
	FI	Sisältää kromi(VI)-yhdisteitä. Voi aiheuttaa allergisen reaktion.
	SV	Innehåller krom (VI). Kan orsaka en allergisk reaktion.
EUH 204	Taal	
	BG	Съдържа изоцианати. Може да причини алергична реакция.
	ES	Contiene isocianatos. Puede provocar una reacción alérgica.
	CS	Obsahuje isokyanáty. Může vyvolat alergickou reakci.
	DA	Indeholder isocyanater. Kan udløse allergisk reaktion.
	DE	Enthält Isocyanate. Kann allergische Reaktionen hervorrufen.
	ET	Sisaldab isotsüanaate. Võib esile kutsuda allergilise reaktsiooni.
	EL	Περιέχει ισοκυανικές ενώσεις. Μπορεί να προκαλέσει αλλεργική αντίδραση.
	EN	Contains isocyanates. May produce an allergic reaction.
	FR	Contient des isocyanates. Peut déclencher une réaction allergique.
	GA	Isicianaítí ann. D'fhéadfadh a bheith ina chúis fhrithghnímh ailléirigh.
	IT	Contiene isocianati. Può provocare una reazione allergica.
	LV	Satur izocianātus. Var izraisīt alerģisku reakciju.
	LT	Sudėtyje yra izocianatų. Gali sukelti alerginę reakciją.

EUH 204	Taal	
	HU	Izocianátokat tartalmaz. Allergiás reakciót válthat ki.
	MT	Fih l-isocyanates. Jista' jagħmel reazzjoni allergika.
	NL	Bevat isocyanaten. Kan een allergische reactie veroorzaken.
	PL	Zawiera izocyjaniany. Może wywoływać reakcję alergiczną.
	PT	Contém isocianatos. Pode provocar uma reacção alérgica.
	RO	Conține izocianati. Poate provoca o reacție alergică.
	SK	Obsahuje izokyanáty. Môže vyvolať alergickú reakciu.
	SL	Vsebuje izocianate. Lahko povzroči alergijski odziv.
	FI	Sisältää isosyanaatteja. Voi aiheuttaa allergisen reaktion.
	SV	Innehåller isocyanater. Kan orsaka en allergisk reaktion.

EUH 205	Taal	
	BG	Съдържа епоксидни съставки. Може да причини алергична реакция.
	ES	Contiene componentes epoxídicos. Puede provocar una reacción alérgica.
	CS	Obsahuje epoxidové složky. Může vyvolat alergickou reakci.
	DA	Indeholder epoxyforbindelser. Kan udløse allergisk reaktion.
	DE	Enthält epoxidhaltige Verbindungen. Kann allergische Reaktionen hervorrufen.
	ET	Sisaldab epoksükomponente. Võib esile kutsuda allergilise reaktsiooni.
	EL	Περιέχει εποξειδικές ενώσεις. Μπορεί να προκαλέσει αλλεργική αντίδραση.
	EN	Contains epoxy constituents. May produce an allergic reaction.
	FR	Contient des composés époxydiques. Peut déclencher une réaction allergique.
	GA	Comhábhair eapocsacha ann. D'fhéadfadh a bheith ina chúis fhrithghnímh ailléirgigh.
	IT	Contiene componenti epossidici. Può provocare una reazione allergica.
	LV	Satur epoksīda sastāvdaļas. Var izraisīt alerģisku reakciju.
	LT	Sudėtyje yra epoksidinių komponentų. Gali sukelti alerginę reakciją.
	HU	Epoxid tartalmú vegyületeket tartalmaz. Allergiás reakciót válthat ki.
	MT	Fih kostitwenti ta' l-eposside. Jista' jagħmel reazzjoni allergika.
	NL	Bevat epoxyverbindingen. Kan een allergische reactie veroorzaken.
	PL	Zawiera składniki epoksydowe. Może wywoływać reakcję alergiczną.
	PT	Contém componentes epoxídicos. Pode provocar uma reacção alérgica.
	RO	Conține compuși epoxidici. Poate provoca o reacție alergică.
	SK	Obsahuje epoxidové zložky. Môže vyvolať alergickú reakciu.
	SL	Vsebuje epoksidne sestavine. Lahko povzroči alergijski odziv.
	FI	Sisältää epoksihartseja. Voi aiheuttaa allergisen reaktion.
	SV	Innehåller epoxiförening. Kan orsaka en allergisk reaktion.

EUH 206	Taal	
	BG	Внимание! Не използвайте продукта заедно с други продукти. Може да отдели опасни газове (хлор).

EUH 206	Taal	
	ES	¡Atención! No utilizar junto con otros productos. Puede desprender gases peligrosos (cloro).
	CS	Pozor! Nepoužívejte společně s jinými přípravky. Může uvolňovat nebezpečné plyny (chlor).
	DA	Advarsel! Må ikke anvendes i forbindelse med andre produkter. Farlige luftarter (chlor) kan frigøres.
	DE	Warnung! Nicht zusammen mit anderen Produkten verwenden, da gefährliche Gase (Chlor) freigesetzt werden können.
	ET	Ettevaatust! Mitte kasutada koos teiste toodetega. Segust võib eralduda ohtlikke gaase (kloori).
	EL	Προσοχή! Να μην χρησιμοποιείται σε συνδυασμό με άλλα προϊόντα. Μπορεί να ελευθερωθούν επικίνδυνα αέρια (χλώριο).
	EN	Warning! Do not use together with other products. May release dangerous gases (chlorine).
	FR	Attention! Ne pas utiliser en combinaison avec d'autres produits. Peut libérer des gaz dangereux (chlore).
	GA	Rabhadh! Ná húsáid in éineacht le táirgí eile. D'fhéadfadh sé go scaoilfí gás chontúirteacha (clóirín).
	IT	Attenzione! Non utilizzare in combinazione con altri prodotti. Possono formarsi gas pericolosi (cloro).
	LV	Brīdinājums! Nelietot kopā ar citiem produktiem. Var izdalīt bīstamas gāzes (hloru).
	LT	Įspėjimas! Nenaudoti kartu su kitais produktais. Gali išsiskirti pavojingos dujos (chloras).
	HU	Figyelem! Tilos más termékekkel együtt használni. Veszélyes gázok (klór) szabadulhatnak fel.
	MT	Twissija! Tużahx flimkien ma' prodotti oħra. Jista' jerhi gassijiet perikolużi (kloru).
	NL	Let op! Niet in combinatie met andere producten gebruiken. Er kunnen gevaarlijke gassen (chlor) vrijkomen.
	PL	Uwaga! Nie używać razem z innymi produktami. Może wydzielać niebezpieczne gazy (chlor).
	PT	Atenção! Não utilizar juntamente com outros produtos. Podem libertar-se gases perigosos (cloro).
	RO	Atenție! A nu se utiliza împreună cu alte produse. Poate degaja gaze periculoase (clor).
	SK	Pozor! Nepoužívať spolu s inými výrobkami. Môže uvoľňovať nebezpečné plyny (chlór).
	SL	Pozor! Ne uporabljajte skupaj z drugimi izdelki. Lahko se sproščajo nevarni plini (klor).
	FI	Varoitus! Älä käytä yhdessä muiden tuotteiden kanssa. Tuotteesta voi vapautua vaarallista kaasua (klooria).
	SV	Varning! Får ej användas tillsammans med andra produkter. Kan avge farliga gaser (klor).
EUH 207	Taal	
	BG	Внимание! Съдържа кадмий. При употреба се образуват опасни пари. Виж информацията, предоставена от производителя. Спазвай инструкциите за безопасност.
	ES	¡Atención! Contiene cadmio. Durante su utilización se desprenden vapores peligrosos. Véase la información facilitada por el fabricante. Seguir las instrucciones de seguridad.
	CS	Pozor! Obsahuje kadmium. Při použití vznikají nebezpečné výpary. Viz informace dodané výrobcem. Dodržujte bezpečnostní pokyny.
	DA	Advarsel! Indeholder cadmium. Der udvikles farlige dampe under anvendelsen. Se fabrikantens oplysninger. Overhold sikkerhedsforskrifterne.
	DE	Warnung! Enthält Cadmium. Bei der Verwendung entstehen gefährliche Dämpfe. Hinweise des Herstellers beachten. Sicherheitsanweisungen einhalten.

EUH 207	Taal	
	ET	Ettevaatust! Sisaldab kaadmiumi. Kasutamisel moodustuvad ohtlikud aurud. Vt tootja esitatud teavet. Järgida ohutuseeskirju.
	EL	Προσοχή! Περιέχει κάδμιο. Κατά τη χρήση αναπτύσσονται επικίνδυνες αναθυμιάσεις. Βλέπε πληροφορίες του κατασκευαστή. Τηρείτε τις οδηγίες ασφαλείας.
	EN	Warning! Contains cadmium. Dangerous fumes are formed during use. See information supplied by the manufacturer. Comply with the safety instructions.
	FR	Attention! Contient du cadmium. Des fumées dangereuses se développent pendant l'utilisation. Voir les informations fournies par le fabricant. Respectez les consignes de sécurité.
	GA	Rabhadh! Caidmiam ann. Cruthaítear múch chontúirteach le linn a úsáide. Féach an fhaisnéis atá curtha ar fáil ag an déantóir. Cloígh leis na treoracha sábháilteachta.
	IT	Attenzione! Contiene cadmio. Durante l'uso si sviluppano fumi pericolosi. Leggere le informazioni fornite dal fabbricante. Rispettare le disposizioni di sicurezza.
	LV	Brīdinājums! Satur kadmiju. Lietojot veidojas bīstami izgarojumi. Sk. ražotāja sniegto informāciju. Ievērot drošības instrukcijas.
	LT	Įspėjimas! Sudėtyje yra kadmio. Naudojant susidaro pavojingi garai. Žiūrėti gamintojo teikiamą informaciją. Vykdyti saugos instrukcijas.
	HU	Figyelem! Kadmiumot tartalmaz! A használat során veszélyes füstök képződnek. Lásd a gyártó által közölt információt. Be kell tartani a biztonsági előírásokat.
	MT	Twissija! Fih il-kadmju. Waqt li jintuza' jiffurmaw dhahen perikolużi. Ara l-informazzjoni mogħtija mill-fabbrikant. Hares l-istruzzjonijiet dwar is-sigurtà.
	NL	Let op! Bevat cadmium. Bij het gebruik ontwikkelen zich gevaarlijke dampen. Zie de aanwijzingen van de fabrikant. Neem de veiligheidsvoorschriften in acht.
	PL	Uwaga! Zawiera kadm. Przy użyciu wydziela niebezpieczne pary. Patrz informacje dostarczone przez producenta. Postępuj zgodnie z instrukcjami bezpiecznego użytkowania.
	PT	Atenção! Contém cádmio. Libertam-se fumos perigosos durante a utilização. Ver as informações fornecidas pelo fabricante. Respeitar as instruções de segurança.
	RO	Atenție! Conține cadmiu. În timpul utilizării se formează aburi periculoși. A se vedea informațiile furnizate de producător. A se respecta instrucțiunile privind siguranța.
	SK	Pozor! Obsahuje kadmium. Pri používaní sa tvorí nebezpečný dym. Pozri informácie od výrobcu. Dodržiavajte bezpečnostné pokyny.
	SL	Pozor! Vsebuje kadmij. Med uporabo nastajajo nevarni dimi. Upoštevajte navodila proizvajalca. Upoštevajte navodila za varno uporabo.
	FI	Varoitus! Sisältää kadmiumia. Käytettäessä muodostuu vaarallisia huuruja. Noudata valmistajan antamia ohjeita. Noudata turvallisuusohjeita.
	SV	Varning! Innehåller kadmium. Farliga ångor bildas vid användning. Se information från tillverkaren. Följ skyddsanvisningarna.
EUH 208	Taal	
	BG	Съдържа <име на сенсibiliзиращото вещество>. Може да причини алергична реакция.
	ES	Contiene <nombre de la sustancia sensibilizante>. Puede provocar una reacción alérgica.
	CS	Obsahuje <název senzibilizující látky>. Může vyvolat alergickou reakci.
	DA	Indeholder <navn på det sensibiliserende stof>. Kan udløse allergisk reaktion.
	DE	Enthält <Name des sensibilisierenden Stoffes>. Kann allergische Reaktionen hervorrufen.
	ET	Sisaldab <sensibiliseeriva aine nimetus>. Võib esile kutsuda allergilise reaktsiooni.
	EL	Περιέχει <όνομα της ευαισθητοποιητικής ουσίας>. Μπορεί να προκαλέσει αλλεργική αντίδραση.
	EN	Contains <name of sensitising substance>. May produce an allergic reaction.
	FR	Contient <nom de la substance sensibilisante>. Peut déclencher une réaction allergique.

EUH 208	Taal	
	GA	<Ainm na substainte íograithe> ann. D'fhéadfadh a bheith ina chúis fhrithghnímh ailléirgigh.
	IT	Contiene <denominazione della sostanza sensibilizzante>. Può provocare una reazione allergica.
	LV	Satur <sensibilizējošās vielas nosaukumu>. Var izraisīt alerģisku reakciju.
	LT	Sudėtyje yra <jautrinančios medžiagos pavadinimas>. Gali sukelti alerginę reakciją.
	HU	<Allergén anyag neve>-t tartalmaz. Allergiás reakciót válthat ki.
	MT	Fih <l-isem tas-sustanza sensibbli>. Jista' jagħmel reazzjoni allergika.
	NL	Bevat <naam van de sensibiliserende stof>. Kan een allergische reactie veroorzaken.
	PL	Zawiera <nazwa substancji uczulającej>. Może wywoływać reakcję alergiczną.
	PT	Contém <nome da substância sensibilizante em questão>. Pode provocar uma reacção alérgica.
	RO	Conține <denumirea substanței sensibilizatoare>. Poate provoca o reacție alergică.
	SK	Obsahuje <názov senzibilizujúcej chemickej látky>. Môže vyvolať alergickú reakciu.
	SL	Vsebuje <ime snovi, ki povzroča preobčutljivost>. Lahko povzroči alergijski odziv.
	FI	Sisältää <herkistävän aineen nimi>. Voi aiheuttaa allergisen reaktion.
	SV	Innehåller <namnet på det sensibiliserande ämnet>. Kan orsaka en allergisk reaktion.
EUH 209/ 209A	Taal	
209 209A	BG	При употреба може да стане силно запалим При употреба може да стане запалим.
209 209A	ES	Puede inflamarse fácilmente al usarlo Puede inflamarse al usarlo.
209 209A	CS	Při používání se může stát hořlavým. Při používání se může stát hořlavým.
209 209A	DA	Kan blive meget brandfarlig ved brug. Kan blive brandfarlig ved brug.
209 209A	DE	Kann bei Verwendung leicht entzündbar werden. Kann bei Verwendung entzündbar werden.
209 209A	ET	Kasutamisel võib muutuda väga tuleohtlikuks. Kasutamisel võib muutuda tuleohtlikuks.
209 209A	EL	Μπορεί να γίνει πολύ εύφλεκτο κατά τη χρήση. Μπορεί να γίνει εύφλεκτο κατά τη χρήση.
209 209A	EN	Can become highly flammable in use. Can become flammable in use.
209 209A	FR	Peut devenir facilement inflammable en cours d'utilisation. Peut devenir inflammable en cours d'utilisation.
209 209A	GA	D'fhéadfadh sé éirigh an-inadhainte agus é á úsáid. D'fhéadfadh sé éirigh inadhainte agus á úsáid.
209 209A	IT	Può diventare facilmente infiammabile durante l'uso. Può diventare infiammabile durante l'uso.
209 209A	LV	Lietojoj var viegli uzliesmot. Kļūt uzliesmojšs.

EUH 209/ 209A	Taal	
209 209A	LT	Naudojama gali tapti labai degia. Naudojama gali tapti degia.
209 209A	HU	A használat során fokozottan tűzveszélyessé válhat. A használat során tűzveszélyessé válhat.
209 209A	MT	Jista' jiehu n-nar faċilment meta jintuża. Jista' jiehu n-nar meta jintuża.
209 209A	NL	Kan bij gebruik licht ontvlambaar worden. Kan bij gebruik ontvlambaar worden.
209 209A	PL	Przy użyciu może stać się wysoce łatwopalny. Przy użyciu może stać się łatwopalny.
209 209A	PT	Pode tornar-se facilmente inflamável durante o uso. Pode tornar-se inflamável durante o uso.
209 209A	RO	Poate deveni foarte inflamabil în timpul utilizării. Poate deveni inflamabil în timpul utilizării.
209 209A	SK	Pri používaní sa môže stať vysoko horľavou. Pri používaní sa môže stať horľavou.
209 209A	SL	Med uporabo utegne postati lahko vnetljivo. Med uporabo utegne postati vnetljivo.
209 209A	FI	Voi muuttua helposti syttyväksi käytössä. Voi muuttua syttyväksi käytössä.
209 209A	SV	Kan bli mycket brandfarligt vid användning. Kan bli brandfarligt vid användning.
EUH 210	Taal	
	BG	Информационен лист за безопасност на разположение при поискване.
	ES	Puede solicitarse la ficha de datos de seguridad.
	CS	Na žádost je k°dispozici bezpečnostní list.
	DA	Sikkerhedsdatablad kan rekvireres.
	DE	Sicherheitsdatenblatt auf Anfrage erhältlich.
	ET	Ohutuskaart nõudmisel kättesaadav.
	EL	Δελτίο δεδομένων ασφαλείας παρέχεται εφόσον ζητηθεί.
	EN	Safety data sheet available on request.
	FR	Fiche de données de sécurité disponible sur demande.
	GA	Bileog sonraí sábháilteachta ar fáil ar iarratas.
	IT	Scheda dati di sicurezza disponibile su richiesta.
	LV	Drošības datu lapa ir pieejama pēc pieprasījuma.
	LT	Saugos duomenų lapą galima gauti paprašius.
	HU	Kérésre biztonsági adatlap kapható.
	MT	Il-karta tat-tagħrif tas-sigurtà hija disponibbli meta ssir talba għaliha.
	NL	Veiligheidsinformatieblad op verzoek verkrijgbaar.
	PL	Karta charakterystyki udostępniiana na życzenie.
	PT	Ficha de segurança fornecida a pedido.



EUH 210	Taal	
	RO	Fișa tehnică de securitate disponibilă la cerere.
	SK	Na požiadanie možno poskytnúť kartu bezpečnostných údajov.
	SL	Varnosti list na voljo na zahtevo.
	FI	Käyttöturvallisuustiedote toimitetaan pyynnöstä.
	SV	Säkerhetsdatablad finns att rekquirera.
EUH 401	Taal	
	BG	За да се избегнат рисковете за човешкото здраве и околната среда, спазвайте инструкциите за употреба.
	ES	A fin de evitar riesgos para las personas y el medio ambiente, siga las instrucciones de uso.
	CS	Dodržujte pokyny pro používání, abyste se vyvarovali rizik pro lidské zdraví a životní prostředí.
	DA	Overhold brugsanvisningen for ikke at bringe menneskers sundhed og miljøet i fare.
	DE	Zur Vermeidung von Risiken für Mensch und Umwelt die Gebrauchsanleitung einhalten.
	ET	Inimeste tervise ja keskkonna ohustamise vältimiseks järgida kasutusjuhendit.
	EL	Για να αποφύγετε τους κινδύνους για την ανθρώπινη υγεία και το περιβάλλον, ακολουθήστε τις οδηγίες χρήσης.
	EN	To avoid risks to human health and the environment, comply with the instructions for use.
	FR	Respectez les instructions d'utilisation pour éviter les risques pour la santé humaine et l'environnement.
	GA	Chun contúirtí do shláinte an duine agus don timpeallacht a sheachaint, clóigh leis na treoracha maidir le húsáid.
	IT	Per evitare rischi per la salute umana e per l'ambiente, seguire le istruzioni per l'uso.
	LT	Siekiant išvengti neigiamo poveikio žmonių sveikatai ir aplinkai, laikytis naudojimo instrukcijų.
	LV	Lai izvairītos no riska cilvēku veselībai un videi, ievērojiet lietošanas pamācību.
	HU	Az emberi egészség és a környezet veszélyeztetésének elkerülése érdekében be kell tartani a használati utasítás előírásait.
	MT	Bieq jgħu evitati r-riskji għal saħħet il-bniedem u għall-ambjent, ħares l-istruzzjonijiet dwar l-użu.
	NL	Volg de gebruiksaanwijzing om gevaar voor de menselijke gezondheid en het milieu te voorkomen.
	PL	W celu uniknięcia zagrożenia dla zdrowia ludzi i środowiska, należy stosować się do instrukcji użycia.
	PT	Para evitar riscos para a saúde humana e para o ambiente, respeitar as instruções de utilização.
	RO	Pentru a evita riscurile pentru sănătatea umană și mediul inconjurător, respectați instrucțiunile de utilizare.
	SK	Dodržiavajte návod na používanie, aby ste zabránili vzniku rizík pre ľudské zdravie a životné prostredie.
	SL	Da bi se izognili tveganjem za ljudi in okolje, ravnajte v skladu z navodili za uporabo.
	FI	Noudata käyttöohjeita ihmisen terveydelle ja ympäristölle aiheutuvien vaarojen välttämiseksi.
	SV	För att undvika risker för människors hälsa och för miljön, följ bruksanvisningen.

## BIJLAGE IV

## LIJST VAN VOORZORGSMaatregelen

Bij de keuze van de voorzorgsmaatregelen overeenkomstig artikel 22 en artikel 28, lid 3, mogen de leveranciers, met inachtneming van de duidelijkheid en verstaanbaarheid van de gebruikte voorzorgsmaatregel, de in onderstaande tabel vermelde voorzorgsmaatregelen combineren.

## 1. Deel 1: criteria voor de keuze van voorzorgsmaatregelen

Tabel 6.1

## Algemene voorzorgsmaatregelen

Code (1)	Algemene voorzorgsmaatregelen (2)	Gevarenklasse (3)	Gevarencategorie (4)	Voorwaarden voor gebruik (5)
P101	Bij het inwinnen van medisch advies de verpakking of het etiket meenemen.	naar gelang van het geval		Consumentenproducten
P102	Buiten bereik van kinderen houden.	naar gelang van het geval		Consumentenproducten
P103	Voor gebruik het etiket lezen.	naar gelang van het geval		Consumentenproducten

Tabel 6.2

## Voorzorgsmaatregelen i.v.m. preventie

Code (1)	Voorzorgsmaatregelen i.v.m. preventie (2)	Gevarenklasse (3)	Gevarencategorie (4)	Voorwaarden voor gebruik (5)
P201	Vóór gebruik speciale aanwijzingen raadplegen.	Ontpofbare stoffen (afdeling 2.1)	Instabiele ontpofbare stoffen	
		Mutageniteit in geslachtscellen (afdeling 3.5)	1A, 1B, 2	
		Kankerverwekkendheid (afdeling 3.6)	1A, 1B, 2	
		Voortplantingstoxiciteit (afdeling 3.7)	1A, 1B, 2	
		Voortplantingstoxiciteit — effecten op of via lactatie (afdeling 3.7)	Aanvullende categorie	
P202	Pas gebruiken nadat u alle veiligheidsvoorschriften gelezen en begrepen heeft	Ontpofbare stoffen (afdeling 2.1)	Instabiele ontpofbare stoffen	
		Mutageniteit in geslachtscellen (afdeling 3.5)	1A, 1B, 2	
		Kankerverwekkendheid (afdeling 3.6)	1A, 1B, 2	
		Voortplantingstoxiciteit (afdeling 3.7)	1A, 1B, 2	

Code (1)	Voorzorgsmaatregelen i.v.m. preventie (2)	Gevarenklasse (3)	Gevarencategorie (4)	Voorwaarden voor gebruik (5)	
P210	Verwijderd houden van warmte/vonken/open vuur/ hete oppervlakken — niet roken.	Ontploffbare stoffen (afdeling 2.1)	Subklassen 1.1, 1.2, 1.3, 1.4, 1.5	Toepasselijke ontste- kingsbron(nen) door fabrikant/leverancier te specificeren.	
		Ontvlambare gassen (afdeling 2.2)	1, 2		
		Ontvlambare aerosolen (afde- ling 2.3)	1, 2		
		Ontvlambare vloeistoffen (afde- ling 2.6)	1, 2, 3		
		Ontvlambare vaste stoffen (afde- ling 2.7)	1, 2		
		Zelfontledende stoffen en meng- sels (afdeling 2.8)	Typen A, B, C, D, E, F		
		Pyrofore vloeistoffen (afdeling 2.9)	1		
		Pyrofore vaste stoffen (afde- ling 2.10)	1		
		Organische peroxiden (afde- ling 2.15)	Typen A, B, C, D, E, F		
		Oxiderende vloeistoffen (afde- ling 2.13)	1, 2, 3		— vermelden: verwij- derd houden van warmte.
		Oxiderende vaste stoffen (afde- ling 2.14)	1, 2, 3		
P211	Niet in open vuur of op andere ontstekingsbronnen spuiten.	Ontvlambare aerosolen (afde- ling 2.3)	1, 2		
P220	Van kleding/.../brandbare stoffen verwijderd houden/ bewaren	Oxiderende gassen (afdeling 2.4)	1	Stoffen waarmee con- tact vermeden dient te worden door fabrikant/ leverancier te specificeren.	
		Zelfontledende stoffen en meng- sels (afdeling 2.8)	Typen A, B, C, D, E, F		
		Oxiderende vloeistoffen (afde- ling 2.13)	1	Stoffen waarmee con- tact vermeden dient te worden door fabrikant/ leverancier te specificeren. — vermelden: verwij- derd houden van kleding en andere stoffen waarmee contact vermeden dient te worden.	
			2, 3	Stoffen waarmee con- tact vermeden dient te worden door fabrikant/ leverancier te specificeren.	

Code (1)	Voorzorgsmaatregelen i.v.m. preventie (2)	Gevarenklasse (3)	Gevarencategorie (4)	Voorwaarden voor gebruik (5)
		Oxiderende vaste stoffen (afdeling 2.14)	1	Stoffen waarmee contact vermeden dient te worden door fabrikant/leverancier te specificeren. — vermelden: verwijderd houden van kleding en andere stoffen waarmee contact vermeden dient te worden.
			2, 3	
		Organische peroxiden (afdeling 2.15)	Typen A, B, C, D, E, F	Stoffen waarmee contact vermeden dient te worden door fabrikant/leverancier te specificeren.
P221	Vermenging met brandbare stoffen/... absoluut vermijden.	Oxiderende vloeistoffen (afdeling 2.13)	1, 2, 3	Stoffen waarmee contact vermeden dient te worden door fabrikant/leverancier te specificeren.
		Oxiderende vaste stoffen (afdeling 2.14)	1, 2, 3	
P222	Contact met lucht vermijden.	Pyrofore vloeistoffen (afdeling 2.9)	1	
		Pyrofore vaste stoffen (afdeling 2.10)	1	
P223	Contact met water vermijden in verband met een heftige reactie en een mogelijke wolkbrand.	Stoffen en mengsels die in contact met water ontvlambare gassen ontwikkelen (afdeling 2.12)	1, 2	
P230	Vochtig houden met ...	Ontploffbare stoffen (afdeling 2.1)	Subklassen 1.1, 1.2, 1.3, 1.5	Middel door fabrikant/leverancier te specificeren. — indien het ontploffingsgevaar bij uitdroging toeneemt, behalve voor zover noodzakelijk voor vervaardigings- of werkingsprocedures (bv. nitrocellulose).
P231	Onder inert gas werken.	Stoffen en mengsels die in contact met water ontvlambare gassen ontwikkelen (afdeling 2.12)	1, 2, 3	
P232	Tegen vocht beschermen.	Stoffen en mengsels die in contact met water ontvlambare gassen ontwikkelen (afdeling 2.12)	1, 2, 3	
P233	In goed gesloten verpakking bewaren.	Ontvlambare vloeistoffen (afdeling 2.6)	1, 2, 3	— indien door de vluchtigheid van het product een gevaarlijke atmosfeer kan ontstaan.
		Acute toxiciteit bij inademing (afdeling 3.1)	1, 2, 3	
		Specifieke doelorgaan toxiciteit bij eenmalige blootstelling; irritatie van de luchtwegen (afdeling 3.8)	3	
		Specifieke doelorgaan toxiciteit bij eenmalige blootstelling; narcotische werking (afdeling 3.8)	3	
P234	Uitsluitend in de oorspronkelijke verpakking bewaren.	Zelfontledende stoffen en mengsels (afdeling 2.8)	Typen A, B, C, D, E, F	
		Organische peroxiden (afdeling 2.15)	Typen A, B, C, D, E, F	
		Voor metalen bijtend (afdeling 2.16)	1	

Code (1)	Vorzorgsmaatregelen i.v.m. preventie (2)	Gevarenklasse (3)	Gevarencategorie (4)	Voorwaarden voor gebruik (5)
P235	Koel bewaren.	Ontvlambare vloeistoffen (afdeling 2.6)	1, 2, 3	
		Zelfontledende stoffen en mengsels (afdeling 2.8)	Typen A, B, C, D, E, F	
		Voor zelfverhitting vatbare stoffen en mengsels (afdeling 2.11)	1, 2	
		Organische peroxiden (afdeling 2.15)	Typen A, B, C, D, E, F	
P240	Opslag- en opvangreservoir aarden.	Ontplobbare stoffen (afdeling 2.1)	Subklassen 1.1, 1.2, 1.3, 1.4, 1.5	— indien de ontplobbare stof gevoelig is voor elektrostatische lading.
		Ontvlambare vloeistoffen (afdeling 2.6)	1, 2, 3	— indien de voor elektrostatische lading gevoelige stof bestemd is om te worden overgeladen. — indien door de vluchtigheid van het product een gevaarlijke atmosfeer kan ontstaan.
		Ontvlambare vaste stoffen (afdeling 2.7)	1, 2	— indien de voor elektrostatische lading gevoelige stof bestemd is om te worden overgeladen.
P241	Explosieveilige elektrische/ventilatie-/verlichtings-/.../apparatuur gebruiken.	Ontvlambare vloeistoffen (afdeling 2.6)	1, 2, 3	Andere apparatuur door fabrikant/leverancier te specificeren.
		Ontvlambare vaste stoffen (afdeling 2.7)	1, 2	Andere apparatuur door fabrikant/leverancier te specificeren. — indien zich stofwolken kunnen vormen.
P242	Uitsluitend vonkvrij gereedschap gebruiken.	Ontvlambare vloeistoffen (afdeling 2.6)	1, 2, 3	
P243	Maatregelen treffen tegen ontladingen van statische elektriciteit.	Ontvlambare vloeistoffen (afdeling 2.6)	1, 2, 3	
P244	Reduceerventielen vrij van olie en vet houden.	Oxiderende gassen (afdeling 2.4)	1	
P250	Niet malen — schokken/.../wrijving vermijden.	Ontplobbare stoffen (afdeling 2.1)	Subklassen 1.1, 1.2, 1.3, 1.4, 1.5	Toepasselijke ruwe behandeling door fabrikant/leverancier te specificeren.
P251	Houder onder druk: ook na gebruik niet doorboren of verbranden.	Ontvlambare aerosolen (afdeling 2.3)	1, 2	
P260	Stof/rook/gas/nevel/damp/spuitnevel niet inademen.	Acute toxiciteit bij inademing (afdeling 3.1)	1, 2	Toepasselijke voorwaarden door fabrikant/leverancier te specificeren.
		Specifieke doelorgaantoxiciteit bij eenmalige blootstelling (afdeling 3.8)	1, 2	
		Specifieke doelorgaantoxiciteit bij herhaalde blootstelling (afdeling 3.9)	1, 2	

Code (1)	Voorzorgsmaatregelen i.v.m. preventie (2)	Gevarenklasse (3)	Gevarencategorie (4)	Voorwaarden voor gebruik (5)
		Huidcorrosie (afdeling 3.2)	1A, 1B, 1C	— vermelden: stof of nevel niet inademen. — indien bij het gebruik stofdeeltjes of nevels kunnen worden ingeademd.
		Voortplantingstoxiciteit — effecten op of via lactatie (afdeling 3.7)	Aanvullende categorie	
P261	Inademing van stof/rook/gas/nevel/ damp/spuitnevel vermijden.	Acute toxiciteit bij inademing (afdeling 3.1)	3, 4	Toepasselijke voorwaarden door fabrikant/leverancier te specificeren.
		Sensibilisatie van de luchtwegen (afdeling 3.4)	1	
		Sensibilisatie van de huid (afdeling 3.4)	1	
		Specifieke doelorgaantoxiciteit bij eenmalige blootstelling; irritatie van de luchtwegen (afdeling 3.8)	3	
		Specifieke doelorgaantoxiciteit bij eenmalige blootstelling; narcotische werking (afdeling 3.8)	3	
P262	Mag niet in de ogen, op de huid of op de kleding komen.	Acute dermale toxiciteit (afdeling 3.1)	1, 2	
P263	Bij zwangerschap of borstvoeding aanraking vermijden.	Voortplantingstoxiciteit — effecten op of via lactatie (afdeling 3.7)	Aanvullende categorie	
P264	Na het werken met dit product ... grondig wassen.	Acute orale toxiciteit (afdeling 3.1)	1, 2, 3, 4	Na behandeling te wassen lichaamsdelen door fabrikant/leverancier te specificeren.
		Acute dermale toxiciteit (afdeling 3.1)	1, 2	
		Huidcorrosie (afdeling 3.2)	1A, 1B, 1C	
		Huidirritatie (afdeling 3.2)	2	
		Oogirritatie (afdeling 3.3)	2	
		Voortplantingstoxiciteit — effecten op of via lactatie (afdeling 3.7)	Aanvullende categorie	
		Specifieke doelorgaantoxiciteit bij eenmalige blootstelling (afdeling 3.8)	1, 2	
		Specifieke doelorgaantoxiciteit bij herhaalde blootstelling (afdeling 3.9)	1	
P270	Niet eten, drinken of roken tijdens het gebruik van dit product.	Acute orale toxiciteit (afdeling 3.1)	1, 2, 3, 4	
		Acute dermale toxiciteit (afdeling 3.1)	1, 2	
		Voortplantingstoxiciteit — effecten op of via lactatie (afdeling 3.7)	Aanvullende categorie	
		Specifieke doelorgaantoxiciteit bij eenmalige blootstelling (afdeling 3.8)	1, 2	
		Specifieke doelorgaantoxiciteit bij herhaalde blootstelling (afdeling 3.9)	1	

Code (1)	Voorzorgsmaatregelen i.v.m. preventie (2)	Gevarenklasse (3)	Gevarencategorie (4)	Voorwaarden voor gebruik (5)
P271	Alleen buiten of in een goed geventileerde ruimte gebruiken.	Acute toxiciteit bij inademing (afdeling 3.1)	1, 2, 3, 4	
		Specifieke doelorgaantoxiciteit bij eenmalige blootstelling; irritatie van de luchtwegen (afdeling 3.8)	3	
		Specifieke doelorgaantoxiciteit bij eenmalige blootstelling; narcotische werking (afdeling 3.8)	3	
P272	Verontreinigde werkkleding mag de werkruimte niet verlaten.	Sensibilisatie van de huid (afdeling 3.4)	1	
P273	Voorkom lozing in het milieu.	Gevaar voor het aquatisch milieu, acute aquatische toxiciteit (afdeling 4.1)	1	— indien dit niet het beoogde gebruik is.
		Gevaar voor het aquatisch milieu, chronische aquatische toxiciteit (afdeling 4.1)	1, 2, 3, 4	
P280	Beschermdende handschoenen/beschermdende kleding/oogbeschermding/gelaatsbeschermding dragen.	Ontpofbare stoffen (afdeling 2.1)	Subklassen 1.1, 1.2, 1.3, 1.4, 1.5	Soort beschermding door fabrikant/leverancier te specificeren. — gelaatsbeschermding specificeren.
		Ontvlambare vloeistoffen (afdeling 2.6)	1, 2, 3	Soort beschermding door fabrikant/leverancier te specificeren. — beschermdende handschoenen en oog-/gelaatsbeschermding specificeren.
		Ontvlambare vaste stoffen (afdeling 2.7)	1, 2	
		Zelfontledende stoffen en mengsels (afdeling 2.8)	Typen A, B, C, D, E, F	
		Pyrofore vloeistoffen (afdeling 2.9)	1	
		Pyrofore vaste stoffen (afdeling 2.10)	1	
		Voor zelfverhitting vatbare stoffen en mengsels (afdeling 2.11)	1, 2	
		Stoffen en mengsels die in contact met water ontvlambare gassen ontwikkelen (afdeling 2.12)	1, 2, 3	
		Oxiderende vloeistoffen (afdeling 2.13)	1, 2, 3	
		Oxiderende vaste stoffen (afdeling 2.14)	1, 2, 3	
		Organische peroxiden (afdeling 2.15)	Typen A, B, C, D, E, F	
		Acute dermale toxiciteit (afdeling 3.1)	1, 2, 3, 4	Soort beschermding door fabrikant/leverancier te specificeren. — beschermdende handschoenen/kleding specificeren.
		Huidcorrosie (afdeling 3.2)	1A, 1B, 1C	Soort beschermding door fabrikant/leverancier te specificeren. — beschermdende handschoenen/kleding en oog-/gelaatsbeschermding specificeren.

Code (1)	Voorzorgsmaatregelen i.v.m. preventie (2)	Gevarenklasse (3)	Gevarencategorie (4)	Voorwaarden voor gebruik (5)
		Huidirritatie (afdeling 3.2)	2	Soort bescherming door fabrikant/leverancier te specificeren. — beschermende handschoenen specificeren.
		Sensibilisatie van de huid (afdeling 3.4)	1	
		Ernstig oogletsel/oogirritatie (afdeling 3.3)	1	Soort bescherming door fabrikant/leverancier te specificeren. — oog-/gelaatsbescherming specificeren.
		Oogirritatie (afdeling 3.3)	2	
P281	De nodige persoonlijke beschermingsmiddelen gebruiken.	Ontplobbare stoffen (afdeling 2.1)	Instabiele ontplobbare stoffen	
		Mutageniteit in geslachtscellen (afdeling 3.5)	1A, 1B, 2	
		Kankerverwekkendheid (afdeling 3.6)	1A, 1B, 2	
		Voortplantingstoxiciteit (afdeling 3.7)	1A, 1B, 2	
P282	Koude-isolerende handschoenen/gelaatsbescherming/oogbescherming dragen.	Gassen onder druk (afdeling 2.5)	Sterk gekoeld vloeibaar gas	
P283	Vuur/vlambestendige/vertragende kleding dragen.	Oxiderende vloeistoffen (afdeling 2.13)	1	
		Oxiderende vaste stoffen (afdeling 2.14)	1	
P284	Adembescherming dragen.	Acute toxiciteit bij inademing (afdeling 3.1)	1, 2	Bescherming door fabrikant/leverancier te specificeren.
P285	Bij ontoereikende ventilatie een geschikte adembescherming dragen.	Sensibilisatie van de luchtwegen (afdeling 3.4)	1	Bescherming door fabrikant/leverancier te specificeren.
P231 + P232	Onder inert gas werken. Tegen vocht beschermen.	Stoffen en mengsels die in contact met water ontvlambare gassen ontwikkelen (afdeling 2.12)	1, 2, 3	
P235 + P410	Koel bewaren. Tegen zonlicht beschermen.	Voor zelfverhitting vatbare stoffen en mengsels (afdeling 2.11)	1, 2	

Tabel 6.3

**Voorzorgsmaatregelen i.v.m. reactie**

Code (1)	Voorzorgsmaatregelen i.v.m. reactie (2)	Gevarenklasse (3)	Gevarencategorie (4)	Voorwaarden voor gebruik (5)
P301	NA INSLIKKEN:	Acute orale toxiciteit (afdeling 3.1)	1, 2, 3, 4	
		Huidcorrosie (afdeling 3.2)	1A, 1B, 1C	
		Aspiratiegevaar (afdeling 3.10)	1	
P302	BIJ CONTACT MET DE HUID:	Pyrofore vloeistoffen (afdeling 2.9)	1	
		Acute dermale toxiciteit (afdeling 3.1)	1, 2, 3, 4	



Code (1)	Voorzorgsmaatregelen i.v.m. reactie (2)	Gevarenklasse (3)	Gevarencategorie (4)	Voorwaarden voor gebruik (5)
		Huidirritatie (afdeling 3.2)	2	
		Sensibilisatie van de huid (afdeling 3.4)	1	
P303	BIJ CONTACT MET DE HUID (of het haar):	Ontvlambare vloeistoffen (afdeling 2.6)	1, 2, 3	
		Huidcorrosie (afdeling 3.2)	1A, 1B, 1C	
P304	NA INADEMING:	Acute toxiciteit bij inademing (afdeling 3.1)	1, 2, 3, 4	
		Huidcorrosie (afdeling 3.2)	1A, 1B, 1C	
		Sensibilisatie van de luchtwegen (afdeling 3.4)	1	
		Specifieke doelorgaantoxiciteit bij eenmalige blootstelling; irritatie van de luchtwegen (afdeling 3.8)	3	
		Specifieke doelorgaantoxiciteit bij eenmalige blootstelling; narcotische werking (afdeling 3.8)	3	
P305	BIJ CONTACT MET DE OGEN:	Huidcorrosie (afdeling 3.2)	1A, 1B, 1C	
		Ernstig oogletsel/oogirritatie (afdeling 3.3)	1	
		Oogirritatie (afdeling 3.3)	2	
P306	NA MORSEN OP KLEDING:	Oxiderende vloeistoffen (afdeling 2.13)	1	
		Oxiderende vaste stoffen (afdeling 2.14)	1	
P307	NA blootstelling:	Specifieke doelorgaantoxiciteit bij eenmalige blootstelling (afdeling 3.8)	1	
P308	NA (mogelijke) blootstelling:	Mutageniteit in geslachtscellen (afdeling 3.5)	1A, 1B, 2	
		Kankerverwekkendheid (afdeling 3.6)	1A, 1B, 2	
		Voortplantingstoxiciteit (afdeling 3.7)	1A, 1B, 2	
		Voortplantingstoxiciteit — effecten op of via lactatie (afdeling 3.7)	Aanvullende categorie	
P309	NA blootstelling of bij onwel voelen:	Specifieke doelorgaantoxiciteit bij eenmalige blootstelling (afdeling 3.8)	2	
P310	Onmiddellijk een VERGIFTIGINGSCENTRUM of een arts raadplegen.	Acute orale toxiciteit (afdeling 3.1)	1, 2, 3	
		Acute dermale toxiciteit (afdeling 3.1)	1, 2	
		Acute toxiciteit bij inademing (afdeling 3.1)	1, 2	
		Huidcorrosie (afdeling 3.2)	1A, 1B, 1C	
		Ernstig oogletsel/oogirritatie (afdeling 3.3)	1	
		Aspiratiegevaar (afdeling 3.10)	1	

Code (1)	Voorzorgsmaatregelen i.v.m. reactie (2)	Gevarenklasse (3)	Gevarencategorie (4)	Voorwaarden voor gebruik (5)
P311	Een VERGIFTIGINGEN- CENTRUM of een arts raadplegen.	Acute toxiciteit bij inademing (afdeling 3.1)	3	
		Sensibilisatie van de luchtwegen (afdeling 3.4)	1	
		Specifieke doelorgaantoxiciteit bij eenmalige blootstelling (afde- ling 3.8)	1, 2	
P312	Bij onwel voelen een VER- GIFTIGINGENCENTRUM of een arts raadplegen.	Acute orale toxiciteit (afdeling 3.1)	4	
		Acute dermale toxiciteit (afde- ling 3.1)	3, 4	
		Acute toxiciteit bij inademing (afdeling 3.1)	4	
		Specifieke doelorgaantoxiciteit bij eenmalige blootstelling; irritatie van de luchtwegen (afdeling 3.8)	3	
		Specifieke doelorgaantoxiciteit bij eenmalige blootstelling; narcoti- sche werking (afdeling 3.8)	3	
P313	Een arts raadplegen.	Huidirritatie (afdeling 3.2)	2, 3	
		Oogirritatie (afdeling 3.3)	2	
		Sensibilisatie van de huid (afde- ling 3.4)	1	
		Mutageniteit in geslachtscellen (afdeling 3.5)	1A, 1B, 2	
		Kankerverwekkendheid (afde- ling 3.6)	1A, 1B, 2	
		Voortplantingstoxiciteit (afde- ling 3.7)	1A, 1B, 2	
		Voortplantingstoxiciteit — effec- ten op of via lactatie (afdeling 3.7)	Aanvullende categorie	
P314	Bij onwel voelen een arts raadplegen.	Specifieke doelorgaantoxiciteit bij herhaalde blootstelling (afde- ling 3.9)	1, 2	
P315	Onmiddellijk een arts raad- plegen.	Gassen onder druk (afdeling 2.5)	Sterk gekoeld vloeibaar gas	
P320	Specifieke behandeling dringend vereist (zie ... op dit etiket).	Acute toxiciteit bij inademing (afdeling 3.1)	1, 2	Verwijzen naar aan- vullende eerstehulpmaat- regel. — indien onmidde- lijk een antidotum moet worden toe- gediend.
P321	Specifieke behandeling ver- eist (zie ... op dit etiket).	Acute orale toxiciteit (afdeling 3.1)	1, 2, 3	Verwijzen naar aan- vullende eerstehulpmaat- regel. — indien onmidde- lijk een antidotum moet worden toe- gediend.

Code (1)	Voorzorgsmaatregelen i.v.m. reactie (2)	Gevarenklasse (3)	Gevarencategorie (4)	Voorwaarden voor gebruik (5)
		Acute toxiciteit bij inademing (afdeling 3.1)	3	Verwijzen naar aanvullende eerstehulpmaatregel. — indien onmiddellijk specifieke maatregelen moeten worden genomen.
		Specifieke doelorgaantoxiciteit bij eenmalige blootstelling (afdeling 3.8)	1	Verwijzen naar aanvullende eerstehulpmaatregel. — indien onmiddellijk maatregelen moeten worden genomen.
		Sensibilisatie van de huid (afdeling 3.4)	1	Verwijzen naar aanvullende eerstehulpmaatregel.
		Huidcorrosie (afdeling 3.2)	1A, 1B, 1C	— fabrikant/leverancier kan zo nodig een reinigingsmiddel specificeren.
		Huidirritatie (afdeling 3.2)	2	
P322	Specifieke maatregelen vereist (zie ... op dit etiket).	Acute dermale toxiciteit (afdeling 3.1)	1, 2	Verwijzen naar aanvullende eerstehulpmaatregel. — indien aangeraden wordt onmiddellijk maatregelen te nemen, bijvoorbeeld een specifiek reinigingsmiddel te gebruiken.
		Acute dermale toxiciteit (afdeling 3.1)	3, 4	Verwijzen naar aanvullende eerstehulpmaatregel. — indien aangeraden wordt maatregelen te nemen, bijvoorbeeld een specifiek reinigingsmiddel te gebruiken.
P330	De mond spoelen.	Acute orale toxiciteit (afdeling 3.1)	1, 2, 3, 4	
		Huidcorrosie (afdeling 3.2)	1A, 1B, 1C	
P331	GEEN braken opwekken.	Huidcorrosie (afdeling 3.2)	1A, 1B, 1C	
		Aspiratiegevaar (afdeling 3.10)	1	
P332	Bij huidirritatie:	Huidirritatie (afdeling 3.2)	2, 3	
P333	Bij huidirritatie of uitslag:	Sensibilisatie van de huid (afdeling 3.4)	1	
P334	In koud water onderdompen/nat verband aanbrengen.	Pyrofore vloeistoffen (afdeling 2.9)	1	
		Pyrofore vaste stoffen (afdeling 2.10)	1	
		Stoffen en mengsels die in contact met water ontvlambare gassen ontwikkelen (afdeling 2.12)	1, 2	
P335	Losse deeltjes van de huid afvegen.	Pyrofore vaste stoffen (afdeling 2.10)	1	
		Stoffen en mengsels die in contact met water ontvlambare gassen ontwikkelen (afdeling 2.12)	1, 2	

Code (1)	Voorzorgsmaatregelen i.v.m. reactie (2)	Gevarenklasse (3)	Gevarencategorie (4)	Voorwaarden voor gebruik (5)
P336	Bevroren lichaamsdelen met lauw water ontdooien. Niet wrijven.	Gassen onder druk (afdeling 2.5)	Sterk gekoeld vloeibaar gas	
P337	Bij aanhoudende oogirritatie:	Oogirritatie (afdeling 3.3)	2	
P338	Contactlenzen verwijderen, indien mogelijk; blijven spoelen.	Huidcorrosie (afdeling 3.2)	1A, 1B, 1C	
		Ernstig oogletsel/oogirritatie (afdeling 3.3)	1	
		Oogirritatie (afdeling 3.3)	2	
P340	In de frisse lucht brengen en laten rusten in een houding die het ademen vergemakkelijkt.	Acute toxiciteit bij inademing (afdeling 3.1)	1, 2, 3, 4	
		Huidcorrosie (afdeling 3.2)	1A, 1B, 1C	
		Specifieke doelorgaantoxiciteit bij eenmalige blootstelling; irritatie van de luchtwegen (afdeling 3.8)	3	
		Specifieke doelorgaantoxiciteit bij eenmalige blootstelling; narcotische werking (afdeling 3.8)	3	
P341	Bij ademhalingsmoeilijkheden in de frisse lucht brengen en laten rusten in een houding die het ademen vergemakkelijkt.	Sensibilisatie van de luchtwegen (afdeling 3.4)	1	
P342	Bij ademhalingsymptomen:	Sensibilisatie van de luchtwegen (afdeling 3.4)	1	
P350	Voorzichtig wassen met veel water en zeep.	Acute dermale toxiciteit (afdeling 3.1)	1, 2	
P351	Voorzichtig afspoelen met water gedurende een aantal minuten.	Huidcorrosie (afdeling 3.2)	1A, 1B, 1C	
		Ernstig oogletsel/oogirritatie (afdeling 3.3)	1	
		Oogirritatie (afdeling 3.3)	2	
P352	Met veel water en zeep wassen.	Acute dermale toxiciteit (afdeling 3.1)	3, 4	
		Huidirritatie (afdeling 3.2)	2	
		Sensibilisatie van de huid (afdeling 3.4)	1	
P353	Huid met water afspoelen/afdouchen.	Ontvlambare vloeistoffen (afdeling 2.6)	1, 2, 3	
		Huidcorrosie (afdeling 3.2)	1A, 1B, 1C	
P360	Verontreinigde kleding en huid onmiddellijk met veel water afspoelen en pas daarna kleding uittrekken.	Oxiderende vloeistoffen (afdeling 2.13)	1	
		Oxiderende vaste stoffen (afdeling 2.14)	1	
P361	Verontreinigde kleding onmiddellijk uittrekken.	Ontvlambare vloeistoffen (afdeling 2.6)	1, 2, 3	
		Acute dermale toxiciteit (afdeling 3.1)	1, 2, 3	
		Huidcorrosie (afdeling 3.2)	1A, 1B, 1C	

Code (1)	Voorzorgsmaatregelen i.v.m. reactie (2)	Gevarenklasse (3)	Gevarencategorie (4)	Voorwaarden voor gebruik (5)
P362	Verontreinigde kleding uit- trekken en wassen alvorens deze opnieuw te gebruiken.	Huidirritatie (afdeling 3.2)	2	
P363	Verontreinigde kleding wassen alvorens deze opnieuw te gebruiken.	Acute dermale toxiciteit (afde- ling 3.1)	1, 2, 3, 4	
		Huidcorrosie (afdeling 3.2)	1A, 1B, 1C	
		Sensibilisatie van de huid (afde- ling 3.4)	1	
P370	In geval van brand:	Ontplobbare stoffen (afdeling 2.1)	Subklassen 1.1, 1.2, 1.3, 1.4, 1.5	
		Oxiderende gassen (afdeling 2.4)	1	
		Ontvlambare vloeistoffen (afde- ling 2.6)	1, 2, 3	
		Ontvlambare vaste stoffen (afde- ling 2.7)	1, 2	
		Zelfontledende stoffen en meng- sels (afdeling 2.8)	Typen A, B, C, D, E, F	
		Pyrofore vloeistoffen (afdeling 2.9)	1	
		Pyrofore vaste stoffen (afde- ling 2.10)	1	
		Stoffen en mengsels die in contact met water ontvlambare gassen ontwikkelen (afdeling 2.12)	1, 2, 3	
		Oxiderende vloeistoffen (afde- ling 2.13)	1, 2, 3	
		Oxiderende vaste stoffen (afde- ling 2.14)	1, 2, 3	
P371	In geval van grote brand en grote hoeveelheden:	Oxiderende vloeistoffen (afde- ling 2.13)	1	
		Oxiderende vaste stoffen (afde- ling 2.14)	1	
P372	Ontploffingsgevaar in geval van brand.	Ontplobbare stoffen (afdeling 2.1)	Ontplobbare stoffen van de subklassen 1.1, 1.2, 1.3, 1.4, 1.5	— behalve voor ont- plobbare stoffen van subklasse 1.4S (munitie en bestanddelen ervan).
P373	NIET blussen wanneer het vuur de ontplobbare stoffen bereikt.	Ontplobbare stoffen (afdeling 2.1)	Ontplobbare stoffen van de subklassen 1.1, 1.2, 1.3, 1.4, 1.5	
P374	Met normale voorzorgen vanaf een redelijke afstand blussen.	Ontplobbare stoffen (afdeling 2.1)	Subklasse 1.4	— voor ontplobbare stoffen van sub- klasse 1.4S (muni- tie en bestanddelen ervan).

Code (1)	Voorzorgsmaatregelen i.v.m. reactie (2)	Gevarenklasse (3)	Gevarencategorie (4)	Voorwaarden voor gebruik (5)
P375	Op afstand blussen in verband met ontploffingsgevaar.	Zelfontledende stoffen en mengsels (afdeling 2.8)	Typen A, B	
		Oxiderende vloeistoffen (afdeling 2.13)	1	
		Oxiderende vaste stoffen (afdeling 2.14)	1	
P376	Het lek dichten als dat veilig gedaan kan worden.	Oxiderende gassen (afdeling 2.4)	1	
P377	Brand door lekkend gas: niet blussen, tenzij het lek veilig gedicht kan worden.	Ontvlambare gassen (afdeling 2.2)	1, 2	
P378	Blussen met ...	Ontvlambare vloeistoffen (afdeling 2.6)	1, 2, 3	Middel door fabrikant/leverancier te specificeren. — indien water het risico vergroot.
		Ontvlambare vaste stoffen (afdeling 2.7)	1, 2	
		Zelfontledende stoffen en mengsels (afdeling 2.8)	Typen A, B, C, D, E, F	
		Pyrofore vloeistoffen (afdeling 2.9)	1	
		Pyrofore vaste stoffen (afdeling 2.10)	1	
		Stoffen en mengsels die in contact met water ontvlambare gassen ontwikkelen (afdeling 2.12)	1, 2, 3	
		Oxiderende vloeistoffen (afdeling 2.13)	1, 2, 3	
		Oxiderende vaste stoffen (afdeling 2.14)	1, 2, 3	
P380	Evacueren.	Ontplobbare stoffen (afdeling 2.1)	Instabiele ontplobbare stoffen	
		Ontplobbare stoffen (afdeling 2.1)	Subklassen 1.1, 1.2, 1.3, 1.4, 1.5	
		Zelfontledende stoffen en mengsels (afdeling 2.8)	Typen A, B	
		Oxiderende vloeistoffen (afdeling 2.13)	1	
		Oxiderende vaste stoffen (afdeling 2.14)	1	
P381	Alle ontstekingsbronnen wegnemen als dat veilig gedaan kan worden.	Ontvlambare gassen (afdeling 2.2)	1, 2	
P390	Gelekte/gemorste stof opnemen om materiële schade te vermijden.	Voor metalen bijtend (afdeling 2.16)	1	
P391	Gelekte/gemorste stof opruimen.	Gevaar voor het aquatisch milieu — acuut aquatisch gevaar (afdeling 4.1)	1	
		Gevaar voor het aquatisch milieu — chronisch aquatisch gevaar (afdeling 4.1)	1, 2	

Code (1)	Voorzorgsmaatregelen i.v.m. reactie (2)	Gevarenklasse (3)	Gevarencategorie (4)	Voorwaarden voor gebruik (5)
P301 + P310	NA INSLIKKEN: onmiddellijk een VERGIFTIGINGSCENTRUM of een arts raadplegen.	Acute orale toxiciteit (afdeling 3.1)	1, 2, 3	
		Aspiratiegevaar (afdeling 3.10)	1	
P301 + P312	NA INSLIKKEN: bij onwel voelen een VERGIFTIGINGSCENTRUM of een arts raadplegen.	Acute orale toxiciteit (afdeling 3.1)	4	
P301 + P330 + P331	NA INSLIKKEN: de mond spoelen — GEEN braken opwekken.	Huidcorrosie (afdeling 3.2)	1A, 1B, 1C	
P302 + P334	BIJ CONTACT MET DE HUID: in koud water onderdompelen/nat verband aanbrengen.	Pyrofore vloeistoffen (afdeling 2.9)	1	
P302 + P350	BIJ CONTACT MET DE HUID: voorzichtig wassen met veel water en zeep.	Acute dermale toxiciteit (afdeling 3.1)	1, 2	
P302 + P352	BIJ CONTACT MET DE HUID: met veel water en zeep wassen.	Acute dermale toxiciteit (afdeling 3.1)	3, 4	
		Huidirritatie (afdeling 3.2)	2	
		Sensibilisatie van de huid (afdeling 3.4)	1	
P303 + P361 + P353	BIJ CONTACT MET DE HUID (of het haar): verontreinigde kleding onmiddellijk uittrekken — huid met water afspoelen/afdouchen.	Ontvlambare vloeistoffen (afdeling 2.6)	1, 2, 3	
		Huidcorrosie (afdeling 3.2)	1A, 1B, 1C	
P304 + P340	NA INADEMING: het slachtoffer in de frisse lucht brengen en laten rusten in een houding die het ademen vergemakkelijkt.	Acute toxiciteit bij inademing (afdeling 3.1)	1, 2, 3, 4	
		Huidcorrosie (afdeling 3.2)	1A, 1B, 1C	
		Specifieke doelorgaantoxiciteit bij eenmalige blootstelling; irritatie van de luchtwegen (afdeling 3.8)	3	
		Specifieke doelorgaantoxiciteit bij eenmalige blootstelling; narcotische werking (afdeling 3.8)	3	
P304 + P341	NA INADEMING: het slachtoffer bij ademhalingsmoeilijkheden in de frisse lucht brengen en laten rusten in een houding die het ademen vergemakkelijkt.	Sensibilisatie van de luchtwegen (afdeling 3.4)	1	
P305 + P351 + P338	BIJ CONTACT MET DE OGEN: voorzichtig afspoelen met water gedurende een aantal minuten; contactlenzen verwijderen, indien mogelijk; blijven spoelen.	Huidcorrosie (afdeling 3.2)	1A, 1B, 1C	
		Ernstig oogletsel/oogirritatie (afdeling 3.3)	1	
		Oogirritatie (afdeling 3.3)	2	
P306 + P360	NA MORSEN OP KLEDING: verontreinigde kleding en huid onmiddellijk met veel water afspoelen en pas daarna kleding uittrekken.	Oxiderende vloeistoffen (afdeling 2.13)	1	
		Oxiderende vaste stoffen (afdeling 2.14)	1	
P307 + P311	NA blootstelling: een VERGIFTIGINGSCENTRUM of een arts raadplegen.	Specifieke doelorgaantoxiciteit bij eenmalige blootstelling (afdeling 3.8)	1	

Code (1)	Voorzorgsmaatregelen i.v.m. reactie (2)	Gevarenklasse (3)	Gevarencategorie (4)	Voorwaarden voor gebruik (5)
P308 + P313	NA (mogelijke) blootstelling: een arts raadplegen.	Mutageniteit in geslachtscellen (afdeling 3.5)	1A, 1B, 2	
		Kankerverwekkendheid (afdeling 3.6)	1A, 1B, 2	
		Voortplantingstoxiciteit (afdeling 3.7)	1A, 1B, 2	
		Voortplantingstoxiciteit — effecten op of via lactatie (afdeling 3.7)	Aanvullende categorie	
P309 + P311	NA blootstelling of bij onwel voelen: een VERGIFTIGINGSCENTRUM of een arts raadplegen.	Specifieke doelorgaan toxiciteit bij eenmalige blootstelling (afdeling 3.8)	2	
P332 + P313	Bij huidirritatie: een arts raadplegen.	Huidirritatie (afdeling 3.2)	2	
P333 + P313	Bij huidirritatie of uitslag: een arts raadplegen.	Sensibilisatie van de huid (afdeling 3.4)	1	
P335 + P334	Losse deeltjes van de huid afvegen. In koud water onderdompelen/nat verband aanbrengen.	Pyrofore vaste stoffen (afdeling 2.10)	1	
		Stoffen en mengsels die in contact met water ontvlambare gassen ontwikkelen (afdeling 2.12)	1, 2	
P337 + P313	Bij aanhoudende oogirritatie: een arts raadplegen.	Oogirritatie (afdeling 3.3)	2	
P342 + P311	Bij ademhalingsymptomen: een VERGIFTIGINGSCENTRUM of een arts raadplegen.	Sensibilisatie van de luchtwegen (afdeling 3.4)	1	
P370 + P376	In geval van brand: het lek dichten als dat veilig gedaan kan worden.	Oxiderende gassen (afdeling 2.4)	1	
P370 + P378	In geval van brand: blussen met ...	Ontvlambare vloeistoffen (afdeling 2.6)	1, 2, 3	Middel door fabrikant/leverancier te specificeren. — indien water het risico vergroot.
		Ontvlambare vaste stoffen (afdeling 2.7)	1, 2	
		Zelfontledende stoffen en mengsels (afdeling 2.8)	Typen A, B, C, D, E, F	
		Pyrofore vloeistoffen (afdeling 2.9)	1	
		Pyrofore vaste stoffen (afdeling 2.10)	1	
		Stoffen en mengsels die in contact met water ontvlambare gassen ontwikkelen (afdeling 2.12)	1, 2, 3	
		Oxiderende vloeistoffen (afdeling 2.13)	1, 2, 3	
		Oxiderende vaste stoffen (afdeling 2.14)	1, 2, 3	
P370 + P380	In geval van brand: evacueren.	Ontploffbare stoffen (afdeling 2.1)	Subklassen 1.1, 1.2, 1.3, 1.4, 1.5	
P370 + P380 + P375	In geval van brand: evacueren — op afstand blussen in verband met ontploffingsgevaar.	Zelfontledende stoffen en mengsels (afdeling 2.8)	Typen A, B	



Code (1)	Voorzorgsmaatregelen i.v.m. reactie (2)	Gevarenklasse (3)	Gevarencategorie (4)	Voorwaarden voor gebruik (5)
P371 + P380 + P375	In geval van grote brand en grote hoeveelheden: evacueren — op afstand blussen in verband met ontplofingsgevaar.	Oxiderende vloeistoffen (afdeling 2.13)	1	
		Oxiderende vaste stoffen (afdeling 2.14)	1	

Tabel 6.4

**Vorzorgsmaatregelen i.v.m. opslag**

Code (1)	Voorzorgsmaatregelen i.v.m. opslag (2)	Gevarenklasse (3)	Gevarencategorie (4)	Voorwaarden voor gebruik (5)	
P401	... bewaren.	Ontplobbare stoffen (afdeling 2.1)	Ontplobbare stoffen van de subklassen 1.1, 1.2, 1.3, 1.4, 1.5	overeenkomstig de plaatselijke/regionale/nationale/internationale voorschriften (specificeren).	
P402	Op een droge plaats bewaren.	Stoffen en mengsels die in contact met water ontvlambare gassen ontwikkelen (afdeling 2.12)	1, 2, 3		
P403	Op een goed geventileerde plaats bewaren.	Ontvlambare gassen (afdeling 2.2)	1, 2	— indien door de vluchtigheid van het product een gevaarlijke atmosfeer kan ontstaan.	
		Oxiderende gassen (afdeling 2.4)	1		
		Gassen onder druk (afdeling 2.5)	Samengeperst gas		
			Vloeibaar gas		
			Sterk gekoeld vloeibaar gas		
			Opgelost gas		
		Ontvlambare vloeistoffen (afdeling 2.6)	1, 2, 3		
		Zelfontledende stoffen en mengsels (afdeling 2.8)	Typen A, B, C, D, E, F		
		Acute toxiciteit bij inademing (afdeling 3.1)	1, 2, 3		
		Specifieke doelorgaantoxiciteit bij eenmalige blootstelling; irritatie van de luchtwegen (afdeling 3.8)	3		
Specifieke doelorgaantoxiciteit bij eenmalige blootstelling; narcotische werking (afdeling 3.8)	3				
P404	In gesloten verpakking bewaren.	Stoffen en mengsels die in contact met water ontvlambare gassen ontwikkelen (afdeling 2.12)	1, 2, 3		
P405	Achter slot bewaren.	Acute orale toxiciteit (afdeling 3.1)	1, 2, 3		
		Acute dermale toxiciteit (afdeling 3.1)	1, 2, 3		
		Acute toxiciteit bij inademing (afdeling 3.1)	1, 2, 3		
		Huidcorrosie (afdeling 3.2)	1A, 1B, 1C		
		Mutageniteit in geslachtscellen (afdeling 3.5)	1A, 1B, 2		

Code (1)	Voorzorgsmaatregelen i.v.m. opslag (2)	Gevarenklasse (3)	Gevarencategorie (4)	Voorwaarden voor gebruik (5)
		Kankerverwekkendheid (afdeling 3.6)	1A, 1B, 2	
		Voortplantingstoxiciteit (afdeling 3.7)	1A, 1B, 2	
		Specifieke doelorgaantoxiciteit bij eenmalige blootstelling (afdeling 3.8)	1, 2	
		Specifieke doelorgaantoxiciteit bij eenmalige blootstelling; irritatie van de luchtwegen (afdeling 3.8)	3	
		Specifieke doelorgaantoxiciteit bij eenmalige blootstelling; narcotische werking (afdeling 3.8)	3	
		Aspiratiegevaar (afdeling 3.10)	1	
P406	In corrosiebestendige/... houder met corrosiebestendige binnenbekleding bewaren.	Voor metalen bijtend (afdeling 2.16)	1	Andere stoffen waarmee contact vermeden dient te worden door fabrikant/leverancier te specificeren.
P407	Ruimte laten tussen stapels/pallets.	Voor zelfverhitting vatbare stoffen en mengsels (afdeling 2.11)	1, 2	
P410	Tegen zonlicht beschermen.	Ontvlambare aerosolen (afdeling 2.3)	1, 2	
		Gassen onder druk (afdeling 2.5)	Samengeperst gas	
			Vloeibaar gas	
			Opgelost gas	
		Voor zelfverhitting vatbare stoffen en mengsels (afdeling 2.11)	1, 2	
		Organische peroxiden (afdeling 2.15)	Typen A, B, C, D, E, F	
P411	Bij maximaal ... °C bewaren.	Zelfontledende stoffen en mengsels (afdeling 2.8)	Typen A, B, C, D, E, F	Temperatuur door fabrikant/leverancier te specificeren.
		Organische peroxiden (afdeling 2.15)	Typen A, B, C, D, E, F	
P412	Niet blootstellen aan temperaturen boven 50 °C.	Ontvlambare aerosolen (afdeling 2.3)	1, 2	
P413	Bulkmateriaal, indien meer dan ... kg, bij temperaturen van maximaal ... °C bewaren.	Voor zelfverhitting vatbare stoffen en mengsels (afdeling 2.11)	1, 2	Gewicht en temperatuur door fabrikant/leverancier te specificeren.
P420	Gescheiden van ander materiaal bewaren.	Zelfontledende stoffen en mengsels (afdeling 2.8)	Typen A, B, C, D, E, F	
		Voor zelfverhitting vatbare stoffen en mengsels (afdeling 2.11)	1, 2	
		Organische peroxiden (afdeling 2.15)	Typen A, B, C, D, E, F	
P422	Onder ... bewaren.	Pyrofore vloeistoffen (afdeling 2.9)	1	Vloeistof of inert gas door fabrikant/leverancier te specificeren.
		Pyrofore vaste stoffen (afdeling 2.10)	1	

Code (1)	Voorzorgsmaatregelen i.v.m. opslag (2)	Gevarenklasse (3)	Gevarencategorie (4)	Voorwaarden voor gebruik (5)
P402 + P404	Op een droge plaats bewaren. In gesloten verpakking bewaren.	Stoffen en mengsels die in contact met water ontvlambare gassen ontwikkelen (afdeling 2.12)	1, 2, 3	
P403 + P233	Op een goed geventileerde plaats bewaren. In goed gesloten verpakking bewaren.	Acute toxiciteit bij inademing (afdeling 3.1)	1, 2, 3	— indien door de vluchtigheid van het product een gevaarlijke atmosfeer kan ontstaan.
		Specifieke doelorgaantoxiciteit bij eenmalige blootstelling; irritatie van de luchtwegen (afdeling 3.8)	3	
		Specifieke doelorgaantoxiciteit bij eenmalige blootstelling; narcotische werking (afdeling 3.8)	3	
P403 + P235	Op een goed geventileerde plaats bewaren. Koel bewaren.	Ontvlambare vloeistoffen (afdeling 2.6)	1, 2, 3	
		Zelfontledende stoffen en mengsels (afdeling 2.8)	Typen A, B, C, D, E, F	
P410 + P403	Tegen zonlicht beschermen. Op een goed geventileerde plaats bewaren.	Gassen onder druk (afdeling 2.5)	Samengeperst gas	
			Vloeibaar gas	
			Opgelost gas	
P410 + P412	Tegen zonlicht beschermen. Niet blootstellen aan temperaturen boven 50 °C.	Ontvlambare aerosolen (afdeling 2.3)	1, 2	
P411 + P235	Bij maximaal ... °C bewaren. Koel bewaren.	Organische peroxiden (afdeling 2.15)	Typen A, B, C, D, E, F	Temperatuur door fabrikant/leverancier te specificeren.

Tabel 6.5

**Voorzorgsmaatregelen i.v.m. verwijdering**

Code (1)	Voorzorgsmaatregelen i.v.m. verwijdering (2)	Gevarenklasse (3)	Gevarencategorie (4)	Voorwaarden voor gebruik (5)
P501	Inhoud/verpakking afvoeren naar ...	Ontplobbare stoffen (afdeling 2.1)	Ontplobbare stoffen van de subklassen 1.1, 1.2, 1.3, 1.4, 1.5	overeenkomstig de plaatselijke/regionale/nationale/internationale voorschriften (specificeren).
		Ontvlambare vloeistoffen (afdeling 2.6)	1, 2, 3	
		Zelfontledende stoffen en mengsels (afdeling 2.8)	Typen A, B, C, D, E, F	
		Stoffen en mengsels die in contact met water ontvlambare gassen ontwikkelen (afdeling 2.12)	1, 2, 3	
		Oxiderende vloeistoffen (afdeling 2.13)	1, 2, 3	
		Oxiderende vaste stoffen (afdeling 2.14)	1, 2, 3	
		Organische peroxiden (afdeling 2.15)	Typen A, B, C, D, E, F	
		Acute orale toxiciteit (afdeling 3.1)	1, 2, 3, 4	

Code (1)	Voorzorgsmaatregelen i.v.m. verwijdering (2)	Gevarenklasse (3)	Gevarencategorie (4)	Voorwaarden voor gebruik (5)
		Acute dermale toxiciteit (afdeling 3.1)	1, 2, 3, 4	
		Acute toxiciteit bij inademing (afdeling 3.1)	1, 2	
		Huidcorrosie (afdeling 3.2)	1A, 1B, 1C	
		Sensibilisatie van de luchtwegen (afdeling 3.4)	1	
		Sensibilisatie van de huid (afdeling 3.4)	1	
		Mutageniteit in geslachtscellen (afdeling 3.5)	1A, 1B, 2	
		Kankerverwekkendheid (afdeling 3.6)	1A, 1B, 2	
		Voortplantingstoxiciteit (afdeling 3.7)	1A, 1B, 2	
		Specifieke doelorgaantoxiciteit bij eenmalige blootstelling (afdeling 3.8)	1, 2	
		Specifieke doelorgaantoxiciteit bij eenmalige blootstelling; irritatie van de luchtwegen (afdeling 3.8)	3	
		Specifieke doelorgaantoxiciteit bij eenmalige blootstelling; narcotische werking (afdeling 3.8)	3	
		Specifieke doelorgaantoxiciteit bij herhaalde blootstelling (afdeling 3.9)	1, 2	
		Aspiratiegevaar (afdeling 3.10)	1	
		Gevaar voor het aquatisch milieu, acute aquatische toxiciteit (afdeling 4.1)	1	
		Gevaar voor het aquatisch milieu, chronische aquatische toxiciteit (afdeling 4.1)	1, 2, 3, 4	

## 2. Deel 2: voorzorgsmaatregelen

De hierna vermelde voorzorgsmaatregelen worden overeenkomstig deel 1 gekozen.

Tabel 1.1

### Voorzorgsmaatregelen — Algemeen

P101	Taal	
	BG	При необходимост от медицинска помощ, носете опаковката или етикета на продукта.
	ES	Si se necesita consejo médico, tener a mano el envase o la etiqueta.
	CS	Je-li nutná lékařská pomoc, mějte po ruce obal nebo štítek výrobku.
	DA	Hvis der er brug for lægehjælp, medbring da beholderen eller etiketten.
	DE	Ist ärztlicher Rat erforderlich, Verpackung oder Kennzeichnungsetikett bereithalten.

P101	Taal	
	ET	Arsti poole pöördues võtta kaasa toote pakend või etikett.
	EL	Εάν ζητήσετε ιατρική συμβουλή, να έχετε μαζί σας τον περιέκτη του προϊόντος ή την ετικέτα.
	EN	If medical advice is needed, have product container or label at hand.
	FR	En cas de consultation d'un médecin, garder à disposition le récipient ou l'étiquette.
	GA	Más gá comhairle liachta, bíodh coimeádán nó lipéad an táirge ina aice láimhe.
	IT	In caso di consultazione di un medico, tenere a disposizione il contenitore o l'etichetta del prodotto.
	LV	Medicīniska padoma nepieciešamības gadījumā attiecīgā informācija ir norādīta uz iepakojuma vai etiķetes.
	LT	Jei reikalinga gydytojo konsultacija, su savimi turėkite produkto talpyklą ar jo etiketę.
	HU	Orvosi tanácsadás esetén tartsa kéznél a termék edényét vagy címkéjét.
	MT	Jekk ikun mehtieg parir mediku, ara li jkollok il-kontenitur jew it-tikketta tal-prodott fil-qrib.
	NL	Bij het inwinnen van medisch advies, de verpakking of het etiket ter beschikking houden.
	PL	W razie konieczności zasięgnięcia porady lekarza należy pokazać pojemnik lub etykietę.
	PT	Se for necessário consultar um médico, mostre-lhe a embalagem ou o rótulo.
	RO	Dacă este necesară consultarea medicului, țineți la îndemână recipientul sau eticheta produsului.
	SK	Ak je potrebná lekárska pomoc, majte k dispozícii obal alebo etiketu výrobu.
	SL	Če je potreben zdravniški nasvet, mora biti na voljo posoda ali etiketa proizvoda.
	FI	Jos tarvitaan lääkinnällistä apua, näytä pakkaus tai varoitusetiketti.
	SV	Ha förpackningen eller etiketten till hands om du måste söka läkarvård.
P102	Taal	
	BG	Да се съхранява извън обсега на деца.
	ES	Mantener fuera del alcance de los niños.
	CS	Uchovávejte mimo dosah dětí.
	DA	Opbevares utilgængeligt for børn.
	DE	Darf nicht in die Hände von Kindern gelangen.
	ET	Hoida lastele kättesaamatus kohas.
	EL	Μακριά από παιδιά.
	EN	Keep out of reach of children.
	FR	Tenir hors de portée des enfants.
	GA	Coimeád as aimsiú leanaí.
	IT	Tenere fuori dalla portata dei bambini.
	LV	Sargāt no bērniem.
	LT	Laikyti vaikams neprieinamoje vietoje.
	HU	Gyermekektől elzárva tartandó.
	MT	Żommu 'l bogħod minn fejn jistghu jilhqum it-tfal.
	NL	Buiten het bereik van kinderen houden.

P102	Taal	
	PL	Chronić przed dziećmi.
	PT	Manter fora do alcance das crianças.
	RO	A nu se lăsa la îndemâna copiilor.
	SK	Uchovávať mimo dosahu detí.
	SL	Hraniti zunaj dosega otrok.
	FI	Säilytä lasten ulottumattomissa.
	SV	Förvaras oåtkomligt för barn.
P103	Taal	
	BG	Преди употреба прочетете етикета.
	ES	Leer la etiqueta antes del uso.
	CS	Před použitím si přečtete údaje na štítku.
	DA	Læs etiketten før brug.
	DE	Vor Gebrauch Kennzeichnungsetikett lesen.
	ET	Enne kasutamist tutvuda etiketil oleva infoga.
	EL	Διαβάστε την ετικέτα πριν από τη χρήση.
	EN	Read label before use.
	FR	Lire l'étiquette avant utilisation.
	GA	Léigh an lipéad roimh úsáid.
	IT	Leggere l'etichetta prima dell'uso.
	LV	Pirms izmantošanas izlasīt etiķeti.
	LT	Prieš naudojimą perskaityti etiketę.
	HU	Használat előtt olvassa el a címkén közölt információkat.
	MT	Aqra t-tikketta qabel l-użu.
	NL	Alvorens te gebruiken, het etiket lezen.
	PL	Przed użyciem przeczytać etykietę.
	PT	Ler o rótulo antes da utilização.
	RO	Citiți eticheta înainte de a utiliza.
	SK	Pred použitím si prečítajte etiketu.
	SL	Pred uporabo preberite etiketo.
	FI	Lue merkinnät ennen käyttöä.
	SV	Läs etiketten före användning.

Tabel 1.2

**Voorzorgsmaatregelen i.v.m. preventie**

P201	Taal	
	BG	Преди употреба се снабдете със специални инструкции.
	ES	Pedir instrucciones especiales antes del uso.

P201	Taal	
	CS	Před použitím si obstarajte speciální instrukce.
	DA	Indhent særlige anvisninger før brug.
	DE	Vor Gebrauch besondere Anweisungen einholen.
	ET	Enne kasutamist tutvuda erijuhistega.
	EL	Εφοδιαστείτε με τις ειδικές οδηγίες πριν από τη χρήση.
	EN	Obtain special instructions before use.
	FR	Se procurer les instructions avant utilisation.
	GA	Faigh treoracha speisialta roimh úsáid.
	IT	Procurarsi istruzioni specifiche prima dell'uso.
	LV	Pirms lietošanas saņemt speciālu instruktažu.
	LT	Prieš naudojimą gauti specialias instrukcijas.
	HU	Használat előtt ismerje meg az anyagra vonatkozó különleges utasításokat.
	MT	Ikseb struzzjonijiet speċjali qabel l-użu.
	NL	Alvorens te gebruiken de speciale aanwijzingen raadplegen.
	PL	Przed użyciem zapoznać się ze specjalnymi środkami ostrożności.
	PT	Pedir instruções específicas antes da utilização.
	RO	Procurați instrucțiuni speciale înainte de a utiliza.
	SK	Pred použitím sa oboznámte s osobitnými pokynmi.
	SL	Pred uporabo pridobiti posebna navodila.
	FI	Lue erityisohjeet ennen käyttöä.
	SV	Inhämta särskilda instruktioner före användning.

P202	Taal	
	BG	Не използвайте преди да сте прочели и разбрали всички предупредителни мерки за безопасност.
	ES	No manipular la sustancia antes de haber leído y comprendido todas las instrucciones de seguridad.
	CS	Nepoužívejte, dokud jste si nepřečetli všechny bezpečnostní pokyny a neporozuměli jim.
	DA	Anvend ikke produktet, før alle advarsler er læst og forstået.
	DE	Vor Gebrauch alle Sicherheitshinweise lesen und verstehen.
	ET	Mitte käidelda enne ohutusnõuetega tutvumist ja nendest arusaamist.
	EL	Μην το χρησιμοποιήσετε πριν διαβάσετε και κατανοήσετε τις οδηγίες προφύλαξης.
	EN	Do not handle until all safety precautions have been read and understood.
	FR	Ne pas manipuler avant d'avoir lu et compris toutes les précautions de sécurité.
	GA	Ná láimhsigh go dtí go léifear agus go dtuigfear gach ráiteas réamhchúraim sábháilteachta.
	IT	Non manipolare prima di avere letto e compreso tutte le avvertenze.
	LV	Neizmantot pirms nav izlasīti un saprasti visi apzīmējumi.
	LT	Nenaudoti, jeigu neperskaityti ar nesuprasti visi saugos įspėjimai.
	HU	Ne használja addig, amíg az összes biztonsági óvintézkedést el nem olvasta és meg nem értette.

P202	Taal	
	MT	Tmissux qabel ma tkun qrajt u fhimt l-istruzzjonijiet kollha ta' prekawzjoni.
	NL	Pas gebruiken nadat u alle veiligheidsvoorschriften gelezen en begrepen heeft
	PL	Nie używać przed zapoznaniem się i zrozumieniem wszystkich środków bezpieczeństwa.
	PT	Não manuseie o produto antes de ter lido e percebido todas as precauções de segurança.
	RO	A nu se manipula decât după ce au fost citite și înțelese toate măsurile de securitate.
	SK	Nepoužívajte, kým si neprečítate a nepochopíte všetky bezpečnostné opatrenia.
	SL	Ne uporabljajte, dokler se ne seznanite z vsemi varnostnimi ukrepi.
	FI	Lue varoitukset huolellisesti ennen käsittelyä.
	SV	Använd inte produkten innan du har läst och förstått säkerhetsanvisningarna
P210	Taal	
	BG	Да се пази от топлина/искри/открит пламък/нагорешени повърхности. — Тютюнопушенето е забранено.
	ES	Mantener alejado de fuentes de calor, chispas, llama abierta o superficies calientes. — No fumar.
	CS	Chraňte před teplem/jiskrami/otevřeným plamenem/horkými povrchy. — Zákaz kouření.
	DA	Holdes væk fra varme/gnister/åben ild/varme overflader. Rygning forbudt.
	DE	Von Hitze/Funken/offener Flamme/heißen Oberflächen fernhalten. Nicht rauchen.
	ET	Hoida eemal soojusallikast/sädemetest/leekidest/kuumadest pindadest. — Mitte suitsetada.
	EL	Μακριά από θερμότητα/σπινθήρες/γυμνές φλόγες/θερμές επιφάνειες. — Μην καπνίζετε.
	EN	Keep away from heat/sparks/open flames/hot surfaces. — No smoking.
	FR	Tenir à l'écart de la chaleur/des étincelles/des flammes nues/des surfaces chaudes. — Ne pas fumer.
	GA	Coimeád ó theas/splancacha/lasair gan chosaint/dromchlaí te. — Ná caitear tobac.
	IT	Tenere lontano da fonti di calore/scintille/fiamme libere/superfici riscaldate. — Non fumare.
	LV	Nelietot vietās, kur ir sastopams karstums/dzirksteles/atklāta uguns/.../karstas virsmas. Nesmēķēt.
	LT	Laikyti atokiau nuo šilumos šaltinių/žiežirbų/atviros liepsnos/karštų paviršių. — Nerūkyti.
	HU	Hőtől/szikrától/nyílt lángtól/.../forró felületektől távol tartandó. Tilos a dohányzás.
	MT	Żomm 'il bogħod mis-shana/xrar tan-nar/fjammiet mikxufa/uċuħ jaħarqu. — Trejjipx.
	NL	Verwijderd houden van warmte/vonken/open vuur/hete oppervlakken. — Niet roken.
	PL	Przechowywać z dala od źródeł ciepła/iskrzzenia/otwartego ognia/gorących powierzchni. Palenie wzbronione.
	PT	Manter afastado do calor/faísca/chama aberta/superfícies quentes. — Não fumar.
	RO	A se păstra departe de surse de căldură/scântei/flăcări deschise/suprafețe incinse. — Fumatul interzis.
	SK	Uchovávať mimo dosahu tepla/iskier/otvoreného ohňa/horúcich povrchov. Nefajčite.
	SL	Hraniti ločeno od vročine/isker/odprtega ognja/vročih površin. — Kajenje prepovedano.
	FI	Suojaa lämmöltä/kipinöltä/avotulelta/kuumilta pinnoilta. — Tupakointi kielletty.
	SV	Får inte utsättas för värme/gnistor/öppen låga/heta ytor. — Rökning förbjuden.



P211	Taal	
	BG	Да не се пръска към открит пламък или друг източник на запалване.
	ES	No pulverizar sobre una llama abierta u otra fuente de ignición.
	CS	Nestříkejte do otevřeného ohně nebo jiných zdrojů zapálení.
	DA	Spray ikke mod åben ild eller andre antændelseskilder.
	DE	Nicht gegen offene Flamme oder andere Zündquelle sprühen.
	ET	Mitte pihustada leekidesse või muusse süüteallikasse.
	EL	Μην ψεκάζετε κοντά σε γυμνή φλόγα ή άλλη πηγή ανάφλεξης.
	EN	Do not spray on an open flame or other ignition source.
	FR	Ne pas vaporiser sur une flamme nue ou sur toute autre source d'ignition.
	GA	Ná spraeáil ar lasair gan chosaint ná ar fhoirse eile adhainte.
	IT	Non vaporizzare su una fiamma libera o altra fonte di accensione.
	LV	Neizsmidzināt uz atklātas uguns vai citiem aizdegšanās avotiem.
	LT	Nepurkšti į atvirą liepsną arba kitus degimo šaltinius.
	HU	Tilos nyílt lángra vagy más gyújtóforrásra permetezni.
	MT	Tisprejjax fuq fjamma mikxufa jew sors ieħor li jaqbad.
	NL	Niet in een open vuur of op andere ontstekingsbronnen spuiten.
	PL	Nie rozpylać nad otwartym ogniem lub innym źródłem zapłonu.
	PT	Não pulverizar sobre chama aberta ou outra fonte de ignição.
	RO	Nu pulverizați deasupra unei flăcări deschise sau unei alte surse de aprindere.
	SK	Nestriekajte na otvorený oheň ani iný zdroj zapálenia.
	SL	Ne pršiti proti odprtemu ognju ali drugemu viru vžiga.
	FI	Ei saa suihkuttaa avotuleen tai muuhun sytytysläheteeseen.
	SV	Spreja inte över öppen låga eller andra antändningskällor.

P220	Taal	
	BG	Да се държи/съхранява далеч от облекло/.../горими материали
	ES	Mantener o almacenar alejado de la ropa/.../materiales combustibles.
	CS	Uchovávejte/skladujte odděleně od oděvů/.../hořlavých materiálů.
	DA	Må ikke anvendes/opbevares i nærheden af tøj/.../brændbare materialer.
	DE	Von Kleidung/.../brennbaren Materialien fernhalten/entfernt aufbewahren.
	ET	Hoida eemal rõivastest/.../süttivast materjalist.
	EL	Διατηρείται/Φυλάσσεται μακριά από ενδύματα/.../καύσιμα υλικά.
	EN	Keep/Store away from clothing/.../combustible materials.
	FR	Tenir/stocker à l'écart des vêtements/.../matières combustibles
	GA	Coimeád/Stóráil glan ar éadaí/.../ábhair indóite.
	IT	Tenere/conservare lontano da indumenti/...../materiali combustibili.
	LV	Turēt/uzglabāt vietās, kur nav piekļuves drēbēm/.../uzliesmojošiem materiāliem.
	LT	Laikyti/sandėliuoti atokiau nuo drabužių/.../degių medžiagų.

P220	Taal	
	HU	Ruhától/.../éghető anyagtól távol tartandó/tárolandó.
	MT	Żomm/Ahżen 'il bogħod mill-hwejjeġ/.../materjali li jaqbdū.
	NL	Van kleding/.../brandbare stoffen verwijderd houden/bewaren.
	PL	Trzymać/przechowywać z dala od odzieży/.../materiałów zapalnych.
	PT	Manter/guardar afastado de roupa/.../matérias combustíveis.
	RO	A se păstra/depozita departe de îmbrăcăminte/.../materiale combustibile.
	SK	Uchovávať/skladujte mimo odevov/.../horľavých materiálov.
	SL	Hraniti ločeno od oblačil/.../vnetljivih materialov.
	FI	Pidä/Varastoi erillään vaatetuksesta/.../syttyistä materiaaleista.
	SV	Hålls/förvarad åtskilt från kläder/.../brännbara material.
P221	Taal	
	BG	Вземете всички предпазни мерки за избягване на смесването с горими материали...
	ES	Tomar todas las precauciones necesarias para no mezclar con materias combustibles...
	CS	Proveďte preventivní opatření proti smíchání s hořlavými materiály...
	DA	Undgå at blande med brændbare materialer...
	DE	Mischen mit brennbaren Stoffen/... unbedingt verhindern.
	ET	Rakendada ettevaatusabinõusid, et vältida segunemist põlevainetega...
	EL	Λάβετε κάθε προφύλαξη ώστε να μην αναμειχθεί με καύσιμα...
	EN	Take any precaution to avoid mixing with combustibles...
	FR	Prendre toutes précautions pour éviter de mélanger avec des matières combustibles...
	GA	Déan gach réamhchúram chun meascadh le hábhair indóite a sheachaint...
	IT	Prendere ogni precauzione per evitare di miscelare con sostanze combustibili...
	LV	Nekādā gadījumā nemaisīt ar viegli uzliesmojošām vielām...
	LT	Imtis visų atsargumo priemonių, kad nebūtų sumaišyta su degiomis medžiagomis...
	HU	Minden óvintézkedést meg kell tenni, hogy ne keveredjen éghető anyagokkal.
	MT	Hu kull prekawzjoni biex tevita li jithallat mal-kombustibbli...
	NL	Vermenging met brandbare stoffen... absoluut vermijden.
	PL	Zastosować wszelkie środki ostrożności w celu uniknięcia mieszania z innymi materiałami zapalnymi ...
	PT	Tomar todas as precauções para não misturar com combustíveis...
	RO	Luăți toate măsurile de precauție pentru a evita amestecul cu combustibili...
	SK	Prijmite opatrenia na zabránenie zmiešania s horľavými materiálmi...
	SL	Preprečiti mešanje z vnetljivimi snovmi ...
	FI	Varo sekoittamasta syttyvien materiaalien... kanssa.
	SV	Undvik att blanda med med brännbara ämnen...

P222	Taal	
	BG	Не допускайте контакт с въздух.
	ES	No dejar que entre en contacto con el aire.
	CS	Zabraňte styku se vzduchem.
	DA	Undgå kontakt med luft.
	DE	Kontakt mit Luft nicht zulassen.
	ET	Hoida õhuga kokkupuute eest.
	EL	Να μην έρθει σε επαφή με τον αέρα.
	EN	Do not allow contact with air.
	FR	Ne pas laisser au contact de l'air.
	GA	Ná ceadaiḡh teagmháil le haer.
	IT	Evitare il contatto con l'aria.
	LV	Nepieļaut kontaktu ar gaisu.
	LT	Saugoti nuo kontakto su oru.
	HU	Nem érintkezhet levegővel.
	MT	Thallix li jkun hemm kuntatt ma' l-arja.
	NL	Contact met de lucht vermijden.
	PL	Nie dopuszczać do kontaktu z powietrzem.
	PT	Não deixar entrar em contacto com o ar.
	RO	A nu se lăsa în contact cu aerul.
	SK	Zabraňte kontaktu so vzduchom.
	SL	Preprečiti stik z zrakom.
	FI	Ei saa joutua kosketuksiin ilman kanssa.
	SV	Undvik kontakt med luft.
P223	Taal	
	BG	Да се избягва всякакъв възможен контакт с вода поради бурна реакция и възможно внезапно запалване.
	ES	Mantener alejado de cualquier posible contacto con el agua, pues reacciona violentamente y puede provocar una llamarada.
	CS	Chraňte před možným stykem s vodou kvůli prudké reakci a možnému náhlému vzplanutí.
	DA	Undgå enhver kontakt med vand, da dette kan fremkalde voldsom reaktion og risiko for eksplosionsagtig brand.
	DE	Kontakt mit Wasser wegen heftiger Reaktion und möglichem Aufflammen unbedingt verhindern.
	ET	Hoida igasuguse kokkupuute eest veega, vastasel juhul reageerib ägedalt ja võib põhjustada hetkpõlemise.
	EL	Αποφύγετε κάθε πιθανή επαφή με το νερό, διότι αντιδρά βίαια και μπορεί να προκληθεί ανάφλεξη.
	EN	Keep away from any possible contact with water, because of violent reaction and possible flash fire.
	FR	Éviter tout contact avec l'eau, à cause du risque de réaction violente et d'inflammation spontanée.

P223	Taal	
	GA	Ná ceadaigh teagmháil de shaghas ar bith le huisce, mar gheall ar imoibriú foirtíl agus splancthine a d'fhéadfadh a bheith ann.
	IT	Evitare qualsiasi contatto con l'acqua: pericolo di reazione violenta e di infiammazione spontanea.
	LV	Nepieļaut kontaktu ar ūdeni īpaši stipras reakcijas un iespējamās eksplozijas dēļ.
	LT	Saugoti nuo bet kokio galimo kontakto su vandeniu, nes smarkiai reaguoja ir gali susidaryti ugnies pliūpsnis.
	HU	Vízzel semmilyen formában nem érintkezhet, ellenkező esetben heves reakció és belobbanás fordulhat elő.
	MT	Żomm 'il bogħod minn kull kuntatt possibbli ma' l-ilma, minhabba li jirreaġixxi bil-qawwa u jista' jkun hemm fjamma nar.
	NL	Contact met water vermijden in verband met een heftige reactie en een mogelijke wolkbrand.
	PL	Chronić przed wszelkim kontaktem z wodą z powodu gwałtownej reakcji i możliwości wystąpienia błyskawicznego pożaru.
	PT	Não deixar entrar em contacto com a água: risco de reacção violenta e possibilidade de formação de chama súbita.
	RO	A se evita orice contact cu apa, din cauza reacției violente și a riscului de aprindere spontană.
	SK	Zabráňte akémukoľvek kontaktu s vodou, aby nedošlo k prudkej reakcii a prípadnému zapáleniu.
	SL	Hraniti ločeno od možnega stika z vodo zaradi burne reakcije in možnega bliskovitega požara.
	FI	Ei saa joutua kosketuksiin veden kanssa voimakkaan reaktion ja mahdollisen leimahduksen takia.
	SV	Undvik all kontakt med vatten eftersom det kan framkalla en våldsam reaktion och explosionsartad brand.
P230	Taal	
	BG	Да се държи навлажнен с...
	ES	Mantener humedecido con...
	CS	Uchovávejte ve zvlhčeném stavu ...
	DA	Holdes befugtet med...
	DE	Feucht halten mit ...
	ET	Niisutada ...-ga.
	EL	Να διατηρείται υγρό με ...
	EN	Keep wetted with...
	FR	Maintenir humidifié avec...
	GA	Coimeád fliuchta le...
	IT	Mantenere umido con....
	LV	Vienmēr samitrināt ar ...
	LT	Laikyti sudrėkintą (kuo)
	HU	...-val/-vel nedvesítve tartandó.
	MT	Żommu mxarrab bi ...
	NL	Vochtig houden met...

P230	Taal	
	PL	Przechowywać produkt zwilżony....
	PT	Manter húmido com...
	RO	A se păstra umezit cu...
	SK	Uchovávať zvlhčené ...
	SL	Hraniti prepojeno z ...
	FI	Säilytä kostutettuna ...
	SV	Ska hållas fuktigt med...

P231	Taal	
	BG	Да се използва под инертен газ.
	ES	Manipular en gas inerte.
	CS	Manipulace pod inertním plynem.
	DA	Håndteres under inaktiv gas.
	DE	Unter inertem Gas handhaben.
	ET	Käidelda inertgaasis.
	EL	Χειρισμός σε αδρανή ατμόσφαιρα.
	EN	Handle under inert gas.
	FR	Manipuler sous gaz inerte.
	GA	Láimhsigh faoi thriathghás.
	IT	Manipolare in atmosfera di gas inerte.
	LV	Rīkoties tikai inertas gāzes apstākļos.
	LT	Tvarkyti inertinėse dujose.
	HU	Inert gázban használandó.
	MT	Immaniġġja taht gass inerti.
	NL	Onder inert gas werken.
	PL	Używać w atmosferze obojętnego gazu.
	PT	Manusear em atmosfera de gás inerte.
	RO	A se manipula sub un gaz inert.
	SK	Manipulujte v prostredí s inertným plynom.
	SL	Hraniti v ustreznem inertnem plinu.
	FI	Käsittele inertissä kaasussa.
	SV	Hanteras under inert gas.

P232	Taal	
	BG	Да се пази от влага.
	ES	Proteger de la humedad.
	CS	Chraňte před vlhkem.
	DA	Beskyttes mod fugt.

P232	Taal	
	DE	Vor Feuchtigkeit schützen.
	ET	Hoida niiskuse eest.
	EL	Προσπετέψτε από την υγρασία.
	EN	Protect from moisture.
	FR	Protéger de l'humidité.
	GA	Cosain ar thaise.
	IT	Proteggere dall'umidità.
	LV	Aizsargāt no mitruma.
	LT	Saugoti nuo drėgmės.
	HU	Nedvességtől védendő.
	MT	Ipproteggi mill-umdità.
	NL	Tegen vocht beschermen.
	PL	Chronić przed wilgocią.
	PT	Manter ao abrigo da humidade.
	RO	A se proteja de umiditate.
	SK	Chránite pred vlhkosťou.
	SL	Zaščititi pred vlago.
	FI	Suojaa kosteudelta.
	SV	Skyddas från fukt.

P233	Taal	
	BG	Съдът да се съхранява плътно затворен.
	ES	Mantener el recipiente herméticamente cerrado.
	CS	Uchovávejte obal těsně uzavřený.
	DA	Hold beholderen tæt lukket.
	DE	Behälter dicht verschlossen halten.
	ET	Hoida pakend tihedalt suletuna.
	EL	Να διατηρείται ο περιέκτης ερμητικά κλειστός.
	EN	Keep container tightly closed.
	FR	Maintenir le récipient fermé de manière étanche.
	GA	Coimeád an coimeádán dúnta go docht.
	IT	Tenere il recipiente ben chiuso.
	LV	Tvertni stingri noslēgt.
	LT	Talpyklą laikyti sandariai uždarytą.
	HU	Az edény szorosan lezárva tartandó.
	MT	Żomm il-kontenitur magħluq sew.
	NL	In goed gesloten verpakking bewaren.
	PL	Przechowywać pojemnik szczelnie zamknięty.

P233	Taal	
	PT	Manter o recipiente bem fechado.
	RO	Păstrați recipientul închis etanș.
	SK	Nádobu uchovávejte tesne uzavretú.
	SL	Hraniti v tesno zaprti posodi.
	FI	Säilytä tiiviisti suljettuna.
	SV	Behållaren ska vara väl tillsluten.

P234	Taal	
	BG	Да се съхранява само в оригиналната опаковка.
	ES	Conservar únicamente en el recipiente original.
	CS	Uchovávejte pouze v původním obalu.
	DA	Opbevares kun i den originale beholder.
	DE	Nur im Originalbehälter aufbewahren.
	ET	Hoida üksnes originaalpakendis.
	EL	Να διατηρείται μόνο στον αρχικό περιέκτη.
	EN	Keep only in original container.
	FR	Conserver uniquement dans le récipient d'origine.
	GA	Coimeád sa choimeádán bunaidh amháin.
	IT	Conservare soltanto nel contenitore originale.
	LV	Turēt tikai oriģinālā iepakojumā.
	LT	Laikyti tik originalioje talpykloje.
	HU	Az eredeti edényben tartandó.
	MT	Żomm biss fil-kontenitur oriġinali.
	NL	Uitsluitend in de oorspronkelijke verpakking bewaren.
	PL	Przechowywać wyłącznie w oryginalnym pojemniku.
	PT	Conservar unicamente no recipiente de origem.
	RO	Păstrați numai în recipientul original.
	SK	Uchovávejte iba v pôvodnej nádobe.
	SL	Hraniti samo v originalni posodi.
	FI	Säilytä alkuperäispakkauksessa.
	SV	Förvaras endast i originalbehållaren.

P235	Taal	
	BG	Да се държи на хладно.
	ES	Mantener en lugar fresco.
	CS	Uchovávejte v chladu.
	DA	Opbevares køligt.
	DE	Kühl halten.

P235	Taal	
	ET	Hoida jahedas.
	EL	Να διατηρείται δροσερό.
	EN	Keep cool.
	FR	Tenir au frais.
	GA	Coimeád fionnuar é
	IT	Conservare in luogo fresco.
	LV	Turēt vēsumā.
	LT	Laikyti vėsioje vietoje.
	HU	Hűvös helyen tartandó.
	MT	Żomm frisk.
	NL	Koel bewaren.
	PL	Przechowywać w chłodnym miejscu.
	PT	Conservar em ambiente fresco.
	RO	A se păstra la rece.
	SK	Uchovávať v chlade.
	SL	Hraniti na hladnem.
	FI	Säilytä viileässä.
	SV	Förvaras svalt.
P240	Taal	
	BG	Заземяване/еквипотенциална връзка на съда и приемателното устройство.
	ES	Conectar a tierra/enlace equipotencial del recipiente y del equipo de recepción.
	CS	Uzemněte obal a odběrové zařízení.
	DA	Beholder og modtageudstyr jordforbindes/potentialudlignes.
	DE	Behälter und zu befüllende Anlage erden.
	ET	Mahuti ja vastuvõtuseade maandada/ühendada.
	EL	Γείωση/ισοδυναμική σύνδεση του περιέκτη και του εξοπλισμού δέκτη.
	EN	Ground/bond container and receiving equipment.
	FR	Mise à la terre/liaison équipotentielle du récipient et du matériel de réception.
	GA	Nasc an coimeádán agus an trealamh glactha leis an talamh.
	IT	Mettere a terra/massa il contenitore e il dispositivo ricevente.
	LV	Tvertnes un iekārtas saņemšanai ievietot zemē/sasaistīt
	LT	Įžeminti/įtvirtinti talpyklą ir priėmimo įrangą.
	HU	A tárolóedényt és a fogadóedényt le kell földelni/át kell kötni.
	MT	Poġġi ma' l-art/wahhal il-kontenitur u t-tagħmir li jirċievi.
	NL	Opslag- en opvangreservoir aarden.
	PL	Uziemić/połączyć pojemnik i sprzęt odbiorczy.
	PT	Ligação à terra/equipotencial do recipiente e do equipamento receptor.



P240	Taal	
	RO	Legătură la pământ/conexiune echipotențială cu recipientul și cu echipamentul de recepție.
	SK	Uzemnite/upevnite nádoby a plniace zariadenie.
	SL	Ozemljiti posodo in opremo za sprejem tekočine.
	FI	Säiliö ja vastaanottavat laitteet on maadoitettava/yhdistettävä.
	SV	Jorda/potentialförbind behållare och mottagarutrustning.

P241	Taal	
	BG	Използвайте електрическо/проветряващо/осветително/.../оборудване, обезопасено срещу експлозия
	ES	Utilizar un material eléctrico, de ventilación o de iluminación/.../antideflagrante.
	CS	Používejte elektrické/ventilační/osvětlovací/.../zařízení do výbušného prostředí.
	DA	Anvend eksplosionssikkert elektrisk/ventilations-/lys-/.../udstyr.
	DE	Explosionssgeschützte elektrische Betriebsmittel/Lüftungsanlagen/Beleuchtung/... verwenden.
	ET	Kasutada plahvatuskindlaid elektri-/ventilatsiooni-/valgustus-/.../seadmeid.
	EL	Να χρησιμοποιείται αντικηρηκτικός ηλεκτρολογικός/εξαερισμού/φωτιστικός/.../εξοπλισμός.
	EN	Use explosion-proof electrical/ventilating/lighting/.../equipment.
	FR	Utiliser du matériel électrique/de ventilation/d'éclairage/.../antidéflagrant.
	GA	Bain úsáid as trealamh pléascdhíonach leictreach/aerála/soilsiúcháin/...
	IT	Utilizzare impianti elettrici/di ventilazione/d'illuminazione/.../a prova di esplosione.
	LV	Izmantot sprādzien drošas elektriskas/ar ventilāciju/izgaismotas/.../iekārtas
	LT	Naudoti sprogimui atsparią elektros/ventiliacijos/apšvietimo/.../įrangą.
	HU	Robbanásbiztos elektromos/szellőztető/világító/.../berendezés használandó.
	MT	Uża' tagħmir elettriku/ta' ventilazzjoni/ta' dawl/.../li jiflah għal splużjoni.
	NL	Explosieveilige elektrische/ventilatie-/verlichtings-/...apparatuur gebruiken.
	PL	Używać elektrycznego/wentylującego/oświetleniowego/.../przeciwwybuchowego sprzętu.
	PT	Utilizar equipamento eléctrico/de ventilação/de iluminação/.../à prova de explosão.
	RO	Utilizați echipamente electrice/de ventilare/de iluminat/.../antideflagrante.
	SK	Používajte elektrické/ventilačné/osvetľovacie/.../zariadenie do výbušného prostredia.
	SL	Uporabiti električno/prezračevalno opremo, opremo za razsvetljavo/.../, odporno proti eksplozijam.
	FI	Käytä räjähdysturvallisia sähkö/ilmanvaihto/valaisin/.../laitteita.
	SV	Använd explosionssäker elektrisk/ventilations-/belysnings-/.../utrustning.

P242	Taal	
	BG	Използвайте само инструменти, които не предизвикват искри.
	ES	Utilizar únicamente herramientas que no produzcan chispas.
	CS	Používejte pouze nářadí z nejiskřícího kovu.
	DA	Anvend kun værktøj, som ikke frembringer gnister.
	DE	Nur funkenfreies Werkzeug verwenden.

P242	Taal	
	ET	Mitte kasutada seadmeid, mis võivad tekitada sädemeid.
	EL	Να χρησιμοποιούνται μόνο εργαλεία που δεν παράγουν σπινθήρες.
	EN	Use only non-sparking tools.
	FR	Ne pas utiliser d'outils produisant des étincelles.
	GA	Bain úsáid as uirlisí neamhspréachta amháin.
	IT	Utilizzare solo utensili antiscintillamento.
	LV	Izmantot instrumentus, kas nerada dzirksteles.
	LT	Naudoti tik kibirkščių nekeliančius įrankius.
	HU	Szikramentes eszközök használandók.
	MT	Uża' biss għodda li ma jtajrux żnied.
	NL	Uitsluitend vonkvrij gereedschap gebruiken.
	PL	Używać wyłącznie nieiskrzących narzędzi.
	PT	Utilizar apenas ferramentas antichispa.
	RO	Nu utilizați unelte care produc scântei.
	SK	Používajte iba neiskriace prístroje.
	SL	Uporabiti le orodje, ki ne povzroča isker.
	FI	Käytä ainoastaan kipinöimättömiä työkaluja.
	SV	Använd endast verktyg som inte ger upphov till gnistor.
P243	Taal	
	BG	Вземете предпазни мерки срещу освобождаване на статично електричество.
	ES	Tomar medidas de precaución contra descargas electrostáticas.
	CS	Proveďte preventivní opatření proti výbojům statické elektřiny.
	DA	Træf foranstaltninger mod statisk elektricitet.
	DE	Maßnahmen gegen elektrostatische Aufladungen treffen.
	ET	Rakendada ettevaatusabinõusid staatilise elektri vastu.
	EL	Λάβετε προστατευτικά μέτρα έναντι ηλεκτροστατικών εκκενώσεων.
	EN	Take precautionary measures against static discharge.
	FR	Prendre des mesures de précaution contre les décharges électrostatiques.
	GA	Déan bearta réamhchúraim in aghaidh dífluchtú statach.
	IT	Prendere precauzioni contro le scariche elettrostatiche.
	LV	Nodrošināties pret statiskās enerģijas izlādi.
	LT	Imtis atsargumo priemonių statinei iškrovai išvengti.
	HU	Az elektrosztatikus kisülés megakadályozására óvintézkedéseket kell tenni.
	MT	Hu miżuri ta' prekawzjoni kontra l-hruġ ta' elettriku statiku.
	NL	Voorzorgsmaatregelen treffen tegen ontladingen van statische elektriciteit.
	PL	Przedsięwziąć środki ostrożności zapobiegające statycznemu rozładowaniu.
	PT	Evitar acumulação de cargas electrostáticas.

P243	Taal	
	RO	Luați măsuri de precauție împotriva descărcărilor electrostatice.
	SK	Urobte preventívne opatrenia proti výbojom statickej elektriny.
	SL	Preprečiti statično naelektrenje.
	FI	Estä staattisen sähköön aiheuttama kipinöinti.
	SV	Vidta åtgärder mot statisk elektricitet.

P244	Taal	
	BG	Почиствайте редуциращите вентили от смазка и масло
	ES	Mantener las válvulas de reducción limpias de grasa y aceite.
	CS	Udržujte redukční ventily bez maziva a oleje.
	DA	Reduktionsventilerne holdes fri for fedt og olie.
	DE	Druckminderer frei von Fett und Öl halten.
	ET	Hoida reduktsiooniklapid rasvast ja õlist puhtad.
	EL	Να διατηρούνται καθαρές από γράσα και λάδια οι βαλβίδες μείωσης.
	EN	Keep reduction valves free from grease and oil.
	FR	S'assurer de l'absence de graisse ou d'huile sur les soupapes de réduction.
	GA	Coimeád comhláí brúlaghdaithe saor ó ghréisc agus ó ola.
	IT	Mantenere le valvole di riduzione libere da grasso e olio.
	LV	Turēt reducēšanās vārstus tīrus no taukiem un eļļas.
	LT	Saugoti, kad ant redukcinių vožtuvų nepatektų riebalų ir tepalų.
	HU	A nyomáscsökkentő szelepeket zsírtól és olajtól mentesen kell tartani.
	MT	Żomm il-valvs ta' tnaqqis hielsa mill-griz u ż-żejt.
	NL	Reduceerventielen vrij van olie en vet houden.
	PL	Chronicz zawory redukcyjne przed tłuszczem i olejem.
	PT	Manter as válvulas de redução isentas de óleo e massa lubrificantes.
	RO	Protejați supapele reductoare de grăsimi și ulei.
	SK	Redukčné ventily udržiavajte bez mazadiel a oleja.
	SL	Preprečiti stik reduciranih ventilov z mastjo in oljem.
	FI	Pidä paineenalennusventtiilit vapaana rasvasta ja öljystä.
	SV	Reducerventilerna ska hållas fria från fett och olja.

P250	Taal	
	BG	Да не се подлага на стържене/удар/.../триене
	ES	Evitar la abrasión/el choque/.../la fricción.
	CS	Nevystavujte obušování/narázům/.../tření.
	DA	Må ikke udsættes for slibning/stød/.../gnidning.
	DE	Nicht schleifen/stoßen/.../reiben.
	ET	Hoida kriimustamise/põrutuse/.../hõõrdumise eest.

P250	Taal	
	EL	Να αποφεύγεται άλεση/κρούση/.../τριβή.
	EN	Do not subject to grinding/shock/.../friction.
	FR	Éviter les abrasions/les chocs/.../les frottements.
	GA	Ná nocht do mheilt/do thurraing/.../do fhrithchuimilt.
	IT	Evitare le abrasioni/gli urti/.../gli attriti.
	LV	Nepakļaut drupināšanai/triecienam/.../berzei
	LT	Nešlifuoti/netrankyti/.../netrinti.
	HU	Tilos csiszolásnak/ütésnek/.../súrlódásnak kitenni.
	MT	Tissottoponihomx għal brix/xokk/.../frizzjoni.
	NL	Malen/schokken/.../wrijving vermijden.
	PL	Nie poddawać szlifowaniu/wstrząsom/.../tarcui.
	PT	Não submeter a trituração/choque/.../fricção.
	RO	A nu supune la abraziuni/şocuri/.../frecare.
	SK	Nevystavujte brúseniu/nárazu/.../treniu.
	SL	Ne izpostavljati drgnjenju/udarcem/.../trenju.
	FI	Suojele rasitukselta/iskuilta/.../hankaukselta.
	SV	Får inte utsättas för gnidning/stötar/.../friktion.
P251	Taal	
	BG	Съд под налягане: да не се пробива и изгаря дори след употреба.
	ES	Recipiente a presión: no perforar ni quemar, aun después del uso.
	CS	Tlakový obal: nepropichujte nebo nespalujte ani po použití.
	DA	Beholder under tryk: Må ikke punkteres eller brændes, heller ikke efter brug.
	DE	Behälter steht unter Druck: Nicht durchstechen oder verbrennen, auch nicht nach der Verwendung.
	ET	Mahuti on rõhu all: mitte purustada ega põletada isegi pärast kasutamist.
	EL	Περίεκτης υπό πίεση. Να μην τρυπηθεί ή καεί ακόμη και μετά τη χρήση.
	EN	Pressurized container: Do not pierce or burn, even after use.
	FR	Récipient sous pression: ne pas perforer, ni brûler, même après usage.
	GA	Coimeádán brúchóirithe: Ná toll agus ná dóigh, fiú tar éis úsáide.
	IT	Recipiente sotto pressione: non perforare né bruciare, neppure dopo l'uso.
	LV	Tvertne zem spiediena: nedurt vai nededzināt, arī pēc izlietošanas.
	LT	Slėginis indas. Nepradurti ir nedeginti net panaudoto.
	HU	Nyomás alatti edény: ne lyukassza ki vagy égesse el, még használat után sem.
	MT	Kontenitur taht pressjoni: Ittaqqbux jew taħarqux, anki wara li tużah.
	NL	Houder onder druk: ook na gebruik niet doorboren of verbranden.
	PL	Pojemnik pod ciśnieniem. Nie przekłuwać ani nie spalać, nawet po zużyciu.
	PT	Recipiente sob pressão. Não furar nem queimar, mesmo após utilização.

P251	Taal	
	RO	Recipient sub presiune. Nu perforați sau ardeți, chiar și după utilizare.
	SK	Nádoba je pod tlakom: neprepichujte alebo nespáľujte ju, a to ani po spotrebovaní obsahu.
	SL	Posoda je pod tlakom: ne preluknjajte ali sežigajte je niti, ko je prazna.
	FI	Painesäiliö: Ei saa puhkaista tai polttaa edes tyhjänä.
	SV	Tryckbehållare: Får inte punkteras eller brännas, gäller även tömd behållare.

P260	Taal	
	BG	Не вдишвайте прах/пушек/газ/дим/изпарения/аерозоли
	ES	No respirar el polvo/el humo/el gas/la niebla/los vapores/el aerosol.
	CS	Nevdechujte prach/dým/plyn/mlhu/páry/aerosoly.
	DA	Indånd ikke pulver/røg/gas/tåge/damp/spray.
	DE	Staub/Rauch/Gas/Nebel/Dampf/Aerosol nicht einatmen.
	ET	Tolmu/suitsu/gaasi/udu/auru/pihustatud ainet mitte sisse hingata.
	EL	Μην αναπνέετε σκόνη/ακαθυμιάσεις/αέρια/σταγονίδια/ατμούς/εκνεφώματα
	EN	Do not breathe dust/fume/gas/mist/vapours/spray.
	FR	Ne pas respirer les poussières/fumées/gaz/brouillards/vapeurs/aérosols.
	GA	Ná hanálaigh deannach/múch/gás/ceo/gala/sprae.
	IT	Non respirare la polvere/i fumi/i gas/la nebbia/i vapori/gli aerosol.
	LV	Neieelpot puteklus/tvaikus/gāzi/dūmus/izgarojumus/smidzinājumu.
	LT	Neįkvėpti dulkių/dūmų/dujų/rūko/garų/aerolio.
	HU	A por/füst/gáz/köd/gőzök/permet belélegzése tilos.
	MT	Tiblx bin-nifs trabijiet/dhaħen/gass/raxx/fwar/sprej.
	NL	Stof/rook/gas/nevel/damp/spuitnevel niet inademen.
	PL	Nie wdychać pyłu/dymu/gazu/mgły/par/rozpylonej cieczy.
	PT	Não respirar as poeiras/fumos/gases/névoas/vapores/aerossóis.
	RO	Nu inspirați praful/fumul/gazul/ceapa/vaporii/spray-ul.
	SK	Nevdychujte prach/dym/plyn/hmlu/pary/aerosóly.
	SL	Ne vdihavati prahu/dima/plina/meglíce/hlapov/razpršila.
	FI	Älä hengitä pölyä/savua/kaasua/sumua/höyryä/suihketta.
	SV	Inandas inte damm/rök/gaser/dimma/ångor/sprej.

P261	Taal	
	BG	Избягвайте вдишване на прах/пушек/газ/дим/изпарения/аерозоли
	ES	Evitar respirar el polvo/el humo/el gas/la niebla/los vapores/el aerosol.
	CS	Zamezte vdechování prachu/dýmu/plynu/mlhy/par/aerosolů.
	DA	Undgå indånding af pulver/røg/gas/tåge/damp/spray.
	DE	Einatmen von Staub/Rauch/Gas/Nebel/Dampf/Aerosol vermeiden.
	ET	Vältida tolmu/suitsu/gaasi/udu/auru/pihustatud aine sissehingamist.

P261	Taal	
	EL	Αποφεύγετε να αναπνέετε σκόνη/αναθυμιάσεις/αέρια/σταγονίδια/ατμούς/εκνεφώματα.
	EN	Avoid breathing dust/fume/gas/mist/vapours/spray.
	FR	Éviter de respirer les poussières/fumées/gaz/brouillards/vapeurs/aérosols.
	GA	Seachain deannach/múch/gás/ceo/gala/sprae a anáilí.
	IT	Evitare di respirare la polvere/i fumi/i gas/la nebbia/i vapori/gli aerosol.
	LV	Izvairīties ieelpot puteklus/tvaikus/gāzi/dūmus/izgarojumus/smidzinājumu.
	LT	Stengtis neįkvėpti dulkių/dūmų/dujų/rūko/garų/aerozolio.
	HU	Kerülje a por/füst/gáz/köd/gőzök/permet belélegzését.
	MT	Evita li tibra' bin-nifs trabijiet/dhaħen/gass/raxx/fwar/sprej.
	NL	Inademing van stof/rook/gas/nevel/damp/spuitnevel vermijden.
	PL	Unikać wdychania pyłu/dymu/gazu/mgły/par/rozpylonej cieczy.
	PT	Evitar respirar as poeiras/fumos/gases/névoas/vapores/aerossóis.
	RO	Evitați să inspirați praful/fumul/gazul/ceafa/vaporii/spray-ul.
	SK	Zabraňte vdychovaniu prachu/dymu/plynu/hmly/pár/aerosólov.
	SL	Ne vdihavati prahu/dima/plina/megllice/hlapov/razpršila.
	FI	Vältä pölyn/savun/kaasun/sumun/höyryn/suihkeen hengittämistä.
	SV	Undvik att inandas damm/rök/gaser/dimma/ångor/sprej.
P262	Taal	
	BG	Да се избягва контакт с очите, кожата или облеклото.
	ES	Evitar el contacto con los ojos, la piel o la ropa.
	CS	Zabraňte styku s očima, kůží nebo oděvem.
	DA	Må ikke komme i kontakt med øjne, hud eller tøj.
	DE	Nicht in die Augen, auf die Haut oder auf die Kleidung gelangen lassen.
	ET	Vältida silma, nahale või rõivastele sattumist.
	EL	Να μην έρθει σε επαφή με τα μάτια, με το δέρμα ή με τα ρούχα.
	EN	Do not get in eyes, on skin, or on clothing.
	FR	Éviter tout contact avec les yeux, la peau ou les vêtements.
	GA	Ná lig sna súile, ar an gcráiceann, ná ar éadaí.
	IT	Evitare il contatto con gli occhi, la pelle o gli indumenti.
	LV	Nepieļaut nokļūšanu acīs, uz ādas vai uz drēbēm.
	LT	Saugotis, kad nepatektų į akis, ant odos ar drabužių.
	HU	Szembe, bőrre vagy ruhára nem kerülhet.
	MT	Iddahħalx fl-ghajnejn, fuq il-ġilda, jew fuq il-ħwejjeġ.
	NL	Contact met de ogen, de huid of de kleding vermijden.
	PL	Nie wprowadzać do oczu, na skórę lub na odzież.
	PT	Não pode entrar em contacto com os olhos, a pele ou a roupa.
	RO	Evitați orice contact cu ochii, pielea sau îmbrăcămintea.

P262	Taal	
	SK	Zabráňte kontaktu s očami, pokožkou alebo odevom.
	SL	Preprečiti stik z očmi, kožo ali oblačili.
	FI	Varo kemikaalin joutumista silmiin, iholle tai vaatteisiin.
	SV	Får inte komma i kontakt med ögonen, huden eller kläderna.

P263	Taal	
	BG	Да се избягва контакт по време на бременност/при кърмене.
	ES	Evitar el contacto durante el embarazo/la lactancia.
	CS	Zabraňte styku během těhotenství/kojení.
	DA	Undgå kontakt under graviditet/amning.
	DE	Kontakt während der Schwangerschaft/und der Stillzeit vermeiden.
	ET	Vältida kokkupuudet raseduse/imetamise ajal.
	EL	Αποφεύγετε την επαφή στη διάρκεια της εγκυμοσύνης/γαλουχίας.
	EN	Avoid contact during pregnancy/while nursing.
	FR	Éviter tout contact avec la substance au cours de la grossesse/pendant l'allaitement.
	GA	Seachain teagmháil le linn toirchis/agus an chíoch á tabhairt.
	IT	Evitare il contatto durante la gravidanza/l'allattamento.
	LV	Izvairīties no saskares grūtniecības laikā/barojot bērnu ar krūti.
	LT	Vengti kontakto nėštumo metu/maitinant krūtimi.
	HU	A terhesség/szoptatás alatt kerülni kell az anyaggal való érintkezést.
	MT	Evita l-kuntatt waqt it-tqala/waqt it-treddigh.
	NL	Bij zwangerschap of borstvoeding aanraking vermijden.
	PL	Unikać kontaktu w czasie ciąży/karmienia piersią.
	PT	Evitar o contacto durante a gravidez/o aleitamento.
	RO	Evitați contactul în timpul sarcinii/alăptării.
	SK	Zabráňte kontaktu počas tehotenstva a dojčenia.
	SL	Preprečiti stik med nosečnostjo/dojenjem.
	FI	Vältä kosketusta raskauden tai imetyksen aikana.
	SV	Undvik kontakt under graviditet eller amning.

P264	Taal	
	BG	Да се измие... старателно след употреба.
	ES	Lavarse ... concienzudamente tras la manipulación.
	CS	Po manipulaci důkladně omyjte ....
	DA	Vask ... grundigt efter brug.
	DE	Nach Gebrauch ... gründlich waschen.
	ET	Pärast käitlemist pesta hoolega ....
	EL	Πλύνετε ... σχολαστικά μετά το χειρισμό.

P264	Taal	
	EN	Wash ... thoroughly after handling.
	FR	Se laver ... soigneusement après manipulation.
	GA	Nigh ... go lánchúramach tar éis láimhsithe.
	IT	Lavare accuratamente ... dopo l'uso.
	LV	Pēc izmantošanas ... kārtīgi nomazgāt.
	LT	Po naudojimo kruopščiai nuplauti ...
	HU	A használatot követően a(z) ... -t alaposan meg kell mosni.
	MT	Aħsel ... sew wara li timmaniġġjah.
	NL	Na het werken met dit product ... grondig wassen.
	PL	Dokładnie umyć ... po użyciu.
	PT	Lavar ... cuidadosamente após manuseamento.
	RO	Spălați-vă ... bine după utilizare.
	SK	Po manipulácii starostlivo umyte...
	SL	Po uporabi temeljito umiti ...
	FI	Pese ... huoleellisesti käsittelyn jälkeen.
	SV	Tvätta ... grundligt efter användning.
P270	Taal	
	BG	Да не се яде, пие или пуши при употреба на продукта.
	ES	No comer, beber ni fumar durante su utilización.
	CS	Při používání tohoto výrobku nejezte, nepijte ani nekuřte.
	DA	Der må ikke spises, drikkes eller ryges under brugen af dette produkt.
	DE	Bei Gebrauch nicht essen, trinken oder rauchen.
	ET	Toote käitlemise ajal mitte süüa, juua ega suitsetada.
	EL	Μην τρώτε, πίνετε ή καπνίζετε, όταν χρησιμοποιείτε αυτό το προϊόν.
	EN	Do no eat, drink or smoke when using this product.
	FR	Ne pas manger, boire ou fumer en manipulant ce produit.
	GA	Ná hith, ná hól agus ná caitear tobac agus an táirge seo á úsáid.
	IT	Non mangiare, né bere, né fumare durante l'uso.
	LV	Neēst, nedzert un nesmēķēt produkta izmantošanas laikā.
	LT	Naudojant šį produktą, nevalgyti, negerti ir nerūkyti.
	HU	A termék használatá közben tilos enni, inni vagy dohányozni.
	MT	Tikolx, tixrobx u tpejjipx waqt li tuża' dan il-prodott.
	NL	Niet eten, drinken of roken tijdens het gebruik van dit product.
	PL	Nie jeść, nie pić i nie palić podczas używania produktu.
	PT	Não comer, beber ou fumar durante a utilização deste produto.
	RO	A nu mânca, bea sau fuma în timpul utilizării produsului.
	SK	Pri používaní výrobku nejedzte, nepite ani nefajčite.



P270	Taal	
	SL	Ne jesti, piti ali kaditi med uporabo tega izdelka.
	FI	Syöminen, juominen ja tupakointi kielletty kemikaalia käytettäessä.
	SV	Ät inte, drick inte och rök inte när du använder produkten.
P271	Taal	
	BG	Да се използва само на открито или на добре проветриво място.
	ES	Utilizar únicamente en exteriores o en un lugar bien ventilado.
	CS	Používejte pouze venku nebo v dobře větraných prostorách.
	DA	Brug kun udendørs eller i et rum med god udluftning.
	DE	Nur im Freien oder in gut belüfteten Räumen verwenden.
	ET	Käidelda üksnes välitingimustes või hästi ventileeritavas kohas.
	EL	Να χρησιμοποιείται μόνο σε ανοικτό ή καλά αεριζόμενο χώρο.
	EN	Use only outdoors or in a well-ventilated area.
	FR	Utiliser seulement en plein air ou dans un endroit bien ventilé.
	GA	Úsáid amuigh faoin aer nó i limistéar dea-aerálaithe amháin.
	IT	Utilizzare soltanto all'aperto o in luogo ben ventilato.
	LV	Izmantot tikai ārā vai labi vēdināmās telpās.
	LT	Naudoti tik lauke arba gerai vėdinamoje patalpoje.
	HU	Kizárólag szabadban vagy jól szellőző helyiségben használható.
	MT	Uża biss barra jew fpost ventilat sew.
	NL	Alleen buiten of in een goed geventileerde ruimte gebruiken.
	PL	Stosować wyłącznie na zewnątrz lub w dobrze wentylowanym pomieszczeniu
	PT	Utilizar apenas ao ar livre ou em locais bem ventilados.
	RO	A se utiliza numai în aer liber sau în spații bine ventilate.
	SK	Používajte iba na voľnom priestranstve alebo v dobre vetranom priestore.
	SL	Uporabljati le zunaj ali v dobro prezračevanem prostoru.
	FI	Käytä ainoastaan ulkona tai tiloissa, joissa on hyvä ilmanvaihto.
	SV	Används endast utomhus eller i väl ventilerade utrymmen.
P272	Taal	
	BG	Да не се изнася замърсено работно облекло извън работното помещение.
	ES	Las prendas de trabajo contaminadas no podrán sacarse del lugar de trabajo.
	CS	Kontaminovaný pracovní oděv neodnášejte z pracoviště.
	DA	Tilsmudset arbejdstøj bør ikke fjernes fra arbejdspladsen.
	DE	Kontaminierte Arbeitskleidung nicht außerhalb des Arbeitsplatzes tragen.
	ET	Saastunud töörõivaid töökohast mitte välja viia.
	EL	Τα μολυσμένα ενδύματα εργασίας δεν πρέπει να βγαίνουν από το χώρο εργασίας.
	EN	Contaminated work clothing should not be allowed out of the workplace.

P272	Taal	
	FR	Les vêtements de travail contaminés ne devraient pas sortir du lieu de travail.
	GA	Níor chóir éadaí éillithe oibre a ligean amach as an láthair oibre.
	IT	Gli indumenti da lavoro contaminati non devono essere portati fuori dal luogo di lavoro.
	LV	Piesārņoto darba apģērbu neiznest ārpus darba telpām.
	LT	Užterštų darbo drabužių negalima išnešti iš darbo vietos.
	HU	Szennyezett munkaruhát tilos kivinni a munkahely területéről.
	MT	Ilbies tax-xoghol kontaminat m'għandux jithalla johroġ mill-post tax-xoghol.
	NL	Verontreinigde werkkleding mag de werkruimte niet verlaten.
	PL	Zanieczyszczonej odzieży ochronnej nie wnosić poza miejsce pracy.
	PT	A roupa de trabalho contaminada não pode sair do local de trabalho.
	RO	Nu scoateți îmbrăcămintea de lucru contaminată în afara locului de muncă.
	SK	Je zakázané vyniesť kontaminovaný pracovný odev z pracoviska.
	SL	Kontaminirana delovna oblačila niso dovoljena zunaj delovnega mesta.
	FI	Saastuneita työvaatteita ei saa viedä työpaikalta.
	SV	Nedstänkta arbetskläder får inte avlägsnas från arbetsplatsen.

P273	Taal	
	BG	Да се избягва изпускане в околната среда.
	ES	Evitar su liberación al medio ambiente.
	CS	Zabraňte uvolnění do životního prostředí.
	DA	Undgå udledning til miljøet.
	DE	Freisetzung in die Umwelt vermeiden.
	ET	Vältida sattumist keskkonda.
	EL	Να αποφεύγεται η ελευθέρωση στο περιβάλλον.
	EN	Avoid release to the environment.
	FR	Éviter le rejet dans l'environnement.
	GA	Ná scaoiltear amach sa chomhshaol.
	IT	Non disperdere nell'ambiente.
	LV	Izvairīties no izplatīšanas apkārtējā vidē.
	LT	Saugoti, kad nepatektų į aplinką.
	HU	Kerülni kell az anyagnak a környezetbe való kijutását.
	MT	Evita r-rilaxx fl-ambjent.
	NL	Voorkom lozing in het milieu.
	PL	Unikać uwolnienia do środowiska.
	PT	Evitar a libertação para o ambiente.
	RO	Evitați dispersarea în mediu.
	SK	Zabraňte uvoľneniu do životného prostredia.
	SL	Preprečiti sproščanje v okolje.

P273	Taal	
	FI	Vältettävä päästämistä ympäristöön.
	SV	Undvik utsläpp till miljön.

P280	Taal	
	BG	Използвайте предпазни ръкавици/предпазно облекло/предпазни очила/предпазна маска за лице.
	ES	Llevar guantes/prendas/gafas/máscara de protección.
	CS	Používejte ochranné rukavice/ochranný oděv/ochranné brýle/obličejový štít.
	DA	Bær beskyttelsehandsker/beskyttelsestøj/øjenskyttelse/ansigtsbeskyttelse
	DE	Schutzhandschuhe/Schutzkleidung/Augenschutz/Gesichtsschutz tragen.
	ET	Kanda kaitsekindaid/kaitserõivastust/kaitseprille/kaitsemaski.
	EL	Να φοράτε προστατευτικά γάντια/προστατευτικά ενδύματα/μέσα ατομικής προστασίας για τα μάτια/πρόσωπο.
	EN	Wear protective gloves/protective clothing/eye protection/face protection.
	FR	Porter des gants de protection/des vêtements de protection/un équipement de protection des yeux/du visage.
	GA	Caith lámhainní cosanta/éadaí cosanta/cosaint súile/cosaint aghaidhe.
	IT	Indossare guanti/indumenti protettivi/Proteggere gli occhi/il viso.
	LV	Izmantot aizsargcimdus/aizsargdrēbes/acu aizsargus/sejas aizsargus.
	LT	Mūvėti apsaugines pirštines/dėvėti apsauginius drabužius/naudoti akių (veido) apsaugos priemonės.
	HU	Védőkesztyű/védőruha/szemvédő/arcvédő használatra kötelező.
	MT	Ilbes ingwanti protettivi/ilbies protettiv/protezzjoni għall-ghajnejn/protezzjoni għall-wiċċ.
	NL	Beschermende handschoenen/beschermende kleding/oogbescherming/gelaatsbescherming dragen.
	PL	Stosować rękawice ochronne/odzież ochronną/ochronę oczu/ochronę twarzy.
	PT	Usar luvas de protecção/vestuário de protecção/protecção ocular/protecção facial.
	RO	Purtați mănuși de protecție/îmbrăcăminte de protecție/echipament de protecție a ochilor/echipament de protecție a feței.
	SK	Noste ochranné rukavice/ochranný odev/ochranné okuliare/ochranu tváre.
	SL	Nositi zaščitne rokavice/zaščitno obleko/zaščito za oči/zaščito za obraz.
	FI	Käytä suojakäsineitä/suojavaatetusta/silmiensuojainta/kasvonsuojainta.
	SV	Använd skyddshandskar/skyddskläder/ögonskydd/ansiktsskydd.

P281	Taal	
	BG	Използвайте предписаните лични предпазни средства.
	ES	Utilizar el equipo de protección individual obligatorio.
	CS	Používejte požadované osobní ochranné prostředky.
	DA	Anvend de påkrævede personlige værnemidler.
	DE	Vorgeschriebene persönliche Schutzausrüstung verwenden.
	ET	Kasutada vajalikke isikukaitsevahendeid.

P281	Taal	
	EL	Χρησιμοποιείτε μέσα ατομικής προστασίας όταν απαιτείται.
	EN	Use personal protective equipment as required.
	FR	Utiliser l'équipement de protection individuel requis.
	GA	Bain úsáid as an trealamh cosanta pearsanta faoi mar a éilítear.
	IT	Utilizzare il dispositivo di protezione individuale richiesto.
	LV	Izmantot personisko aizsargaprīkojumu atbilstoši prasībām.
	LT	Naudoti reikalaujamas asmenines apsaugos priemonės.
	HU	Az előírt egyéni védőfelszerelés használatára kötelező.
	MT	Uża' t-tagħmir personali protettiv kif meħtieġ.
	NL	De nodige persoonlijke beschermingsuitrusting gebruiken.
	PL	Stosować wymagane środki ochrony indywidualnej.
	PT	Usar o equipamento de protecção individual exigido.
	RO	Utilizați echipamentul de protecție individuală conform cerințelor.
	SK	Používajte predpísané osobné ochranné prostriedky.
	SL	Uporabiti predpisano osebno zaščitno opremo.
	FI	Käytä vaadittuja henkilönsuojaimia.
	SV	Använd föreskriven personlig skyddsutrustning.
P282	Taal	
	BG	Носете предпазващи от студ ръкавици/маска за лице/защитни очила.
	ES	Llevar guantes que aislen del frío/gafas/máscara.
	CS	Používejte ochranné rukavice proti chladu/obličejový štít/ochranné brýle.
	DA	Bær kuldeisolerende handsker/ansigtsskærm/øjenbeskyttelse.
	DE	Schutzhandschuhe/Gesichtsschild/Augenschutz mit Kälteisolierung tragen.
	ET	Kanda külmakaitsekindaid/kaitsemaski/kaitseprille.
	EL	Φοράτε μονωτικά γάντια προστασίας από το ψύχος/προστατευτική μάσκα/προστατευτικά γυαλιά.
	EN	Wear cold insulating gloves/face shield/eye protection.
	FR	Porter des gants isolants contre le froid/un équipement de protection du visage/des yeux.
	GA	Caith lámhainní inslithe fuachta/aghaidhsciath/cosaint súile.
	IT	Utilizzare guanti termici/schermo facciale/Proteggere gli occhi.
	LV	Izmantot aizsargcimodus/sejas aizsargus/acu aizsargus ar aukstuma izolāciju.
	LT	Mūvėti nuo šalčio izoliuojančias pirštines/naudoti veido skydelį/akių apsaugos priemonės.
	HU	Hidegszigetelő kesztyű/arcvédő/szemvédő használatára kötelező.
	MT	Ilbies ingwanti kiesha li ma jinfedx minnhom/ilqugh għall-wiċċ/protezzjoni għall-ghajnejn.
	NL	Koude-isolerende handschoenen/gelaatsbescherming/oogbescherming dragen.
	PL	Nosić rękawice izolujące od zimna/maski na twarz/ochronę oczu.
	PT	Usar luvas de protecção contra o frio/escudo facial/protecção ocular.

P282	Taal	
	RO	Purtați mănuși izolante împotriva frigului/echipament de protecție a feței/ochilor.
	SK	Používajte termostabilné rukavice/ochranný štít/ochranné okuliare.
	SL	Nositi hladne izolirne rokavice/zaščito za obraz/zaščito za oči.
	FI	Käytä kylmäeristäviä suojakäsineitä/kasvosuojainta/silmiensuojainta.
	SV	Använd köldisolerande handskar/visir/ögonskydd.

P283	Taal	
	BG	Носете огнеупорно/огнезащитно облекло.
	ES	Llevar prendas ignífugas/resistentes al fuego/resistentes a las llamas.
	CS	Používejte ohnivzdorný/nehořlavý oděv.
	DA	Bær brandbestandig/brandhæmmende beklædning.
	DE	Schwer entflammbare/flammhemmende Kleidung tragen.
	ET	Kanda tule-/leegikindlat/tule levikut aeglustavat rõivastust.
	EL	Φοράτε αντιπυρικά/αλεξίφλογα πυράντοχα/βραδυφλεγή ενδύματα.
	EN	Wear fire/flame resistant/retardant clothing.
	FR	Porter des vêtements résistant au feu/aux flammes/ignifuges.
	GA	Caith éadaí dódhíonacha/lasairdhíonacha nó dómhoillitheacha/lasairmhoillitheacha.
	IT	Indossare indumenti completamente ignifughi o in tessuti ritardanti di fiamma.
	LV	Izmantot aizsargapģērbu pret uguni/liesmām.
	LT	Dėvėti ugniai/liepsnai atsparius/antipireninius drabužius.
	HU	Tűz-/lángálló/-késleltető ruházat viselése kötelező.
	MT	Ilbies ħwejjeġ rezistenti għan-nar/fjammi.
	NL	Vuur/vlambestendige/brandwerende kleding dragen.
	PL	Nosić odzież ognioodporną/płomienioodporną/opóźniającą zapalenie.
	PT	Usar vestuário ignífugo/retardador de fogo/chamas.
	RO	Purtați îmbrăcăminte rezistentă la foc/flacăra/ignifugă.
	SK	Noste ohňovzdorný odev/odev so zníženou horľavosťou.
	SL	Nositi negorljiva oblačila in oblačila, odporna proti ognju.
	FI	Käytä palosuojattua/paloturvallista vaateusta.
	SV	Använd brand-/flamsäkra eller brand-/flamhämmande kläder.

P284	Taal	
	BG	Носете респираторни предпазни средства.
	ES	Llevar equipo de protección respiratoria.
	CS	Používejte vybavení pro ochranu dýchacích cest.
	DA	Anvend åndedrætsværn.
	DE	Atemschutz tragen.
	ET	Kanda hingamisteede kaitsevahendeid.

P284	Taal	
	EL	Φοράτε μέσα ατομικής προστασίας της αναπνοής.
	EN	Wear respiratory protection.
	FR	Porter un équipement de protection respiratoire.
	GA	Caith cosaint riospráide.
	IT	Utilizzare un apparecchio respiratorio.
	LV	Izmantot gāzmasku.
	LT	Naudoti kvėpavimo takų apsaugos priemonės.
	HU	Légzésvédelem használata kötelező.
	MT	Ilbes protezzjoni respiratorja.
	NL	Adembescherming dragen.
	PL	Stosować indywidualne środki ochrony dróg oddechowych.
	PT	Usar protecção respiratória.
	RO	Purtați echipament de protecție respiratorie.
	SK	Používajte ochranu dýchacích ciest.
	SL	Nositi opremo za zaščito dihal.
	FI	Käytä hengityksensuojainta.
	SV	Använd andningsskydd.
P285	Taal	
	BG	В случай на лоша вентилация носете респираторни предпазни средства.
	ES	En caso de ventilación insuficiente, llevar equipo de protección respiratoria.
	CS	V případě nedostatečného větrání použijte vybavení pro ochranu dýchacích cest.
	DA	Ved utilstrækkelig udluftning anvendes åndedrætsværn.
	DE	Bei unzureichender Belüftung Atemschutz tragen.
	ET	Ebapiisava ventilatsiooni korral kanda hingamisteede kaitsevahendeid.
	EL	Σε περίπτωση ανεπαρκούς αερισμού, να φοράτε μέσα ατομικής προστασίας της αναπνοής.
	EN	In case of inadequate ventilation wear respiratory protection.
	FR	Lorsque la ventilation du local est insuffisante, porter un équipement de protection respiratoire.
	GA	I gcás aerála uireasaigh caith cosaint riospráide.
	IT	In caso di ventilazione insufficiente utilizzare un apparecchio respiratorio.
	LV	Neatbilstošas ventilācijas gadījumā izmantot gāzmasku.
	LT	Esant nepakankamam vėdinimui, naudoti kvėpavimo takų apsaugos priemonės.
	HU	Nem megfelelő szellőzés esetén légzésvédelem kötelező.
	MT	F'każ ta' ventilazzjoni inadegwata ilbes protezzjoni respiratorja.
	NL	Bij ontoereikende ventilatie een geschikte adembescherming dragen.
	PL	W przypadku niedostatecznej wentylacji stosować indywidualne środki ochrony dróg oddechowych.
	PT	Em caso de ventilação inadequada, usar protecção respiratória.

P285	Taal	
	RO	În cazul în care ventilarea este insuficientă, purtați echipament de protecție respiratorie.
	SK	V prípade nedostatočného vetrania, používajte ochranu dýchacích ciest.
	SL	Ob nezadostnem prezračevanju nositi opremo za zaščito dihal.
	FI	Käytä hengityksensuojainta, jos ilmanvaihto on riittämätön.
	SV	Använd andningsskydd vid otillräcklig ventilation.
P231 + P232	Taal	
	BG	Да се използва под инертен газ. Да се пази от влага.
	ES	Manipular en gas inerte. Proteger de la humedad.
	CS	Manipulace pod inertním plynem. Chraňte před vlhkem.
	DA	Anvendes under inaktiv gas. Beskyttes mod fugt.
	DE	Unter inertem Gas handhaben. Vor Feuchtigkeit schützen.
	ET	Käidelda inertgaasis. Hoida niiskuse eest.
	EL	Χειρισμός σε αδρανή ατμόσφαιρα. Προστατέψτε από την υγρασία.
	EN	Handle under inert gas. Protect from moisture.
	FR	Manipuler sous gaz inerte. Protéger de l'humidité.
	GA	Láimhsigh faoi thriathghás. Cosain ó thaise.
	IT	Manipolare in atmosfera di gas inerte. Tenere al riparo dall'umidità.
	LV	Izmantot tikai inertas gāzes apstākļos. Aizsargāt no mitruma.
	LT	Tvarkyti inertinėse dujose. Saugoti nuo drėgmės.
	HU	Inert gázban használandó. Nedvességől védendő.
	MT	Uża' taht gass inerti. Ipprotegi mill-umdità.
	NL	Onder inert gas werken. Tegen vocht beschermen.
	PL	Używać w atmosferze obojętnego gazu Chronić przed wilgocią.
	PT	Manusear em atmosfera de gás inerte. Manter ao abrigo da humidade.
	RO	A se manipula sub un gaz inert. A se proteja de umiditate.
	SK	Manipulujte v prostredí s inertným plynom. Chráňte pred vlhkosťou.
	SL	Hraniti v ustreznem inertnem plinu. Zaščititi pred vlago.
	FI	Käsittele inertissä kaasussa. Suojaa kosteudelta.
	SV	Hanteras under inert gas. Skyddas från fukt.
P235 + P410	Taal	
	BG	Да се държи на хладно. Да се пази от пряка слънчева светлина.
	ES	Conservar en un lugar fresco. Proteger de la luz del sol.
	CS	Uchovávejte v chladu. Chraňte před slunečním zářením.
	DA	Opbevares køligt. Beskyttes mod sollys.
	DE	Kühl halten. Vor Sonnenbestrahlung schützen.

P235 + P410	Taal	
	ET	Hoida jahedas. Hoida päikesevalguse eest.
	EL	Να διατηρείται δροσερό. Να προστατεύεται από τις ηλιακές ακτίνες.
	EN	Keep cool. Protect from sunlight.
	FR	Tenir au frais. Protéger du rayonnement solaire.
	GA	Coimeád fionnuar. Cosain ó sholas na gréine.
	IT	Tenere in luogo fresco. Proteggere dai raggi solari.
	LV	Turēt vēsumā. Aizsargāt no saules gaismas.
	LT	Laikyti vėsioje vietoje. Saugoti nuo saulės šviesos.
	HU	Hűvös helyen tartandó. Napfénytől védendő.
	MT	Żomm frisk. Ipproteġi mir-raġġi tax-xemx.
	NL	Koel bewaren. Tegen zonlicht beschermen.
	PL	Przechowywać w chłodnym miejscu. Chronić przed światłem słonecznym.
	PT	Conservar em ambiente fresco. Manter ao abrigo da luz solar.
	RO	A se păstra la rece. A se proteja de lumina solară.
	SK	Uchovávať v chlade. Chrániť pred slnečným žiarením.
	SL	Hraniti na hladnem. Zaščititi pred sončno svetlobo.
	FI	Säilytä viileässä. Suojaa auringonvalolta.
	SV	Förvaras svalt. Skyddas från solljus.

Tabel 1.3

**Voorzorgsmaatregelen i.v.m. reactie**

P301	Taal	
	BG	ПРИ ПОГЛЪЩАНЕ:
	ES	EN CASO DE INGESTIÓN:
	CS	PŘI POŽITÍ:
	DA	I TILFÆLDE AF INDTAGELSE:
	DE	BEI VERSCHLUCKEN:
	ET	ALLANEELAMISE KORRAL:
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ ΚΑΤΑΠΟΣΗΣ:
	EN	IF SWALLOWED:
	FR	EN CAS D'INGESTION:
	GA	MÁ SHLOGTAR:
	IT	IN CASO DI INGESTIONE:
	LV	NORĪŠANAS GADĪJUMĀ:
	LT	PRARIJUS:
	HU	LENYELÉS ESETÉN:
	MT	JEKK JINBELA:



P301	Taal	
	NL	NA INSLIKKEN:
	PL	W PRZYPADKU POŁKNIĘCIA:
	PT	EM CASO DE INGESTÃO:
	RO	ÎN CAZ DE ÎNGHIȚIRE:
	SK	PO POŽITÍ:
	SL	PRI ZAUŽITJU:
	FI	JOS KEMIKAALIA ON NIELTY:
	SV	VID FÖRTÄRING:

P302	Taal	
	BG	ПРИ КОHTAKT C KOЖATA:
	ES	EN CASO DE CONTACTO CON LA PIEL:
	CS	PŘI STYKU S KŮŽÍ:
	DA	VED KONTAKT MED HUDEN:
	DE	BEI BERÜHRUNG MIT DER HAUT:
	ET	NAHALE SATTUMISE KORRAL:
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ ΕΠΑΦΗΣ ΜΕ ΤΟ ΔΕΡΜΑ:
	EN	IF ON SKIN:
	FR	EN CAS DE CONTACT AVEC LA PEAU:
	GA	I gCÁS TEAGMHÁLA LEIS AN gCRAICEANN:
	IT	IN CASO DI CONTATTO CON LA PELLE:
	LV	SASKARĒ AR ĀDU:
	LT	PATEKUS ANT ODOS:
	HU	HA BŐRRE KERÜL:
	MT	FKAŻ TA' KUNTATT MAL-ĠILDA:
	NL	BIJ CONTACT MET DE HUID:
	PL	W PRZYPADKU KONTAKTU ZE SKÓRĄ:
	PT	SE ENTRAR EM CONTACTO COM A PELE:
	RO	ÎN CAZ DE CONTACT CU PIELEA:
	SK	PRI KONTAKTE S POKOŽKOU:
	SL	PRI STIKU S KOŽO:
	FI	JOS KEMIKAALIA JOUTUU IHOLLE:
	SV	VID HUDKONTAKT:

P303	Taal	
	BG	ПРИ КОHTAKT C KOЖATA (или косата):
	ES	EN CASO DE CONTACTO CON LA PIEL (o el pelo):
	CS	PŘI STYKU S KŮŽÍ (nebo s vlasy):

P303	Taal	
	DA	VED KONTAKT MED HUDEN (eller håret):
	DE	BEI BERÜHRUNG MIT DER HAUT (oder dem Haar):
	ET	NAHALE (või juuste) SATTUMISE KORRAL:
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ ΕΠΑΦΗΣ ΜΕ ΤΟ ΔΕΡΜΑ (ή με τα μαλλιά):
	EN	IF ON SKIN (or hair):
	FR	EN CAS DE CONTACT AVEC LA PEAU (ou les cheveux):
	GA	I gCÁS TEAGMHÁLA LEIS AN gCRAICEANN (nó le gruaig):
	IT	IN CASO DI CONTATTO CON LA PELLE (o con i capelli):
	LV	SASKARĒ AR ĀDU (vai matiem):
	LT	PATEKUS ANT ODOS (arba plaukų):
	HU	HA BŐRRE (vagy hajra) KERÜL:
	MT	F'KAŻ TA' KUNTATT MAL-ĠILDA (jew ix-xagħar):
	NL	BIJ CONTACT MET DE HUID (of het haar):
	PL	W PRZYPADKU KONTAKTU ZE SKÓRĄ (lub z włosami):
	PT	SE ENTRAR EM CONTACTO COM A PELE (ou o cabelo):
	RO	ÎN CAZ DE CONTACT CU PIELEA (sau părul):
	SK	PRI KONTAKTE S POKOŽKOU (alebo vlasmi):
	SL	PRI STIKU S KOŽO (ali lasmi):
	FI	JOS KEMIKAALIA JOUTUU IHOLLE (tai hiuksiin):
	SV	VID HUDKONTAKT (även håret):
P304	Taal	
	BG	ПРИ ВДИШВАНЕ:
	ES	EN CASO DE INHALACIÓN:
	CS	PŘI VDECHNUTÍ:
	DA	VED INDÅNDING:
	DE	BEI EINATMEN:
	ET	SISSEHINGAMISE KORRAL:
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ ΕΙΣΠΝΟΗΣ:
	EN	IF INHALED:
	FR	EN CAS D'INHALATION:
	GA	MÁ IONANÁLAÍTEAR:
	IT	IN CASO DI INALAZIONE:
	LV	IEELPOJOT:
	LT	ĮKVĖPUS:
	HU	BELÉLEGZÉS ESETÉN:
	MT	JEKK JINGĠIBED MAN-NIFS:
	NL	NA INADEMING:

P304	Taal	
	PL	W PRZYPADKU DOSTANIA SIĘ DO DRÓG ODDECHOWYCH:
	PT	EM CASO DE INALAÇÃO:
	RO	ÎN CAZ DE INHALARE:
	SK	PO VDÝCHNUTÍ:
	SL	PRI VDIHAVANJU:
	FI	JOS KEMIKAALIA ON HENGITETTY:
	SV	VID INANDNING:

P305	Taal	
	BG	ПРИ КОНТАКТ С ОЧИТЕ:
	ES	EN CASO DE CONTACTO CON LOS OJOS:
	CS	PŘI ZASAŽENÍ OČÍ:
	DA	VED KONTAKT MED ØJNENE:
	DE	BEI KONTAKT MIT DEN AUGEN:
	ET	SILMA SATTUMISE KORRAL:
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ ΕΠΑΦΗΣ ΜΕ ΤΑ ΜΑΤΙΑ:
	EN	IF IN EYES:
	FR	EN CAS DE CONTACT AVEC LES YEUX:
	GA	I gCÁS TEAGMHÁLA LEIS NA SÚILE:
	IT	IN CASO DI CONTATTO CON GLI OCCHI:
	LV	IEKĻŪSTOT ACĪS:
	LT	PATEKUS Į AKIS:
	HU	SZEMBE KERÜLÉS ESETÉN:
	MT	JEKK JIDHOL FL-GHAJNEJN:
	NL	BIJ CONTACT MET DE OGEN:
	PL	W PRZYPADKU DOSTANIA SIĘ DO OCZU:
	PT	SE ENTRAR EM CONTACTO COM OS OLHOS:
	RO	ÎN CAZ DE CONTACT CU OCHII:
	SK	PO ZASIAHNUTÍ OČÍ:
	SL	PRI STIKU Z OČMI:
	FI	JOS KEMIKAALIA JOUTUU SILMIIN:
	SV	VID KONTAKT MED ÖGONEN:

P306	Taal	
	BG	ПРИ ПОПАДАНЕ ВЪРХУ ОБЛЕКЛОТО:
	ES	EN CASO DE CONTACTO CON LA ROPA:
	CS	PŘI STYKU S ODĚVEM:
	DA	VED KONTAKT MED TØJET:

P306	Taal	
	DE	BEI KONTAMINIERTER KLEIDUNG:
	ET	RÕIVASTELE SATTUMISE KORRAL:
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ ΕΠΑΦΗΣ ΜΕ ΤΑ ΡΟΥΧΑ:
	EN	IF ON CLOTHING:
	FR	EN CAS DE CONTACT AVEC LES VÊTEMENTS:
	GA	I gCÁS TEAGMHÁLA LE hÉADAÍ:
	IT	IN CASO DI CONTATTO CON GLI INDUMENTI:
	LV	SASKARĒ AR APĢĒRBU:
	LT	PATEKUS ANT DRABUŽIŲ:
	HU	HA RUHÁRA KERÜL:
	MT	F'KAŻ TA' KUNTATT MA' L-ILBIES:
	NL	NA MORSEN OP KLEDING:
	PL	W PRZYPADKU KONTAKTU Z ODZIEŻĄ:
	PT	SE ENTRAR EM CONTACTO COM A ROUPA:
	RO	ÎN CAZ DE CONTACT CU ÎMBRĂCĂMINTEA:
	SK	PRI KONTAKTE S ODEVOM:
	SL	PRI STIKU Z OBLAČILI:
	FI	JOS KEMIKAALIA JOUTUU VAATTEISIIN:
	SV	VID KONTAKT MED KLÄDERNA:
P307	Taal	
	BG	ПРИ експозиция:
	ES	EN CASO DE exposición:
	CS	PŘI expozici:
	DA	VED eksponering:
	DE	BEI Exposition:
	ET	Kokkupuute korral:
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ έκθεσης:
	EN	IF exposed:
	FR	EN CAS d'exposition:
	GA	I gCÁS nochta:
	IT	IN CASO di esposizione:
	LV	JA saskaras:
	LT	Esant sąlyčiui:
	HU	Expozíció esetén:
	MT	JEKK espost:
	NL	NA blootstelling:
	PL	W PRZYPADKU narażenia:

P307	Taal	
	PT	EM CASO DE exposição:
	RO	ÎN CAZ DE expunere:
	SK	PO expozícií:
	SL	PRI izpostavljenosti:
	FI	Altistumisen tapahduttua:
	SV	Om du exponerats:

P308	Taal	
	BG	ПРИ явна или предполагаема експозиция:
	ES	EN CASO DE exposición manifiesta o presunta:
	CS	PŘI expozici nebo podezření na ni:
	DA	VED eksponering eller mistanke om eksponering:
	DE	BEI Exposition oder falls betroffen
	ET	Kokkupuute või kokkupuutekahtluse korral:
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ έκθεσης ή πιθανής έκθεσης:
	EN	IF exposed or concerned:
	FR	EN CAS d'exposition prouvée ou suspectée:
	GA	I gCÁS noichta nó má mheastar a bheith nochtaithe:
	IT	IN CASO di esposizione o di possibile esposizione:
	LV	Ja saskaras vai saistīts ar:
	LT	Esant sąlyčiui arba jeigu numanomas sąlytis:
	HU	Expozíció vagy annak gyanúja esetén:
	MT	JEKK espost jew konċernat:
	NL	NA (mogelijke) blootstelling:
	PL	W PRZYPADKU narażenia lub styczności:
	PT	EM CASO DE exposição ou suspeita de exposição:
	RO	ÎN CAZ DE expunere sau de posibilă expunere:
	SK	Po expozícií alebo podozrení z nej:
	SL	PRI izpostavljenosti ali sumu izpostavljenosti:
	FI	Altistumisen tapahduttua tai jos epäillään altistumista:
	SV	Vid exponering eller misstanke om exponering:

P309	Taal	
	BG	ПРИ експозиция или при неразположение:
	ES	EN CASO DE exposición o malestar:
	CS	PŘI expozici nebo necítíte-li se dobře:
	DA	VED eksponering eller ubehag:
	DE	BEI Exposition oder Unwohlsein:

P309	Taal	
	ET	Kokkupuute või halva enesetunde korral:
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ έκθεσης ή αδιαθεσίας:
	EN	If exposed or if you feel unwell:
	FR	EN CAS d'exposition ou d'un malaise:
	GA	I gCÁS nochta nó má bhraitear tinn:
	IT	IN CASO di esposizione o di malessere:
	LV	JA saskaras vai ja jums ir slikta pašsajūta:
	LT	Esant sąlyčiui arba blogai pasijutus:
	HU	Expozíció vagy rosszullét esetén:
	MT	JEKK espost jew thossok ma tiflahx:
	NL	NA blootstelling of bij onwel voelen:
	PL	W PRZYPADKU narażenia lub złego samopoczucia:
	PT	EM CASO DE exposição ou de indisposição:
	RO	ÎN CAZ DE expunere sau dacă nu vă simțiți bine:
	SK	Po expozícii alebo pri zdravotných problémoch.
	SL	PRI izpostavljenosti ali slabem počutju:
	FI	Altistumisen tapahduttua tai jos ilmenee pahoinvointia:
	SV	Vid exponering eller obehag:
P310	Taal	
	BG	Незабавно се обадете в ЦЕНТЪР ПО ТОКСИКОЛОГИЯ или на лекар.
	ES	Llamar inmediatamente a un CENTRO DE INFORMACION TOXICOLOGICA o a un médico.
	CS	Okamžitě volejte TOXIKOLOGICKÉ INFORMAČNÍ STŘEDISKO nebo lékaře.
	DA	Ring omgående til en GIFTINFORMATION eller en læge.
	DE	Sofort GIFTINFORMATIONSZENTRUM oder Arzt anrufen.
	ET	Võtta viivitamata ühendust MÜRGISTUSTEABEKESKUSE või arstiga.
	EL	Καλέστε αμέσως το ΚΕΝΤΡΟ ΔΗΛΗΘΗΡΙΑΣΕΩΝ ή ένα γιατρό.
	EN	Immediately call a POISON CENTER or doctor/physician.
	FR	Appeler immédiatement un CENTRE ANTIPOISON ou un médecin.
	GA	Cuir glao láithreach ar IONAD NIMHE nó ar dhochtúir/lia.
	IT	Contattare immediatamente un CENTRO ANTIVELENI o un medico.
	LV	Nekavējoties sazinieties ar SAINDĒŠANĀS CENTRU vai ārstu.
	LT	Nedelsiant skambinti į APSINUODIJIMŲ KONTROLĖS IR INFORMACIJOS BIURĄ arba kreiptis į gydytoją.
	HU	Azonnal forduljon TOXIKOLÓGIAI KÖZPONTHOZ vagy orvoshoz.
	MT	Ikkuntattja ĊENTRU TA' L-AVVELENAMENT jew tabib.
	NL	Onmiddellijk een ANTIGIFCENTRUM of een arts raadplegen.
	PL	Natychmiast skontaktować się z OŚRODKIEM ZATRUĆ lub lekarzem.

P310	Taal	
	PT	Contacte imediatamente um CENTRO DE INFORMAÇÃO ANTIVENENOS ou um médico.
	RO	Sunați imediat la un CENTRU DE INFORMARE TOXICOLOGICĂ sau un medic.
	SK	Okamžite volajte NÁRODNÉ TOXIKOLOGICKÉ INFORMAČNÉ CENTRUM alebo lekára.
	SL	Takoj pokličite CENTER ZA ZASTRUPITVE ali zdravnika.
	FI	Ota välittömästi yhteys MYRKYTYSTIETOKESKUKSEEN tai lääkäriin.
	SV	Kontakta genast GIFTINFORMATIONSCENTRAL eller läkare.

P311	Taal	
	BG	Обадете се в ЦЕНТЪР ПО ТОКСИКОЛОГИЯ или на лекар.
	ES	Llamar a un CENTRO DE INFORMACION TOXICOLOGICA o a un médico.
	CS	Volejte TOXIKOLOGICKÉ INFORMAČNÍ STŘEDISKO nebo lékaře.
	DA	Ring til en GIFTINFORMATION eller en læge.
	DE	GIFTINFORMATIONSZENTRUM oder Arzt anrufen.
	ET	Võtta ühendust MÜRGISTUSTEABEKESKUSE või arstiga.
	EL	Καλέστε το ΚΕΝΤΡΟ ΔΗΛΗΘΗΡΙΑΣΕΩΝ ή ένα γιατρό.
	EN	Call a POISON CENTER or doctor/physician.
	FR	Appeler un CENTRE ANTIPOISON ou un médecin.
	GA	Cuir glao ar IONAD NIMHE nó ar dhochtúir/lia.
	IT	Contattare un CENTRO ANTIVELENI o un medico.
	LV	Sazinieties ar SAINDĒŠANĀS CENTRU vai ārstu.
	LT	Skambinti į APSINUODIJIMŲ KONTROLĖS IR INFORMACIJOS BIURĄ arba kreiptis į gydytoją.
	HU	Forduljon TOXIKOLÓGIAI KÖZPONTHOZ vagy orvoshoz.
	MT	Ikkuntattja ĊENTRU TA' L-AVVELENAMENT jew tabib.
	NL	Een ANTIGIFCENTRUM of een arts raadplegen.
	PL	Skontaktować się z OŚRODKIEM ZATRUĆ lub lekarzem.
	PT	Contacte um CENTRO DE INFORMAÇÃO ANTIVENENOS ou um médico.
	RO	Sunați la un CENTRU DE INFORMARE TOXICOLOGICĂ sau un medic.
	SK	Volajte NÁRODNÉ TOXIKOLOGICKÉ INFORMAČNÉ CENTRUM alebo lekára.
	SL	Pokličite CENTER ZA ZASTRUPITVE ali zdravnika.
	FI	Ota yhteys MYRKYTYSTIETOKESKUKSEEN tai lääkäriin.
	SV	Kontakta GIFTINFORMATIONSCENTRAL eller läkare.

P312	Taal	
	BG	При неразположение се обадете в ЦЕНТЪР ПО ТОКСИКОЛОГИЯ или на лекар.
	ES	Llamar a un CENTRO DE INFORMACION TOXICOLOGICA o a un médico en caso de malestar.
	CS	Necítíte-li se dobře, volejte TOXIKOLOGICKÉ INFORMAČNÍ STŘEDISKO nebo lékaře.
	DA	I tilfælde af ubehag ring til en GIFTINFORMATION eller en læge.

P312	Taal	
	DE	Bei Unwohlsein GIFTINFORMATIONSZENTRUM oder Arzt anrufen.
	ET	Halva enesetunde korral võtta ühendust MÜRGISTUSTEABEKESKUSE või arstiga.
	EL	Καλέστε το ΚΕΝΤΡΟ ΔΗΛΗΘΡΙΑΣΕΩΝ ή ένα γιατρό εάν αισθανθείτε αδιαθεσία.
	EN	Call a POISON CENTER or doctor/physician if you feel unwell.
	FR	Appeler un CENTRE ANTIPOISON ou un médecin en cas de malaise.
	GA	Cuir glao ar IONAD NIMHE nó ar dhochtúir/lia má bhraitheann tú tinn.
	IT	In caso di malessere, contattare un CENTRO ANTIVELENI o un medico.
	LV	Sazinieties ar SAINDĒŠANĀS CENTRU vai ārstu, ja jums ir slikta pašsajūta.
	LT	Pasijutus blogai, skambinti į APSINUODIJIMŲ KONTROLĖS IR INFORMACIJOS BIURĄ arba kreiptis į gydytoją.
	HU	Rosszullét esetén forduljon TOXIKOLÓGIAI KÖZPONTHOZ vagy orvoshoz.
	MT	Ikkuntattja ĊENTRU TA' L-AVVELENAMENT jew tabib jekk thossok ma tiflahx.
	NL	Bij onwel voelen een ANTIGIFCENTRUM of een arts raadplegen.
	PL	W przypadku złego samopoczucia skontaktować się z OŚRODKIEM ZATRUĆ lub z lekarzem.
	PT	Caso sinta indisposição, contacte um CENTRO DE INFORMAÇÃO ANTIVENENOS ou um médico.
	RO	Sunați la un CENTRU DE INFORMARE TOXICOLOGICĂ sau un medic, dacă nu vă simțiți bine.
	SK	Pri zdravotných problémoch, volajte NÁRODNÉ TOXIKOLOGICKÉ INFORMAČNÉ CENTRUM alebo lekára.
	SL	Ob slabem počutju pokličite CENTER ZA ZASTRUPITVE ali zdravnika.
	FI	Ota yhteys MYRKYTYSTIETOKESKUKSEEN tai lääkäriin, jos ilmenee pahoinvointia.
	SV	Vid obehag, kontakta GIFTINFORMATIONSCENTRAL eller läkare.
P313	Taal	
	BG	Потърсете медицински съвет/помощ.
	ES	Consultar a un médico.
	CS	Vyhledejte lékařskou pomoc/ošetření.
	DA	Søg lægehjælp.
	DE	Ärztlichen Rat einholen/ärztliche Hilfe hinzuziehen.
	ET	Pöörduda arsti poole.
	EL	Συμβουλευθείτε/Επισκεφθείτε γιατρό.
	EN	Get medical advice/attention.
	FR	Consulter un médecin.
	GA	Faigh comhairle/cúram liachta.
	IT	Consultare un medico.
	LV	Lūdziet palīdzību mediķiem.
	LT	Kreiptis į gydytoją.
	HU	Orvosi ellátást kell kérni.
	MT	Ikkonsulta tabib.



P313	Taal	
	NL	Een arts raadplegen.
	PL	Zasięgnąć porady/zgłosić się pod opiekę lekarza.
	PT	Consulte um médico.
	RO	Consultați medicul.
	SK	Vyhľadajte lekársku pomoc/starostlivosť.
	SL	Poiščite zdravniško pomoč/oskrbo.
	FI	Hakeudu lääkäriin.
	SV	Sök läkarhjälp.

P314	Taal	
	BG	При неразположение потърсете медицински съвет/помощ.
	ES	Consultar a un médico en caso de malestar.
	CS	Necítíte-li se dobře, vyhledejte lékařskou pomoc/ošetření.
	DA	Søg lægehjælp ved ubehag.
	DE	Bei Unwohlsein ärztlichen Rat einholen/ärztliche Hilfe hinzuziehen.
	ET	Halva enesetunde korral pöörduda arsti poole.
	EL	Συμβουλευθείτε/Επισκεφθείτε γιατρό εάν αισθανθείτε αδιαθεσία.
	EN	Get medical advice/attention if you feel unwell.
	FR	Consulter un médecin en cas de malaise.
	GA	Faigh comhairle/cúram liachta má bhraitheann tú tinn.
	IT	In caso di malessere, consultare un medico.
	LV	Lūdziet palīdzību mediķiem, ja jums ir slikta pašsajūta.
	LT	Pasijutus blogai, kreiptis į gydytoją.
	HU	Roszzullét esetén orvosi ellátást kell kérni.
	MT	Ikkonsulta tabib jekk thossok ma tiflaħx.
	NL	Bij onwel voelen een arts raadplegen.
	PL	W przypadku złego samopoczucia zasięgnąć porady/zgłosić się pod opiekę lekarza.
	PT	Em caso de indisposição, consulte um médico.
	RO	Consultați medicul, dacă nu vă simțiți bine.
	SK	Ak pociťujete zdravotné problémy, vyhľadajte lekársku pomoc/starostlivosť.
	SL	Ob slabem počutju poiščite zdravniško pomoč/oskrbo.
	FI	Hakeudu lääkäriin, jos ilmenee pahoinvointia.
	SV	Sök läkarhjälp vid obehag

P315	Taal	
	BG	Незабавно потърсете медицински съвет/помощ.
	ES	Consultar a un médico inmediatamente.
	CS	Okamžitě vyhledejte lékařskou pomoc/ošetření.

P315	Taal	
	DA	Søg omgående lægehjælp.
	DE	Sofort ärztlichen Rat einholen/ärztliche Hilfe hinzuziehen.
	ET	Pöörduda viivitamata arsti poole.
	EL	Συμβουλευθείτε/Επισκεφθείτε αμέσως γιατρό.
	EN	Get immediate medical advice/attention.
	FR	Consulter immédiatement un médecin.
	GA	Faigh comhairle/cúram liachta láithreach.
	IT	Consultare immediatamente un medico.
	LV	Nekavējoties lūdziet palīdzību mediķiem.
	LT	Nedelsiant kreiptis į gydytoją.
	HU	Azonnal orvosi ellátást kell kérni.
	MT	Ikkonsulta tabib minnufih.
	NL	Onmiddellijk een arts raadplegen.
	PL	Natychmiast zasięgnąć porady/zgłosić się pod opiekę lekarza.
	PT	Consulte imediatamente um médico.
	RO	Consultați imediat medicul.
	SK	Okamžite vyhľadajte lekársku pomoc/starostlivosť.
	SL	Takoj poiščite zdravniško pomoč/oskrbo.
	FI	Hakeudu välittömästi lääkäriin.
	SV	Sök omedelbart läkarhjälp.
P320	Taal	
	BG	Спешна нужда от специализирано лечение (вж... на този етикет).
	ES	Se necesita urgentemente un tratamiento específico (ver ... en esta etiqueta).
	CS	Je nutné odborné ošetření (viz ... na tomto štítku).
	DA	Særlig behandling straks påkrævet (se ... på denne etiket).
	DE	Besondere Behandlung dringend erforderlich (siehe ... auf diesem Kennzeichnungsetikett).
	ET	Nõuab viivitamatut eriravi (vt ... käesoleval etiketil).
	EL	Χρειάζεται επείγοντως ειδική αγωγή (βλέπε ... στην ετικέτα).
	EN	Specific treatment is urgent (see ... on this label).
	FR	Un traitement spécifique est urgent (voir ... sur cette étiquette).
	GA	Tá sé práinneach go bhfaightear cóir leighis ar leith (féach ... ar an lipéad seo).
	IT	Trattamento specifico urgente (vedere..... su questa etichetta).
	LV	Steidzami nepieciešama īpaša medicīniskā palīdzība (skat. ... uz šīs etiķetes).
	LT	Būtinus skubus specialus gydymas (žr. ... šioje etiketėje).
	HU	Sürgős szakellátás szükséges (lásd ... a címkén).
	MT	Trattament specifiku hu urġenti (ara ... fuq din it-tikketta).
	NL	Specifieke behandeling dringend vereist (zie ... op dit etiket).

P320	Taal	
	PL	Pilnie zastosować określone leczenie (patrz ... na etykietcie).
	PT	É urgente um tratamento específico (ver ... no presente rótulo).
	RO	Un tratament specific este urgent (a se vedea ... de pe această etichetă).
	SK	Odborné ošetrenie je naliehavé (pozri ... na etikete).
	SL	Posebno zdravljenje je nujno (glejte ... na tej etiketi).
	FI	Erityishoitoa tarvitaan välittömästi (katso ... pakkauksen merkinnöissä).
	SV	Särskild behandling krävs omedelbart (se ... på etiketten).

P321	Taal	
	BG	Специализирано лечение (вж... на този етикет).
	ES	Se necesita un tratamiento específico (ver ... en esta etiqueta).
	CS	Odborné ošetření (viz ... na tomto štítku).
	DA	Særlig behandling (se ... på denne etiket).
	DE	Besondere Behandlung (siehe ... auf diesem Kennzeichnungsetikett).
	ET	Nõuab eriravi (vt ... käesoleval etiketil).
	EL	Χρειάζεται ειδική αγωγή (βλέπε ... στην ετικέτα).
	EN	Specific treatment (see ... on this label).
	FR	Traitement spécifique (voir ... sur cette étiquette).
	GA	Cóir liachta ar leith (féach ... ar an lipéad seo).
	IT	Trattamento specifico (vedere .....su questa etichetta).
	LV	Īpaša medicīniskā palīdzība (skat. ... uz šīs etiķetes).
	LT	Specialus gydymas (žr. ... šioje etiketėje).
	HU	Szakellátás (lásd ... a címkén).
	MT	Trattament speċifiku (ara ... fuq din it-tikketta).
	NL	Specifieke behandeling vereist (zie ... op dit etiket).
	PL	Zastosować określone leczenie (patrz ... na etykietcie).
	PT	Tratamento específico (ver ... no presente rótulo).
	RO	Tratament specific (a se vedea ... de pe această etichetă).
	SK	Odborné ošetrenie (pozri ... na etikete).
	SL	Posebno zdravljenje (glejte ... na tej etiketi).
	FI	Erityishoitoa tarvitaan (katso ... pakkauksen merkinnöissä).
	SV	Särskild behandling (se ... på etiketten).

P322	Taal	
	BG	Специални мерки (вж... на този етикет).
	ES	Se necesitan medidas específicas (ver ... en esta etiqueta).
	CS	Specifické opatření (viz ... na tomto štítku).
	DA	Særlige foranstaltninger (se ... på denne etiket).

P322	Taal	
	DE	Gezielte Maßnahmen (siehe ... auf diesem Kennzeichnungsetikett).
	ET	Nõuab erimeetmeid (vt ... käesoleval etiketil).
	EL	Χρειάζονται ειδικά μέτρα (βλέπε ... στην ετικέτα).
	EN	Specific measures (see ... on this label).
	FR	Mesures spécifiques (voir ... sur cette étiquette).
	GA	Bearta ar leith (féach ... ar an lipéad seo).
	IT	Misure specifiche (vedere ...su questa etichetta).
	LV	Īpaši pasākumi (skat. ... uz šīs etiķetes).
	LT	Specialios priemonės (žr. ... šioje etiketėje).
	HU	Különleges intézkedések (lásd ... a címkén).
	MT	Miżuri speċifiċi (ara ... fuq din it-tikketta).
	NL	Specifieke maatregelen (zie ... op dit etiket).
	PL	Środki szczególne (patrz ... na etykiecie).
	PT	Medidas específicas (ver ... no presente rótulo).
	RO	Măsurî specifice (a se vedea ... de pe această etichetă).
	SK	Osobitné opatrenia (pozri ... na etikete).
	SL	Posebni ukrepi (glejte ... na tej etiketi).
	FI	Erityistoimenpiteitä tarvitaan (katso ... pakkauksen merkinnöissä).
	SV	Särskilda åtgärder (se ... på etiketten).
P330	Taal	
	BG	Изплакнете устата.
	ES	Enjuagarse la boca.
	CS	Vypláchněte ústa.
	DA	Skyl munden.
	DE	Mund ausspülen.
	ET	Loputada suud.
	EL	Ξεπλύνετε το στόμα.
	EN	Rinse mouth.
	FR	Rincer la bouche.
	GA	Sruthlaítear an béal.
	IT	Sciacquare la bocca.
	LV	Izskalot muti.
	LT	Išskalauti burną.
	HU	A száját ki kell öblíteni.
	MT	Lahlah halqek.
	NL	De mond spoelen.
	PL	Wyplukać usta.

P330	Taal	
	PT	Enxaguar a boca.
	RO	Clătiți gura.
	SK	Vypláchnite ústa.
	SL	Izprati usta.
	FI	Huuhto suu.
	SV	Skölj munnen.

P331	Taal	
	BG	НЕ предизвиквайте повръщане.
	ES	NO provocar el vómito.
	CS	NEVYVOLÁVEJTE zvracení.
	DA	Fremkald IKKE opkastning.
	DE	KEIN Erbrechen herbeiführen.
	ET	MITTE kutsuda esile oksendamist.
	EL	ΜΗΝ προκαλέσετε εμετό.
	EN	Do NOT induce vomiting.
	FR	NE PAS faire vomir.
	GA	NÁ spreagtar urlacan.
	IT	NON provocare il vomito.
	LV	NEIZRAISĪT vemšanu.
	LT	NESKATINTI vėmimo.
	HU	TILOS hánytatni.
	MT	TIPPROVOKAX ir-remettar.
	NL	GEEN braken opwekken.
	PL	NIE wywoływać wymiotów.
	PT	NÃO provocar o vómito.
	RO	NU provocați voma.
	SK	Nevyvolávajte zvracanie.
	SL	NE izzvati bruhanja.
	FI	Ei saa oksennuttaa.
	SV	Framkalla INTE kräkning.

P332	Taal	
	BG	При поява на кожно дразнене:
	ES	En caso de irritación cutánea:
	CS	Při podráždění kůže:
	DA	Ved hudirritation:
	DE	Bei Hautreizung:

P332	Taal	
	ET	Nahaärrituse korral:
	EL	Εάν παρατηρηθεί ερεθισμός του δέρματος:
	EN	If skin irritation occurs:
	FR	En cas d'irritation cutanée:
	GA	I gcás greannú craicinn:
	IT	In caso di irritazione della pelle:
	LV	Ja rodas ādas iekaisums:
	LT	Jeigu sudirginama oda:
	HU	Bőrirritáció esetén:
	MT	Jekk ikun hemm irritazzjoni tal-ġilda:
	NL	Bij huidirritatie:
	PL	W przypadku wystąpienia podrażnienia skóry:
	PT	Em caso de irritação cutânea:
	RO	În caz de iritare a pielii:
	SK	Ak sa prejaví podráždenie pokožky:
	SL	Če nastopi draženje kože:
	FI	Jos ilmenee ihoärsytystä:
	SV	Vid hudirritation:
P333	Taal	
	BG	При поява на кожно дразнене или обрив на кожата:
	ES	En caso de irritación o erupción cutánea:
	CS	Při podráždění kůže nebo vyrážce:
	DA	Ved hudirritation eller udslet:
	DE	Bei Hautreizung oder -ausschlag:
	ET	Nahaärrituse või _obe korral:
	EL	Εάν παρατηρηθεί ερεθισμός του δέρματος ή εμφανιστεί εξάνθημα:
	EN	If skin irritation or rash occurs:
	FR	En cas d'irritation ou d'éruption cutanée:
	GA	I gcás greannú nó grís craicinn:
	IT	In caso di irritazione o eruzione della pelle:
	LV	Ja rodas ādas iekaisums vai izsitumi:
	LT	Jeigu sudirginama oda arba ją išberia.
	HU	Bőrirritáció vagy kiütések megjelenése esetén:
	MT	Jekk ikun hemm irritazzjoni jew raxx tal-ġilda:
	NL	Bij huidirritatie of uitslag:
	PL	W przypadku wystąpienia podrażnienia skóry lub wysypki:
	PT	Em caso de irritação ou erupção cutânea:

P333	Taal	
	RO	În caz de iritare a pielii sau de erupție cutanată:
	SK	Ak sa prejaví podráždenie pokožky alebo sa vytvoria vyrážky:
	SL	Če nastopi draženje kože ali se pojavi izpuščaj:
	FI	Jos ilmenee ihoärsytystä tai ihottumaa:
	SV	Vid hudirritation eller utslag:

P334	Taal	
	BG	Потопете в хладка вода/сложете мокри компреси.
	ES	Sumergir en agua fresca/aplicar compresas húmedas.
	CS	Ponořte do studené vody/zabalte do vlhkého obvazu.
	DA	Skyl under koldt vand/anvend våde omslag.
	DE	In kaltes Wasser tauchen/nassen Verband anlegen.
	ET	Hoida jahedas vees/panna peale niiske kompress.
	EL	Βυθίστε σε δροσερό νερό/τυλίξτε με βρεγμένους επίδεσμούς.
	EN	Immerse in cool water/wrap in wet bandages.
	FR	Rincer à l'eau fraîche/poser une compresse humide.
	GA	Tum in uisce fionnuar/cuir bréid fliuch air.
	IT	Immergere in acqua fredda/avvolgere con un bendaggio umido.
	LV	Iegremdēt vēsā ūdenī/ietīt mitros apsējos.
	LT	Įmerkti į vėsų vandenį/apvynioti šlapiais tvarščiais.
	HU	Hideg vízzel/nedves kötéssel kell hűteni.
	MT	Dahhal fl-ilma kiesah/kebbeb f'faxex imxarrbin.
	NL	In koud water onderdompelen/nat verband aanbrengen.
	PL	Zanurzyć w zimnej wodzie/owinąć mokrym bandażem.
	PT	Mergulhar em água fria/aplicar compressas húmidas.
	RO	Introduceți în apă rece/acoperiți cu o compresă umedă.
	SK	Ponorte do studenej vody/obviažte mokrými obvázmi.
	SL	Potopiti v hladno vodo/zaviti v mokre povoje.
	FI	Upota kylmään veteen/kääri märkiin siteisiin.
	SV	Skölj under kallt vatten/använd våta omslag.

P335	Taal	
	BG	Отстранете от кожата посипаните частици.
	ES	Sacudir las partículas que se hayan depositado en la piel.
	CS	Volné částice odstraňte z kůže.
	DA	Børst løse partikler bort fra huden.
	DE	Lose Partikel von der Haut abbürsten.
	ET	Pühkida lahtised osakesed nahalt maha.

P335	Taal	
	EL	Αφαιρέστε προσεκτικά τα σωματίδια που έχουν μείνει στο δέρμα.
	EN	Brush off loose particles from skin.
	FR	Enlever avec précaution les particules déposées sur la peau.
	GA	Glan cáithníní scaoilte den chraiceann.
	IT	Rimuovere le particelle depositate sulla pelle.
	LV	Noberzt no ādas nepiestiprinātās daļiņas.
	LT	Nepirilipusias daleles nuvalyti nuo odos.
	HU	A bőrré lazán tapadó szemcséket óvatosan le kell kefélni.
	MT	Farfar il-frak mhux imwählha minn fuq il-ġilda.
	NL	Losse deeltjes van de huid afvegen.
	PL	Nie związaną pozostałość strzepnąc ze skóry.
	PT	Sacudir da pele as partículas soltas.
	RO	Îndepărtați particulele depuse pe piele.
	SK	Z pokožky oprášte sypké čiastočky.
	SL	S krtačo odstraniti razsute delce s kože.
	FI	Poista irtohiukkaset iholta.
	SV	Borsta bort lösa partiklar från huden.
P336	Taal	
	BG	Размразете замръзналите части в хладка вода. Не разтривайте засегнатото място.
	ES	Descongelar las partes heladas con agua tibia. No frotar la zona afectada.
	CS	Omrzlá místa ošetřete vlažnou vodou. Postižené místo netřete.
	DA	Forsigtig opvarmning af frostskaadede legemsdele i lunkent vand. Gnid ikke det angrebne område.
	DE	Vereiste Bereiche mit lauwarmem Wasser auftauen. Betroffenen Bereich nicht reiben.
	ET	Sulatada külmunud piirkonnad leige veega. Kannatada saanud piirkonda mitte hõõruda.
	EL	Ξπαγώστε τα παγωμένα μέρη με χλιαρό νερό. Μην τρίβετε την περιοχή που πάγωσε.
	EN	Thaw frosted parts with lukewarm water. Do no rub affected area.
	FR	Dégeler les parties gelées avec de l'eau tiède. Ne pas frotter les zones touchées.
	GA	Leáigh codanna siochtha le huisce alabhog. Ná cuimil an réimse lena mbaineann.
	IT	Sgelare le parti congelate usando acqua tiepida. Non sfregare la parte interessata.
	LV	Atkausēt sasalušās daļas ar remdenu ūdeni. Skarto zonu neberzt.
	LT	Prišalusias daleles atitirpinti drungnu vandeniu. Netrinti paveiktos zonas.
	HU	A fagyott részeket langyos vízzel fel kell melegíteni. Tilos az érintett terület dörzsölése.
	MT	Holl il-partijiet kiesha bl-ilma fietel. Toghroxx il-parti affettwata.
	NL	Bevroren lichaamsdelen met lauw water ontdooien. Niet wrijven op de betrokken plaatsen.
	PL	Rozmrozić oszronione obszary letnią wodą. Nie trzeć oszronionego obszaru.
	PT	Derreter as zonas congeladas com água morna. Não friccionar a zona afectada.



P336	Taal	
	RO	Dezghetați părțile degerate cu apă caldă. Nu frecați zona afectată.
	SK	Zmrznuté časti ošetrte vlažnou vodou. Postihnuté miesto netrite.
	SL	Zamrznjene dele odtaliti z mlačno vodo. Ne drgniti prizadetega mesta.
	FI	Sulata jäätyneet alueet haalealla vedellä. Vahingoittunutta aluetta ei saa hangata.
	SV	Värm det köldskadade området med ljummet vatten. Gnid inte det skadade området.
P337	Taal	
	BG	При продължително дразнене на очите:
	ES	Si persiste la irritación ocular:
	CS	Přetrvává-li podráždění očí:
	DA	Ved vedvarende øjenirritation:
	DE	Bei anhaltender Augenreizung:
	ET	Kui silmade ärritus ei möödu:
	EL	Εάν δεν υποχωρεί ο οφθαλμικός ερεθισμός:
	EN	If eye irritation persists:
	FR	Si l'irritation oculaire persiste:
	GA	Má mhaireann an greannú súile:
	IT	Se l'irritazione degli occhi persiste:
	LV	Ja acu iekaisums nepāriet:
	LT	Jei akių dirginimas nepraeina:
	HU	Ha a szemirritáció nem múlik el:
	MT	Jekk l-irritazzjoni ta' l-għajnejn tibqa':
	NL	Bij aanhoudende oogirritatie:
	PL	W przypadku utrzymywania się działania drażniącego na oczy:
	PT	Caso a irritação ocular persista:
	RO	Dacă iritarea ochilor persistă:
	SK	Ak podráždenie očí pretrváva:
	SL	Če draženje oči ne preneha:
	FI	Jos silmä-ärsytys jatkuu:
	SV	Vid bestående ögonirritation:
P338	Taal	
	BG	Свалете контактните лещи, ако има такива и доколкото това е възможно. Продължете с изплакването.
	ES	Quitar las lentes de contacto, si lleva y resulta fácil. Seguir aclarando.
	CS	Vyjměte kontaktní čočky, jsou-li nasazeny a pokud je lze vyjmout snadno. Pokračujte ve vyplachování.
	DA	Fjern eventuelle kontaktlinser, hvis dette kan gøres let. Fortsæt skylning.
	DE	Eventuell Vorhandene Kontaktlinsen nach Möglichkeit entfernen. Weiter ausspülen.

P338	Taal	
	ET	Eemaldada kontaktläätsed, kui neid kasutatakse ja kui neid on kerge eemaldada. Loputada veel kord.
	EL	Εάν υπάρχουν φακοί επαφής, αφαιρέστε τους, εφόσον είναι εύκολο. Συνεχίστε να ξεπλένετε.
	EN	Remove contact lenses, if present and easy to do. Continue rinsing.
	FR	Enlever les lentilles de contact si la victime en porte et si elles peuvent être facilement enlevées. Continuer à rincer.
	GA	Tóg amach na tadhall-lionsaí, más ann dóibh agus más furasta é sin a dhéanamh. Lean den sruthlú.
	IT	Togliere le eventuali lenti a contatto se è agevole farlo. Continuare a sciacquare.
	LV	Izņemiet kontaktlēcas, ja tās ir ievietotas un to ir viegli izdarīt. Turpiniet skalot.
	LT	Išimti kontaktinius lęšius, jeigu jie yra ir jeigu lengvai galima tai padaryti. Toliau plauti akis.
	HU	Adott esetben kontaktlencsék eltávolítása, ha könnyen megoldható. Az öblítés folytatása.
	MT	Nehhi l-lentijiet tal-kuntatt, jekk ikun hemm u jkunu faċli biex tneħħihom. Komplilahlah.
	NL	Contactlenzen verwijderen, indien mogelijk. Blijven spoelen.
	PL	Wyjąć soczewki kontaktowe, jeżeli są i można je łatwo usunąć. Nadal płukać.
	PT	Se usar lentes de contacto, retire-as, se tal lhe for possível. Continue a enxaguar.
	RO	Scoateți lentilele de contact, dacă este cazul și dacă acest lucru se poate face cu ușurință. Continuați să clătiți.
	SK	Ak používate kontaktné šošovky a ak je to možné, odstráňte ich. Pokračujte vo vyplachovaní.
	SL	Odstranite kontaktne leče, če jih imate in če to lahko storite brez težav. Nadaljujte z izpiranjem.
	FI	Poista piilolinssit, jos sen voi tehdä helposti. Jatka huuhtomista.
	SV	Ta ur eventuella kontaktlinser om det går lätt. Fortsätt att skölja.
P340	Taal	
	BG	Изведете пострадалия на чист въздух и го поставете в позиция, улесняваща дишането.
	ES	Transportar a la víctima al exterior y mantenerla en reposo en una posición confortable para respirar.
	CS	Přeneste postiženého na čerstvý vzduch a ponechte jej v klidu v poloze usnadňující dýchání.
	DA	Flyt personen til et sted med frisk luft og sørg for, at vedkommende hviler i en stilling, som letter vejrtrækningen.
	DE	Die betroffene Person an die frische Luft bringen und in einer Position ruhigstellen, die das Atmen erleichtert.
	ET	Toimetada kannatanu värske õhu kätte ja asetada mugavasse puhkeasendisse, mis võimaldab kergesti hingata.
	EL	Μεταφέρετε τον παθόντα στον καθαρό αέρα και αφήστε τον να ξεκουραστεί σε στάση που διευκολύνει την αναπνοή.
	EN	Remove victim to fresh air and keep at rest in a position comfortable for breathing.
	FR	Transporter la victime à l'extérieur et la maintenir au repos dans une position où elle peut confortablement respirer.
	GA	Tabhair amach faoin aer an duine agus coimeád socair é, i riocht ina bhféadfaidh sé anáil a tharraingt go réidh.
	IT	Trasportare l'fortunato all'aria aperta e mantenerlo a riposo in posizione che favorisca la respirazione.

P340	Taal	
	LV	Izvest cietušo svaigā gaisā un turēt miera stāvoklī, lai būtu ērti elpot.
	LT	Išnešti nukentėjusijį į gryną orą; jam būtina ramybė ir padėtis, leidžianti laisvai kvėpuoti.
	HU	Az érintett személyt friss levegőre kell vinni és olyan nyugalmi testhelyzetbe kell helyezni, hogy könnyen tudjon lélegezni.
	MT	Esponi lill-vittma għall-arja friska u zommha mistrieħa f'pożizzjoni komda biex tkun tista' tieħu n-nifs.
	NL	Het slachtoffer in de frisse lucht brengen en laten rusten in een houding die het ademen vergemakkelijkt.
	PL	Wyprowadzić lub wynieść poszkodowanego na świeże powietrze i zapewnić warunki do odpoczynku w pozycji umożliwiającej swobodne oddychanie.
	PT	Retirar a vítima para uma zona ao ar livre e mantê-la em repouso numa posição que não dificulte a respiração.
	RO	Transportați victima la aer liber și mențineți-o în stare de repaus într-o poziție confortabilă pentru respirație.
	SK	Presuňte postihnutého na čerstvý vzduch a nechajte ho oddychovať v polohe, ktorá mu umožní pohodlné dýchanie.
	SL	Prenesti žrtev na svež zrak in jo pustiti počivati v položaju, ki olajša dihanje.
	FI	Siirrä henkilö raittiiseen ilmaan ja pidä lepoasennossa, jossa on helppo hengittää.
	SV	Flytta personen till frisk luft och se till att han eller hon vilar i en ställning som underlättar andningen
P341	Taal	
	BG	При затруднено дишане изведете пострадалия на чист въздух и го поставете в позиция, улесняваща дишането.
	ES	Si respira con dificultad, transportar a la víctima al exterior y mantenerla en reposo en una posición confortable para respirar.
	CS	Při obtížném dýchání přeneste postiženého na čerstvý vzduch a ponechte jej v klidu v poloze usnadňující dýchání.
	DA	Ved vejrtrækningsbesvær: Flyt personen til et sted med frisk luft og sørg for, at vedkommende hviler i en stilling, som letter vejrtrækningen.
	DE	Bei Atembeschwerden an die frische Luft bringen und in einer Position ruhigstellen, die das Atmen erleichtert.
	ET	Hingamisraskuste korral toimetada kannatanu värske õhu kätte ja asetada mugavasse puhkeasendisse, mis võimaldab kergesti hingata.
	EL	Εάν ο παθών έχει δύσπνοια, μεταφέρετέ τον στον καθαρό αέρα και αφήστε τον να ξεκουραστεί σε στάση που διευκολύνει την αναπνοή.
	EN	If breathing is difficult, remove victim to fresh air and keep at rest in a position comfortable for breathing.
	FR	S'il y a difficulté à respirer, transporter la victime à l'extérieur et la maintenir au repos dans une position où elle peut confortablement respirer.
	GA	Más deacair don duine anáil, tabhair amach faoin aer é agus coimeád socair é, i riocht ina bhféadfaidh sé anáil a tharraingt go réidh.
	IT	Se la respirazione è difficile, trasportare l'infortunato all'aria aperta e mantenerlo a riposo in posizione che favorisca la respirazione.
	LV	Ja elpošana ir apgrūtināta, izvest cietušo svaigā gaisā un turēt miera stāvoklī, lai būtu ērti elpot.
	LT	Jeigu nukentėjusiajam sunku kvėpuoti, išnešti jį į gryną orą; jam būtina ramybė ir padėtis, leidžianti laisvai kvėpuoti.
	HU	Légzési nehézségek esetén az érintett személyt friss levegőre kell vinni és olyan nyugalmi testhelyzetbe kell helyezni, hogy könnyen tudjon lélegezni.

P341	Taal	
	MT	Jekk in-nifs ikun diffiċli, esponi lill-vittma għall-arja friska u zommha mistrieħa f'pożizzjoni komda biex tkun tista' tieħu n-nifs.
	NL	Bij ademhalingsmoeilijkheden het slachtoffer in de frisse lucht brengen en laten rusten in een houding die het ademen vergemakkelijkt.
	PL	W przypadku trudności z oddychaniem, wyprowadzić lub wynieść poszkodowanego na świeże powietrze i zapewnić warunki do odpoczynku w pozycji umożliwiającej swobodne oddychanie.
	PT	Em caso de dificuldade respiratória, retirar a vítima para uma zona ao ar livre e mantê-la em repouso numa posição que não dificulte a respiração.
	RO	Dacă respirația este dificilă, transportați victima la aer liber și mențineți-o în stare de repaus într-o poziție confortabilă pentru respirație.
	SK	Ak nastanú ťažkosti s dýchaním, presuňte postihnutého na čerstvý vzduch a nechajte ho oddychovať v polohe, ktorá mu umožní pohodlné dýchanie.
	SL	Pri oteženem dihanju prenesti žrtev na svež zrak in jo pustiti počivati v položaju, ki olajša dihanje.
	FI	Jos hengitysvaikeuksia, siirrä henkilö raittiiseen ilmaan ja pidä lepoasennossa, jossa on helppo hengittää.
	SV	Vid andningsbesvär, flytta personen till frisk luft och se till att han eller hon vilar i en ställning som underlättar andningen.

P342	Taal	
	BG	При симптоми на затруднено дишане:
	ES	En caso de síntomas respiratorios:
	CS	Při dýchacích potížích:
	DA	Ved luftvejssymptomer:
	DE	Bei Symptomen der Atemwege:
	ET	Hingamisteede probleemide ilmnemise korral:
	EL	Εάν παρουσιάζονται αναπνευστικά συμπτώματα:
	EN	If experiencing respiratory symptoms:
	FR	En cas de symptômes respiratoires:
	GA	I gcás siomptóm riospráide:
	IT	In caso di sintomi respiratori:
	LV	Ja rodas elpošanas traucējumu simptomi:
	LT	Jeigu pasireiškia respiraciniai simptomai:
	HU	Légzési problémák esetén:
	MT	Jekk tkun qed tbat i minn sintomi respiratorji:
	NL	Bij ademhalings symptomen:
	PL	W przypadku wystąpienia objawów ze strony układu oddechowego:
	PT	Em caso de sintomas respiratórios:
	RO	În caz de simptome respiratorii:
	SK	Pri sťaženom dýchaní:
	SL	Pri respiratornih simptomih:

P342	Taal	
	FI	Jos ilmenee hengitysoireita:
	SV	Vid besvär i luftvägarna:
P350	Taal	
	BG	Измийте внимателно и обилно със сапун и вода.
	ES	Lavar suavemente con agua y jabón abundantes.
	CS	Jemně omyjte velkým množstvím vody a mýdla.
	DA	Vask forsigtigt med rigeligt sæbe og vand.
	DE	Behutsam mit viel Wasser und Seife waschen.
	ET	Pesta õrnalt rohke vee ja seebiga.
	EL	Πλύνετε απαλά με άφθονο νερό και σαπούνι.
	EN	Gently wash with plenty of soap and water.
	FR	Laver avec précaution et abondamment à l'eau et au savon.
	GA	Nigh go bog le neart gallúnaí agus uisce.
	IT	Lavare delicatamente e abbondantemente con acqua e sapone.
	LV	Maigi izskalot ar lielu daudzumu ziepēm un ūdeni.
	LT	Atsargiai nuplauti dideliu kiekiu muilo ir vandens.
	HU	Óvatos lemosás bő szappanos vízzel.
	MT	Aħsel bil-mod b'ħafna sapun u ilma.
	NL	Voorzichtig wassen met veel water en zeep.
	PL	Delikatnie umyć dużą ilością wody z mydłem.
	PT	Lavar suavemente com sabonete e água abundantes.
	RO	Spălați ușor cu multă apă și săpun.
	SK	Opatrne umyte veľkým množstvom vody a mydla.
	SL	Nežno umiti z veliko mila in vode.
	FI	Pese varovasti runsaalla vedellä ja saippualla.
	SV	Tvätta försiktigt med mycket tvål och vatten.
P351	Taal	
	BG	Промивайте внимателно с вода в продължение на няколко минути.
	ES	Aclarar cuidadosamente con agua durante varios minutos.
	CS	Několik minut opatrně oplachujte vodou.
	DA	Skyl forsigtigt med vand i flere minutter.
	DE	Einige Minuten lang behutsam mit Wasser ausspülen.
	ET	Loputada mitme minuti jooksul ettevaatlikult veega.
	EL	Ξεπλύνετε προσεκτικά με νερό για αρκετά λεπτά.
	EN	Rinse cautiously with water for several minutes.
	FR	Rincer avec précaution à l'eau pendant plusieurs minutes.

P351	Taal	
	GA	Sruthlaítear go faichilleach le huisce ar feadh roinnt nóiméad.
	IT	Sciacquare accuratamente per parecchi minuti.
	LV	Uzmanīgi skalot ar ūdeni vairākas minūtes.
	LT	Atsargiai plauti vandeniui kelias minutes.
	HU	Óvatos öblítés vízzel több percen keresztül.
	MT	Lahlah b'attenzjoni bl-ilma ghal diversi minuti.
	NL	Voorzichtig afspoelen met water gedurende een aantal minuten.
	PL	Ostrożnie płukać wodą przez kilka minut.
	PT	Enxaguar cuidadosamente com água durante vários minutos.
	RO	Clătiți cu atenție cu apă, timp de mai multe minute.
	SK	Opatrne niekoľko minút oplachujte vodou.
	SL	Previdno izpirati z vodo nekaj minut.
	FI	Huuhdo huolellisesti vedellä usean minuutin ajan.
	SV	Skölj försiktigt med vatten i flera minuter.

P352	Taal	
	BG	Измийте обилно със сапун и вода.
	ES	Lavar con agua y jabón abundantes.
	CS	Omyjte velkým množstvím vody a mýdla.
	DA	Vask med rigeligt sæbe og vand.
	DE	Mit viel Wasser und Seife waschen.
	ET	Pesta rohke vee ja seebiga.
	EL	Πλύνετε με άφθονο σαπούνι και νερό.
	EN	Wash with plenty of soap and water.
	FR	Laver abondamment à l'eau et au savon.
	GA	Nigh le neart gallúnaí agus uisce.
	IT	Lavare abbondantemente con acqua e sapone.
	LV	Mazgāt ar lielu daudzumu ziepēm un ūdeni.
	LT	Plauti dideliu kiekiu muilo ir vandens.
	HU	Lemosás bő szappanos vízzel.
	MT	Aħsel b'hafna sapun u ilma.
	NL	Met veel water en zeep wassen.
	PL	Umyć dużą ilością wody z mydłem.
	PT	Lavar com sabonete e água abundantes.
	RO	Spălați cu multă apă și săpun.
	SK	Umyte veľkým množstvom vody a mydla.
	SL	Umiti z veliko mila in vode.

P352	Taal	
	FI	Pese runsaalla vedellä ja saippualla.
	SV	Tvätta med mycket tvål och vatten.
P353	Taal	
	BG	Облейте кожата с вода/вземете душ.
	ES	Aclararse la piel con agua/ducharse.
	CS	Opláchněte kůži vodou/osprchujte.
	DA	Skyl/brus huden med vand.
	DE	Haut mit Wasser abwaschen/duschen.
	ET	Loputada nahka veega/loputada duši all.
	EL	Ξεπλύνετε την επιδερμίδα με νερό/στο ντους.
	EN	Rinse skin with water/shower.
	FR	Rincer la peau à l'eau/se doucher.
	GA	Sruthlaítear an craiceann le huisce/glac cithfholcadh.
	IT	Sciacquare la pelle/fare una doccia.
	LV	Noskalot ādu ar ūdeni/dušā.
	LT	Odą nuplauti vandeniu/čiurkšle.
	HU	A bőrt le kell öblíteni vízzel/zuhanyozás.
	MT	Lahlah il-ġilda bl-ilma/bix-xawer.
	NL	Huid met water afspoelen/afdouchen.
	PL	Splukać skórę pod strumieniem wody/prysznicem.
	PT	Enxaguar a pele com água/tomar um duche.
	RO	Clătiți pielea cu apă/faceți duș.
	SK	Pokožku opláchnite vodou/sprchou.
	SL	Kožo izprati z vodo/prho.
	FI	Huuhdo/suihkuta iho vedellä.
	SV	Skölj huden med vatten/duscha.
P360	Taal	
	BG	Незабавно облейте замърсеното облекло и кожата обилно с вода, преди да свалите дрехите.
	ES	Aclarar inmediatamente con agua abundante las prendas y la piel contaminadas antes de quitarse la ropa.
	CS	Kontaminovaný oděv a kůži okamžitě omyjte velkým množstvím vody a potom oděv odložte.
	DA	Skyl omgående tilsmudset tøj og hud med rigeligt vand, før tøjet fjernes.
	DE	Kontaminierte Kleidung und Haut sofort mit viel Wasser abwaschen und danach Kleidung ausziehen.
	ET	Saastunud rõivad ja nahk loputada viivitamata rohke veega ning alles seejärel rõivad eemaldada.
	EL	Ξεπλύνετε αμέσως τα μολυσμένα ρούχα και την επιδερμίδα με άφθονο νερό πριν αφαιρέσετε τα ρούχα.

P360	Taal	
	EN	Rinse immediately contaminated clothing and skin with plenty of water before removing clothes.
	FR	Rincer immédiatement et abondamment avec de l'eau les vêtements contaminés et la peau avant de les enlever.
	GA	Sruthlaitear éadaí éillithe agus an craiceann láithreach le neart uisce sula mbaineann an duine na héadaí de.
	IT	Sciacquare immediatamente e abbondantemente gli indumenti contaminati e la pelle prima di togliersi gli indumenti.
	LV	Nekavējoties noskalot piesārņoto apģērbu un skarto ādu ar lielu daudzumu ūdens pirms apģērba novilkšanas.
	LT	Prieš nuvelkant užterštus drabužius, nedelsiant juos ir odą nuplauti dideliu kiekiu vandens.
	HU	A ruhák levetése előtt a szennyezett ruházatot és a bőrt bő vízzel azonnal le kell öblíteni.
	MT	Lahlah mall-ewwel l-ilbies ikkontaminat u l-gilda b'hafna ilma qabel ma tneħhi l-ilbies.
	NL	Verontreinigde kleding en huid onmiddellijk met veel water afspoelen en pas daarna kleding uittrekken.
	PL	Natychmiast spłukać zanieczyszczoną odzież i skórę dużą ilością wody przed zdjęciem odzieży.
	PT	Enxaguar imediatamente com muita água a roupa e a pele contaminadas antes de se despir.
	RO	Clătiți imediat îmbrăcămintea contaminată și pielea cu multă apă, înainte de scoaterea îmbrăcămintei.
	SK	Kontaminovaný odev a pokožku ihneď opláchnite veľkým množstvom vody a potom odev odstráňte.
	SL	Takoj izprati kontaminirana oblačila in kožo z veliko vode pred odstranitvijo oblačil.
	FI	Huuhto saastunut vaatetus ja iho välittömästi runsaalla vedellä ennen vaatetuksen riisumista.
	SV	Skölj genast nedstänkta kläder och hud med mycket vatten innan du tar av dig kläderna.
P361	Taal	
	BG	Незабавно свалете цялото замърсено облекло.
	ES	Quitarse inmediatamente las prendas contaminadas.
	CS	Veškeré kontaminované části oděvu okamžitě svlékněte.
	DA	Tilsmudset tøj tages straks af/fjernes.
	DE	Alle kontaminierten Kleidungsstücke sofort ausziehen.
	ET	Kõik saastunud rõivad viivitamata seljast võtta.
	EL	Αφαιρέστε/Βγάλτε αμέσως όλα τα μολυσμένα ρούχα.
	EN	Remove/Take off immediately all contaminated clothing.
	FR	Enlever immédiatement les vêtements contaminés.
	GA	Bain díot láithreach na héadaí éillithe go léir.
	IT	Togliersi di dosso immediatamente tutti gli indumenti contaminati.
	LV	Noņemt/Novilkt nekavējoties visu piesārņoto apģērbu.
	LT	Nedelsiant nuvilkti/pašalinti visus užterštus drabužius.
	HU	Az összes szennyezett ruhadarabot azonnal el kell távolítani/le kell vetni.
	MT	Nehħi/Inža' mall-ewwel l-ilbies ikkontaminat.



P361	Taal	
	NL	Verontreinigde kleding onmiddellijk uittrekken.
	PL	Natychmiast usunąć/zdjąć całą zanieczyszczoną odzież.
	PT	Despir/retirar imediatamente toda a roupa contaminada.
	RO	Scoateți imediat toată îmbrăcămintea contaminată.
	SK	Ihned' odstráňte/vyzlečte všetky kontaminované časti odevu.
	SL	Takoj odstraniti/sleči vsa kontaminirana oblačila.
	FI	Riisu saastunut vaatetus välittömästi.
	SV	Ta omedelbart av alla nedstänkta kläder.

P362	Taal	
	BG	Свалете замърсеното облекло и го изперете преди повторна употреба.
	ES	Quitarse las prendas contaminadas y lavarlas antes de volver a usarlas.
	CS	Kontaminovaný oděv svlékněte a před opětovným použitím ho vyperte.
	DA	Forurenet tøj tages af og vaskes, før det bruges igen.
	DE	Kontaminierte Kleidung ausziehen und vor erneutem Tragen waschen.
	ET	Võtta saastunud rõivad seljast ja pesta neid enne järgmist kasutamist.
	EL	Βγάλτε τα μολυσμένα ρούχα και πλύνετέ τα πριν τα ξαναχρησιμοποιήσετε.
	EN	Take off contaminated clothing and wash before reuse.
	FR	Enlever les vêtements contaminés et les laver avant réutilisation
	GA	Bain díot láithreach na héadaí éillithe go léir agus nigh iad sula ndéanfar iad a athúsáid.
	IT	Togliersi di dosso gli indumenti contaminati e lavarli prima di indossarli nuovamente.
	LV	Novilkt piesārņoto apģērbu un pirms atkārtotas lietošanas izmazgāt.
	LT	Nusivilkti užterštus drabužius ir išskalbti prieš vėl juos apsivelkant.
	HU	A szennyezett ruhát le kell vetni és az újbóli használat előtt ki kell mosni.
	MT	Inza' l-hwejjeg kontaminati u aħsilhom qabel ma terġa' tużahom.
	NL	Verontreinigde kleding uittrekken en wassen alvorens deze opnieuw te gebruiken.
	PL	Zanieczyszczoną odzież zdjąć i wyprać przed ponownym użyciem.
	PT	Retirar a roupa contaminada e lavá-la antes de a voltar a usar.
	RO	Scoateți îmbrăcămintea contaminată și spălați-o înainte de reutilizare.
	SK	Kontaminovaný odev vyzlečte a pred ďalším použitím vyperte.
	SL	Sleči kontaminirana oblačila in jih oprati pred ponovno uporabo.
	FI	Riisu ja pese saastunut vaatetus ennen uudelleenkäyttöä.
	SV	Nedstänkta kläder tas av och tvättas innan de används igen.

P363	Taal	
	BG	Изперете замърсеното облекло преди повторна употреба.
	ES	Lavar las prendas contaminadas antes de volver a usarlas.
	CS	Kontaminovaný oděv před opětovným použitím vyperte.

P363	Taal	
	DA	Tilsmudset tøj skal vaskes, før det kan anvendes igen.
	DE	Kontaminierte Kleidung vor erneutem Tragen waschen.
	ET	Saastunud rõivad enne järgmist kasutamist pesta.
	EL	Πλύνετε τα μολυσμένα ενδύματα πριν τα ξαναχρησιμοποιήσετε.
	EN	Wash contaminated clothing before reuse.
	FR	Laver les vêtements contaminés avant réutilisation.
	GA	Nigh éadaí éillithe sula ndéanfar iad a athúsáid.
	IT	Lavare gli indumenti contaminati prima di indossarli nuovamente.
	LV	Pirms atkārtotas lietošanas piesārņoto apģērbu izmazgāt.
	LT	Užterštus drabužius išskalbti prieš vėl juos apsivelkant.
	HU	A szennyezett ruhát újbóli használat előtt ki kell mosni.
	MT	Aħsel il-hwejjeġ kontaminati qabel terġa' tużahom.
	NL	Verontreinigde kleding wassen alvorens deze opnieuw te gebruiken.
	PL	Wyprać zanieczyszczoną odzież przed ponownym użyciem.
	PT	Lavar a roupa contaminada antes de a voltar a usar.
	RO	Spălați îmbrăcămintea contaminată, înainte de reutilizare.
	SK	Kontaminovaný odev pred ďalším použitím vyperte.
	SL	Kontaminirana oblačila oprati pred ponovno uporabo.
	FI	Pese saastunut vaatetus ennen uudelleenkäyttöä.
	SV	Nedstänkta kläder ska tvättas innan de används igen.

P370	Taal	
	BG	При пожар:
	ES	En caso de incendio:
	CS	V případě požáru:
	DA	Ved brand:
	DE	Bei Brand:
	ET	Tulekahju korral:
	EL	Σε περίπτωση πυρκαγιάς:
	EN	In case of fire:
	FR	En cas d'incendie:
	GA	I gcás dóiteáin:
	IT	In caso di incendio:
	LV	Ugunsgrēka gadījumā:
	LT	Gaisro atveju:
	HU	Tűz esetén:
	MT	F'każ ta' nar:
	NL	In geval van brand:

P370	Taal	
	PL	W przypadku pożaru:
	PT	Em caso de incêndio:
	RO	În caz de incendiu:
	SK	V prípade požiaru:
	SL	Ob požaru:
	FI	Tulipalon sattuessaa:
	SV	Vid brand:

P371	Taal	
	BG	При голям пожар и значителни количества:
	ES	En caso de incendio importante y en grandes cantidades:
	CS	V případě velkého požáru a velkého množství:
	DA	Ved større brand og store mængder:
	DE	Bei Großbrand und großen Mengen:
	ET	Suure tulekahju korral ning kui on tegemist suurte kogustega:
	EL	Σε περίπτωση σοβαρής πυρκαγιάς και εάν πρόκειται για μεγάλες ποσότητες:
	EN	In case of major fire and large quantities:
	FR	En cas d'incendie important et s'il s'agit de grandes quantités:
	GA	I gcás mórdhóiteáin agus má tá cainníochtaí móra i gceist:
	IT	In caso di incendio grave e di quantità rilevanti:
	LV	Ugunsgrēka un lielu apjomu gadījumā:
	LT	Didelio gaisro ir didelių kiekių atveju:
	HU	Nagyobb tűz és nagy mennyiség esetén:
	MT	F'każ ta' nar kbir u kwantitajiet kbar:
	NL	In geval van grote brand en grote hoeveelheden:
	PL	W przypadku poważnego pożaru i dużych ilości:
	PT	Em caso de incêndio importante e de grandes quantidades:
	RO	În caz de incendiu de proporții și de cantități mari de produs:
	SK	V prípade veľkého požiaru a veľkého množstva:
	SL	Ob velikem požaru in velikih količinah:
	FI	Jos tulipalo ja ainemäärät ovat suuret:
	SV	Vid större brand och stora mängder:

P372	Taal	
	BG	Опасност от експлозия при пожар.
	ES	Riesgo de explosión en caso de incendio.
	CS	Nebezpečí výbuchu v případě požáru.
	DA	Eksplodingsfare ved brand.

P372	Taal	
	DE	Explosionsgefahr bei Brand.
	ET	Tulekahju korral plahvatusoht.
	EL	Κίνδυνος έκρηξης σε περίπτωση πυρκαγιάς.
	EN	Explosion risk in case of fire.
	FR	Risque d'explosion en cas d'incendie.
	GA	Baol pléasctha i gcás dóiteáin.
	IT	Rischio di esplosione in caso di incendio.
	LV	Eksplōzijas risks ugunsgrēka gadījumā:
	LT	Sprogimo pavojus gaisro atveju.
	HU	Tűz esetén robbanásveszély.
	MT	Riskju ta' splużjoni f'każ ta' nar.
	NL	Ontploffingsgevaar in geval van brand.
	PL	Ryzyko wybuchu w razie pożaru.
	PT	Risco de explosão em caso de incêndio.
	RO	Risc de explozie în caz de incendiu.
	SK	V prípade požiaru hrozí riziko výbuchu.
	SL	Nevarnost eksplozije ob požaru.
	FI	Tulipalon sattuesssa räjähdysvaara.
	SV	Explosionsrisk vid brand.
P373	Taal	
	BG	НЕ се опитвайте да гасите пожара, ако огънят наближи експлозивни.
	ES	NO luchar contra el incendio cuando el fuego llega a los explosivos.
	CS	Požár NEHAŠTE, dostane-li se k výbušninám.
	DA	BEKÆMP IKKE branden, hvis denne når eksplosiverne.
	DE	KEINE Brandbekämpfung, wenn das Feuer explosive Stoffe/Gemische/Erzeugnisse erreicht.
	ET	Kui tuli jõuab lõhkeaineteni, MITTE teha kustutustöid.
	EL	ΜΗΝ προσπαθείτε να σβήσετε την πυρκαγιά, όταν η φωτιά πλησιάζει σε εκρηκτικά.
	EN	DO NOT fight fire when fire reaches explosives.
	FR	NE PAS combattre l'incendie lorsque le feu atteint les explosifs.
	GA	NÁ DÉÁN an dóiteán a chomhrac má shroicheann sé pléascáin.
	IT	NON utilizzare mezzi estinguenti se l'incendio raggiunge materiali esplosivi.
	LV	NECENSTIES dzēst ugunsgrēku, ja uguns piekļūst sprādzienbīstamām vielām.
	LT	NEGESINTI gaisro, jeigu ugnis pasiekia sprogmenis.
	HU	TILOS a tűz oltása, ha az robbanóanyagra átterjedt.
	MT	TIPPRUVAX TITFI n-nar meta n-nar jilhaq l-isplussivi.
	NL	NIET blussen wanneer het vuur de ontplofbare stoffen bereikt.
	PL	NIE gasić pożaru, jeżeli ogień dosięgnie materiały wybuchowe

P373	Taal	
	PT	Se o fogo atingir os explosivos, NÃO tentar combatê-lo.
	RO	NU încercați să stingeți incendiul atunci când focul a ajuns la exploziv.
	SK	Požiar NEHASTE, ak sa oheň priblížil k výbušninám.
	SL	NE gasiti, ko ogenj doseže eksploziv.
	FI	Tulta EI SAA yrittää sammuttaa sen saavutettua räjäheteet.
	SV	Försök INTE bekämpa branden när den når explosiva varor.

P374	Taal	
	BG	Гасете пожара с обичайните предпазни мерки от разумно разстояние.
	ES	Luchar contra el incendio desde una distancia razonable, tomando las precauciones habituales.
	CS	Haste z přiměřené vzdálenosti a dodržujte běžná opatření.
	DA	Træf normale foranstaltninger mod brand og bekæmp den på en fornuftig afstand.
	DE	Brandbekämpfung mit üblichen Vorsichtsmaßnahmen aus angemessener Entfernung.
	ET	Kustutustõid teha tavaliste ettevaatusabinõudega ja mõistlikust kaugusest.
	EL	Προσπαθήστε να σβήσετε την πυρκαγιά λαμβάνοντας τις κατάλληλες προφυλάξεις και από εύλογη απόσταση.
	EN	Fight fire with normal precautions from a reasonable distance.
	FR	Combattre l'incendie à distance en prenant les précautions normales.
	GA	Déan na gnáth-réamhchúraimí chun an dóiteán a chomhrac gan a bheith níos gaire dó ná mar atá réasúnta.
	IT	Utilizzare i mezzi estinguenti con le precauzioni abituali a distanza ragionevole.
	LV	Dzēst ugunsgrēku, ņemot vērā parastos drošības nosacījumus un no saprātīga attāluma.
	LT	Gaisrą gesinti laikantis įprastinio atsargumo pakankamu atstumu.
	HU	Tűzoltás megfelelő távolságból a szokásos óvintézkedések betartásával.
	MT	Itfi n-nar bil-prekawzjonijiet normali minn distanza raġonevoli.
	NL	Met normale voorzorgen vanaf een redelijke afstand blussen.
	PL	Gasić pożar z rozsądnej odległości z zachowaniem zwykłych środków ostrożności.
	PT	Combater o incêndio tomando as precauções normais e a partir de uma distância razoável.
	RO	Stingeți incendiul de la o distanță rezonabilă, luând măsuri normale de precauție.
	SK	Požiar haste z priveranej vzdialenosti pri dodržiavaní bežných bezpečnostných opatrení.
	SL	Gasiti z običajno previdnostjo in s primerne razdalje.
	FI	Sammuuta palo kohtuullisen välimatkan päästä tavanomaisin varotoimin.
	SV	Bekämpa branden på vanligt sätt på behörigt avstånd.

P375	Taal	
	BG	Гасете пожара от разстояние поради опасност от експлозия.
	ES	Luchar contra el incendio a distancia, dado el riesgo de explosión.
	CS	Kvůli nebezpečí výbuchu haste z dostatečné vzdálenosti.
	DA	Bekæmp branden på afstand på grund af eksplosionsfare.

P375	Taal	
	DE	Wegen Explosionsgefahr Brand aus der Entfernung bekämpfen.
	ET	Plahvatusohu tõttu teha kustutustööid eemalt.
	EL	Προσπαθήστε να σβήσετε την πυρκαγιά από απόσταση, επειδή υπάρχει κίνδυνος έκρηξης.
	EN	Fight fire remotely due to the risk of explosion.
	FR	Combattre l'incendie à distance à cause du risque d'explosion.
	GA	Téigh i gcianghleic leis an dóiteán mar gheall ar an mbaol pléasctha.
	IT	Rischio di esplosione. Utilizzare i mezzi estinguenti a grande distanza.
	LV	Dzēst ugunsgrēku no attāluma eksplozijas riska dēļ.
	LT	Gaisrą gesinti iš toli dėl sproginimo pavojaus.
	HU	A tűz oltását robbanásveszély miatt távolból kell végezni.
	MT	Itfi n-nar mill-bogħod minhabba r-riskju ta' splużjoni.
	NL	Op afstand blussen omwille van ontploffingsgevaar.
	PL	Z powodu ryzyka wybuchu gasić pożar z odległości.
	PT	Combater o incêndio à distância, devido ao risco de explosão.
	RO	Stingeți incendiul de la distanță din cauza pericolului de explozie.
	SK	Z dôvodu nebezpečnosti výbuchu požiar haste z diaľky.
	SL	Gasiti z večje razdalje zaradi nevarnosti eksplozije.
	FI	Sammuta palo etäältä räjähdysvaaran takia.
	SV	Bekämpa branden på avstånd på grund av explosionsrisken.
P376	Taal	
	BG	Спрете теча, ако е безопасно.
	ES	Detener la fuga, si no hay peligro en hacerlo.
	CS	Zastavte únik, můžete-li tak učinit bez rizika.
	DA	Standt lækagen, hvis dette er sikkert.
	DE	Undichtigkeit beseitigen, wenn gefahrlos möglich.
	ET	Leke peatada, kui seda on võimalik teha ohutult.
	EL	Σταματήστε τη διαρροή, εφόσον δεν υπάρχει κίνδυνος.
	EN	Stop leak if safe to do so.
	FR	Obturer la fuite si cela peut se faire sans danger.
	GA	Cuir stop leis an sceitheadh má tá sé sábháilte é sin a dhéanamh.
	IT	Bloccare la perdita se non c'è pericolo.
	LV	Apstādināt noplūdi, ja to var izdarīt drošā veidā.
	LT	Sustabdyti nuotėkį, jeigu galima saugiai tai padaryti.
	HU	Meg kell szüntetni a szivárgást, ha ez biztonságosan megtehető.
	MT	Waqqaf it-tnixxija jekk ma jkunx hemm periklu.
	NL	Het lek dichten als dat veilig gedaan kan worden.
	PL	Jeżeli jest to bezpieczne zahamować wyciek.

P376	Taal	
	PT	Deter a fuga se tal puder ser feito em segurança.
	RO	Oprîți scurgerea, dacă acest lucru se poate face în siguranță.
	SK	Zastavte únik, ak je to bezpečné.
	SL	Zaustaviti puščanje, če je varno.
	FI	Sulje vuoto, jos sen voi tehdä turvallisesti.
	SV	Stoppa läckan om det kan göras på ett säkert sätt.
P377	Taal	
	BG	Пожар от изтекъл газ: Не гасете освен при възможност за безопасно отстраняване на теча.
	ES	Fuga de gas en llamas: No apagar, salvo si la fuga puede detenerse sin peligro.
	CS	Požár unikajícího plynu: Nehaste, nelze-li únik bezpečně zastavit.
	DA	Brand fra udsivende gas: Sluk ikke, medmindre det er sikkert at stoppe lækagen.
	DE	Brand von ausströmendem Gas: Nicht löschen, bis Undichtigkeit gefahrlos beseitigt werden kann.
	ET	Lekkiva gaasi põlemise korral mitte kustutada, välja arvatud juhul, kui leket on võimalik ohutult peatada.
	EL	Διαρροή φλεγόμενου αερίου: Μην την σβήσετε, εκτός εάν μπορείτε να σταματήσετε τη διαρροή χωρίς κίνδυνο.
	EN	Leaking gas fire: Do not extinguish, unless leak can be stopped safely.
	FR	Fuite de gaz enflammé: Ne pas éteindre si la fuite ne peut pas être arrêtée sans danger.
	GA	Tine gháis ag sceitheadh: Ná múch, mura i ndán agus gur féidir stop a chur leis an sceitheadh go sábháilte.
	IT	In caso d'incendio dovuto a perdita di gas, non estinguere a meno che non sia possibile bloccare la perdita senza pericolo.
	LV	Degšanas gāzes noplūde: Nedzēst, ja vien noplūdi var apstādināt drošā veidā.
	LT	Dujų nuotėkio sukeltas gaisras: Negesinti, nebent nuotėkį būtų galima saugiai sustabdyti.
	HU	Égő szivárgó gáz: Csak akkor szabad a tüzet oltani, ha a szivárgás biztonságosan megszüntethető.
	MT	Tnixxija ta' gass tan-nar: Tippurvax titfiha, sakemm it-tnixxija ma tkunx tista' titwaqqaf bla periklu.
	NL	Brand door lekkend gas: niet blussen, tenzij het lek veilig gedicht kan worden.
	PL	W przypadku płonienia wyciekającego gazu: Nie gasić, jeżeli nie można bezpiecznie zahamować wycieku.
	PT	Incêndio por fuga de gás: não apagar, a menos que se possa deter a fuga em segurança.
	RO	Incendiu cauzat de o scurgere de gaz: nu încercați să stingeți, decât dacă scurgerea poate fi oprită în siguranță.
	SK	Požiar unikajúceho plynu: Nehaste, pokiaľ únik nemožno bezpečne zastaviť.

P377	Taal	
	SL	Požar zaradi uhajanja plina: Ne gasiti, če puščanja ni mogoče varno zaustaviti.
	FI	Vuotavasta kaasusta johtuva palo: Ei saa sammuttaa, jollei vuotoa voida pysäyttää turvallisesti.
	SV	Läckande gas som brinner: Försök inte släcka branden om inte läckan kan stoppas på ett säkert sätt.

P378	Taal	
	BG	Използвайте ... за гасене.
	ES	Utilizar ... para apagarlo.
	CS	K hašení použijte ....
	DA	Anvend ... til brandslukning.
	DE	... zum Löschen verwenden.
	ET	Kustutamiseks kasutada ....
	EL	Χρησιμοποιήστε ... για την κατάσβεση.
	EN	Use ... for extinction.
	FR	Utiliser ... pour l'extinction.
	GA	Úsáid ... le haghaidh múchta.
	IT	Estinguere con...
	LV	Nodzēšanai izmantot...
	LT	Gesinimui naudoti ...
	HU	Az oltáshoz ... használandó.
	MT	Uża' ... biex titfi.
	NL	Blussen met ...
	PL	Użyć ... do gaszenia.
	PT	Para a extinção utilizar ...
	RO	Utilizați... pentru stingere.
	SK	Na hasenie použite ....
	SL	Za gašenje uporabiti ...
	FI	Käytä palon sammuttamiseen ...
	SV	Släck branden med ....

P380	Taal	
	BG	Евакуирайте зоната.
	ES	Evacuar la zona.
	CS	Vyklid'te _roctor.
	DA	Evakuer området.
	DE	Umgebung räumen.
	ET	Ala evakueerida.



P380	Taal	
	EL	Εκκενώστε την περιοχή.
	EN	Evacuate area.
	FR	Évacuer la zone.
	GA	Aslonnaigh gach duine as an limistéar.
	IT	Evacuare la zona.
	LV	Evakuēt zonu.
	LT	Evakuoti zoną.
	HU	A területet ki kell üríteni.
	MT	Evakwa ż-zona.
	NL	Evacueren.
	PL	Ewakuować teren.
	PT	Evacuar a zona.
	RO	Evacuați zona.
	SK	Priestory evakuujte.
	SL	Izprazniti območje.
	FI	Evakuoi alue.
	SV	Utrym området.

P381	Taal	
	BG	Премахнете всички източници на запалване, ако е безопасно.
	ES	Eliminar todas las fuentes de ignición si no hay peligro en hacerlo.
	CS	Odstraňte všechny zdroje zapálení, můžete-li tak učinit bez rizika.
	DA	Fjern alle antændelseskilder, hvis dette kan gøres sikkert.
	DE	Alle Zündquellen entfernen, wenn gefahrlos möglich.
	ET	Eemaldada kõik süüteallikad, kui seda on võimalik teha ohutult.
	EL	Απομακρύνετε τις πηγές ανάφλεξης, εάν αυτό μπορεί να γίνει χωρίς κίνδυνο.
	EN	Eliminate all ignition sources if safe to do so.
	FR	Éliminer toutes les sources d'ignition si cela est faisable sans danger.
	GA	Díothaigh gach foinse adhainte, má tá sé sábháilte é sin a dhéanamh.
	IT	Eliminare ogni fonte di accensione se non c'è pericolo.
	LV	Novērst visus uzliesmošanas avotus, ja to var izdarīt droši.
	LT	Pašalinti visus uždegimo šaltinius, jeigu galima saugiai tai padaryti.
	HU	Még kell szüntetni az összes gyújtóforrást, ha ez biztonságosan megtehető.
	MT	Elimina s-sorsi kollha li jqabdu sakemm ma jkunx perikoluż li tagħmel dan.
	NL	Alle ontstekingsbronnen wegnemen als dat veilig gedaan kan worden.
	PL	Wyeliminować wszystkie źródła zapłonu, jeżeli jest to bezpieczne.
	PT	Eliminar todas as fontes de ignição se tal puder ser feito em segurança.
	RO	Eliminați toate sursele de aprindere, dacă acest lucru se poate face în siguranță.

P381	Taal	
	SK	Ak je to bezpečné, odstráňte všetky zdroje zapálenia.
	SL	Odstraniti vse vire vžiga, če je varno.
	FI	Poista kaikki sytytyslähteet, jos sen voi tehdä turvallisesti.
	SV	Avlägsna alla antändningskällor om det kan göras på ett säkert sätt.
P390	Taal	
	BG	Попийте разлятото, за да се предотвратят материални вреди.
	ES	Absorber el vertido para que no dañe otros materiales.
	CS	Uniklý produkt absorbujte, aby se zabránilo materiálním škodám.
	DA	Absorber udslip for at undgå materielskade.
	DE	Verschüttete Mengen aufnehmen, um Materialschäden zu vermeiden.
	ET	Mahavoolanud toode absorbeerida, et see ei kahjustaks teisi materjale.
	EL	Σκουπίστε τη χυμένη ποσότητα για να προλάβετε υλικές ζημιές.
	EN	Absorb spillage to prevent material damage.
	FR	Absorber toute substance répandue pour éviter qu'elle attaque les matériaux environnants.
	GA	Ionúigh doirteadh chun damáiste d'ábhar a chosc.
	IT	Assorbire la fuoriuscita per evitare danni materiali.
	LV	Uzsūkt izšļakstījumus, lai novērstu materiālus zaudējumus.
	LT	Absorbuoti išsiliejusią medžiagą, siekiant išvengti materialinės žalos.
	HU	A kiömlött anyagot fel kell itatni a körülvevő anyagok károsodásának megelőzése érdekében.
	MT	Assorbi t-tixrid biex tipprevjeni hsara fil-materjal.
	NL	Gelekte/gemorste stof opnemen om materiële schade te vermijden.
	PL	Usunąć wyciek, aby zapobiec szkodom materialnym.
	PT	Absorver o produto derramado a fim de evitar danos materiais.
	RO	Absorbiți scurgerile de produs, pentru a nu afecta materialele din apropiere.
	SK	Absorbujte uniknutý produkt, aby sa zabránilo materiálным škodám.
	SL	Odpraviti razlitje, da se prepreči materialna škoda.
	FI	Imeytä valumat vahinkojen estämiseksi.
	SV	Sug upp spill för att undvika materiella skador.
P391	Taal	
	BG	Съберете разлятото.
	ES	Recoger el vertido.
	CS	Uniklý produkt seberte.
	DA	Udslip opsamles.
	DE	Verschüttete Mengen aufnehmen.
	ET	Mahavoolanud toode kokku koguda.
	EL	Μαζέψτε τη χυμένη ποσότητα.

P391	Taal	
	EN	Collect spillage.
	FR	Recueillir le produit répandu.
	GA	Bailigh doirteadh.
	IT	Raccogliere il materiale fuoriuscito.
	LV	Savākt izšļakstīto šķidrums.
	LT	Surinkti ištekėjusią medžiagą.
	HU	A kiömlött anyagot össze kell gyűjteni.
	MT	Iġbor it-tixrid.
	NL	Gelekte/gemorste stof opruimen.
	PL	Zebrać wyciek.
	PT	Recolher o produto derramado.
	RO	Colectați scurgerile de produs.
	SK	Zozbierajte uniknutý produkt.
	SL	Prestreči razlito tekočino.
	FI	Valumat on kerättävä.
	SV	Samla upp spill.

P301 + P310	Taal	
	BG	ПРИ ПОГЛЪТЦАНЕ: Незабавно се обадете в ЦЕНТЪР ПО ТОКСИКОЛОГИЯ или на лекар.
	ES	EN CASO DE INGESTIÓN: Llamar inmediatamente a un CENTRO DE INFORMACIÓN TOXICOLÓGICA o a un médico.
	CS	PŘI POŽITÍ: Okamžitě volejte TOXIKOLOGICKÉ INFORMAČNÍ STŘEDISKO nebo lékaře.
	DA	I TILFÆLDE AF INDTAGELSE: Ring omgående til en GIFTINFORMATION eller en læge.
	DE	BEI VERSCHLUCKEN: Sofort GIFTINFORMATIONSZENTRUM oder Arzt anrufen.
	ET	ALLANEELAMISE KORRAL: võtta viivitamata ühendust MÜRGIKUSTEABEKESKUSE või arstiga.
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ ΚΑΤΑΠΟΣΗΣ: Καλέστε αμέσως το ΚΕΝΤΡΟ ΔΗΛΗΤΗΡΙΑΣΕΩΝ ή ένα γιατρό.
	EN	IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician.
	FR	EN CAS D'INGESTION: appeler immédiatement un CENTRE ANTIPOISON ou un médecin.
	GA	MÁ SHLOGTAR: Cuir glao láithreach ar IONAD NIMHE nó ar dhoctúir/lia.
	IT	IN CASO DI INGESTIONE: contattare immediatamente un CENTRO ANTIVELENI o un medico
	LV	NORĪŠANAS GADĪJUMĀ: Nekavējoties sazināties ar SAINDĒŠANĀS CENTRU vai ārstu.
	LT	PRARIJUS: Nedelsiant skambinti į APSINUODIJIMŲ KONTROLĖS IR INFORMACIJOS BIURĄ arba kreiptis į gydytoją.
	HU	LENYELÉS ESETÉN: azonnal forduljon TOXIKOLÓGIAI KÖZPONTHOZ vagy orvoshoz.
	MT	JEKK JINBELA': Ikkuntattja ĊENTRU TA' L-AVVELENAMENT jew tabib.
	NL	NA INSLIKKEN: onmiddellijk een ANTIGIFCENTRUM of een arts raadplegen.
	PL	W PRZYPADKU POŁKNIECIA: Natychmiast skontaktować się z OŚRODKIEM ZATRUĆ lub z lekarzem.

P301 + P310	Taal	
	PT	EM CASO DE INGESTÃO: contacte imediatamente um CENTRO DE INFORMAÇÃO ANTIVENENOS ou um médico.
	RO	ÎN CAZ DE ÎNGHIȚIRE: sunați imediat la un CENTRU DE INFORMARE TOXICOLOGICĂ sau un medic.
	SK	PO POŽITÍ: okamžite volajte NÁRODNÉ TOXIKOLOGICKÉ INFORMAČNÉ CENTRUM alebo lekára.
	SL	PRI ZAUŽITJU: takoj pokličite CENTER ZA ZASTRUPITVE ali zdravnika.
	FI	JOS KEMIKAALIA ON NIELTY: Ota välittömästi yhteys MYRKYTYSTIETOKESKUKSEEN tai lääkäriin.
	SV	VID FÖRTÄRING: Kontakta genast GIFTINFORMATIONSCENTRAL eller läkare.
P301 + P312	Taal	
	BG	ПРИ ПОГЛЪЩАНЕ: Незабавно се обадете в ЦЕНТЪР ПО ТОКСИКОЛОГИЯ или на лекар при неразположение.
	ES	EN CASO DE INGESTIÓN: Llamar a un CENTRO DE INFORMACIÓN TOXICOLÓGICA o a un médico si se encuentra mal.
	CS	PŘI POŽITÍ: Necítíte-li se dobře, volejte TOXIKOLOGICKÉ INFORMAČNÍ STŘEDISKO nebo lékaře.
	DA	I TILFÆLDE AF INDTAGELSE: I tilfælde af ubehag ring til en GIFTINFORMATION eller en læge.
	DE	BEI VERSCHLUCKEN: Bei Unwohlsein GIFTINFORMATIONSZENTRUM oder Arzt anrufen.
	ET	ALLANEELAMISE KORRAL: halva enesetunde korral võtta ühendust MÜRGISTUSTEA-BEKESKUSE või arstiga.
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ ΚΑΤΑΠΟΣΗΣ: Καλέστε αμέσως το ΚΕΝΤΡΟ ΔΗΛΗΤΗΡΙΑΣΕΩΝ ή ένα γιατρό, εάν αισθανθείτε αδιαθεσία.
	EN	IF SWALLOWED: Call a POISON CENTER or doctor/physician if you feel unwell.
	FR	EN CAS D'INGESTION: appeler un CENTRE ANTIPOISON ou un médecin en cas de malaise.
	GA	MÁ SHLOGTAR: Cuir glao ar IONAD NIMHE nó ar dhochtúir/lia má bhraitheann tú tinn.
	IT	IN CASO DI INGESTIONE accompagnata da malessere: contattare un CENTRO ANTIVELENI o un medico.
	LV	NORĪŠANAS GADĪJUMĀ: sazināties ar SAINDĒŠANĀS CENTRU vai ārstu, ja jums ir slihta pašsajūta.
	LT	PRARIJUS: Pasijutus blogai, skambinti į APSINUODIJIMŲ KONTROLĖS IR INFORMACIJOS BIURĄ arba kreiptis į gydytoją.
	HU	LENYELÉS ESETÉN: rosszullét esetén azonnal forduljon TOXIKOLÓGIAI KÖZPONTHOZ vagy orvoshoz.
	MT	JEKK JINBELA: Ikkuntattja ĊENTRU TA' L-AVVELENAMENT jew tabib jekk thossok ma tiflahx.
	NL	NA INSLIKKEN: bij onwel voelen een ANTIGIFCENTRUM of een arts raadplegen.
	PL	W PRZYPADKU POŁKNIECIA: W przypadku złego samopoczucia skontaktować się z OŚRODKIEM ZATRUĆ lub z lekarzem.
	PT	EM CASO DE INGESTÃO: caso sinta indisposição, contacte um CENTRO DE INFORMAÇÃO ANTIVENENOS ou um médico.
	RO	ÎN CAZ DE ÎNGHIȚIRE: sunați la un CENTRU DE INFORMARE TOXICOLOGICĂ sau un medic, dacă nu vă simțiți bine.

P301 + P312	Taal	
	SK	PO POŽITÍ: ak máte zdravotné problémy, okamžite volajte NÁRODNÉ TOXIKOLOGICKÉ INFORMAČNÉ CENTRUM alebo lekára.
	SL	PRI ZAUŽITJU: ob slabem počutju pokličite CENTER ZA ZASTRUPITVE ali zdravnika.
	FI	JOS KEMIKAALIA ON NIELTY: Ota yhteys MYRKYTYSTIETOKESKUKSEEN tai lääkäriin, jos ilmenee pahoinvointia.
	SV	VID FÖRTÄRING: Kontakta GIFTINFORMATIONSCENTRAL eller läkare om du mår dåligt.

P301 + P330 + P331	Taal	
	BG	ПРИ ПОГЛЪЩАНЕ: изплакнете устата. НЕ предизвиквайте повръщане.
	ES	EN CASO DE INGESTIÓN: Enjuagarse la boca. NO provocar el vómito.
	CS	PŘI POŽITÍ: Vypláchněte ústa. NEVYVOLÁVEJTE zvracení.
	DA	I TILFÆLDE AF INDTAGELSE: Skyl munden. Fremkald IKKE opkastning.
	DE	BEI VERSCHLUCKEN: Mund ausspülen. KEIN Erbrechen herbeiführen.
	ET	ALLANEELAMISE KORRAL: loputada suud. MITTE kutsuda esile oksendamist.
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ ΚΑΤΑΠΟΣΗΣ: Ξεπλύνετε το στόμα. ΜΗΝ προκαλέσετε εμετό.
	EN	IF SWALLOWED: rinse mouth. Do NOT induce vomiting.
	FR	EN CAS D'INGESTION: rincer la bouche. NE PAS faire vomir.
	GA	MÁ SHLOGTAR: sruthlaítear an béal. NÁ déan urlacan a spreagadh.
	IT	IN CASO DI INGESTIONE: sciacquare la bocca. NON provocare il vomito.
	LV	NORIŠANAS GADĪJUMĀ: izskalot muti. NEIZRAISĪT vemšanu.
	LT	PRARIJUS: išskalauti burną. NESKATINTI vėmimo.
	HU	LENYELÉS ESETÉN: a szájat ki kell öblíteni. TILOS hánytatni.
	MT	JEKK JINBELA: laħlaħ il-ħalq. TIPPROVOKAX ir-remettar.
	NL	NA INSLIKKEN: de mond spoelen — GEEN braken opwekken.
	PL	W PRZYPADKU POŁKNIĘCIA: wypłukać usta. NIE wywoływać wymiotów.
	PT	EM CASO DE INGESTÃO: enxaguar a boca. NÃO provocar o vómito.
	RO	ÎN CAZ DE ÎNGHIȚIRE: clătiți gura. NU provocați voma.
	SK	PO POŽITÍ: vypláchnite ústa. Nevyvolávajte zvracanie.
	SL	PRI ZAUŽITJU: izprati usta. NE izzvati bruhanja.
	FI	JOS KEMIKAALIA ON NIELTY: Huuhdo suu. EI saa oksennuttaa.
	SV	VID FÖRTÄRING: Skölj munnen. Framkalla INTE kräkning.

P302 + P334	Taal	
	BG	ПРИ КОНТАКТ С КОЖАТА: Потопете в студена вода/сложете мокри компреси.
	ES	EN CASO DE CONTACTO CON LA PIEL: Sumergir en agua fresca/aplicar compresas húmedas.
	CS	PŘI STYKU S KŮŽÍ: Ponořte do studené vody/zabalte do vlhkého obvazu.
	DA	VED KONTAKT MED HUDEN: Skyl under koldt vand/anvend våde omslag.

P302 + P334	Taal	
	DE	BEI KONTAKT MIT DER HAUT: In kaltes Wasser tauchen/nassen Verband anlegen.
	ET	NAHALE SATTUMISE KORRAL: hoida jahedas vees/panna peale niiske kompress.
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ ΕΠΑΦΗΣ ΜΕ ΤΟ ΔΕΡΜΑ: Πλύντε με άφθονο δροσερό νερό/τυλίξτε με βρεγμένους επίδεσμους.
	EN	IF ON SKIN: Immerse in cool water/wrap in wet bandages.
	FR	EN CAS DE CONTACT AVEC LA PEAU: rincer à l'eau fraîche/poser une compresse humide.
	GA	I gCÁS TEAGMHÁLA LEIS AN gCRAICEANN: Tum in uisce fionnuar/cuir bréid fliuch air.
	IT	IN CASO DI CONTATTO CON LA PELLE: immergere in acqua fredda/avvolgere con un bendaggio umido.
	LV	SASKARĒ AR ĀDU: iegremdēt vēsā ūdenī/ietīt mitros apsējos.
	LT	PATEKUS ANT ODOS: Įmerkti į vėsų vandenį/apvynioti šlapiais tvarščiais.
	HU	HA BŐRRE KERÜL: Hideg vízzel/medves kötésel kell hűteni.
	MT	JEKK FUQ IL-ĠILDA: Dahhal fl-ilma frisk/kebbeb f'faxex imxarrbin.
	NL	BIJ CONTACT MET DE HUID: in koud water onderdompelen/nat verband aanbrengen.
	PL	W PRZYPADKU KONTAKTU ZE SKÓRĄ: Zanurzyć w zimnej wodzie/owinąć mokrym bandażem.
	PT	SE ENTRAR EM CONTACTO COM A PELE: mergulhar em água fria/aplicar compressas húmidas.
	RO	ÎN CAZ DE CONTACT CU PIELEA: introduceți în apă rece/acoperiți cu o compresă umedă.
	SK	PRI KONTAKTE S POKOŽKOU: Ponorte do studenej vody/obviažte mokrými obväzmi.
	SL	PRI STIKU S KOŽO: potopiti v hladno vodo/zaviti v mokre povoje.
	FI	JOS KEMIKAALIA JOUTUU IHOLLE: Upota kylmään veteen/kääri märkiin siteisiin.
	SV	VID HUDKONTAKT: Skölj under kallt vatten/använd våta omslag.

P302 + P350	Taal	
	BG	ПРИ КОНТАКТ С КОЖАТА: Измийте внимателно и обилно със сапун и вода.
	ES	EN CASO DE CONTACTO CON LA PIEL: Lavar suavemente con agua y jabón abundantes.
	CS	PŘI STYKU S KŮŽÍ: Jemně omyjte velkým množstvím vody a mýdla.
	DA	VED KONTAKT MED HUDEN: Vask forsigtigt med rigeligt sæbe og vand.
	DE	BEI KONTAKT MIT DER HAUT: Behutsam mit viel Wasser und Seife waschen.
	ET	NAHALE SATTUMISE KORRAL: pesta õrnalt rohke vee ja seebiga.
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ ΕΠΑΦΗΣ ΜΕ ΤΟ ΔΕΡΜΑ: Πλύντε απαλά με άφθονο νερό και σαπούνι.
	EN	IF ON SKIN: Gently wash with plenty of soap and water.
	FR	EN CAS DE CONTACT AVEC LA PEAU: laver avec précaution et abondamment à l'eau et au savon.
	GA	I gCÁS TEAGMHÁLA LEIS AN gCRAICEANN: Nigh go bog le neart gallúnaí agus uisce.
	IT	IN CASO DI CONTATTO CON LA PELLE: lavare delicatamente e abbondantemente con acqua e sapone.
	LV	SASKARĒ AR ĀDU: maigi nomazgāt ar lielu ziepju un ūdens daudzumu.
	LT	PATEKUS ANT ODOS: Atsargiai nuplauti dideliu kiekiu muilo ir vandens.

P302 + P350	Taal	
	HU	HA BŐRRE KERÜL: Óvatos lemosás bő szappanos vízzel.
	MT	JEKK FUQ IL-ĠILDA: Aħsel bil-mod b'ħafna sapun u ilma.
	NL	BIJ CONTACT MET DE HUID: voorzichtig wassen met veel water en zeep.
	PL	W PRZYPADKU DOSTANIA SIĘ NA SKÓRĘ: Delikatnie umyć dużą ilością wody z mydłem.
	PT	SE ENTRAR EM CONTACTO COM A PELE: lavar suavemente com sabonete e água abundantes.
	RO	ÎN CAZ DE CONTACT CU PIELEA: spălați ușor cu multă apă și săpun.
	SK	PRI KONTAKTE S POKOŽKOU: Opatrne umyte veľkým množstvom vody a mydla.
	SL	PRI STIKU S KOŽO: nežno umiti z veliko mila in vode.
	FI	JOS KEMIKAALIA JOUTUU IHOLLE: Pese varovasti runsaalla vedellä ja saippualla.
	SV	VID HUDKONTAKT: Tvätta försiktigt med mycket tvål och vatten.

P302 + P352	Taal	
	BG	ПРИ КОНТАКТ С КОЖАТА: Измийте обилно със сапун и вода.
	ES	EN CASO DE CONTACTO CON LA PIEL: Lavar con agua y jabón abundantes.
	CS	PŘI STYKU S KŮŽÍ: Omyjte velkým množstvím vody a mýdla.
	DA	VED KONTAKT MED HUDEN: Vask med rigeligt sæbe og vand.
	DE	BEI KONTAKT MIT DER HAUT: Mit viel Wasser und Seife waschen.
	ET	NAHALE SATTUMISE KORRAL: pesta rohke vee ja seebiga.
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ ΕΠΑΦΗΣ ΜΕ ΤΟ ΔΕΡΜΑ: Πλύνετε με άφθονο νερό και σαπούνι.
	EN	IF ON SKIN: Wash with plenty of soap and water.
	FR	EN CAS DE CONTACT AVEC LA PEAU: laver abondamment à l'eau et au savon.
	GA	I gCÁS TEAGMHÁLA LEIS AN gCRAICEANN: Nigh le neart gallúnaí agus uisce.
	IT	IN CASO DI CONTATTO CON LA PELLE: lavare abbondantemente con acqua e sapone.
	LV	SASKARĒ AR ĀDU: nomazgāt ar lielu ziepju un ūdens daudzumu.
	LT	PATEKUS ANT ODOS: Nuplauti dideliu kiekio muilo ir vandens.
	HU	HA BŐRRE KERÜL: Lemosás bő szappanos vízzel.
	MT	JEKK FUQ IL-ĠILDA: Aħsel b'ħafna sapun u ilma.
	NL	BIJ CONTACT MET DE HUID: met veel water en zeep wassen.
	PL	W PRZYPADKU KONTAKTU ZE SKÓRĄ: Umyć dużą ilością wody z mydłem.
	PT	SE ENTRAR EM CONTACTO COM A PELE: lavar com sabonete e água abundantes.
	RO	ÎN CAZ DE CONTACT CU PIELEA: spălați cu multă apă și săpun.
	SK	PRI KONTAKTE S POKOŽKOU: Umyte veľkým množstvom vody a mydla.
	SL	PRI STIKU S KOŽO: umiti z veliko mila in vode.
	FI	JOS KEMIKAALIA JOUTUU IHOLLE: Pese runsaalla vedellä ja saippualla.
	SV	VID HUDKONTAKT: Tvätta med mycket tvål och vatten.

P303 + P361 + P353	Taal	
	BG	ПРИ КОНТАКТ С КОЖАТА (или косата): Незабавно свалете цялото замърсено облекло. Облейте кожата с вода/вземете душ
	ES	EN CASO DE CONTACTO CON LA PIEL (o el pelo): Quitarse inmediatamente las prendas contaminadas. Aclararse la piel con agua o ducharse.
	CS	PŘI STYKU S KŮŽÍ (nebo s vlasy): Veškeré kontaminované části oděvu okamžitě svlékněte. Opláchněte kůži vodou/osprchujte.
	DA	VED KONTAKT MED HUDEN (eller håret): Tilmudset tøj tages straks af/fjernes. Skyl/brus huden med vand.
	DE	BEI KONTAKT MIT DER HAUT (oder dem Haar): Alle beschmutzten, getränkten Kleidungsstücke sofort ausziehen. Haut mit Wasser abwaschen/duschen.
	ET	NAHALE (või juustele) SATTUMISE KORRAL: võtta viivitamata kõik saastunud rõivad seljast. Loputada nahka veega/loputada duši all.
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ ΕΠΑΦΗΣ ΜΕ ΤΟ ΔΕΡΜΑ (ή με τα μαλλιά): Αφαιρέστε αμέσως όλα τα μολυσμένα ενδύματα. Ξεπλύνετε το δέρμα με νερό/στο ντους.
	EN	IF ON SKIN (or hair): Remove/Take off immediately all contaminated clothing. Rinse skin with water/shower.
	FR	EN CAS DE CONTACT AVEC LA PEAU (ou les cheveux): enlever immédiatement les vêtements contaminés. Rincer la peau à l'eau/se doucher.
	GA	I gCÁS TEAGMHÁLA LEIS AN gCRAICEANN(nó le gruaig): Bain díot láithreach na héadaí éillithe go léir. Sruthlaítear an craiceann le huisce/glac cithfholcadh.
	IT	IN CASO DI CONTATTO CON LA PELLE (o con i capelli): togliersi di dosso immediatamente tutti gli indumenti contaminati. Sciacquare la pelle/fare una doccia.
	LV	SASKARĒ AR ĀDU (vai matiēm): nogērbt visu piesārņoto apģērbu. Noskalot ādu ar ūdeni/dušā.
	LT	PATEKUS ANT ODOS (arba plaukų): Nedelsiant nuvilkti/pašalinti visus užterštus drabužius. Odą nuplauti vandeniu/čiurkšle.
	HU	HA BŐRRE (vagy hajra) KERÜL: Az összes szennyezett ruhadarabot azonnal el kell távolítani/le kell vetni. A bőrt le kell öblíteni vízzel/zuhanyozás.
	MT	JEKK FUQ IL-ĠILDA (jew xagħar): Neħħi/inza' minnufih l-ilbies kontaminat. Laħlah il-ġilda bl-ilma/bix-xawer.
	NL	BIJ CONTACT MET DE HUID (of het haar): verontreinigde kleding onmiddellijk uittrekken — huid met water afspoelen/afdouchen.
	PL	W PRZYPADKU KONTATKU ZE SKÓRĄ (lub z włosami): Natychmiast usunąć/zdjąć całą zanieczyszczoną odzież. Spłukać skórę pod strumieniem wody/prysznicem.
	PT	SE ENTRAR EM CONTACTO COM A PELE (ou o cabelo): despir/retirar imediatamente toda a roupa contaminada. Enxaguar a pele com água/tomar um duche.
	RO	ÎN CAZ DE CONTACT CU PIELEA (sau părul): scoateți imediat toată îmbrăcămintea contaminată. Clătiți pielea cu apă/faceți duș.
	SK	PRI KONTAKTE S POKOŽKOU (alebo vlasmi): Odstráňte/vyzlečte všetky kontaminované časti odevu. Pokožku ihneď opláchnite vodou/sprchou.
	SL	PRI STIKU S KOŽO (ali lasmi): takoj odstraniti/sleči vsa kontaminirana oblačila. Izprati kožo z vodo/prho.
	FI	JOS KEMIKAALIA JOUTUU IHOLLE (tai hiuksiin): Riisu saastunut vaatetus välittömästi. Huuho/suihkuta iho vedellä.
	SV	VID HUDKONTAKT (även håret): Ta omedelbart av alla nedstänkta kläder. Skölj huden med vatten/duscha.



P304 + P340	Taal	
	BG	ПРИ ВДИШВАНЕ: Изведете пострадалия на чист въздух и го поставете в позиция, улесняваща дишането.
	ES	EN CASO DE INHALACIÓN: Transportar a la víctima al exterior y mantenerla en reposo en una posición confortable para respirar.
	CS	PŘI VDECHNUTÍ: Přeneste postiženého na čerstvý vzduch a ponechte jej v klidu v poloze usnadňující dýchání.
	DA	VED INDÅNDING: Flyt personen til et sted med frisk luft og sørg for, at vedkommende hviler i en stilling, som letter vejrtrækningen.
	DE	BEI EINATMEN: An die frische Luft bringen und in einer Position ruhigstellen, die das Atmen erleichtert.
	ET	SISSEHINGAMISE KORRAL: toimetada kannatanu värske õhu kätte ja asetada mugavasse puhkeasendisse, mis võimaldab kergesti hingata.
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ ΕΙΣΠΝΟΗΣ: Μεταφέρετε τον παθόντα στον καθαρό αέρα και αφήστε τον να ξεκουραστεί σε στάση που διευκολύνει την αναπνοή.
	EN	IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing.
	FR	EN CAS D'INHALATION: transporter la victime à l'extérieur et la maintenir au repos dans une position où elle peut confortablement respirer.
	GA	MÁ IONÁLAÍTEAR, tabhair amach faoin aer an duine agus coimeád socair é, i riocht ina bhféadfaidh sé anáil a tharraingt go réidh.
	IT	IN CASO DI INALAZIONE: trasportare l'infortunato all'aria aperta e mantenerlo a riposo in posizione che favorisca la respirazione.
	LV	IEELPOŠANAS GADĪJUMĀ: izvest cietušo svaigā gaisā un turēt miera stāvoklī, lai būtu ērti elpot.
	LT	ĮKVĖPUS: Išnešti nukentėjusį į gryną orą; jam būtina ramybė ir padėtis, leidžianti laisvai kvėpuoti.
	HU	BELÉLEGZÉS ESETÉN: Az érintett személyt friss levegőre kell vinni és olyan nyugalmi testhelyzetbe kell helyezni, hogy könnyen tudjon lélegezni.
	MT	JEKK JITTIEHED FIN-NIFS: Esponi lill-vittma għall-arja friska u zommha mistrieħa f'pożizzjoni komda biex tkun tista' tieħu n-nifs.
	NL	NA INADEMING: het slachtoffer in de frisse lucht brengen en laten rusten in een houding die het ademen vergemakkelijkt.
	PL	W PRZYPADKU DOSTANIA SIĘ DO DRÓG ODDECHOWYCH: wyprowadzić lub wynieść poszkodowanego na świeże powietrze i zapewnić warunki do odpoczynku w pozycji umożliwiającej swobodne oddychanie.
	PT	EM CASO DE INALAÇÃO: retirar a vítima para uma zona ao ar livre e mantê-la em repouso numa posição que não dificulte a respiração.
	RO	ÎN CAZ DE INHALARE: transportați victima la aer liber și mențineți-o în stare de repaus, într-o poziție confortabilă pentru respirație.
	SK	PO VDÝCHNUTÍ: Presuňte postihnutého na čerstvý vzduch a nechajte ho oddychovať v polohe, ktorá mu umožní pohodlné dýchanie.
	SL	PRI VDIHAVANJU: prenesti žrtev na svež zrak in jo pustiti počivati v položaju, ki olajša dihanje.
	FI	JOS KEMIKAALIA ON HENGITETTY: Siirrä henkilö raittiiseen ilmaan ja pidä lepoasennossa, jossa on helppo hengittää.
	SV	VID INANDNING: Flytta personen till frisk luft och se till att han eller hon vilar i en ställning som underlättar andningen.

P304 + P341	Taal	
	BG	ПРИ ВДИШВАНЕ: При затруднено дишане изведете пострадалия на чист въздух и го поставете в позиция, улесняваща дишането.
	ES	EN CASO DE INHALACIÓN: Si respira con dificultad, transportar a la víctima al exterior y mantenerla en reposo en una posición confortable para respirar.
	CS	PŘI VDECHNUTÍ: Při obtížném dýchání přeneste postiženého na čerstvý vzduch a ponechte jej v klidu v poloze usnadňující dýchání.
	DA	VED INDÅNDING: Ved vejrtrækningsbesvær: Flyt personen til et sted med frisk luft og sørg for, at vedkommende hviler i en stilling, som letter vejrtrækningen.
	DE	BEI EINATMEN: Bei Atembeschwerden an die frische Luft bringen und in einer Position ruhigstellen, die das Atmen erleichtert.
	ET	SISSEHINGAMISE KORRAL: hingamisraskuste korral toimetada kannatanu värske õhu kätte ja asetada mugavasse puhkeasendisse, mis võimaldab kergesti hingata.
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ ΕΙΣΠΝΟΗΣ: Εάν ο παθών έχει δύσπνοια, μεταφέρετέ τον στον καθαρό αέρα και αφήστε τον να ξεκουραστεί σε στάση που διευκολύνει την αναπνοή.
	EN	IF INHALED: If breathing is difficult, remove victim to fresh air and keep at rest in a position comfortable for breathing.
	FR	EN CAS D'INHALATION: s'il y a difficulté à respirer, transporter la victime à l'extérieur et la maintenir au repos dans une position où elle peut confortablement respirer.
	GA	MÁ THÉANN AN TÁIRGE SEO LE HANÁIL DUINE, tabhair amach faoin aer an duine agus coimeád socair é, i riocht ina bhféadfaidh sé anáil a tharraingt go réidh.
	IT	IN CASO DI INALAZIONE: se la respirazione è difficile, trasportare l'infortunato all'aria aperta e mantenerlo a riposo in posizione che favorisca la respirazione.
	LV	IEELPOŠANAS GADĪJUMĀ: ja elpošana ir apgrūtināta, izvest cietušo svaigā gaisā un turēt miera stāvoklī, lai būtu ērti elpot.
	LT	ĮKVĖPUS: Jeigu nukentėjusiajam sunku kvėpuoti, išnešti jį į gryną orą; jam būtina ramybė ir padėtis, leidžianti laisvai kvėpuoti.
	HU	BELÉLEGZÉS ESETÉN: Légzési nehézségek esetén az érintett személyt friss levegőre kell vinni és olyan nyugalmi testhelyzetbe kell helyezni, hogy könnyen tudjon lélegezni.
	MT	JEKK JITTIEHED FIN-NIFS: Jekk in-nifs ikun diffiċli, esponi lill-vittma għall-arja friska u zommha mistrieħa f'pożizzjoni komda biex tkun tista' tieħu n-nifs.
	NL	NA INADEMING: bij ademhalingsmoeilijkheden het slachtoffer in de frisse lucht brengen en laten rusten in een houding die het ademen vergemakkelijkt.
	PL	W PRZYPADKU DOSTANIA SIĘ DO DRÓG ODDECHOWYCH: W przypadku trudności z oddychaniem, wyprowadzić lub wynieść poszkodowanego na świeże powietrze i zapewnić warunki do odoczynku w pozycji umożliwiającej swobodne oddychanie.
	PT	EM CASO DE INALAÇÃO: em caso de dificuldade respiratória, retirar a vítima para uma zona ao ar livre e mantê-la em repouso numa posição que não dificulte a respiração.
	RO	ÎN CAZ DE INHALARE: dacă respirația este dificilă, transportați victima la aer liber și mențineți-o în stare de repaus, într-o poziție confortabilă pentru respirație.
	SK	PO VDÝCHNUTÍ: Ak nastanú ťažkosti s dýchaním, presuňte postihnutého na čerstvý vzduch a nechajte ho oddychovať v polohe, ktorá mu umožní pohodlné dýchanie.
	SL	PRI VDIHAVANJU: prenesti žrtev pri oteženem dihanju na svež zrak in jo pustiti počivati v položaju, ki olajša dihanje.
	FI	JOS KEMIKAALIA ON HENGITETTY: Jos hengitysvaikeuksia, siirrä henkilö raittiseen ilmaan ja pidä lepoasennossa, jossa on helppo hengittää.
	SV	VID INANDNING: Vid andningsbesvär, flytta personen till frisk luft och se till att han eller hon vilar i en ställning som underlättar andningen.

P305 + P351 + P338	Taal	
	BG	ПРИ КОНТАКТ С ОЧИТЕ: Промивайте внимателно с вода в продължение на няколко минути. Свалете контактните лещи, ако има такива и доколкото това е възможно. Продължавайте да промивате.
	ES	EN CASO DE CONTACTO CON LOS OJOS: Aclarar cuidadosamente con agua durante varios minutos. Quitar las lentes de contacto, si lleva y resulta fácil. Seguir aclarando.
	CS	PŘI ZASAŽENÍ OČÍ: Několik minut opatrně vyplachujte vodou. Vyjměte kontaktní čočky, jsou-li nasazeny a pokud je lze vyjmout snadno. Pokračujte ve vyplachování.
	DA	VED KONTAKT MED ØJNENE: Skyl forsigtigt med vand i flere minutter. Fjern eventuelle kontaktlinser, hvis dette kan gøres let. Fortsæt skylning.
	DE	BEI KONTAKT MIT DEN AUGEN: Einige Minuten lang behutsam mit Wasser spülen. Vorhandene Kontaktlinsen nach Möglichkeit entfernen. Weiter spülen.
	ET	SILMA SATTUMISE KORRAL: loputada mitme minuti jooksul ettevaatlikult veega. Eemaldada kontaktläätsed, kui neid kasutatakse ja kui neid on kerge eemaldada. Loputada veel kord.
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ ΕΠΑΦΗΣ ΜΕ ΤΑ ΜΑΤΙΑ: Ξεπλύνετε προσεκτικά με νερό για αρκετά λεπτά. Εάν υπάρχουν φακοί επαφής, αφαιρέστε τους, εφόσον είναι εύκολο. Συνεχίστε να ξεπλένετε.
	EN	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
	FR	EN CAS DE CONTACT AVEC LES YEUX: rincer avec précaution à l'eau pendant plusieurs minutes. Enlever les lentilles de contact si la victime en porte et si elles peuvent être facilement enlevées. Continuer à rincer.
	GA	I gCÁS TEAGMHÁLA LEIS NA SÚILE: Sruthlaigh go cúramach le huisce ar feadh roinnt nóiméad. Tóg amach na tadhall-lionsaí, más ann dóibh agus más furasta. Lean den sruthlú.
	IT	IN CASO DI CONTATTO CON GLI OCCHI: sciacquare accuratamente per parecchi minuti. Togliere le eventuali lenti a contatto se è agevole farlo. Continuare a sciacquare.
	LV	SASKARĒ AR ACĪM: uzmanīgi izskalot ar ūdeni vairākas minūtes. Izņemt kontaktlēcas, ja tās ir ievietotas un ja to ir viegli izdarīt. Turpināt skalot.
	LT	PATEKUS Į AKIS: Kelias minutes atsargiai plauti vandeniu. Išimti kontaktinius lęšius, jeigu jie yra ir jeigu lengvai galima tai padaryti. Toliau plauti akis.
	HU	SZEMBE KERÜLÉS esetén: Több percig tartó óvatos öblítés vízzel. Adott esetben a kontaktlencsék eltávolítása, ha könnyen megoldható. Az öblítés folytatása.
	MT	JEKK JIDHOL FL-GHAJNEJN: Lahlah b'attenzjoni bl-ilma għal diversi minuti. Nehhi l-lentijiet tal-kuntatt, jekk ikun hemm u jkunu faċli biex tnehhihom. Komplli lahlah.
	NL	BIJ CONTACT MET DE OGEN: voorzichtig afspoelen met water gedurende een aantal minuten; contactlenzen verwijderen, indien mogelijk; blijven spoelen.
	PL	W PRZYPADKU DOSTANIA SIĘ DO OCZU: Ostrożnie płukać wodą przez kilka minut. Wyjąć soczewki kontaktowe, jeżeli są i można je łatwo usunąć. Nadal płukać.
	PT	SE ENTRAR EM CONTACTO COM OS OLHOS: enxaguar cuidadosamente com água durante vários minutos. Se usar lentes de contacto, retire-as, se tal lhe for possível. Continuar a enxaguar.
	RO	ÎN CAZ DE CONTACT CU OCHII: clătiți cu atenție cu apă timp de mai multe minute. Scoateți lentilele de contact, dacă este cazul și dacă acest lucru se poate face cu ușurință. Continuați să clătiți.
	SK	PO ZASIAHNUTÍ OČÍ: Niekoľko minút ich opatrne vyplachujte vodou. Ak používate kontaktné šošovky a ak je to možné, odstráňte ich. Pokračujte vo vyplachovaní.
	SL	PRI STIKU Z OČMI: previdno izpirajte z vodo nekaj minut. Odstranite kontaktne leče, če jih imate in če to lahko storite brez težav. Nadaljujte z izpiranjem.
	FI	JOS KEMIKAALIA JOUTUU SILMIIN: Huuhdo huolellisesti vedellä usean minuutin ajan. Poista piilolinsit, _edical voi tehdä helposti. Jatka huuhtomista.
	SV	VID KONTAKT MED ÖGONEN: Skölj försiktigt med vatten i flera minuter. Ta ur eventuella kontaktlinser om det går lätt. Fortsätt att skölja.

P306 + P360	Taal	
	BG	ПРИ ПОПАДАНЕ ВЪРХУ ОБЛЕКЛОТО: незабавно облейте замърсеното облекло и кожата обилно с вода, преди да свалите дрехите.
	ES	EN CASO DE CONTACTO CON LA ROPA: Aclarar inmediatamente con agua abundante las prendas y la piel contaminadas antes de quitarse la ropa.
	CS	PŘI STYKU S ODĚVEM: Kontaminovaný oděv a kůži okamžitě omyjte velkým množstvím vody a potom oděv odložte.
	DA	VED KONTAKT MED TØJET: Skyl omgående tilsmudset tøj og hud med rigeligt vand, før tøjet fjernes.
	DE	BEI KONTAKT MIT DER KLEIDUNG: Kontaminierte Kleidung und Haut sofort mit viel Wasser abwaschen und danach Kleidung ausziehen.
	ET	RÕIVASTELE SATTUMISE KORRAL: saastunud rõivad ja nahk loputada viivitamata rohke veega ning alles seejärel rõivad eemaldada.
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ ΕΠΑΦΗΣ ΜΕ ΤΑ ΡΟΥΧΑ: Ξεπλύντε αμέσως τα μολυσμένα ρούχα και την επιδερμίδα με άφθονο νερό πριν αφαιρέσετε τα ρούχα.
	EN	IF ON CLOTHING: rinse immediately contaminated clothing and skin with plenty of water before removing clothes.
	FR	EN CAS DE CONTACT AVEC LES VÊTEMENTS: rincer immédiatement et abondamment avec de l'eau les vêtements contaminés et la peau avant de les enlever.
	GA	I gCÁS TEAGMHÁLA LE HÉADAÍ: sruthlaítear éadaí éillithe agus an craiceann láithreach le neart uisce sula ndéantar na héadaí a bhaint den duine.
	IT	IN CASO DI CONTATTO CON GLI INDUMENTI: sciacquare immediatamente e abbondantemente gli indumenti contaminati e la pelle prima di togliersi gli indumenti.
	LV	SASKARĒ AR APĢĒRBŪ: nekavējoties izskalot piesārņoto apģērbu un ādu ar lielu daudzumu ūdeni, pirms apģērba novilkšanas.
	LT	PATEKUS ANT DRABUŽIŲ: Prieš nuvelkant užterštus drabužius, nedelsiant juos ir odą nuplauti dideliu kiekiu vandens.
	HU	HA RUHÁRA KERÜL: A ruhák levetése előtt a szennyezett ruházatot és a bőrt bő vízzel azonnal le kell öblíteni.
	MT	JEKK FUQ L-ILBIES: laħlah mall-ewwel l-ilbies ikkontaminat u l-ġilda b'ħafna ilma qabel ma tneħhi l-ilbies.
	NL	NA MORSEN OP KLEDING: verontreinigde kleding en huid onmiddellijk met veel water afspoelen en pas daarna kleding uittrekken.
	PL	W PRZYPADKU KONTAKTU Z ODZIEŻĄ: natychmiast spłukać zanieczyszczoną odzież i skórę dużą ilością wody przed zdjęciem odzieży.
	PT	SE ENTRAR EM CONTACTO COM A ROUPA: enxaguar imediatamente com muita água a roupa e a pele contaminadas antes de se despir.
	RO	ÎN CAZ DE CONTACT CU ÎMBRĂCĂMINTEA: clătiți imediat îmbrăcămintea contaminată și pielea cu multă apă, înainte de scoaterea îmbrăcămintei.
	SK	PRI KONTAKTE S ODEVOM: kontaminovaný odev a pokožku opláchnite velkým množstvóm vody a potom odev odstráňte.
	SL	PRI STIKU Z OBLAČILI: takoj izprati kontaminirana oblačila in kožo z veliko vode pred odstranitvijo oblačil.
	FI	JOS KEMIKAALIA JOUTUU VAATTEISIIN: Huuho saastunut vaatus ja iho välittömästi runsaalla vedellä ennen vaatetuksen riisumista.
	SV	VID KONTAKT MED KLÄDERNA: Skölj omedelbart nedstänkta kläder och hud med mycket vatten innan du tar av dig kläderna.

P307 + P311	Taal	
	BG	ПРИ експозиция: Обадете се в ЦЕНТЪР ПО ТОКСИКОЛОГИЯ или на лекар.
	ES	EN CASO DE exposición: Llamar a un CENTRO DE INFORMACIÓN TOXICOLÓGICA o a un médico.
	CS	PŘI expozici: Volejte TOXIKOLOGICKÉ INFORMAČNÍ STŘEDISKO nebo lékaře.
	DA	VED eksponering: Ring til en GIFTINFORMATION eller en læge.
	DE	BEI Exposition: GIFTINFORMATIONSZENTRUM oder Arzt anrufen.
	ET	Kokkupuute korral: võtta ühendust MÜRGISTUSTEABEKESKUSE või arstiga.
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ έκθεσης: Καλέστε το ΚΕΝΤΡΟ ΔΗΛΗΤΗΡΙΑΣΕΩΝ ή ένα γιατρό.
	EN	IF exposed: Call a POISON CENTER or doctor/physician.
	FR	EN CAS d'exposition: appeler un CENTRE ANTIPOISON ou un médecin.
	GA	I gCÁS noichta: Cuir glao ar IONAD NIMHE nó ar dhochtúir/lia.
	IT	IN CASO di esposizione, contattare un CENTRO ANTIVELENI o un medico.
	LV	Ja ir saskarē: Sazināties ar SAINDĒŠANĀS CENTRU vai ārstu.
	LT	Esant sąlyčiui: Skambinti į APSINUODIJIMŲ KONTROLĖS IR INFORMACIJOS BIURĄ arba kreiptis į gydytoją.
	HU	Expozíció esetén: forduljon TOXIKOLÓGIAI KÖZPONTHOZ vagy orvoshoz.
	MT	Jekk espost: Ikkuntattja ĊENTRU TA' L-AVVELENAMENT jew tabib.
	NL	NA blootstelling: een ANTIGIFCENTRUM of een arts raadplegen.
	PL	W przypadku narażenia: Skontaktować się z OŚRODKIEM ZATRUĆ lub z lekarzem.
	PT	EM CASO DE exposição: contacte um CENTRO DE INFORMAÇÃO ANTIVENENOS ou um médico.
	RO	ÎN CAZ DE expunere: sunați la un CENTRU DE INFORMARE TOXICOLOGICĂ sau un medic.
	SK	Po expozícii: volajte NÁRODNÉ TOXIKOLOGICKÉ INFORMAČNÉ CENTRUM alebo lekára.
	SL	PRI izpostavljenosti: pokličite CENTER ZA ZASTRUPITVE ali zdravnika.
	FI	Altistumisen tapahduttua: Ota yhteys MYRKYTYSTIETOKESKUKSEEN tai lääkäriin.
	SV	Om du exponerats: Kontakta GIFTINFORMATIONSCENTRAL eller läkare.
P308 + P313	Taal	
	BG	ПРИ явна или предполагаема експозиция: Потърсете медицински съвет/помощ.
	ES	EN CASO DE exposición manifiesta o presunta: Consultar a un médico.
	CS	PŘI expozici nebo podezření na ni: Vyhleďte lékařskou pomoc/ošetření.
	DA	VED eksponering eller mistanke om eksponering: Søg lægehjælp.
	DE	BEI Exposition oder falls betroffen: Ärztlichen Rat einholen/ärztliche Hilfe hinzuziehen.
	ET	Kokkupuute või kokkupuutekahtluse korral: pöörduda arsti poole.
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ έκθεσης ή πιθανότητας έκθεσης: Συμβουλευθείτε/Επισκεφθείτε γιατρό.
	EN	IF exposed or concerned: Get medical advice/attention.
	FR	EN CAS d'exposition prouvée ou suspectée: consulter un médecin.
	GA	I gCÁS noichta nó má mheastar a bheith nochtaithe: Faigh comhairle/cúram liachta.

P308 + P313	Taal	
	IT	IN CASO di esposizione o di possibile esposizione, consultare un medico.
	LV	Ja nokļūst saskarē vai saistīts ar to: lūdziet mediķu palīdzību.
	LT	Esant sąlyčiui arba jeigu numanomas sąlytis: kreiptis į gydytoją.
	HU	Expozíció vagy annak gyanúja esetén: orvosi ellátást kell kérni.
	MT	Jekk espost jew konċernat: Ikkonsulta tabib.
	NL	NA (mogelijke) blootstelling: een arts raadplegen.
	PL	W przypadku narażenia lub styczności: Zasięgnąć porady/zgłosić się pod opiekę lekarza.
	PT	EM CASO DE exposição ou suspeita de exposição: consulte um médico.
	RO	ÎN CAZ DE expunere sau de posibilă expunere: consultați medicul.
	SK	Po expozícii alebo podozrení z nej: Vyhľadajte lekársku pomoc/starostlivosť.
	SL	PRI izpostavljenosti ali sumu izpostavljenosti: poiščite zdravniško pomoč/oskrbo.
	FI	Altistumisen tapahduttua tai jos epäillään altistumista: Hakeudu lääkäriin.
	SV	Vid exponering eller misstanke om exponering Sök läkarhjälp.
P309 + P311	Taal	
	BG	ПРИ експозиция или неразположение: Обадете се в ЦЕНТЪР ПО ТОКСИКОЛОГИЯ или на лекар.
	ES	EN CASO DE exposición o si se encuentra mal: Llamar a un CENTRO DE INFORMACIÓN TOXICOLÓGICA o a un médico.
	CS	PŘI expozici nebo necítíte-li se dobře: Volejte TOXIKOLOGICKÉ INFORMAČNÍ STŘEDISKO nebo lékaře.
	DA	VED eksponering eller ubehag: Ring til en GIFTINFORMATION eller en læge.
	DE	BEI Exposition oder Unwohlsein: GIFTINFORMATIONSZENTRUM oder Arzt anrufen.
	ET	Kokkupuute või halva enesetunde korral: võtta ühendust MÜRGIKUSTEABEKESKUSE või arstiga.
	EL	ΣΕ ΠΕΡΙΠΤΩΣΗ έκθεσης ή αδιαθεσίας: Καλέστε το ΚΕΝΤΡΟ ΔΗΛΗΘΗΡΙΑΣΕΩΝ ή ένα γιατρό.
	EN	IF exposed or if you feel unwell: Call a POISON CENTER or doctor/physician.
	FR	EN CAS d'exposition ou de malaise: appeler un CENTRE ANTIPOISON ou un médecin.
	GA	I gCÀS nochta nó má bhraitear tinn: Cuir glao ar IONAD NIMHE nó ar dhochtúir/lia.
	IT	IN CASO di esposizione o di malessere, contattare un CENTRO ANTIVELENI o un medico.
	LV	Ja nokļūst saskarē vai jums ir slikta pašsajūta: sazinieties ar SAINDĒŠANĀS CENTRU vai ārstu.
	LT	Esant sąlyčiui arba pasijutus blogai: Skambinti į APSINUODIJIMŲ KONTROLĖS IR INFORMACIJOS BIURĄ arba kreiptis į gydytoją.
	HU	Expozíció vagy rosszullét esetén: forduljon TOXIKOLÓGIAI KÖZPONTHOZ vagy orvoshoz.
	MT	JEKK espost jew thossok ma tiflahx: Ikkuntattja ĊENTRU TA' L-AVVELENAMENT jew tabib.
	NL	NA blootstelling of bij onwel voelen: een ANTIGIFCENTRUM of een arts raadplegen.
	PL	W przypadku narażenia lub złego samopoczucia: Skontaktować się z OŚRODKIEM ZATRUC lub z lekarzem.
	PT	EM CASO DE exposição ou de indisposição: contacte um CENTRO DE INFORMAÇÃO ANTIVENENOS ou um médico.

P309 + P311	Taal	
	RO	În CAZ DE expunere sau dacă nu vă simțiți bine: sunați la un CENTRU DE INFORMARE TOXICOLOGICĂ sau un medic.
	SK	Po expozícii alebo pri zdravotných problémoch: volajte NÁRODNÉ TOXIKOLOGICKÉ INFORMAČNÉ CENTRUM alebo lekára.
	SL	PRI izpostavljenosti ali slabem počutju: pokličite CENTER ZA ZASTRUPITVE ali zdravnika.
	FI	Altistumisen tapahduttua tai jos ilmenee pahoinvointia: Ota yhteys MYRKYTYSTIETO-SKESKUKSEEN tai lääkäriin.
	SV	Vid exponering eller obehag: Kontakta GIFTINFORMATIONSCENTRAL eller läkare.
P332 + P313	Taal	
	BG	При поява на кожно дразнене: Потърсете медицински съвет/помощ.
	ES	En caso de irritación cutánea: Consultar a un médico.
	CS	Při podráždění kůže: Vyhleďte lékařskou pomoc/ošetření.
	DA	Ved hudirritation: Søg lægehjælp.
	DE	Bei Hautreizung: Ärztlichen Rat einholen/ärztliche Hilfe hinzuziehen.
	ET	Nahaärrituse korral: pöörduda arsti poole.
	EL	Εάν παρατηρηθεί ερεθισμός του δέρματος: Συμβουλευθείτε/Επισκεφθείτε γιατρό.
	EN	If skin irritation occurs: Get medical advice/attention.
	FR	En cas d'irritation cutanée: consulter un médecin.
	GA	I gcás greannú craicinn: Faigh comhairle/cúram liachta.
	IT	In caso di irritazione della pelle: consultare un medico.
	LV	Ja rodas ādas iekaisums: lūdziet medicīnu palīdzību.
	LT	Jeigu sudirginama oda: kreiptis į gydytoją.
	HU	Bőrirritáció esetén: orvosi ellátást kell kérni.
	MT	Jekk ikun hemm irritazzjoni tal-gilda: Ikkonsulta tabib.
	NL	Bij huidirritatie: een arts raadplegen.
	PL	W przypadku wystąpienia podrażnienia skóry: Zasięgnąć porady/zgłosić się pod opiekę lekarza.
	PT	Em caso de irritação cutânea: consulte um médico.
	RO	În caz de iritare a pielii: consultați medicul.
	SK	Ak sa objaví podráždenie pokožky, vyhľadajte lekársku pomoc/starostlivosť.
	SL	Če nastopi draženje kože: poiščite zdravniško pomoč/oskrbo.
	FI	Jos ilmenee ihoärsytystä: Hakeudu lääkäriin.
	SV	Vid hudirritation: Sök läkarhjälp.
P333 + P313	Taal	
	BG	При поява на кожно дразнене или обрив на кожата: Потърсете медицински съвет/помощ.
	ES	En caso de irritación o erupción cutánea: Consultar a un médico.
	CS	Při podráždění kůže nebo vyrážce: Vyhleďte lékařskou pomoc/ošetření.

P333 + P313	Taal	
	DA	Ved hudirritation eller udslet: Søg lægehjælp.
	DE	Bei Hautreizung oder -ausschlag: Ärztlichen Rat einholen/ärztliche Hilfe hinzuziehen.
	ET	Nahaärrituse või _obe korral: pöörduda arsti poole.
	EL	Εάν παρατηρηθεί ερεθισμός του δέρματος ή εμφανιστεί εξάνθημα: Συμβουλευθείτε/Επισκεφθείτε γιατρό.
	EN	If skin irritation or rash occurs: Get medical advice/attention.
	FR	En cas d'irritation ou d'éruption cutanée: consulter un médecin.
	GA	Má tharlaíonn greannú nó gríos craicinn: Faigh comhairle/cúram liachta.
	IT	In caso di irritazione o eruzione della pelle: consultare un medico.
	LV	Ja rodas ādas iekaisums vai izsitumi: lūdziet medicīnu palīdzību.
	LT	Jeigu sudirginama oda arba ją išberia: kreiptis į gydytoją.
	HU	Bőrirritáció vagy kiütések megjelenése esetén: orvosi ellátást kell kérni.
	MT	Jekk ikun hemm irritazzjoni jew raxx tal-ġilda: Ikkonsulta tabib.
	NL	Bij huidirritatie of uitslag: een arts raadplegen.
	PL	W przypadku wystąpienia podrażnienia skóry lub wysypki: Zasięgnąć porady/zgłosić się pod opiekę lekarza.
	PT	Em caso de irritação ou erupção cutânea: consulte um médico.
	RO	În caz de iritare a pielii sau de erupție cutanată: consultați medicul.
	SK	Ak sa prejaví podráždenie pokožky alebo sa vytvoria vyrážky: vyhľadajte lekársku pomoc/starostlivosť.
	SL	Če nastopi draženje kože ali se pojavijo izpuščaji: poiščite zdravniško pomoč/oskrbo.
	FI	Jos ilmenee ihoärsytystä tai ihottumaa: Hakeudu lääkäriin.
	SV	Vid hudirritation eller utslag: Sök läkarhjälp.
P335 + P334	Taal	
	BG	Отстранете посипаните частици от кожата. Потопете в хладка вода/сложете мокри компреси.
	ES	Sacudir las partículas que se hayan depositado en la piel. Sumergir en agua fresca/aplicar compresas húmedas.
	CS	Volné částice odstraňte z kůže. Ponořte do studené vody/zabalte do vlhkého obvazu.
	DA	Børst løse partikler bort fra huden. Skyl under koldt vand/anvend våde omslag.
	DE	Lose Partikel von der Haut abbürsten. In kaltes Wasser tauchen/nassen Verband anlegen.
	ET	Pühkida lahtised osakesed nahalt maha. Hoida jahedas vees / panna peale niiske kompress.
	EL	Αφαιρέστε προσεκτικά τα σωματίδια που έχουν μείνει στο δέρμα. Πλύντε με άφθονο δροσερό νερό/τυλίξτε με βρεγμένους επιδέσμους.
	EN	Brush off loose particles from skin. Immerse in cool water/wrap in wet bandages.
	FR	Enlever avec précaution les particules déposées sur la peau. Rincer à l'eau fraîche/poser une compresse humide.
	GA	Scuab cáithníní scaoilte den chraiceann. Tum in uisce fionnuar/cuir bréid fliuch air.
	IT	Rimuovere le particelle depositate sulla pelle. Immergere in acqua fredda/avvolgere con un bendaggio umido.
	LV	Noberziet brīvās daļiņas no ādas. Iegremdējiet vēsā ūdenī/ietiniet mitros apsējos.



P335 + P334	Taal	
	LT	Nepriilipusias daleles nuvalyti nuo odos. Įmerkti į vėsų vandenį/apvynioti šlapiais tvarščiais.
	HU	A bőrre tapadó szemcséket óvatosan le kell kefélni. Hideg vízzel/nedves kötéssel kell hűteni.
	MT	Farfar il-frac mhux imwahhal minn mal-ġilda. Dahhal fl-ilma frisk/kebbeb f'faxex imxarrbin.
	NL	Losse deeltjes van de huid afvegen. In koud water onderdompelen/nat verband aanbrengen.
	PL	Nie związaną pozostałość strzepnąć ze skóry. Zanurzyć w zimnej wodzie/owinąć mokrym bandażem.
	PT	Sacudir da pele as partículas soltas. Mergulhar em água fria/aplicar compressas húmidas.
	RO	Îndepărtați particulele depuse pe piele. Introduceți în apă rece/acoperiți cu o compresă umedă.
	SK	Z pokožky oprášte sypké čiastočky. Ponorte do studenej vody/obviažte mokrými obväzmi.
	SL	S krtačo odstraniti razsute delce s kože. Potopiti v hladno vodo/zaviti v mokre povoje.
	FI	Poista irtohiukkaset iholta. Upota kylmään veteen/kääri märkiin siteisiin.
	SV	Borsta bort lösa partiklar från huden. Skölj under kallt vatten/använd våta omslag.
P337 + P313	Taal	
	BG	При продължително дразнене на очите: Потърсете медицински съвет/помощ.
	ES	Si persiste la irritación ocular: Consultar a un médico.
	CS	Přetrvává-li podráždění očí: Vyhleďte lékařskou pomoc/ošetření.
	DA	Ved vedvarende øjenirritation: Søg lægehjælp.
	DE	Bei anhaltender Augenreizung: Ärztlichen Rat einholen/ärztliche Hilfe hinzuziehen.
	ET	Kui silmade ärritus ei möödu: pöörduda arsti poole.
	EL	Εάν δεν υποχωρεί ο οφθαλμικός ερεθισμός: Συμβουλευθείτε/Επισκεφθείτε γιατρό.
	EN	If eye irritation persists: Get medical advice/attention.
	FR	Si l'irritation oculaire persiste: consulter un médecin.
	GA	Má mhaireann an greannú súile: Faigh comhairle/cúram liachta.
	IT	Se l'irritazione degli occhi persiste, consultare un medico.
	LV	Ja acu iekaisums nepāriet: lūdziet mediķu palīdzību.
	LT	Jei akių dirginimas nepraeina: kreiptis į gydytoją.
	HU	Ha a szemirritáció nem múlik el: orvosi ellátást kell kérni.
	MT	Jekk l-irritazzjoni ta' l-għajnejn tippersisti: Ikkonsulta tabib.
	NL	Bij aanhoudende oogirritatie: een arts raadplegen.
	PL	W przypadku utrzymywania się działania drażniącego na oczy: Zasięgnąć porady/zgłosić się pod opiekę lekarza.
	PT	Caso a irritação ocular persista: consulte um médico.
	RO	Dacă iritarea ochilor persistă: consultați medicul.
	SK	Ak podráždenie očí pretrváva: vyhľadajte lekársku pomoc/starostlivosť.
	SL	Če draženje oči ne preneha: poiščite zdravniško pomoč/oskrbo.

P337 + P313	Taal	
	FI	Jos silmä-ärsytys jatkuu: Hakeudu lääkäriin.
	SV	Vid bestående ögonirritation: Sök läkarhjälp.
P342 + P311	Taal	
	BG	При симптоми на затруднено дишане: Обадете се в ЦЕНТЪР ПО ТОКСИКОЛОГИЯ или на лекар.
	ES	En caso de síntomas respiratorios: Llamar a un CENTRO DE INFORMACIÓN TOXICOLÓGICA o a un médico.
	CS	Při dýchacích potížích: Volejte TOXIKOLOGICKÉ INFORMAČNÍ STŘEDISKO nebo lékaře.
	DA	Ved luftvejssymptomer: Ring til en GIFTINFORMATION eller en læge.
	DE	Bei Symptomen der Atemwege: GIFTINFORMATIONSZENTRUM oder Arzt anrufen.
	ET	Hingamisteede probleemide ilmnemise korral: võtta ühendust MÜRGISTUSTEABEKESKUSE või arstiga.
	EL	Εάν παρουσιάζονται αναπνευστικά συμπτώματα: Καλέστε το ΚΕΝΤΡΟ ΔΗΛΗΤΗΡΙΑΣΕΩΝ ή ένα γιατρό.
	EN	If experiencing respiratory symptoms: Call a POISON CENTER or doctor/physician.
	FR	En cas de symptômes respiratoires: appeler un CENTRE ANTIPOISON ou un médecin.
	GA	I gcás siomptóm riospráide: Cuir glao ar IONAD NIMHE nó ar dhochtúir/lia.
	IT	In caso di sintomi respiratori: contattare un CENTRO ANTIVELENI o un medico.
	LV	Ja rodas elpas trūkuma simptomi: sazinieties ar SAINDĒŠANĀS CENTRU vai ārstu.
	LT	Jeigu pasireiškia respiraciniai simptomai: skambinti į APSINUODIJIMŲ KONTROLĖS IR INFORMACIJOS BIURĄ arba kreiptis į gydytoją.
	HU	Légzési problémák esetén: forduljon TOXIKOLÓGIAI KÖZPONTHOZ vagy orvoshoz.
	MT	Jekk ikollok sintomi respiratorji: Ikkuntattja ĊENTRU TA' L-AVVELENAMENT jew tabib.
	NL	Bij ademhalings symptomen: een ANTIGIFCENTRUM of een arts raadplegen.
	PL	W przypadku wystąpienia objawów ze strony układu oddechowego: Skontaktować się z OŚRODKIEM ZATRUCI lub z lekarzem.
	PT	Em caso de sintomas respiratórios: contacte um CENTRO DE INFORMAÇÃO ANTIVENENOS ou um médico.
	RO	În caz de simptome respiratorii: sunați la un CENTRU DE INFORMARE TOXICOLOGICĂ sau un medic.
	SK	Pri ťažkostiach s dýchaním: volajte NÁRODNÉ TOXIKOLOGICKÉ INFORMAČNÉ CENTRUM alebo lekára.
	SL	Pri respiratornih simptomih: pokličite CENTER ZA ZASTRUPITVE ali zdravnika.
	FI	Jos ilmenee hengitysoireita: Ota yhteys MYRKYTYSTIETOKESKUKSEEN tai lääkäriin.
	SV	Vid besvär i luftvägarna: Kontakta GIFTINFORMATIONSCENTRAL eller läkare.
P370 + P376	Taal	
	BG	При пожар: Спрете теча, ако е безопасно.
	ES	En caso de incendio: Detener la fuga, si no hay peligro en hacerlo.
	CS	V případě požáru: Zastavte únik, můžete-li tak učinit bez rizika.
	DA	Ved brand: Stands lækagen, hvis dette er sikkert.

P370 + P376	Taal	
	DE	Bei Brand: Undichtigkeit beseitigen, wenn gefahrlos möglich.
	ET	Tulekahju korral: leke peatada, kui seda on võimalik teha ohutult.
	EL	Σε περίπτωση πυρκαγιάς: Σταματήστε τη διαρροή, εφόσον δεν υπάρχει κίνδυνος.
	EN	In case of fire: Stop leak if safe to do so.
	FR	En cas d'incendie: obturer la fuite si cela peut se faire sans danger.
	GA	I gcás dóiteáin: Cuir stop leis an sceitheadh má tá sé sábháilte é sin a dhéanamh.
	IT	In caso di incendio: bloccare la perdita se non c'è pericolo.
	LV	Ugunsgrēka gadījumā: apturiet noplūdi, ja to darīt ir droši.
	LT	Gaisro atveju: sustabdyti nuotėkį, jeigu galima saugiai tai padaryti.
	HU	Tűz esetén: Meg kell szüntetni a szivárgást, ha ez biztonságosan megtehető.
	MT	F'każ ta' nar: Waqqaf it-tnixxija sakemm ma jkunx ta' periklu.
	NL	In geval van brand: het lek dichten als dat veilig gedaan kan worden.
	PL	W przypadku pożaru: Jeżeli jest to bezpieczne zahamować wyciek.
	PT	Em caso de incêndio: deter a fuga se tal puder ser feito em segurança.
	RO	În caz de incendiu: opriți scurgerea, dacă acest lucru se poate face în siguranță.
	SK	V prípade požiaru: ak je to bezpečné, zastavte únik.
	SL	Ob požaru: zaustaviti puščanje, če je varno.
	FI	Tulipalon sattuesssa: Sulje vuoto, jos sen voi tehdä turvallisesti.
	SV	Vid brand: Stoppa läckan om det kan göras på ett säkert sätt.
P370 + P378	Taal	
	BG	При пожар: Използвайте ... за гасене.
	ES	En caso de incendio: Utilizar ... para apagarlo.
	CS	V případě požáru: K hašení použijte ....
	DA	Ved brand: Anvend ... til brandslukning.
	DE	Bei Brand: ... zum Löschen verwenden.
	ET	Tulekahju korral: kasutada kustutamiseks ....
	EL	Σε περίπτωση πυρκαγιάς: Χρησιμοποιήστε ... για την κατάσβεση.
	EN	In case of fire: Use ... for extinction.
	FR	En cas d'incendie: utiliser ... pour l'extinction.
	GA	I gcás dóiteáin: Úsáid ... le haghaidh múchta.
	IT	In caso di incendio: estinguere con....
	LV	Ugunsgrēka gadījumā: dzēšanai izmantojiet ...
	LT	Gaisro atveju: gesinimui naudoti ...
	HU	Tűz esetén: az oltáshoz ...használandó.
	MT	F'każ ta' nar: Uża' ... għat-tifi.
	NL	In geval van brand: blussen met ...

P370 + P378	Taal	
	PL	W przypadku pożaru: Użyć ... do gaszenia.
	PT	Em caso de incêndio: para a extinção utilizar ...
	RO	În caz de incendiu: utilizați... pentru stingere.
	SK	V prípade požiaru: na hasenie použite ....
	SL	Ob požaru: za gašenje uporabiti ...
	FI	Tulipalon sattuessa: Käytä palon sammuttamiseen ...
	SV	Vid brand: Släck branden med ....

P370 + P380	Taal	
	BG	При пожар: Евакуирайте зоната.
	ES	En caso de incendio: Evacuar la zona.
	CS	V případě požáru: Vykliďte prostor.
	DA	Ved brand: Evakuer området.
	DE	Bei Brand: Umgebung räumen.
	ET	Tulekahju korral: ala evakueerida.
	EL	Σε περίπτωση πυρκαγιάς: Εκκενώστε την περιοχή.
	EN	In case of fire: Evacuate area.
	FR	En cas d'incendie: évacuer la zone.
	GA	I gcás dóiteáin: Aslonnaigh gach duine as an limistéar.
	IT	Evacuare la zona in caso di incendio.
	LV	Ugunsgrēka gadījumā: evakuēt zonu.
	LT	Gaisro atveju: evakuoti zona.
	HU	Tűz esetén: Ki kell üríteni a területet.
	MT	F'każ ta' nar: Evakwa ż-zona.
	NL	In geval van brand: evacueren.
	PL	W przypadku pożaru: Ewakuować teren.
	PT	Em caso de incêndio: evacuar a zona.
	RO	În caz de incendiu: evacuați zona.
	SK	V prípade požiaru: priestory evakuujte.
	SL	Ob požaru: izprazniti območje.
	FI	Tulipalon sattuessa: Evakuoi alue.
	SV	Vid brand: Utrym området.

P370 + P380 + P375	Taal	
	BG	При пожар: Евакуирайте зоната. Гасете пожара от разстояние поради опасност от експлозия.
	ES	En caso de incendio: Evacuar la zona. Luchar contra el incendio a distancia, dado el riesgo de explosión.

P370 + P380 + P375	Taal	
	CS	V případě požáru: Vyklidte prostor. Kvůli nebezpečí výbuchu haste z dostatečné vzdálenosti.
	DA	Ved brand: Evakuer området. Bekæmp branden på afstand på grund af eksplosionsfare.
	DE	Bei Brand: Umgebung räumen. Wegen Explosionsgefahr Brand aus der Entfernung bekämpfen.
	ET	Tulekahju korral: ala evakueerida. Plahvatusohu tõttu teha kustutustööid eemalt.
	EL	Σε περίπτωση πυρκαγιάς: Εκκενώστε την περιοχή. Προσπαθήστε να σβήσετε την πυρκαγιά από απόσταση, επειδή υπάρχει κίνδυνος έκρηξης.
	EN	In case of fire: Evacuate area. Fight fire remotely due to the risk of explosion.
	FR	En cas d'incendie: évacuer la zone. Combattre l'incendie à distance à cause du risque d'explosion.
	GA	I gcás dóiteáin: Aslonnaigh gach duine as an limistéar. Téigh i gcianghleic leis an dóiteán mar gheall ar an mbaol pléasctha.
	IT	In caso di incendio: evacuare la zona. Rischio di esplosione. Utilizzare i mezzi estinguenti a grande distanza.
	LV	Ugunsgrēka gadījumā: evakuēt zonu. Dzēst uguni no attāluma eksplozijas riska dēļ.
	LT	Gaisro atveju: evakuoti zoną. Gaisrą gesinti iš toli dėl sprogimo pavojaus.
	HU	Tűz esetén: Ki kell üríteni a területet. A tűz oltását robbanásveszély miatt távolból kell végezni.
	MT	F'każ ta' nar: Evakwa ż-zona. Itfi n-nar mill-bogħod minhabba r-riskju ta' splużjoni.
	NL	In geval van brand: evacueren. Op afstand blussen omwille van ontploffingsgevaar.
	PL	W przypadku pożaru: Ewakuować teren. Z powodu ryzyka wybuchu gasić pożar z odległości.
	PT	Em caso de incêndio: evacuar a zona. Combater o incêndio à distância, devido ao risco de explosão.
	RO	În caz de incendiu: evacuați zona. Stingeti incendiul de la distanță din cauza pericolului de explozie.
	SK	V prípade požiaru: priestory evakuujte. Z dôvodu nebezpečenstva výbuchu požiar haste z diaľky.
	SL	Ob požaru: izprazniti območje. Gasiti z večje razdalje zaradi nevarnosti eksplozije.
	FI	Tulipalon sattuessa: Evakuoï alue. Sammuta palo etäältä räjähdysvaaran takia.
	SV	Vid brand: Utrym området. Bekämpa branden på avstånd på grund av explosionsrisken.
P371 + P380 + P375	Taal	
	BG	При голям пожар и значителни количества: Евакуирайте зоната. Гасете пожара от разстояние поради опасност от експлозия.
	ES	En caso de incendio importante y en grandes cantidades: Evacuar la zona. Luchar contra el incendio a distancia, dado el riesgo de explosión.
	CS	V případě velkého požáru a velkého množství: Vyklidte prostor. Kvůli nebezpečí výbuchu haste z dostatečné vzdálenosti.
	DA	Ved større brand og store mængder: Evakuer området. Bekæmp branden på afstand på grund af eksplosionsfare.
	DE	Bei Großbrand und großen Mengen: Umgebung räumen. Wegen Explosionsgefahr Brand aus der Entfernung bekämpfen.
	ET	Suure tulekahju korral ning kui on tegemist suurte kogustega: ala evakueerida. Plahvatusohu tõttu teha kustutustööid eemalt.

P371 + P380 + P375	Taal	
	EL	Σε περίπτωση σοβαρής πυρκαγιάς και εάν πρόκειται για μεγάλες ποσότητες: Εκκενώστε την περιοχή. Προσπαθήστε να σβήσετε την πυρκαγιά από απόσταση, επειδή υπάρχει κίνδυνος έκρηξης.
	EN	In case of major fire and large quantities: Evacuate area. Fight fire remotely due to the risk of explosion.
	FR	En cas d'incendie important et s'il s'agit de grandes quantités: évacuer la zone. Combattre l'incendie à distance à cause du risque d'explosion.
	GA	I gcás mórdhóiteáin agus mórchainníochtaí: Aslonnaigh gach duine as an limistéar. Téigh i gcianghleic leis an dóiteán mar gheall ar an mbaol pléasctha.
	IT	In caso di incendio grave e di grandi quantità: evacuare la zona. Rischio di esplosione. Utilizzare i mezzi estinguenti a grande distanza.
	LV	Ugunsgrēka vai liela apjoma gadījumā: evakuēt zonu. Dzēst uguni no attāluma eksplozijas riska dēļ.
	LT	Didelio gaisro ir didelių kiekių atveju: evakuoti zoną. Gaisrą gesinti iš toli dėl sprogimo pavojaus.
	HU	Nagyobb tűz és nagy mennyiség esetén: Ki kell üríteni a területet. A tűz oltását robbanásveszély miatt távolból kell végezni.
	MT	F'każ ta' nar kbir u kwantitajiet kbar: Evakwa ż-zona. Itfi n-nar mill-boghod minhabba r-riskju ta' splużjoni.
	NL	In geval van grote brand en grote hoeveelheden: evacueren. Op afstand blussen omwille van ontploffingsgevaar.
	PL	W przypadku poważnego pożaru i dużych ilości: Ewakuować teren. Z powodu ryzyka wybuchu gasić pożar z odległości.
	PT	Em caso de incêndio importante e de grandes quantidades: evacuar a zona. Combater o incêndio à distância, devido ao risco de explosão.
	RO	În caz de incendiu de proporții și de cantități mari de produs: evacuați zona. Stingeti incendiul de la distanță din cauza pericolului de explozie.
	SK	V prípade veľkého požiaru a značného množstva: priestory evakuujte. Z dôvodu nebezpečenstva výbuchu požiar haste z diaľky.
	SL	Ob velikem požaru in velikih količinah: izprazniti območje. Gasiti z večje razdalje zaradi nevarnosti eksplozije.
	FI	Jos tulipalo ja ainemäärät ovat suuret: Evakuoi alue. Sammuta palo etäältä räjähdysvaaran takia.
	SV	Vid större brand och stora mängder: Utrym området. Bekämpa branden på avstånd på grund av explosionsrisken.

Tabel 1.4

**Voorzorgsmaatregelen i.v.m. opslag**

P401	Taal	
	BG	Да се съхранява...
	ES	Almacenar ...
	CS	Skladujte ...
	DA	Opbevares ...
	DE	... aufbewahren.
	ET	Hoida ...
	EL	Αποθηκεύεται ...

P401	Taal	
	EN	Store ...
	FR	Stocker ...
	GA	Stóráil ...
	IT	Conservare...
	LV	Glabāt...
	LT	Laikyti...
	HU	Tárolás: ... .
	MT	Ahżen ...
	NL	... bewaren.
	PL	Przechowywać ...
	PT	Armazenar ...
	RO	A se depozita...
	SK	Uchovávaťe ...
	SL	Hraniti ...
	FI	Varastoi ...
	SV	Förvaras ...

P402	Taal	
	BG	Да се съхранява на сухо място.
	ES	Almacenar en un lugar seco.
	CS	Skladujte na suchém místě.
	DA	Opbevares et tørt sted.
	DE	An einem trockenen Ort aufbewahren.
	ET	Hoida kuivas.
	EL	Αποθηκεύεται σε στεγνό μέρος.
	EN	Store in a dry place.
	FR	Stocker dans un endroit sec.
	GA	Stóráil in áit thirim.
	IT	Conservare in luogo asciutto.
	LV	Glabāt sausā vietā.
	LT	Laikyti sausoje vietoje.
	HU	Száraz helyen tárolandó.
	MT	Ahżen fpost niexef.
	NL	Op een droge plaats bewaren.
	PL	Przechowywać w suchym miejscu.
	PT	Armazenar em local seco.
	RO	A se depozita într-un loc uscat.
	SK	Uchovávaťe na suchom mieste.

P402	Taal	
	SL	Hraniti na suhem.
	FI	Varastoi kuivassa paikassa.
	SV	Förvaras torrt.
P403	Taal	
	BG	Да се съхранява на добре проветриво място.
	ES	Almacenar en un lugar bien ventilado.
	CS	Skladujte na dobře větraném místě.
	DA	Opbevares på et godt ventileret sted.
	DE	An einem gut belüfteten Ort aufbewahren.
	ET	Hoida hästi ventileeritavas kohas.
	EL	Αποθηκεύεται σε καλά αεριζόμενο χώρο.
	EN	Store in a well-ventilated place.
	FR	Stocker dans un endroit bien ventilé.
	GA	Stóráil in áit dhea-aeráilte.
	IT	Conservare in luogo ben ventilato.
	LV	Glabāt labi vēdināmā vietā.
	LT	Laikyti gerai vėdinamoje vietoje.
	HU	Jól szellőző helyen tárolandó.
	MT	Ahżen f'post b'ventilazzjoni tajba.
	NL	Op een goed geventileerde plaats bewaren.
	PL	Przechowywać w dobrze wentylowanym miejscu.
	PT	Armazenar em local bem ventilado.
	RO	A se depozita într-un spațiu bine ventilat.
	SK	Uchovávať na dobre vetranom mieste.
	SL	Hraniti na dobro prezračevanem mestu.
	FI	Varastoi paikassa, jossa on hyvä ilmanvaihto.
	SV	Förvaras på väl ventilerad plats.
P404	Taal	
	BG	Да се съхранява в затворен съд.
	ES	Almacenar en un recipiente cerrado.
	CS	Skladujte v uzavřeném obalu.
	DA	Opbevares i en lukket beholder.
	DE	In einem geschlossenen Behälter aufbewahren.
	ET	Hoida suletud mahutis.
	EL	Φυλάσσεται σε κλειστό περιέκτη.
	EN	Store in a closed container.



P404	Taal	
	FR	Stocker dans un récipient fermé.
	GA	Stóráil i gcoimeádán iata.
	IT	Conservare in un recipiente chiuso.
	LV	Glabāt slēgtā tvertnē.
	LT	Laikyti uždaroje talpykloje.
	HU	Zárt edényben tárolandó.
	MT	Ahżen f'kontenitur magħluq.
	NL	In gesloten verpakking bewaren.
	PL	Przechowywać w zamkniętym pojemniku.
	PT	Armazenar em recipiente fechado.
	RO	A se depozita într-un recipient închis.
	SK	Uchovávaťe v uzavretej nádobe.
	SL	Hraniti v zaprti posodi.
	FI	Varastoi suljettuna.
	SV	Förvaras i sluten behållare.

P405	Taal	
	BG	Да се съхранява под ключ.
	ES	Guardar bajo llave.
	CS	Składujte uzamčené.
	DA	Opbevares under lås.
	DE	Unter Verschluss aufbewahren.
	ET	Hoida lukustatult.
	EL	Φυλάσσεται κλειδωμένο.
	EN	Store locked up.
	FR	Garder sous clef.
	GA	Stóráil faoi ghlas.
	IT	Conservare sotto chiave.
	LV	Glabāt slēgtā veidā.
	LT	Laikyti užrakintą.
	HU	Elzárva tárolandó.
	MT	Ahżen f'post imsakkar.
	NL	Achter slot bewaren.
	PL	Przechowywać pod zamknięciem.
	PT	Armazenar em local fechado à chave.
	RO	A se depozita sub cheie.
	SK	Uchovávaťe uzamknuté.
	SL	Hraniti zaklenjeno.

P405	Taal	
	FI	Varastoi lukitussa tilassa.
	SV	Förvaras inlåst.
P406	Taal	
	BG	Да се съхранява в устойчив на разяждане съд/... съд с устойчива вътрешна облицовка.
	ES	Almacenar en un recipiente resistente a la corrosión/... con revestimiento interior resistente.
	CS	Skladujte v obalu odolném proti korozi/... obalu s odolnou vnitřní vrstvou.
	DA	Opbevares i ætsningsbestandig/...beholder med modstandsdygtig indvendig belægning.
	DE	In korrosionsbeständigem/... Behälter mit korrosionsbeständiger Auskleidung aufbewahren.
	ET	Hoida sööbekindlas/...sööbekindla sisevooderdisega mahutis.
	EL	Αποθηκεύεται σε ανθεκτικό στη διάβρωση/... περιέκτη με ανθεκτική εσωτερική επένδυση.
	EN	Store in corrosive resistant/... container with a resistant inner liner.
	FR	Stocker dans un récipient résistant à la corrosion/récipient en ... avec doublure intérieure résistant à la corrosion.
	GA	Stóráil i gcoimeádán ... frithchreimneach/... le líneáil frithchreimneach laistigh.
	IT	Conservare in recipiente resistente alla corrosione/... provvisto di rivestimento interno resistente.
	LV	Glabāt tvertnē, kas aizsargā pret koroziju/... tvertnes ar iekšējo pretkorozijas izolāciju.
	LT	Laikyti korozijai atsparioje talpykloje/..., turinčioje atsparią vidinę dangą.
	HU	Saválló/saválló bélésű ... edényben tárolandó.
	MT	Aħżen f'post reżistenti għall-korrużjoni/... kontenitur li huwa infurrat minn ġewwa b'materjal reżistenti.
	NL	In corrosiebestendige/... houder met corrosiebestendige binnenbekleding bewaren.
	PL	Przechowywać w pojemniku odpornym na korozję / ... o odpornej powłoce wewnętrznej.
	PT	Armazenar num recipiente resistente à corrosão/... com um revestimento interior resistente.
	RO	Depozitați într-un recipient rezistent la coroziune/recipient din... cu dublură interioară rezistentă la coroziune.
	SK	Uchovávať v nádobe odolnej proti korózii/... nádobe s odolnou vnútornou vrstvou.
	SL	Hraniti v posodi, odporni proti koroziji/..., z odporno notranjo oblogo.
	FI	Varastoi syöpymättömässä/... säiliössä, jossa on kestävä sisävuoraus.
	SV	Förvaras i korrosionsbeständig/... behållare med beständigt innerhölje.
P407	Taal	
	BG	Да се остави въздушно пространство между купчините/палетите.
	ES	Dejar una separación entre los bloques/los palés de carga.
	CS	Mezi stohy/paletami ponechte vzduchovou mezeru.
	DA	Obevares med luftmellemrum mellem stakkene/pallerne.
	DE	Luftspalt zwischen Stapeln/Paletten lassen.
	ET	Jätta virnade/kaubaaluste vahele õhuvahe.

P407	Taal	
	EL	Να υπάρχει κενό αέρος μεταξύ των σωρών/παλετών.
	EN	Maintain air gap between stacks/pallets.
	FR	Maintenir un intervalle d'air entre les piles/palettes.
	GA	Coimeád bearna aeir idir chruacha/phailéid.
	IT	Mantenere uno spazio libero tra gli scaffali/i pallet.
	LV	Saglabāt gaisa spraugu starp krāvumiem/paletēm.
	LT	Palikti oro tarpą tarp eilių/palečių.
	HU	A rakatok/raklapok között térközt kell hagyni.
	MT	Halli l-arja tgħaddi bejn l-inniezel/il-palits.
	NL	Ruimte laten tussen stapels/pallets.
	PL	Zachować szczelinę powietrzną pomiędzy stosami/paletami.
	PT	Respeitar as distâncias mínimas entre pilhas/paletes.
	RO	Păstrați un spațiu gol între stive/paleți.
	SK	Medzi regálmi/paletami ponechajte vzduchovú medzeru.
	SL	Ohraniti zračno režo med skladi/paletami.
	FI	Jätä pinojen/kuormalavojen väliin ilmarako.
	SV	Se till att det finns luft mellan staplar/pallar.
P410	Taal	
	BG	Да се пази от пряка слънчева светлина.
	ES	Proteger de la luz del sol.
	CS	Chraňte před slunečním zářením.
	DA	Beskyttes mod sollys.
	DE	Vor Sonnenbestrahlung schützen.
	ET	Hoida päikesevalguse eest.
	EL	Να προστατεύεται από τις ηλιακές ακτίνες.
	EN	Protect from sunlight.
	FR	Protéger du rayonnement solaire.
	GA	Cosain ó sholas na gréine.
	IT	Proteggere dai raggi solari.
	LV	Aizsargāt no saules gaismas.
	LT	Saugoti nuo saulės šviesos.
	HU	Napfénytől védendő.
	MT	Ipproteġi mid-dawl tax-xemx.
	NL	Tegen zonlicht beschermen.
	PL	Chronić przed światłem słonecznym.
	PT	Manter ao abrigo da luz solar.
	RO	A se proteja de lumina solară.

P410	Taal	
	SK	Chránite pred slnečným žiarením.
	SL	Zaščititi pred sončno svetlobo.
	FI	Suojaa auringonvalolta.
	SV	Skyddas från solljus.

P411	Taal	
	BG	Да се съхранява при температури, не по-високи от ... °C/...°F.
	ES	Almacenar a temperaturas no superiores a ... °C/...°F.
	CS	Skladujte při teplotě nepřesahující ... °C/...°F.
	DA	Opbevares ved en temperatur, som ikke overstiger ... °C/...°F.
	DE	Bei Temperaturen von nicht mehr als ... °C/...aufbewahren.
	ET	Hoida temperatuuril mitte üle ... °C/... °F.
	EL	Αποθηκεύεται σε θερμοκρασίες που δεν υπερβαίνουν τους ... °C/...°F.
	EN	Store at temperatures not exceeding ... °C/...°F.
	FR	Stocker à une température ne dépassant pas ... °C/... °F.
	GA	Stóráil ag teocht nach airde ná ... °C/...°F.
	IT	Conservare a temperature non superiori a ... °C/...°F.
	LV	Uzglabāt temperatūrā, kas nepārsniedz ... °C/...°F.
	LT	Laikyti ne aukštesnėje kaip ... °C/...°F temperatūroje.
	HU	A tárolási hőmérséklet legfeljebb ... °C/...°F lehet.
	MT	Aħżen f'temperaturi li ma jeċċedux ... °C/...°F.
	NL	Bij maximaal ... °C/... °F bewaren.
	PL	Przechowywać w temperaturze nieprzekraczającej ... °C/...°F.
	PT	Armazenar a uma temperatura não superior a ... °C/...°F.
	RO	A se depozita la temperaturi care să nu depășească ... °C/...°F.
	SK	Uchovávať pri teplotách do ... °C/...°F
	SL	Hraniti pri temperaturi do ... °C/... °F.
	FI	Varastoi alle ... °C/...°F lämpötilassa.
	SV	Förvaras vid högst ... °C/...°F.

P412	Taal	
	BG	Да не се излага на температури, по-високи от 50 °C/122°F.
	ES	No exponer a temperaturas superiores a 50 °C/122°F.
	CS	Nevystavujte teplotě přesahující 50 °C/122 °F.
	DA	Må ikke udsættes for en temperatur, som overstiger 50 °C/122°F.
	DE	Nicht Temperaturen von mehr als 50 °C aussetzen.
	ET	Mitte hoida temperatuuril üle 50 °C/122 °F.
	EL	Να μην εκτίθεται σε θερμοκρασίες που υπερβαίνουν τους 50 °C/122°F.

P412	Taal	
	EN	Do not expose to temperatures exceeding 50 °C/122°F.
	FR	Ne pas exposer à une température supérieure à 50 °C/122 °F.
	GA	Ná nocht do theocht níos airde ná 50 °C/122°F.
	IT	Non esporre a temperature superiori a 50 °C/122°F.
	LV	Nepakļaut temperatūrai, kas pārsniedz 50 °C/122°F.
	LT	Nelaikyti aukštesnėje kaip 50 °C/122°F temperatūroje.
	HU	Nem érheti 50 °C/122°F hőmérsékletet meghaladó hő.
	MT	Tesponix għal temperaturi li jeċċedu l-50 °C/122°F.
	NL	Niet blootstellen aan temperaturen boven 50 °C/122 °F.
	PL	Nie wystawiać na działanie temperatury przekraczającej 50 °C/122 °F.
	PT	Não expor a temperaturas superiores a 50 °C/122°F.
	RO	Nu expuneți la temperaturi care depășesc 50 °C/122 °F.
	SK	Nevystavujte teplotám nad 50 °C/122 °F.
	SL	Ne izpostavlјati temperaturam nad 50 °C/122 °F.
	FI	Ei saa altistaa yli 50 °C/122 °F lämpötiloille.
	SV	Får inte utsättas för temperaturer över 50 °C/122 °F.
P413	Taal	
	BG	При насипни количества, по-големи от ... kg/... фунта, да се съхранява при температури, не по-високи от ... °C/...°F.
	ES	Almacenar las cantidades a granel superiores a ... kg/... lbs a temperaturas no superiores a ... °C/...°F.
	CS	Množství větší než ... kg/... liber skladujte při teplotě nepřesahující ... °C/...°F.
	DA	Bulkmængder på over ... kg/...lbs opbevares ved en temperatur, som ikke overstiger ... °C/...°F.
	DE	Schüttgut in Mengen von mehr als ... kg bei Temperaturen von nicht mehr als ... °C aufbewahren
	ET	Kogust, mis on suurem kui ... kg/... naela, hoida temperatuuril mitte üle ... °C/... °F.
	EL	Οι σωροί χύδην με βάρος άνω των ... kg/... lbs αποθηκεύονται σε θερμοκρασίες που δεν υπερβαίνουν τους ... °C/...°F.
	EN	Store bulk masses greater than ... kg/... lbs at temperatures not exceeding ... °C/...°F.
	FR	Stocker les quantités en vrac de plus de ... kg/... lb à une température ne dépassant pas ... °C/... °F.
	GA	Stóráil bulcmhaiseanna os cionn ... kg/... lb ag teocht nach airde ná ... °C/...°F.
	IT	Conservare le rinfuse di peso superiore a ...kg/...lb a temperature non superiori a ... °C/...°F.
	LV	Lielus apjomus, kas pārsniedz ... kg/... lbs, uzglabāt temperatūrā, kas nepārsniedz ... °C/...°F.
	LT	Didesnius kaip ... kg/... lbs medžiagos kiekius laikyti ne aukštesnėje kaip ... °C/...°F temperatūroje.
	HU	A ... kg/... lb tömeget meghaladó ömlesztett anyag tárolási hőmérséklete legfeljebb ... °C/...°F lehet.
	MT	Ahżen il-kwantitajiet f'massa ta' akbar minn ... kg/... lbs f'temperaturi ta' mhux aktar minn ... °C/...°F.

P413	Taal	
	NL	Bulkmateriaal, indien meer dan ... kg/... lbs, bij temperaturen van maximaal ... °C bewaren.
	PL	Przechowywać luzem masy przekraczające ... kg/... funtów w temperaturze nieprzekraczającej ... °C/...°F.
	PT	Armazenar quantidades a granel superiores a ... kg/... lbs a uma temperatura não superior a ... °C/...°F.
	RO	Depozitați cantitățile în vrac mai mari de ... kg/... lbs la temperaturi care să nu depășească ... °C/...°F.
	SK	Veľké množstvo s hmotnosťou nad ... kg/... lbs uchovávať pri teplote do ... °C/...°F.
	SL	Razsute količine, večje od ... kg/... lbs, hraniti pri temperaturi do ... °C/... °F.
	FI	Säilytä yli ... kg/...lbs painoinen irtotavara enintään ... °C/...°F lämpötilassa.
	SV	Bulkprodukter som väger mer än ... kg/... lbs förvaras vid högst ... °C/...°F.
P420	Taal	
	BG	Да се съхранява на разстояние от други материали.
	ES	Almacenar alejado de otros materiales.
	CS	Skladujte odděleně od ostatních materiálů.
	DA	Må ikke opbevares i nærheden af andre materialer.
	DE	Von anderen Materialien entfernt aufbewahren.
	ET	Hoida eemal teistest materjalidest.
	EL	Αποθηκεύεται μακριά από άλλα υλικά.
	EN	Store away from other materials.
	FR	Stocker à l'écart des autres matières.
	GA	Stóráil glan ar ábhair eile.
	IT	Conservare lontano da altri materiali.
	LV	Glabāt atsevišķi no citiem materiāliem.
	LT	Laikyti atokiau nuo kitų medžiagų.
	HU	Más anyagoktól távol tárolandó.
	MT	Aħżen 'l bogħod minn materjal ieħor.
	NL	Gescheiden van ander materiaal bewaren.
	PL	Przechowywać z dala od innych materiałów.
	PT	Armazenar afastado de outros materiais.
	RO	Depozitați departe de alte materiale.
	SK	Uchovávať oddelene od iných materiálov.
	SL	Hraniti ločeno od drugih materialov.
	FI	Varastoi erillään muista materiaaleista.
	SV	Förvaras åtskilt från andra material.

P422	Taal	
	BG	Съдържанието да се съхранява при...
	ES	Almacenar el contenido en ...
	CS	Skladujte pod ...
	DA	Indholdet skal opbevares under ...
	DE	Inhalt in/unter ... aufbewahren
	ET	Hoida sisu ....
	EL	Το περιεχόμενο αποθηκεύεται σε ...
	EN	Store contents under ...
	FR	Stocker le contenu sous ...
	GA	Stóráil an t-ábhar faoi ...
	IT	Conservare sotto...
	LV	Saturu uzglabāt zem...
	LT	Turinį laikyti ...
	HU	Tartalma ... -ban/-ben tárolandó.
	MT	Aħżen il-kontenut taht ...
	NL	Onder ... bewaren.
	PL	Zawartość przechowywać w ...
	PT	Armazenar o conteúdo em ...
	RO	Depozitați conținutul sub ...
	SK	Obsah uchovávejte v ....
	SL	Vsebino hraniti v ...
	FI	Varastoi sisältö ...
	SV	Förvara innehållet i...

P402 + P404	Taal	
	BG	Да се съхранява на сухо място. Да се съхранява в затворен съд.
	ES	Almacenar en un lugar seco. Almacenar en un recipiente cerrado.
	CS	Skladujte na suchém místě. Skladujte v uzavřeném obalu.
	DA	Opbevares et tørt sted. Opbevares i en lukket beholder.
	DE	In einem geschlossenen Behälter an einem trockenen Ort aufbewahren.
	ET	Hoida kuivas. Hoida suletud mahutis.
	EL	Αποθηκεύεται σε στεγνό μέρος. Φυλάσσεται σε κλειστό περιέκτη.
	EN	Store in a dry place. Store in a closed container.
	FR	Stocker dans un endroit sec. Stocker dans un récipient fermé.
	GA	Stóráil in áit thirim. Stóráil i gcoimeádán iata.
	IT	Conservare in luogo asciutto e in recipiente chiuso.
	LV	Glabāt sausā vietā. Glabāt aizvērtā tvertnē.
	LT	Laikyti sausoje vietoje. Laikyti uždaroje talpykloje.

P402 + P404	Taal	
	HU	Száraz helyen tárolandó. Zárt edényben tárolandó.
	MT	Ahżen fpost niexef. Ahżen fkontenitur maghluq.
	NL	Op een droge plaats bewaren. In gesloten verpakking bewaren.
	PL	Przechowywać w suchym miejscu. Przechowywać w zamkniętym pojemniku.
	PT	Armazenar em local seco. Armazenar em recipiente fechado.
	RO	A se depozita într-un loc uscat, într-un recipient închis.
	SK	Uchovávať na suchom mieste. Uchovávať v uzavretej nádobe.
	SL	Hraniti na suhem. Hraniti v zaprti posodi.
	FI	Varastoi kuivassa paikassa. Varastoi suljettuna.
	SV	Förvaras torrt. Förvaras i sluten behållare.
P403 + P233	Taal	
	BG	Да се съхранява на добре проветриво място. Съдът да се съхранява плътно затворен.
	ES	Almacenar en un lugar bien ventilado. Mantener el recipiente cerrado herméticamente.
	CS	Skladujte na dobře větraném místě. Uchovávejte obal těsně uzavřený.
	DA	Opbevares på et godt ventileret sted. Hold beholderen tæt lukket.
	DE	Behälter dicht verschlossen an einem gut belüfteten Ort aufbewahren.
	ET	Hoida hästi ventileeritavas kohas. Hoida mahuti tihedalt suletuna.
	EL	Αποθηκεύεται σε καλά αεριζόμενο χώρο. Ο περιέκτης διατηρείται ερμητικά κλειστός.
	EN	Store in a well-ventilated place. Keep container tightly closed.
	FR	Stocker dans un endroit bien ventilé. Maintenir le récipient fermé de manière étanche.
	GA	Stóráil in áit dhea-aeráilte. Coimeád an coimeádán dúnta go docht.
	IT	Tenere il recipiente ben chiuso e in luogo ben ventilato.
	LV	Glabāt labi vēdināmās telpās. Tvertni turēt cieši noslēgtu.
	LT	Laikyti gerai vėdinamoje vietoje. Talpyklą laikyti sandariai uždarytą.
	HU	Jól szellőző helyen tárolandó. Az edény szorosan lezárva tartandó.
	MT	Ahżen fpost b'ventilazzjoni tajba. Żomm il-kontenitur maghluq sew.
	NL	Op een goed geventileerde plaats bewaren. In goed gesloten verpakking bewaren.
	PL	Przechowywać w dobrze wentylowanym miejscu. Przechowywać pojemnik szczelnie zamknięty.
	PT	Armazenar em local bem ventilado. Manter o recipiente bem fechado.
	RO	A se depozita într-un spațiu bine ventilat. Păstrați recipientul închis etanș.
	SK	Uchovávať na dobre vetranom mieste. Nádobu uchovávať tesne uzavretú.
	SL	Hraniti na dobro prezračevanem mestu. Hraniti v tesno zaprti posodi.
	FI	Varastoi paikassa, jossa on hyvä ilmanvaihto. Säilytä tiiviisti suljettuna.
	SV	Förvaras på väl ventilerad plats. Förpackningen ska förvaras väl tillsluten.



P403 + P235	Taal	
	BG	Да се съхранява на добре проветриво място. Да се съхранява на хладно.
	ES	Almacenar en un lugar bien ventilado. Mantener en lugar fresco.
	CS	Skladujte na dobře větraném místě. Uchovávejte v chladu.
	DA	Opbevares på et godt ventileret sted. Opbevares køligt.
	DE	Kühl an einem gut belüfteten Ort aufbewahren.
	ET	Hoida hästi ventileeritavas kohas. Hoida jahedas.
	EL	Αποθηκεύεται σε καλά αεριζόμενο χώρο. Διατηρείται δροσερό.
	EN	Store in a well-ventilated place. Keep cool.
	FR	Stocker dans un endroit bien ventilé. Tenir au frais.
	GA	Stóráil in áit dhea-aeráilte. Coimeád fionnuar.
	IT	Conservare in luogo fresco e ben ventilato.
	LV	Glabāt labi vēdināmās telpās. Turēt vēsumā.
	LT	Laikyti gerai vėdinamoje vietoje. Laikyti vėsioje vietoje.
	HU	Jól szellőző helyen tárolandó. Hűvös helyen tartandó.
	MT	Ahżen f'post b'ventilazzjoni tajba. Żomm frisk.
	NL	Op een goed geventileerde plaats bewaren. Koel bewaren.
	PL	Przechowywać w dobrze wentylowanym miejscu. Przechowywać w chłodnym miejscu.
	PT	Armazenar em local bem ventilado. Conservar em ambiente fresco.
	RO	A se depozita într-un spațiu bine ventilat. A se păstra la rece.
	SK	Uchovávať na dobre vetranom mieste. Uchovávať v chlade.
	SL	Hraniti na dobro prezračevanem mestu. Hraniti na hladnem.
	FI	Varastoi paikassa, jossa on hyvä ilmanvaihto. Säilytä viileässä.
	SV	Förvaras på väl ventilerad plats. Förvaras svalt.
P410 + P403	Taal	
	BG	Да се пази от пряка слънчева светлина. Да се съхранява на добре проветриво място.
	ES	Proteger de la luz del sol. Almacenar en un lugar bien ventilado.
	CS	Chraňte před slunečním zářením. Skladujte na dobře větraném místě.
	DA	Beskyttes mod sollys. Opbevares på et godt ventileret sted.
	DE	Vor Sonnenbestrahlung geschützt an einem gut belüfteten Ort aufbewahren.
	ET	Hoida päikesevalguse eest. Hoida hästi ventileeritavas kohas.
	EL	Να προστατεύεται από τις ηλιακές ακτίνες. Αποθηκεύεται σε καλά αεριζόμενο χώρο.
	EN	Protect from sunlight. Store in a well-ventilated place.
	FR	Protéger du rayonnement solaire. Stocker dans un endroit bien ventilé.
	GA	Cosain ó sholas na gréine. Stóráil in áit dhea-aeráilte.
	IT	Proteggere dai raggi solari. Conservare in luogo ben ventilato.
	LV	Aizsargāt no saules gaismas. Glabāt labi vēdināmās telpās.

P410 + P403	Taal	
	LT	Saugoti nuo saulės šviesos. Laikyti gerai vėdinamoje vietoje.
	HU	Napfénytől védendő. Jól szellőző helyen tárolandó.
	MT	Ipproteġi mid-dawl tax-xemx. Ahżen f'post b'ventilazzjoni tajba.
	NL	Tegen zonlicht beschermen. Op een goed geventileerde plaats bewaren.
	PL	Chronić przed światłem słonecznym. Przechowywać w dobrze wentylowanym miejscu.
	PT	Manter ao abrigo da luz solar. Armazenar em local bem ventilado.
	RO	A se proteja de lumina solară. A se depozita într-un spațiu bine ventilat.
	SK	Chránite pred slnečným žiarením. Uchovávajte na dobre vetranom mieste.
	SL	Zaščititi pred sončno svetlobo. Hraniti na dobro prezračevanem mestu.
	FI	Suojaa auringonvalolta. Varastoi paikassa, jossa on hyvä ilmanvaihto.
	SV	Skyddas från solljus. Förvaras på väl ventilerad plats.
P410 + P412	Taal	
	BG	Да се пази от пряка слънчева светлина. Да не се излага на температури, по-високи от 50 °C/122°F.
	ES	Proteger de la luz del sol. No exponer a temperaturas superiores a 50 °C/122°F.
	CS	Chraňte před slunečním zářením. Nevystavujte teplotě přesahující 50 °C/122°F.
	DA	Beskyttes mod sollys. Må ikke udsættes for en temperatur, som overstiger 50 °C/122°F.
	DE	Vor Sonnenbestrahlung schützen und nicht Temperaturen von mehr als 50 °C aussetzen.
	ET	Hoida päikesevalguse eest. Mitte hoida temperatuuril üle 50 °C/122 °F.
	EL	Να προστατεύεται από τις ηλιακές ακτίνες. Να μην εκτίθεται σε θερμοκρασίες που υπερβαίνουν τους 50 °C/122°F.
	EN	Protect from sunlight. Do not expose to temperatures exceeding 50 °C/122°F.
	FR	Protéger du rayonnement solaire. Ne pas exposer à une température supérieure à 50 °C/122 °F.
	GA	Cosain ó sholas na gréine. Ná nocht do theocht níos airde ná 50 °C/122°F.
	IT	Proteggere dai raggi solari. Non esporre a temperature superiori a 50 °C/122°F.
	LV	Aizsargāt no saules gaismas. Nepakļaut temperatūrai, kas pārsniedz 50 °C/122°F.
	LT	Saugoti nuo saulės šviesos. Nelaikyti aukštesnėje kaip 50 °C/122°F temperatūroje.
	HU	Napfénytől védendő. Nem érheti 50 °C/122°F hőmérsékletet meghaladó hő.
	MT	Ipproteġi mid-dawl tax-xemx. Tesponix għal temperatura li teċċedi l-50 °C/122°F.
	NL	Tegen zonlicht beschermen. Niet blootstellen aan temperaturen boven 50 °C/122 °F.
	PL	Chronić przed światłem słonecznym. Nie wystawiać na działanie temperatury przekraczającej 50 °C/122 °F.
	PT	Manter ao abrigo da luz solar. Não expor a temperaturas superiores a 50 °C/122°F.
	RO	A se proteja de lumina solară. Nu expuneți la temperaturi care depășesc 50 °C/122 °F.
	SK	Chránite pred slnečným žiarením. Nevystavujte teplotám nad 50 °C/122 °F.
	SL	Zaščititi pred sončno svetlobo. Ne izpostavljati temperaturam nad 50 °C/122 °F.

P410 + P412	Taal	
	FI	Suojaa auringonvalolta. Ei saa altistaa yli 50 °C/122 °F lämpötiloilta.
	SV	Skyddas från solljus. Får inte utsättas för temperaturer över 50 °C/122 °F.
P411 + P235	Taal	
	BG	Да се съхранява при температури, не по-високи от ... °C/...°F. Да се държи на хладно.
	ES	Almacenar a temperaturas no superiores a ... °C/...°F. Mantener en lugar fresco.
	CS	Skladujte při teplotě nepřesahující ... °C/...°F. Uchovávejte v chladu.
	DA	Opbevares ved en temperatur, som ikke overstiger ... °C/...°F. Opbevares køligt.
	DE	Kühl und bei Temperaturen von nicht mehr als ... °C aufbewahren.
	ET	Hoida temperatuuril mitte üle ... °C/... °F. Hoida jahedas.
	EL	Αποθηκεύεται σε θερμοκρασίες που δεν υπερβαίνουν τους ... °C/...°F. Διατηρείται δροσερό.
	EN	Store at temperatures not exceeding ... °C/...°F. Keep cool.
	FR	Stocker à une température ne dépassant pas ... °C/... °F. Tenir au frais.
	GA	Stóráil ag teocht nach airde ná ... °C/...°F. Coimeád fionnuar.
	IT	Conservare in luogo fresco a temperatura non superiori a .... °C/...°F.
	LV	Glabāt temperatūrā, kas nepārsniedz ... °C/...°F. Turēt vēsumā.
	LT	Laikyti ne aukštesnėje kaip ... °C/...°F temperatūroje. Laikyti vėsioje vietoje.
	HU	A tárolási hőmérséklet legfeljebb ... °C/...°F lehet. Hűvös helyen tartandó.
	MT	Aħżen f'temperaturi li ma jeċċedux ... °C/...°F. Żomm frisk.
	NL	Bij maximaal ... °C/... °F bewaren. Koel bewaren.
	PL	Przechowywać w temperaturze nieprzekraczającej ... °C/...°F. Przechowywać w chłodnym miejscu.
	PT	Armazenar a uma temperatura não superior a ... °C/...°F. Conservar em ambiente fresco.
	RO	A se depozita la temperaturi care să nu depășească ... °C/...°F. A se păstra la rece.
	SK	Uchovávejte pri teplotách do ... °C/...°F. Uchovávejte v chlade.
	SL	Hraniti pri temperaturi do ... °C/... °F. Hraniti na hladnem.
	FI	Varastoi alle ... °C/...°F lämpötilassa. Säilytä viileässä.
	SV	Förvaras vid högst ... °C/...°F. Förvaras svalt.

Tabel 1.5

**Voorzorgsmaatregelen i.v.m. verwijdering**

P501	Taal	
	BG	Съдържанието/съдът да се изхвърли в ...
	ES	Eliminar el contenido/el recipiente en ...
	CS	Odstraňte obsah/obal ...
	DA	Indholdet/holderen bortskaffes i ...
	DE	Inhalt/Behälter ... zuführen.

P501	Taal	
	ET	Sisu/mahuti kõrvaldada ...
	EL	Διάθεση του περιεχομένου/περιέκτη σε ...
	EN	Dispose of contents/container to ...
	FR	Éliminer le contenu/récipient dans ...
	GA	Diúscair an t-ábhar/an coimeádán i ...
	IT	Smaltire il prodotto/recipiente in ...
	LV	Atbrīvoties no satura/tvertnes...
	LT	Turinį/talpyklą išpilti (išmesti) į ...
	HU	A tartalom/edény elhelyezése hulladékként: ...
	MT	Armi l-kontenut/il-kontenitur fi ...
	NL	Inhoud/verpakking afvoeren naar ...
	PL	Zawartość/pojemnik usuwać do ...
	PT	Eliminar o conteúdo/recipiente em ...
	RO	Aruncați conținutul/recipientul la ...
	SK	Zneškodnite obsah/nádobu ...
	SL	Odstraniti vsebino/posodo ...
	FI	Hävitä sisältö/pakkaus ...
	SV	Innehållet/behållaren lämnas till...

## BIJLAGE V


## GEVARENPICTOGRAMMEN

## INLEIDING


De gevarenpictogrammen voor elke gevarenklasse, onderverdeling daarvan en gevarencategorie voldoen aan de bepalingen van deze bijlage en van bijlage I, sectie 1.2 en komen wat kleur, gebruikte symbolen en vorm betreft overeen met de hierna gegeven afbeeldingen.

## 1. DEEL 1: MATERIËLE GEVAREN


1.1. **Symbol: ontploffende bom**

Pictogram (1)	Gevarenklasse en gevarencategorie (2)
GHS01 	Sectie 2.1 Instabiele ontplofbare stoffen Ontplofbare stoffen van de subklassen 1.1, 1.2, 1.3 en 1.4 Sectie 2.8 Zelfontledende stoffen en mengsels, type A en B Sectie 2.15 Organische peroxiden, type A en B


1.2. **Symbol: vlam**

Pictogram (1)	Gevarenklasse en gevarencategorie (2)
GHS02 	Sectie 2.2 Ontvlambare gassen, gevarencategorie 1 Sectie 2.3 Ontvlambare aerosolen, gevarencategorie 1 en 2 Sectie 2.6 Ontvlambare vloeistoffen, gevarencategorie 1, 2 en 3 Sectie 2.7 Ontvlambare vaste stoffen, gevarencategorie 1 en 2 Sectie 2.8 Zelfontledende stoffen en mengsels, type B, C, D, E en F Sectie 2.9 Pyrofore vloeistoffen, gevarencategorie 1 Sectie 2.10 Pyrofore vaste stoffen, gevarencategorie 1 Sectie 2.11 Voor zelfverhitting vatbare stoffen en mengsels, gevarencategorie 1 en 2 Sectie 2.12 Stoffen en mengsels die in contact met water ontvlambare gassen ontwikkelen, gevarencategorie 1, 2 en 3 Sectie 2.15 Organische peroxiden, type B, C, D, E en F


1.3. **Symbool: vlam boven cirkel**

Pictogram (1)	Gevarenklasse en gevarencategorie (2)
GHS03 	Sectie 2.4 Oxiderende gassen, gevarencategorie 1 Sectie 2.13 Oxiderende vloeistoffen, gevarencategorie 1, 2 en 3 Sectie 2.14 Oxiderende vaste stoffen, gevarencategorie 1, 2 en 3

1.4. **Symbool: gasfles**

Pictogram (1)	Gevarenklasse en gevarencategorie (2)
GHS04 	Sectie 2.5 Gassen onder druk: samengeperste gassen; vloeibare gassen; sterk gekoelde vloeibare gassen; opgeloste gassen

1.5. **Symbool: corrosie**

Pictogram (1)	Gevarenklasse en gevarencategorie (2)
GHS05 	Sectie 2.16 Corrosief voor metalen, gevarencategorie 1

1.6. **Voor de volgende klassen en categorieën materiële gevaren is geen pictogram vereist:**

Sectie 2.1: Ontplofbare stoffen van subklasse 1.5

Sectie 2.1: Ontplofbare stoffen van subklasse 1.6


Sectie 2.2: ontvlambare gassen, gevarencategorie 2

Sectie 2.8: zelfontledende stoffen en mengsels, type G


Sectie 2.15: organische peroxiden, type G

## 2. DEEL 2: GEZONDHEIDSGEVAREN


2.1. **Symbool: doodshoofd met gekruiste beenderen**

Pictogram (1)	Gevarenklasse en gevarencategorie (2)
GHS06 	Sectie 3.1 Acute toxiciteit (oraal, dermaal, bij inademing), gevarencategorie 1, 2 en 3


2.2. **Symbol: corrosie**

Pictogram (1)	Gevarenklasse en gevaarcategorie (2)
GHS05 	Sectie 3.2 Huidcorrosie, gevaarcategorieën 1A, 1B, 1C Sectie 3.3 Ernstig oogletsel, gevaarcategorie 1

2.3. **Symbol: uitroepen**

Pictogram (1)	Gevarenklasse en gevaarcategorie (2)
GHS07 	Sectie 3.1 Acute toxiciteit (oraal, dermaal, bij inademing), gevaarcategorie 4 Sectie 3.2 Huidirritatie, gevaarcategorie 2 Sectie 3.3 Oogirritatie, gevaarcategorie 2 Sectie 3.4 Huidsensibilisatie, gevaarcategorie 1 Sectie 3.8 Specifieke doelorgaan toxiciteit (eenmalige blootstelling), gevaarcategorie 3 Irritatie van de luchtwegen Narcotische werking

2.4. **Symbol: gezondheidsgevaar**


Pictogram (1)	Gevarenklasse en gevaarcategorie (2)
GHS08 	Sectie 3.4 Sensibilisatie van de luchtwegen, gevaarcategorie 1 Sectie 3.5 Mutageen in geslachtscellen, gevaarcategorieën 1A, 1B en 2 Sectie 3.6 Kankerverwekkend, gevaarcategorieën 1A, 1B, 2 Sectie 3.7 Voortplantingstoxiciteit, gevaarcategorieën 1A, 1B, 2 Sectie 3.8 Specifieke doelorgaan toxiciteit (eenmalige blootstelling), gevaarcategorieën 1 en 2 Sectie 3.9 Specifieke doelorgaan toxiciteit (herhaalde blootstelling), gevaarcategorieën 1 en 2 Sectie 3.10 Aspiratiegevaar, gevaarcategorie 1

2.5. **Voor de volgende gezondheidsgevaarcategorieën is geen pictogram vereist:**

Sectie 3.7: voortplantingstoxiciteit, effecten op en via lactatie, aanvullende gevaarcategorie.

## 3. DEEL 3: MILIEUGEVAREN

3.1. **Symbool: milieu**

Pictogram (1)	Gevarenklasse en gevarencategorie (2)
<p>GHS09</p> 	<p>Sectie 4.1 Gevaar voor het aquatisch milieu</p> <ul style="list-style-type: none"><li>— acut gevaar van categorie 1</li><li>— chronisch gevaar van categorieën 1 en 2</li></ul>

Voor de volgende klassen en categorieën milieugevaren is geen pictogram vereist:

Sectie 4.1: gevaar voor het aquatisch milieu (chronische toxiciteit), gevarencategorieën 3 en 4.



## BIJLAGE VI

**Geharmoniseerde indeling en etikettering voor bepaalde gevaarlijke stoffen**

Deel 1 van deze bijlage is een inleiding tot de lijst van geharmoniseerde indelingen en etiketteringen, inclusief de bij elke vermelding opgenomen gegevens en bijbehorende indelingen en gevarenaanduidingen in tabel 3.1 waarvoor bepaalde overwegingen gelden bij de omzetting van indelingen van bijlage I bij Richtlijn 67/548/EEG.

In deel 2 van deze bijlage worden algemene beginselen vastgesteld voor de voorbereiding van dossiers om geharmoniseerde indelingen en etiketteringen van stoffen op communautair niveau voor te stellen en te verantwoorden.

Deel 3 van deze bijlage bevat een lijst van gevaarlijke stoffen waarvoor een geharmoniseerde indeling en etikettering op communautair niveau zijn vastgelegd. In tabel 3.1 zijn de indeling en etikettering gebaseerd op de criteria in bijlage I bij deze verordening. In tabel 3.2 zijn de indeling en etikettering gebaseerd op de criteria in bijlage VI bij Richtlijn 67/548/EEG.

**1. DEEL 1: INLEIDING TOT DE LIJST VAN GEHARMONISEERDE INDELINGEN EN ETIKETTERINGEN****1.1. Bij elke vermelding opgenomen gegevens****1.1.1. Nummering van de vermeldingen en identificatie van stoffen****1.1.1.1. Catalogusnummers**

De vermeldingen in deel 3 zijn gerangschikt aan de hand van het atoomnummer van het element dat het meest kenmerkend is voor de eigenschappen van deze stoffen. Organische stoffen zijn vanwege hun verscheidenheid in klassen onderverdeeld. Het catalogusnummer van elke stof bestaat uit een reeks cijfers in het formaat ABC-RST-VW-Y. ABC komt overeen met het atoomnummer van het meest kenmerkende element of de meest kenmerkende organische groep in het molecuul. RST is het volgnummer van de stof binnen de reeks stoffen met dezelfde code ABC. VW is een code voor de vorm waarin de stof wordt geproduceerd of op de markt gebracht. Y is het controlecijfer dat volgens de methode voor de tiencijferige ISBN-methode wordt berekend. Het staat vermeld in de kolom „indexnummer”.

**1.1.1.2. EC-nummer**

Het EC-nummer, d.w.z. EINECS, ELINCS of NLP, is het officiële nummer van de stof binnen de Europese Unie. Het EINECS-nummer kan worden verkregen van de Europese inventaris van bestaande chemische handelsstoffen (EINECS) <sup>(1)</sup>. Het ELINCS-nummer kan worden verkregen van de Europese lijst van stoffen waarvan kennisgeving is gedaan (European List of Notified Chemical Substances) (met wijzigingen) (EUR 22543 EN, Bureau voor officiële publicaties der Europese Gemeenschappen, 2006, ISSN 1018-5593). Het NLP-nummer kan worden verkregen van de lijst „No-longer-polymers” (met wijzigingen) (Document, Bureau voor officiële publicaties der Europese Gemeenschappen, 1997, ISBN 92-827-8995-0). Het EC-nummer bestaat uit zeven cijfers in het formaat XXX-XXX-X, met als eerste nummer 200-001-8 (EINECS), 400-010-9 (ELINCS) en 500-001-0 (NLP). Het staat vermeld in de kolom „EC-nummer”.

**1.1.1.3. CAS-nummer**

Tevens wordt het CAS-nummer (het nummer van de Chemical Abstracts Service) vermeld om identificatie van de stof te vergemakkelijken. Er dient te worden opgemerkt dat voor de watervrije en gehydrateerde vormen van een stof hetzelfde EINECS-nummer wordt gebruikt, terwijl de CAS-nummers voor de watervrije en gehydrateerde vormen vaak verschillen. Het vermelde CAS-nummer is uitsluitend het nummer van de watervrije vorm en vormt derhalve niet altijd een even exacte beschrijving van de stof als het EINECS-nummer. Het staat vermeld in de kolom „CAS-nummer”.

**1.1.1.4. Internationale chemische identificatie**

Gevaarlijke stoffen zijn zo veel mogelijk onder hun Iupac-naam opgenomen. Stoffen die in de EINECS-, ELINCS- of „No-longer-polymers”-lijst staan, zijn onder de in de desbetreffende lijst vermelde naam opgenomen. Andere namen, zoals gewone of gebruikelijke namen, zijn in sommige gevallen opgenomen. Gewasbeschermingsmiddelen en biociden zijn zo veel mogelijk onder hun ISO-naam opgenomen.

<sup>(1)</sup> PB C 146 A van 15.6.1990.

Verontreinigingen, additieven en bestanddelen met een lage concentratie worden meestal niet vermeld, tenzij zij belangrijk zijn voor de indeling van de stof.

Bij sommige stoffen wordt voor de zuiverheidsgraad een specifiek percentage vermeld. Stoffen met een hoger gehalte aan actief materiaal (bv. een organisch peroxide) dan dat percentage vallen niet onder de in deel 3 vermelde stof en kunnen andere gevaarlijke eigenschappen hebben (bv. ontploffingsgevaar), aan de hand waarvan zij moeten worden ingedeeld en geëtiketteerd.

Wanneer specifieke concentratiegrenzen worden opgegeven, gelden deze voor de vermelde stof of stoffen. Vooral wanneer het gaat om mengsels van stoffen of stoffen waarbij voor de zuiverheidsgraad een specifiek percentage is vermeld, gelden de grenswaarden voor de stof zoals in deel 3 beschreven, en niet voor de zuivere stof.

Onverminderd artikel 17, lid 2, moet voor stoffen die in deel 3 voorkomen een van de daar gegeven benamingen als naam van de stof op het etiket worden gebruikt. Voor sommige stoffen is tussen vierkante haken aanvullende informatie vermeld om identificatie van de stof te vergemakkelijken. Deze aanvullende informatie hoeft niet op het etiket te worden vermeld.

Voor sommige stoffen worden gegevens over verontreinigingen vermeld; in dat geval wordt de naam van de stof gevolgd door de tekst: „(met  $\geq$  xx % verontreiniging)”. In dat geval maakt de informatie tussen haakjes deel uit van de naam en moet ook deze op het etiket worden vermeld.

#### 1.1.1.5. *Groepen stoffen*

In een aantal gevallen zijn stoffen als groep in deel 3 opgenomen. In die gevallen gelden de indelings- en etiketteringsvoorschriften voor alle onder de beschrijving vallende stoffen.

In sommige gevallen zijn er indelings- en etiketteringsvoorschriften voor specifieke stoffen die onder de groepsvermelding zouden vallen. In dat geval wordt de stof apart in deel 3 vermeld en wordt aan de groepsvermelding de zin „tenzij elders in deze bijlage vermeld” toegevoegd.

In sommige gevallen kunnen bepaalde stoffen onder meer dan een groepsvermelding vallen. In dat geval moet de etikettering van de stof voldoen aan de etiketteringsvoorschriften voor beide groepsvermeldingen. Wanneer verschillende indelingen voor hetzelfde gevaar worden gegeven, wordt voor de strengste indeling gekozen.

Wanneer in deel 3 zouten zijn opgenomen (onder welke benaming dan ook), vallen zowel de watervrije als de gehydrateerde vormen hieronder, tenzij anders is vermeld.

EC- of CAS-nummers worden meestal niet vermeld voor mengsels van meer dan vier verschillende stoffen.

### 1.1.2. **Gegevens over de indeling en etikettering van elke stof in tabel 3.1**

#### 1.1.2.1. *Codes voor de indeling*

##### 1.1.2.1.1. *Gevarenklasse en categoriecode*

De indeling van elke stof is gebaseerd op de criteria van bijlage I, overeenkomstig artikel 13, onder a), en aangegeven met een code voor de gevarenklasse en de categorie of categorieën/subklassen/soorten binnen die gevarenklasse.

De gevarenklasse en de categoriecodes voor elke gevarencategorie/subklasse/soort binnen een klasse staan vermeld in tabel 1.1.

Tabel 1.1

Gevarenklasse	Gevarenklasse en categoriecode
Ontploffbaar	Inst. Ontpl. Ontpl. 1.1 Ontpl. 1.2 Ontpl. 1.3 Ontpl. 1.4 Ontpl. 1.5 Ontpl. 1.6
Ontvlambaar gas	Ontvl. Gas 1 Ontvl. Gas 2
Ontvlambare aerosol	Ontvl. aerosol 1 Ontvl. aerosol 2
Oxiderend gas	Ox. Gas 1
Gassen onder druk	Gas onder druk (*)
Ontvlambare vloeistof	Ontvl. vlst. 1 Ontvl. vlst. 2 Ontvl. vlst. 3
Ontvlambare vaste stof	Ontvl. vs. 1 Ontvl. vs. 2
Zelfontledende stof of mengsel	Zelfontl. A Zelfontl. B Zelfontl. CD Zelfontl. EF Zelfontl. G
Pyrofore vloeistof	Pyr. vlst. 1
Pyrofore vaste stof	Pyr. vs. 1
Voor zelfverhitting vatbare stof of mengsel	Zelfverh. 1 Zelfverh. 2
Stof die of mengsel dat in contact met water ontvlambare gassen ontwikkelt	Water ontvl. 1 Water ontvl. 2 Water ontvl. 3
Oxiderende vloeistof	Ox. vlst. 1 Ox. vlst. 2 Ox. vlst. 3
Oxiderende vaste stof	Ox. vs. 1 Ox. vs. 2 Ox. vs. 3
Organisch peroxide	Org. Perox. A Org. Perox. B Org. Perox. CD Org. Perox. EF Org. Perox. G
Voor metalen bijtend(e) stof of mengsel	Met. bijt. 1
Acute toxiciteit	Acute tox. 1 Acute tox. 2 Acute tox. 3 Acute tox. 4

Gevarenklasse	Gevarenklasse en categoriecode
Huidcorrosie/-irritatie	Huidcorr. 1A Huidcorr. 1B Huidcorr. 1C Huidirrit. 2
Ernstig oogletsel/oogirritatie	Ooglet. 1 Oogirrit. 2
Sensibilisatie van de luchtwegen/de huid	Sens. luchtw. 1 Sens. huid 1
Mutageniteit in geslachtscellen	Muta. 1A Muta. 1B Muta. 2
Kankerverwekkendheid	Kank. 1A Kank. 1B Kank. 2
Voortplantingstoxiciteit	Voortpl. 1A Voortpl. 1B Voortpl. 2 Lact.
Specifieke doelorgaantoxiciteit bij eenmalige blootstelling STOT eenm.	STOT eenm. 1 STOT eenm. 2 STOT eenm. 3
Specifieke doelorgaantoxiciteit bij herhaalde blootstelling STOT herh.	STOT herh. 1 STOT herh. 2
Aspiratiegevaar	Asp. Tox. 1
Gevaar voor het aquatisch milieu	Aquat. acuut 1 Aquat. chron. 1 Aquat. chron. 2 Aquat. chron. 3 Aquat. chron. 4
Gevaarlijk voor de ozonlaag	Ozon

(\*) Zie noot U in 1.1.3.

#### 1.1.2.1.2. Codes voor gevarenaanduidingen

De gevarenaanduidingen die overeenkomstig artikel 13, onder b), zijn toegekend, zijn aangegeven overeenkomstig bijlage III. Voor bepaalde gevarenaanduidingen zijn bovendien aan de driecijferige codes letters toegevoegd. De volgende opmaak wordt gebruikt:

H350i	Kan kanker veroorzaken bij inademing.
H360F	Kan de vruchtbaarheid schaden.
H360D	Kan het ongeboren kind schaden.
H361f	Wordt ervan verdacht de vruchtbaarheid te schaden.
H361d	Wordt ervan verdacht het ongeboren kind te schaden.
H360FD	Kan de vruchtbaarheid schaden. Kan het ongeboren kind schaden.

H361fd	Wordt ervan verdacht de vruchtbaarheid te schaden. Wordt ervan verdacht het ongeboren kind te schaden.
H360Fd	Kan de vruchtbaarheid schaden. Wordt ervan verdacht het ongeboren kind te schaden.
H360Df	Kan het ongeboren kind schaden. Wordt ervan verdacht de vruchtbaarheid te schaden.

#### 1.1.2.2. *Etiketteringscodes*

In de kolom voor de etikettering zijn de volgende elementen aangegeven:

- i) de gevarenpictogramcodes zoals beschreven in bijlage V, overeenkomstig de voorrangsregels in artikel 26;
- ii) de signaalwoordcode „Gvr” voor „Gevaar” of „Wrschwng” voor „Waarschuwing”, overeenkomstig de voorrangsregel in artikel 20, lid 3;
- iii) de gevarenaanduidingscodes zoals beschreven in bijlage III, overeenkomstig de indeling;
- iv) de codes voor de bijkomende aanduidingen die zijn toegewezen overeenkomstig artikel 25, lid 1, en de regels beschreven in bijlage II, deel 1.

#### 1.1.2.3. *Specifieke concentratiegrenzen en M-factoren*

Indien er voor een bepaalde categorie specifieke concentratiegrenzen zijn die verschillen van de algemene concentratiegrenzen in bijlage I, zijn deze in een aparte kolom aangegeven, met de bijbehorende indeling; hiervoor zijn dezelfde codes gebruikt als in sectie 1.1.2.1.1. Indien in deze bijlage geen specifieke concentratiegrenzen voor een bepaalde categorie zijn aangegeven, gelden de algemene concentratiegrenzen van bijlage I voor de indeling van stoffen die bepaalde verontreinigingen, additieven of afzonderlijke bestanddelen bevatten, of voor mengsels. De aanwezigheid van een asterisk (\*) in deze kolom betekent dat de vermelding specifieke concentratiegrenzen heeft voor acute toxiciteit, overeenkomstig Richtlijn 67/548/EEG (tabel 3.2), zie ook sectie 1.2.1.

Tenzij anders vermeld, worden de concentratiegrenzen uitgedrukt als gewichtspercentage van de stof, berekend ten opzichte van het totaalgewicht van het mengsel.

Indien voor stoffen die als gevaarlijk voor het aquatisch milieu zijn ingedeeld in de categorieën Aquat. acuut 1 of Aquat. chron. 1 een M-factor geharmoniseerd is, is deze M-factor aangegeven in dezelfde kolom als de specifieke concentratiegrenzen. Als in tabel 3.1 geen M-factor is aangegeven, wordt door de fabrikant, importeur of downstreamgebruiker op basis van de voor de stof beschikbare gegevens een M-factor bepaald. Wanneer een mengsel dat de stof bevat, door de fabrikant, importeur of downstreamgebruiker wordt ingedeeld met gebruikmaking van de optelmethode, wordt deze v M-factor gebruikt. Voor de bepaling van de M-factor, zie punt 4.1.3.5.5 van bijlage I.

#### 1.1.3. **Noten**

De bij een stof behorende noten zijn opgenomen in de kolom „Noten”. Deze noten worden hieronder toegelicht.

##### 1.1.3.1. *Noten betreffende de identificatie, indeling en etikettering van stoffen*

###### Noot A

Onverminderd artikel 17, lid 2, moet op het etiket als naam van de stof een van de benamingen uit deel 3 worden gebruikt.

In deel 3 wordt soms een algemene benaming gebruikt, zoals „verbindingen” of „zouten”. In dat geval moet de leverancier op het etiket de juiste naam vermelden, met inachtneming van sectie 1.1.1.4.

###### Noot B

Sommige stoffen (zoals zuren en basen) worden als waterige oplossingen met uiteenlopende concentraties op de markt gebracht en deze oplossingen moeten derhalve, al naar het aan iedere concentratie verbonden gevaar, anders worden ingedeeld en geëtiketteerd.

Wanneer in deel 3 noot B wordt vermeld, wordt een algemene benaming gebruikt zoals: „salpeterzuur ... %”.

In dat geval moet de leverancier op het etiket de concentratie in procenten vermelden. Tenzij dit anders wordt vermeld, wordt aangenomen dat de concentratie is berekend op basis van het gewichtspercentage.

#### Noot C

Sommige organische stoffen kunnen in de vorm van een specifiek isomeer of als mengsel van verschillende isomeren op de markt worden gebracht.

In dat geval moet de leverancier op het etiket vermelden of de stof een specifiek isomeer of een mengsel van isomeren is.

#### Noot D

Sommige stoffen die spontaan kunnen polymeriseren of ontleden, worden meestal in een gestabiliseerde vorm op de markt gebracht. In deel 3 zijn die stoffen in gestabiliseerde vorm opgenomen.

Dergelijke stoffen worden echter soms in een niet-gestabiliseerde vorm in de handel gebracht. In dat geval moet de leverancier op het etiket de naam van de stof met daaraan toegevoegd de vermelding „niet-gestabiliseerd” aangeven.

#### Noot E (tabel 3.2)

Stoffen met specifieke effecten op de gezondheid van de mens (zie hoofdstuk 4 van bijlage VI bij Richtlijn 67/548/EEG) die als kankerverwekkend, mutageen en/of giftig voor de voortplanting in categorie 1 of 2 worden ingedeeld, krijgen nota E indien zij ook als zeer giftig (T+), giftig (T) of schadelijk (Xn) worden ingedeeld. Voor deze stoffen worden de waarschuwingszinnen R20, R21, R22, R23, R24, R25, R26, R27, R28, R39, R68 (schadelijk), R48 en R65 en alle combinaties van deze waarschuwingszinnen voorafgegaan door het woord „Ook”.

#### Noot F

Deze stof kan een stabilisator bevatten. Indien de gevaarlijke eigenschappen van de stof, zoals vermeld bij de indeling in deel 3, door de toevoeging van deze stabilisator veranderen, moeten voor de indeling en etikettering de voorschriften voor de indeling en etikettering van gevaarlijke mengsels worden gevolgd.

#### Noot G

Deze stof kan in een ontplofbare vorm op de markt worden gebracht, in welk geval zij met behulp van de onderzoekmethoden daarvoor moet worden beoordeeld. Uit de indeling blijkt het ontploffingsgevaar en op het etiket wordt dit gevaar vermeld.

#### Noot H (tabel 3.1)

De voor deze stof vermelde indeling en etikettering heeft alleen betrekking op de gevaarlijke eigenschap(en) die wordt (worden) aangeduid met de vermelde gevarenaanduiding(en) in combinatie met de vermelde gevarenklasse(n) en categorie(ën). Voor alle andere gevarenklassen en -categorieën gelden voor fabrikanten, importeurs of downstreamgebruikers van deze stof de voorschriften van artikel 4. Voor gevarenklassen waarbij de blootstellingsroute of de aard van de effecten leidt tot een onderverdeling van de indeling in de gevarenklasse, moet de fabrikant, importeur of downstreamgebruiker rekening houden met de blootstellingsroutes of de aard van de effecten die nog niet in aanmerking genomen zijn.

Voor het uiteindelijke etiket moeten de voorschriften van artikel 17 en van bijlage I, sectie 1.2, worden gevolgd.

#### Noot H (tabel 3.2)

De voor deze stof vermelde indeling en etikettering heeft alleen betrekking op de gevaarlijke eigenschap(en) die wordt (worden) aangeduid met de vermelde waarschuwingszin(nen) in combinatie met de vermelde gevaarscategorie(ën). De fabrikanten, importeurs en downstreamgebruikers van deze stof zijn verplicht een onderzoek in te stellen teneinde kennis te nemen van de bestaande relevante en toegankelijke gegevens betreffende alle andere eigenschappen om de stof in te delen en te etiketteren. Voor het uiteindelijke etiket moeten de voorschriften van deel 7 van bijlage VI bij Richtlijn 67/548/EEG worden gevolgd.

#### Noot J

De stof hoeft niet als kankerverwekkend of mutageen te worden ingedeeld als kan worden aangetoond dat zij minder dan 0,1 % (g/g) benzeen (EINECS-nr. 200-753-7) bevat. Deze noot is alleen van toepassing op bepaalde complexe steenkool- en aardoliederivaten in deel 3.

## Noot K

De stof hoeft niet als kankerverwekkend of mutageen te worden ingedeeld als kan worden aangetoond dat zij minder dan 0,1 % (g/g) buta-1,3-dien (EINECS-nr. 203-450-8) bevat. Als de stof niet als kankerverwekkend of mutageen wordt ingedeeld, gelden hiervoor minimaal de voorzorgsmaatregelen (P102-)P210-P403 (tabel 3.1) of de S-zinnen (2-)9-16 (tabel 3.2). Deze noot is alleen van toepassing op bepaalde complexe aardoliederivaten in deel 3.

## Noot L

De stof hoeft niet als kankerverwekkend te worden ingedeeld als kan worden aangetoond dat zij minder dan 3 % DmsO-extract bevat, gemeten volgens IP 346 „Determination of polycyclic aromatics in unused lubricating base oils and asphaltene free petroleum fractions — Dimethyl sulphoxide extraction refractive index method”, Institute of Petroleum, Londen. Deze noot is alleen van toepassing op bepaalde complexe aardoliederivaten in deel 3.

## Noot M

De stof hoeft niet als kankerverwekkend te worden ingedeeld als kan worden aangetoond dat zij minder dan 0,005 % (g/g) benzo[a]pyreen (EINECS-nr. 200-028-5) bevat. Deze noot is alleen van toepassing op bepaalde complexe steenkoolderivaten in deel 3.

## Noot N

De stof hoeft niet als kankerverwekkend te worden ingedeeld als volledig bekend is hoe de raffinage daarvan is verlopen en kan worden aangetoond dat zij is geproduceerd uit een stof die niet kankerverwekkend is. Deze noot is alleen van toepassing op bepaalde complexe aardoliederivaten in deel 3.

## Noot P

De stof hoeft niet als kankerverwekkend of mutageen te worden ingedeeld als kan worden aangetoond dat zij minder dan 0,1 % (g/g) benzeen (EINECS-nr. 200-753-7) bevat.

Als de stof niet als kankerverwekkend wordt ingedeeld, gelden hiervoor minimaal de voorzorgsmaatregelen (P102-)P260-P262-P301 + P310-P331 (tabel 3.1) of de S-zinnen (2-)23-24-62 (tabel 3.2).

Deze noot is alleen van toepassing op bepaalde complexe aardoliederivaten in deel 3.

## Noot Q

De stof hoeft niet als kankerverwekkend te worden ingedeeld als kan worden aangetoond dat zij aan een van de volgende voorwaarden voldoet:

- bij bepaling van de biologische persistentie in een kortdurende inhalatietest is gebleken dat de vezels met een lengte van meer dan 20 µm een gewogen halfwaardetijd van minder dan tien dagen hebben, of
- bij bepaling van de biologische persistentie in een kortdurende intratracheale instillatietest is gebleken dat de vezels langer dan 20 µm een gewogen halfwaardetijd van minder dan 40 dagen hebben, of
- uit een adequate intraperitoneale test is geen bovenmatige kankerverwekkendheid gebleken, of
- afwezigheid van substantiële pathogeniteit of neoplastische veranderingen in een geschikte inhalatietest op lange termijn.

## Noot R

Indeling als kankerverwekkend is niet noodzakelijk voor vezels waarvan de naar de lengte gewogen meetkundig gemiddelde diameter, minus tweemaal de meetkundige standaardfout, groter is dan 6 µm.

## Noot S

Voor deze stof is eventueel geen etiket overeenkomstig artikel 17 vereist (zie afdeling 1.3 van bijlage I) (tabel 3.1).

Voor deze stof is misschien geen etiket overeenkomstig artikel 23 van Richtlijn 67/548/EEG vereist (zie afdeling 8 van bijlage VI bij die richtlijn) (tabel 3.2).

Noot T

Deze stof mag in de handel worden gebracht in een vorm die niet de fysische gevaren heeft die overeenkomen met de indeling in deel 3. Als uit de resultaten van de desbetreffende methode(n) overeenkomstig deel 2 van Bijlage I bij deze verordening blijkt dat de specifieke vorm waarin de stof in de handel gebracht wordt, deze fysische eigenschap of dit fysisch gevaar niet vertoont, wordt de stof ingedeeld aan de hand van de uitkomst van deze test(s). In het veiligheidsinformatieblad worden hierover gegevens verstrekt, waaronder een verwijzing naar de testmethode(n).

Noot U (tabel 3.1)

Als zij in de handel worden gebracht, moeten gassen worden ingedeeld als „gassen onder druk”, in een van de groepen samengeperst gas, vloeibaar gas, sterk gekoeld vloeibaar gas of opgelost gas. De groep hangt af van de fysische toestand waarin het gas is verpakt en moet daarom per geval worden toegewezen.

1.1.3.2. *Noten betreffende de indeling en etikettering van mengsels*

Noot 1:

De vermelde concentratie, of bij ontbreken daarvan de algemene concentratiegrenzen in deze verordening (tabel 3.1) of de algemene concentratiegrenzen in Richtlijn 1999/45/EG (tabel 3.2), is het gewichtspercentage van het metallische element, berekend ten opzichte van het totaalgewicht van het mengsel.

Noot 2:

De vermelde isocyanaatconcentratie is het gewichtspercentage van het vrije monomeer, berekend ten opzichte van het totaalgewicht van het mengsel.

Noot 3:

De vermelde concentratie is het gewichtspercentage van de in water opgeloste chromaationen, berekend ten opzichte van het totaalgewicht van het mengsel.

Noot 5:

De concentratiegrenzen voor gasvormige mengsels worden uitgedrukt in volumeprocent.

Noot 7:

Nikkelhoudende legeringen worden ingedeeld voor huidsensibilisering als de afgiftesnelheid, zoals gemeten met de referentie-testmethode van Europese norm EN 1811, hoger is dan de in deze norm vermelde grenswaarde van 0,5 µg Ni/cm<sup>2</sup>/week.

1.1.4. ***Gegevens over de indeling en etikettering van elke stof in tabel 3.2.***

1.1.4.1. *Codes voor de indeling*

Voor elke gevaarscategorie waarin de stof wordt ingedeeld (volgens de definitie van artikel 2, lid 2, van Richtlijn 67/548/EEG), worden doorgaans een verkorte aanduiding van de gevaarscategorie en de bijbehorende waarschuwingszin(nen) vermeld. In sommige gevallen (namelijk voor stoffen die als ontvlambaar of sensibiliserend worden ingedeeld en voor sommige stoffen die als gevaarlijk voor het milieu worden ingedeeld) wordt (worden) echter alleen de waarschuwingszin(nen) vermeld.

Bij de indeling worden de gevaarscategorieën als volgt aangeduid:

- ontplofbaar: E
- oxyderend: O
- zeer licht ontvlambaar; F+
- licht ontvlambaar; F



- ontvlambaar: R10
- zeer vergiftig: T+
- vergiftig: T
- schadelijk: Xn
- corrosief: C
- irriterend: Xi
- sensibiliserend: R42 en/of R43
- kankerverwekkend: Kank. Cat. (1, 2 of 3)
- mutageen: Muta. Cat. (1, 2 of 3)
- vergiftig voor de voortplanting: Voortpl. Cat. (1, 2 of 3)
- gevaarlijk voor het milieu: N of R52 en/of R53;

#### 1.1.4.2. *Etiketingscodes*

- i) de letter die overeenkomstig bijlage II van Richtlijn 67/548/EEG aan de stof is toegekend (zie artikel 23, lid 2, onder c), van Richtlijn 67/548/EEG). Dit geldt als aanduiding van het symbool en de gevaarsaanduiding (indien toegekend);
- ii) de waarschuwingzinnen, vermeld als een reeks getallen voorafgegaan door de letter R, waarmee overeenkomstig bijlage III van Richtlijn 67/548/EEG de aard van de bijzondere gevaren wordt aangegeven (zie artikel 23, lid 2, onder d), van Richtlijn 67/548/EEG). De getallen worden gescheiden door een liggend streepje (-) voor de vermelding van afzonderlijke zinnen voor bijzondere gevaren (R) of een schuine streep (/) voor de vermelding van bijzondere gevaren in een enkele zin, zoals vermeld in bijlage III bij Richtlijn 67/548/EEG;
- iii) de veiligheidszinnen, vermeld als een reeks getallen voorafgegaan door de letter S, waarmee overeenkomstig bijlage IV bij Richtlijn 67/548/EEG de aanbevolen voorzorgsmaatregelen worden vermeld (zie artikel 23, lid 2, onder e), van Richtlijn 67/548/EEG). Ook hier worden de getallen gescheiden door een liggend streepje of een schuine streep; de betekenis van de aanbevolen voorzorgsmaatregelen wordt in bijlage IV bij Richtlijn 67/548/EEG vermeld. De vermelde veiligheidszinnen gelden alleen voor stoffen; voor mengsels worden de zinnen volgens de gebruikelijke regels gekozen.

Er dient te worden opgemerkt dat sommige S-zinnen voor bepaalde gevaarlijke stoffen en mengsels die aan het grote publiek worden verkocht, verplicht zijn:

S1, S2 en S45 zijn verplicht voor alle zeer vergiftige, vergiftige en bijtende stoffen en mengsels die aan het grote publiek worden verkocht;

S2 en S46 zijn verplicht voor alle andere gevaarlijke stoffen en mengsels die aan het grote publiek worden verkocht, met uitzondering van die welke uitsluitend als „gevaarlijk voor het milieu” zijn ingedeeld.

De S-zinnen S1 en S2 worden in bijlage I tussen haakjes vermeld en kunnen uitsluitend van het etiket worden weggelaten wanneer de stof of het mengsel alleen voor industrieel gebruik wordt verkocht.

#### 1.1.4.3. *Specifieke concentratiegrenzen*

De concentratiegrenzen en de daarbij behorende indeling die nodig zijn om gevaarlijke mengsels die de stof bevatten, overeenkomstig Richtlijn 1999/45/EG te kunnen indelen.

Tenzij anders vermeld, worden de concentratiegrenzen uitgedrukt als gewichtsperscentage van de stof, berekend ten opzichte van het totaalgewicht van het mengsel.

Wanneer geen concentratiegrenzen worden vermeld, moeten bij de toepassing van de gebruikelijke methode voor de bepaling van de gevaren voor de gezondheid de concentratiegrenzen van bijlage II, en bij de toepassing van de gebruikelijke methode voor de bepaling van de gevaren voor het milieu de concentratiegrenzen van bijlage III van Richtlijn 1999/45/EG worden gebruikt.

1.1.4.4. *Geen overeenkomst met tabel 3.1 voor fysische gevaren*

Aanbevolen wordt de fysische gevaren van sommige vermeldingen in tabel 3.2 bij te werken in het kader van een komende aanpassing aan de technische vooruitgang.

Tot deze vermeldingen zijn bijgewerkt, komen de fysische gevaren van de overeenkomstige vermeldingen in beide tabellen niet overeen. Deze vermeldingen worden aangeduid met het teken ⊗ in tabel 3.2.

1.2. **Indelingen en gevarenaanduidingen in tabel 3.1 die voortvloeien uit de omzetting van indelingen van bijlage I bij Richtlijn 67/548/EEG**

1.2.1. **Minimumindeling**

Voor bepaalde gevarenklassen, o.a. acute toxiciteit en STOT (herhaalde blootstelling), komt de indeling overeenkomstig de criteria van Richtlijn 67/548/EEG niet rechtstreeks overeen met de indeling in een gevarenklasse en -categorie overeenkomstig deze verordening. In dat geval wordt de indeling in deze bijlage als minimumindeling beschouwd. Die indeling geldt als geen van de onderstaande voorwaarden van toepassing is:

- de fabrikant of importeur heeft toegang tot gegevens of andere informatie als omschreven in bijlage I, deel 1, die leidt tot indeling in een hogere categorie dan de minimumindeling. In dat geval geldt de indeling in de ernstigste categorie;
- de minimumindeling kan worden verfijnd met behulp van de omzettingstabel in bijlage VII als de fabrikant of importeur de fysische toestand van de stof die in de test betreffende acute toxiciteit bij inademing is gebruikt, kent. De indeling die resulteert uit bijlage VII komt dan in de plaats van de in deze bijlage vermelde minimumindeling, als die anders is.

Een minimumindeling voor een categorie is in de kolom „Indeling” in tabel 3.1 met \* aangegeven.

Het teken \* is ook te vinden in de kolom „Specifieke concentratiegrenzen en vermenigvuldigingsfactoren”, waar het aangeeft dat de vermelding in kwestie specifieke concentratiegrenzen heeft overeenkomstig Richtlijn 67/548/EEG (tabel 3.2) voor acute toxiciteit. Deze concentratiegrenzen kunnen niet worden omgezet in concentratiegrenzen overeenkomstig deze verordening, met name wanneer een minimumindeling is vermeld. Wanneer er een asterisk (\*) staat, kan het nodig zijn voor deze vermelding bijzondere aandacht te besteden aan de indeling voor acute toxiciteit.

1.2.2. **Blootstellingroute kan niet worden uitgesloten**

Voor bepaalde gevarenklassen, bv. STOT, hoeft de blootstellingsroute alleen in de gevarenaanduiding te worden vermeld als afdoeende bewezen is dat het gevaar overeenkomstig de criteria van bijlage I bij andere blootstellingsroutes niet aanwezig is. Krachtens Richtlijn 67/548/EEG werd de blootstellingsroute voor indelingen met R46 aangegeven als er gegevens beschikbaar waren die de indeling voor deze blootstellingsroute rechtvaardigden. De indeling overeenkomstig Richtlijn 67/548/EEG met vermelding van de blootstellingsroute is omgezet in de overeenkomstige klasse en categorie uit hoofde van deze verordening, maar met een algemene gevarenaanduiding waarin de blootstellingsroute niet wordt genoemd, aangezien de daarvoor benodigde informatie niet beschikbaar is.

Die gevarenaanduidingen zijn in tabel 3.1 met \*\* aangegeven.

1.2.3. **Gevarenaanduidingen voor voortplantingstoxiciteit**

De gevarenaanduidingen H360 en H361 duiden op een algemeen risico voor zowel de vruchtbaarheid als de ontwikkeling: „Kan de vruchtbaarheid of het ongeboren kind schaden” en „Wordt ervan verdacht de vruchtbaarheid of het ongeboren kind te schaden”. Volgens de criteria kan de algemene gevarenaanduiding worden vervangen door een gevarenaanduiding die alleen de betrokken eigenschap aangeeft, indien blijkt dat de andere eigenschap niet relevant is.

Om informatie betreffende geharmoniseerde indelingen voor effecten op de vruchtbaarheid en/of ontwikkelingsstoornissen overeenkomstig Richtlijn 67/548/EEG niet verloren te laten gaan, zijn de indelingen uitsluitend voor de effecten met een indeling overeenkomstig die richtlijn omgezet.

Die gevarenaanduidingen zijn in tabel 3.1 met \*\*\* aangegeven.

#### 1.2.4. ***Er kon geen juiste indeling voor fysieke gevaren worden vastgesteld***

Voor sommige vermeldingen kon geen juiste indeling voor fysieke gevaren worden vastgesteld, omdat niet voldoende gegevens beschikbaar zijn om de indelingscriteria in deze verordening toe te passen. De vermelding kan worden geplaatst in een andere (ook hogere) categorie of zelfs een andere gevarenklasse dan aangegeven. De juiste indeling wordt bevestigd door tests.

De vermeldingen met fysieke gevaren die door tests moeten worden bevestigd, worden aangegeven met \*\*\*\* in tabel 3.1.

### 2. DEEL 2: DOSSIERS VOOR GEHARMONISEERDE INDELINGEN EN ETIKETTERINGEN

Dit deel bevat de algemene beginselen voor het opstellen van dossiers waarin een geharmoniseerde indeling en etikettering wordt voorgesteld en gemotiveerd

Voor de opzet en het formaat van dossiers worden de desbetreffende gedeelten van de hoofdstukken 1, 2 en 3 van bijlage I bij Verordening (EG) nr. 1907/2006 gevolgd.

Voor alle dossiers wordt eventuele relevante informatie uit de registratiedossiers in aanmerking genomen en kan alle verdere beschikbare informatie worden gebruikt. Bij gebruik van informatie over de gevaren die niet eerder aan het Agentschap is voorgelegd, moet een uitgebreide onderzoekssamenvatting in het dossier worden opgenomen.

Een dossier voor geharmoniseerde indeling en etikettering bevat het volgende:

— Voorstel

Het voorstel bevat de identiteit van de desbetreffende stof(fen) en de voorgestelde geharmoniseerde indeling en etikettering.

— Motivering van de voorgestelde geharmoniseerde indeling en etikettering

Rekening houdend met de algemene beginselen in deel I van bijlage I bij deze verordening wordt een vergelijking van de beschikbare informatie met de criteria van delen 2 tot en met 5 opgesteld en gedocumenteerd volgens het in deel B van het chemisch veiligheidsrapport in de bijlage bij Verordening (EG) nr. 1907/2006 vastgestelde formaat.

— Motivering in geval van stoffen met andere effecten op Gemeenschapsniveau

In geval van stoffen met andere effecten dan kankerverwekkendheid, mutageniteit, giftigheid voor de voortplanting of sensibilisatie van de luchtwegen wordt een motivering verstrekt dat er aantoonbare behoefte is aan actie op Gemeenschapsniveau. Dit geldt niet voor een werkzame stof in de zin van Richtlijn 91/414/EEG of Richtlijn 98/8/EG.

### 3. DEEL 3: GEHARMONISEERDE INDELINGEN EN ETIKETTERINGEN

Tabel 3.1: de lijst van de geharmoniseerde indelingen en etiketteringen van gevaarlijke stoffen is opgenomen in een apart deel IIIa.

Tabel 3.2: de lijst van de geharmoniseerde indelingen en etiketteringen van gevaarlijke stoffen van bijlage I bij Richtlijn 67/548/EEG is opgenomen in een apart deel IIIb.

Tabel 3.1

Lijst van geharmoniseerde indeling en etikettering van gevaarlijke stoffen

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
001-001-00-9	hydrogen	215-605-7	1333-74-0	Flam. Gas 1 Press. Gas	H220	GHS02 GHS04 Dgr	H220			U
001-002-00-4	aluminium lithium hydride	240-877-9	16853-85-3	Water-react. 1	H260	GHS02 Dgr	H260			
001-003-00-X	sodium hydride	231-587-3	7646-69-7	Water-react. 1	H260	GHS02 Dgr	H260			
001-004-00-5	calcium hydride	232-189-2	7789-78-8	Water-react. 1	H260	GHS02 Dgr	H260			
003-001-00-4	lithium	231-102-5	7439-93-2	Water-react. 1 Skin Corr. 1B	H260 H314	GHS02 GHS05 Dgr	H260 H314	EUH014		
003-002-00-X	n-hexyllithium	404-950-0	21369-64-2	Water-react. 1 Pyr. Sol. 1 Skin Corr. 1A	H260 H250 H314	GHS02 GHS05 Dgr	H260 H250 H314	EUH014		
004-001-00-7	beryllium	231-150-7	7440-41-7	Carc. 1B Acute Tox. 2 * Acute Tox. 3 * STOT RE 1 Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Skin Sens. 1	H350i H330 H301 H372 ** H319 H335 H315 H317	GHS06 GHS08 Dgr	H350i H330 H301 H372 ** H319 H335 H315 H317			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
004-002-00-2	beryllium compounds with the exception of aluminium beryllium silicates, and with those specified elsewhere in this Annex	—	—	Carc. 1B Acute Tox. 2 * Acute Tox. 3 * STOT RE 1 Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 2	H350i H330 H301 H372 ** H319 H335 H315 H317 H411	GHS06 GHS08 GHS09 Dgr	H350i H330 H301 H372 ** H319 H335 H315 H317 H411			A
004-003-00-8	beryllium oxide	215-133-1	1304-56-9	Carc. 1B Acute Tox. 2 * Acute Tox. 3 * STOT RE 1 Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Skin Sens. 1	H350i H330 H301 H372 ** H319 H335 H315 H317	GHS06 GHS08 Dgr	H350i H330 H301 H372 ** H319 H335 H315 H317			
005-001-00-X	boron trifluoride	231-569-5	7637-07-2	Press. Gas Acute Tox. 2 * Skin Corr. 1A	H330 H314	GHS04 GHS06 GHS05 Dgr	H330 H314	EUH014		U
005-002-00-5	boron trichloride	233-658-4	10294-34-5	Press. Gas Acute Tox. 2 * Acute Tox. 2 * Skin Corr. 1B	H330 H300 H314	GHS04 GHS06 GHS05 Dgr	H330 H300 H314	EUH014		U
005-003-00-0	boron tribromide	233-657-9	10294-33-4	Acute Tox. 2 * Acute Tox. 2 * Skin Corr. 1A	H330 H300 H314	GHS06 GHS05 Dgr	H330 H300 H314	EUH014		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevaar­klasse en categorie	Gevaar­aan­duiding	Pictogram, sig­naal­woord	Gevaar­aan­duiding	Aanvullende gevaar­aan­duiding		
005-004-00-6	trialkylboranes, solid	—	—	Pyr. Sol. 1 Skin Corr. 1B	H250 H314	GHS02 GHS05 Dgr	H250 H314			A
005-004-01-3	trialkylboranes, liquid	—	—	Pyr. Liq. 1 Skin Corr. 1B	H250 H314	GHS02 GHS05 Dgr	H250 H314			A
005-005-00-1	trimethyl borate	204-468-9	121-43-7	Flam. Liq. 3 Acute Tox. 4 *	H226 H312	GHS02 GHS07 Wng	H226 H312			
005-006-00-7	dibutyltin hydrogen borate	401-040-5	75113-37-0	STOT RE 1 Acute Tox. 4 * Acute Tox. 4 * Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H372 ** H312 H302 H318 H317 H400 H410	GHS08 GHS05 GHS07 GHS09 Dgr	H372 ** H312 H302 H318 H317 H410			
005-009-00-3	tetrabutylammonium butyltriphenylborate	418-080-4	120307-06-4	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
005-010-00-9	N,N-dimethylanilinium tetrakis(pentafluorophenyl)borate	422-050-6	118612-00-3	Carc. 2 Acute Tox. 4 * Skin Irrit. 2 Eye Dam. 1	H351 H302 H315 H318	GHS08 GHS05 GHS07 Dgr	H351 H302 H315 H318			
005-012-00-X	diethyl[4-[1,5,5-tris(4-diethylaminophenyl)penta-2,4-dienylidene]cyclohexa-2,5-dienylidene]ammonium butyltriphenylborate	418-070-1	141714-54-7	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevaar­klasse en categorie	Gevaar­aan­duiding	Pictogram, sig­naal­woord	Gevaar­aan­duiding	Aanvullende gevaar­aan­duiding		
006-001-00-2	carbon monoxide	211-128-3	630-08-0	Flam. Gas 1 Press. Gas Repr. 1A Acute Tox. 3 * STOT RE 1	H220 H360-D *** H331 H372 **	GHS02 GHS04 GHS06 GHS08 Dgr	H220 H360D *** H331 H372 **			U
006-002-00-8	phosgene; carbonyl chloride	200-870-3	75-44-5	Press. Gas Acute Tox. 2 * Skin Corr. 1B	H330 H314	GHS04 GHS06 GHS05 Dgr	H330 H314			U
006-003-00-3	carbon disulphide	200-843-6	75-15-0	Flam. Liq. 2 Repr. 2 STOT RE 1 Eye Irrit. 2 Skin Irrit. 2	H225 H361fd H372 ** H319 H315	GHS02 GHS08 GHS07 Dgr	H225 H361fd H372 ** H319 H315	Repr. 2; H361fd: C ≥ 1 % STOT RE 1; H372: C ≥ 1 % STOT RE 2; H373: 0.2 % ≤ C < 1 %		
006-004-00-9	calcium carbide	200-848-3	75-20-7	Water-react. 1	H260	GHS02 Dgr	H260			T
006-005-00-4	thiram (ISO); tetramethylthiuram disulphide	205-286-2	137-26-8	Acute Tox. 4 * Acute Tox. 4 * STOT RE 2 * Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H332 H302 H373 ** H319 H315 H317 H400 H410	GHS08 GHS07 GHS09 Wng	H332 H302 H373 ** H319 H315 H317 H410	M=10		
006-006-00-X	hydrogen cyanide; hydrocyanic acid	200-821-6	74-90-8	Flam. Liq. 1 Acute Tox. 2 * Aquatic Acute 1 Aquatic Chronic 1	H224 H330 H400 H410	GHS02 GHS06 GHS09 Dgr	H224 H330 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
006-006-01-7	hydrogen cyanide ... %; hydrocyanic acid ... %	200-821-6	74-90-8	Acute Tox. 2 * Acute Tox. 1 Acute Tox. 2 * Aquatic Acute 1 Aquatic Chronic 1	H330 H310 H300 H400 H410	GHS06 GHS09 Dgr	H330 H310 H300 H410			B
006-007-00-5	salts of hydrogen cyanide with the exception of complex cyanides such as ferrocyanides, ferricyanides and mercuric oxycyanide	—	—	Acute Tox. 2 * Acute Tox. 1 Acute Tox. 2 * Aquatic Acute 1 Aquatic Chronic 1	H330 H310 H300 H400 H410	GHS06 GHS09 Dgr	H330 H310 H300 H410	EUH032		A
006-008-00-0	antu (ISO); 1-(1-naphthyl)-2-thiourea	201-706-3	86-88-4	Acute Tox. 2 * Carc. 2	H300 H351	GHS06 GHS08 Dgr	H300 H351			
006-009-00-6	1-isopropyl-3-methylpyrazol-5-yl dimethylcarbamate; isolan	204-318-2	119-38-0	Acute Tox. 1 Acute Tox. 2 *	H310 H300	GHS06 Dgr	H310 H300			
006-010-00-1	5,5-dimethyl-3-oxocyclohex-1-enyl dimethylcarbamate 5,5-dimethyldihydroresorcinol dimethylcarbamate; dimetan	204-525-8	122-15-6	Acute Tox. 3 *	H301	GHS06 Dgr	H301			
006-011-00-7	carbaryl (ISO); 1-naphthyl methylcarbamate	200-555-0	63-25-2	Carc. 2 Acute Tox. 4 * Aquatic Acute 1	H351 H302 H400	GHS08 GHS07 GHS09 Wng	H351 H302 H400			



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
006-012-00-2	ziram (ISO); zinc bis dimethyldithiocarbamate	205-288-3	137-30-4	Acute Tox. 2 * Acute Tox. 4 * STOT RE 2 * STOT SE 3 Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H330 H302 H373 ** H335 H318 H317 H400 H410	GHS06 GHS08 GHS05 GHS09 Dgr	H330 H302 H373 ** H335 H318 H317 H410		M=100	
006-013-00-8	metam-sodium (ISO); sodium methyldithiocarbamate	205-293-0	137-42-8	Acute Tox. 4 * Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H314 H317 H400 H410	GHS05 GHS07 GHS09 Dgr	H302 H314 H317 H410	EUH031		
006-014-00-3	nabam (ISO); disodium ethylenebis(N, N'-dithiocarbamate)	205-547-0	142-59-6	Acute Tox. 4 * STOT SE 3 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H335 H317 H410	GHS07 GHS09 Wng	H302 H335 H317 H410			
006-015-00-9	diuron (ISO); 3-(3,4-dichlorophenyl)-1,1-dimethylurea	206-354-4	330-54-1	Carc. 2 Acute Tox. 4 * STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H351 H302 H373 ** H400 H410	GHS08 GHS07 GHS09 Wng	H351 H302 H373 ** H410			
006-016-00-4	propoxur (ISO); 2-isopropoxyphenyl N-methylcarbamate; 2-isopropoxyphenyl methylcarbamate	204-043-8	114-26-1	Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H301 H400 H410	GHS06 GHS09 Dgr	H301 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
006-017-00-X	aldicarb (ISO); 2-methyl-2-(methylthio)propanal-O-(N-methylcarbamoyl)oxime	204-123-2	116-06-3	Acute Tox. 2 * Acute Tox. 2 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H330 H300 H311 H400 H410	GHS06 GHS09 Dgr	H330 H300 H311 H410			
006-018-00-5	aminocarb (ISO); 4-dimethylamino-3-tolyl methylcarbamate	217-990-7	2032-59-9	Acute Tox. 3 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H311 H301 H400 H410	GHS06 GHS09 Dgr	H311 H301 H410			
006-019-00-0	di-allate (ISO); S-(2,3-dichloroallyl)-N,N-diisopropylthiocarbamate	218-961-1	2303-16-4	Carc. 2 Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H351 H302 H400 H410	GHS08 GHS07 GHS09 Wng	H351 H302 H410			
006-020-00-6	barban (ISO); 4-chlorbut-2-ynyl N-(3-chlorophenyl)carbamate	202-930-4	101-27-9	Acute Tox. 4 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H317 H400 H410	GHS07 GHS09 Wng	H302 H317 H410			
006-021-00-1	linuron (ISO); 3-(3,4-dichlorophenyl)-1-methoxy-1-methylurea	206-356-5	330-55-2	Repr. 1B Carc. 2 Acute Tox. 4 * STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H360Df H351 H302 H373 ** H400 H410	GHS08 GHS07 GHS09 Dgr	H360Df H351 H302 H373 ** H410			
006-022-00-7	decarbofuran (ISO); 2,3-dihydro-2-methylbenzofuran-7-yl methylcarbamate	—	1563-67-3	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 *	H331 H311 H301	GHS06 Dgr	H331 H311 H301			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
006-023-00-2	mercaptodimethur (ISO); methiocarb (ISO); 3,5-dimethyl-4-methylthiophenyl N-methylcarbamate	217-991-2	2032-65-7	Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H301 H400 H410	GHS06 GHS09 Dgr	H301 H410			
006-024-00-8	proxan-sodium (ISO); sodium O-isopropylthiocarbonate	205-443-5	140-93-2	Acute Tox. 4 * Skin Irrit. 2 Aquatic Chronic 2	H302 H315 H411	GHS07 GHS09 Wng	H302 H315 H411			
006-025-00-3	allethrin; (RS)-3-allyl-2-methyl-4-oxocyclopent-2-enyl (1RS,3RS;1RS,3SR)-2,2-dimethyl-3-(2-methylprop-1-enyl)cyclopropanecarboxylate; bioallethrin; (RS)-3-allyl-2-methyl-4-oxocyclopent-2-enyl (1R,3R)-2,2-dimethyl-3-(2-methylprop-1-enyl)cyclopropanecarboxylate; [1] S-bioallethrin; (S)-3-allyl-2-methyl-4-oxocyclopent-2-enyl (1R,3R)-2,2-dimethyl-3-(2-methylprop-1-enyl)cyclopropanecarboxylate; [2] esbiothrin; (RS)-3-allyl-2-methyl-4-oxocyclopent-2-enyl (1R,3R)-2,2-dimethyl-3-(2-methylprop-1-enyl)cyclopropanecarboxylate [3]	209-542-4 [1] 249-013-5 [2] — [3]	584-79-2 [1] 28434-00-6 [2] 84030-86-4 [3]	Acute Tox. 4 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H332 H302 H400 H410	GHS07 GHS09 Wng	H332 H302 H410			C
006-026-00-9	carbofuran (ISO); 2,3-dihydro-2,2-dimethylbenzofuran-7-yl N-methylcarbamate	216-353-0	1563-66-2	Acute Tox. 2 * Acute Tox. 2 * Aquatic Acute 1 Aquatic Chronic 1	H330 H300 H400 H410	GHS06 GHS09 Dgr	H330 H300 H410			
006-028-00-X	dinobuton (ISO); 2-(1-methylpropyl)-4,6-dinitrophenyl isopropyl carbonate	213-546-1	973-21-7	Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H301 H400 H410	GHS06 GHS09 Dgr	H301 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
006-029-00-5	dioxacarb (ISO); 2-(1,3-dioxolan-2-yl)phenyl N-methylcarbamate	230-253-4	6988-21-2	Acute Tox. 3 * Aquatic Chronic 2	H301 H411	GHS06 GHS09 Dgr	H301 H411			
006-030-00-0	EPTC (ISO); S-ethyl dipropylthiocarbamate	212-073-8	759-94-4	Acute Tox. 4 *	H302	GHS07 Wng	H302			
006-031-00-6	formetanate (ISO); 3-[(EZ)-dimethylaminomethyleneamino] phenyl methylcarbamate	244-879-0	22259-30-9	Acute Tox. 2 * Acute Tox. 2 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H330 H300 H317 H400 H410	GHS06 GHS09 Dgr	H330 H300 H317 H410			
006-032-00-1	monolinuron (ISO); 3-(4-chlorophenyl)-1-methoxy-1-methylurea	217-129-5	1746-81-2	Acute Tox. 4 * STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H302 H373 ** H400 H410	GHS08 GHS07 GHS09 Wng	H302 H373 ** H410			
006-033-00-7	metoxuron (ISO); 3-(3-chloro-4-methoxyphenyl)-1,1-dimethylurea	243-433-2	19937-59-8	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
006-034-00-2	pebulate (ISO); N-butyl-N-ethyl-S-propylthiocarbamate	214-215-4	1114-71-2	Acute Tox. 4 * Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
006-035-00-8	pirimicarb (ISO); 5,6-dimethyl-2-dimethylamino-pyrimidin-4-yl N,N-dimethylcarbamate	245-430-1	23103-98-2	Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H301 H400 H410	GHS06 GHS09 Dgr	H301 H410			
006-036-00-3	benzthiazuron (ISO); 1-benzothiazol-2-yl-3-methylurea	217-685-9	1929-88-0	Acute Tox. 4 *	H302	GHS07 Wng	H302			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
006-037-00-9	promecarb (ISO); 3-isopropyl-5-methylphenyl N-methylcarbamate	220-113-0	2631-37-0	Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H301 H400 H410	GHS06 GHS09 Dgr	H301 H410			
006-038-00-4	sulfallate (ISO); 2-chloroallyl N,N-dimethyldithiocarbamate	202-388-9	95-06-7	Carc. 1B Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H350 H302 H400 H410	GHS08 GHS07 GHS09 Dgr	H350 H302 H410			
006-039-00-X	tri-allate (ISO); S—2,3,3-trichloroallyl diisopropylthiocarbamate	218-962-7	2303-17-5	Acute Tox. 4 * STOT RE 2 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H373 ** H317 H400 H410	GHS08 GHS07 GHS09 Wng	H302 H373 ** H317 H410			
006-040-00-5	3-methylpyrazol-5-yl-dimethylcarbamate; monometilan	—	2532-43-6	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 *	H331 H311 H301	GHS06 Dgr	H331 H311 H301			
006-041-00-0	dimethylcarbamoyl chloride	201-208-6	79-44-7	Carc. 1B Acute Tox. 3 * Acute Tox. 4 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H350 H331 H302 H319 H335 H315	GHS06 GHS08 Dgr	H350 H331 H302 H319 H335 H315		Carc. 1B; H350: C ≥ 0,001 %	
006-042-00-6	monuron (ISO); 3-(4-chlorophenyl)-1,1-dimethylurea	205-766-1	150-68-5	Carc. 2 Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H351 H302 H400 H410	GHS08 GHS07 GHS09 Wng	H351 H302 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
006-043-00-1	3-(4-chlorophenyl)-1,1-dimethyluronium trichloroacetate; monuron-TCA	—	140-41-0	Carc. 2 Eye Irrit. 2 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H351 H319 H315 H400 H410	GHS08 GHS07 GHS09 Wng	H351 H319 H315 H410			
006-044-00-7	isoproturon (ISO); 3-(4-isopropylphenyl)-1,1-dimethylurea	251-835-4	34123-59-6	Carc. 2 Aquatic Acute 1 Aquatic Chronic 1	H351 H400 H410	GHS08 GHS09 Wng	H351 H410		M=10	
006-045-00-2	methomyl (ISO); 1-(methylthio)ethylideneamino N-methylcarbamate	240-815-0	16752-77-5	Acute Tox. 2 * Aquatic Acute 1 Aquatic Chronic 1	H300 H400 H410	GHS06 GHS09 Dgr	H300 H410			
006-046-00-8	bendiocarb (ISO); 2,2-dimethyl-1,3-benzodioxol-4-yl N-methylcarbamate	245-216-8	22781-23-3	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 4 * Aquatic 1 Aquatic Chronic 1	H331 H301 H312 H410	GHS06 GHS09 Dgr	H331 H301 H312 H410			
006-047-00-3	bufencarb (ISO); reaction mass of 3-(1-methylbutyl)phenyl N-methylcarbamate and 3-(1-ethylpropyl)phenyl N-methylcarbamate	—	8065-36-9	Acute Tox. 3 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H311 H301 H400 H410	GHS06 GHS09 Dgr	H311 H301 H410			
006-048-00-9	ethiofencarb (ISO); 2-(ethylthiomethyl)phenyl N-methylcarbamate	249-981-9	29973-13-5	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
006-049-00-4	dixanthogen; O,O-diethyl dithiobis(thioformate)	207-944-4	502-55-6	Acute Tox. 4 *	H302	GHS07 Wng	H302			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
006-050-00-X	1,1-dimethyl-3-phenyluronium trichloroacetate; fenuron-TCA	—	4482-55-7	Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H315 H400 H410	GHS07 GHS09 Wng	H315 H410			
006-051-00-5	ferbam (ISO); iron tris(dimethyldithiocarbamate)	238-484-2	14484-64-1	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H319 H335 H315 H400 H410	GHS07 GHS09 Wng	H319 H335 H315 H410			
006-052-00-0	formetanate hydrochloride; 3-(N,N-dimethylaminomethyleneamino) phenyl N-methylcarbamate	245-656-0	23422-53-9	Acute Tox. 2 * Acute Tox. 2 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H330 H300 H317 H400 H410	GHS06 GHS09 Dgr	H330 H300 H317 H410			
006-053-00-6	isoprocarb (ISO); 2-isopropylphenyl N-methylcarbamate	220-114-6	2631-40-5	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
006-054-00-1	mexacarbate (ISO); 3,5-dimethyl-4-dimethylaminophenyl N-methylcarbamate	206-249-3	315-18-4	Acute Tox. 2 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H300 H312 H400 H410	GHS06 GHS09 Dgr	H300 H312 H410			
006-055-00-7	xylylcarb (ISO); 3,4-dimethylphenyl N-methylcarbamate; 3,4-xylyl methylcarbamate; MPMC	219-364-9	2425-10-7	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
006-056-00-2	metolcarb (ISO); m-tolyl methylcarbamate; MTMC	214-446-0	1129-41-5	Acute Tox. 4 * Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
006-057-00-8	nitrapyrin (ISO); 2-chloro-6-trichloromethylpyridine	217-682-2	1929-82-4	Acute Tox. 4 * Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
006-058-00-3	noruron (ISO); 1,1-dimethyl-3-(perhydro-4,7-methanoin- den-5-yl)urea	—	2163-79-3	Acute Tox. 4 *	H302	GHS07 Wng	H302			
006-059-00-9	oxamyl (ISO); N,N'-dimethylcarbamoyl(methylthio)methyl- enamine N-methylcarbamate;	245-445-3	23135-22-0	Acute Tox. 2 * Acute Tox. 2 * Acute Tox. 4 * Aquatic Chronic 2	H330 H300 H312 H411	GHS06 GHS09 Dgr	H330 H300 H312 H411			
006-060-00-4	oxycarboxin (ISO); 2,3-dihydro-6-methyl-5-(N-phenylcarbamoyl)- 1,4-oxothiine 4,4-dioxide	226-066-2	5259-88-1	Acute Tox. 4 * Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			
006-061-00-X	S-ethyl N-(dimethylaminopropyl)thiocarbamatehydrochloride; prothiocarb hydrochloride	243-193-9	19622-19-6	Acute Tox. 4 * Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
006-062-00-5	methyl 3,4-dichlorophenylcarbanilate; SWEP.	—	1918-18-9	Acute Tox. 4 *	H302	GHS07 Wng	H302			
006-063-00-0	thiobencarb (ISO); S-4-chlorobenzyl diethylthiocarbamate	248-924-5	28249-77-6	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
006-064-00-6	thiofanox (ISO); 3,3-dimethyl-1-(methylthio)butanone-O-(N- methylcarbamoyl)oxime	254-346-4	39196-18-4	Acute Tox. 1 Acute Tox. 2 * Aquatic Acute 1 Aquatic Chronic 1	H310 H300 H400 H410	GHS06 GHS09 Dgr	H310 H300 H410			



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
006-065-00-1	3-chloro-6-cyano-bicyclo(2,2,1)heptan-2-one-O-(N-methylcarbamoyl)oxime; triamid	—	15271-41-7	Acute Tox. 2 * Acute Tox. 3 * Aquatic Chronic 2	H300 H311 H411	GHS06 GHS09 Dgr	H300 H311 H411			
006-066-00-7	vernolate (ISO); S-propyl dipropylthiocarbamate	217-681-7	1929-77-7	Acute Tox. 4 * Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
006-067-00-2	XMC; 3,5-xylyl methylcarbamate	—	2655-14-3	Acute Tox. 4 *	H302	GHS07 Wng	H302			
006-068-00-8	diazomethane	206-382-7	334-88-3	Carc. 1B	H350	GHS08 Dgr	H350			
006-069-00-3	thiophanate-methyl (ISO); 1,2-di-(3-methoxycarbonyl-2-thioureido)benzene	245-740-7	23564-05-8	Muta. 2 Acute Tox. 4 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H341 H332 H317 H400 H410	GHS08 GHS07 GHS09 Wng	H341 H332 H317 H410			
006-070-00-9	furmecycloox (ISO); N-cyclohexyl-N-methoxy-2,5-dimethyl-3-furamide	262-302-0	60568-05-0	Carc. 2 Aquatic Acute 1 Aquatic Chronic 1	H351 H400 H410	GHS08 GHS09 Wng	H351 H410			
006-071-00-4	cyclooct-4-en-1-yl methyl carbonate	401-620-8	87731-18-8	Skin Sens. 1	H317	GHS07 Wng	H317			
006-072-00-X	prosulfocarb (ISO); S-benzyl N,N-dipropylthiocarbamate	401-730-6	52888-80-9	Acute Tox. 4 * Skin Sens. 1 Aquatic Chronic 2	H302 H317 H411	GHS07 GHS09 Wng	H302 H317 H411			
006-073-00-5	3-(dimethylamino)propylurea	401-950-2	31506-43-1	Eye Dam. 1	H318	GHS05 Dgr	H318			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
006-074-00-0	2-(3-(prop-1-en-2-yl)phenyl)prop-2-yl isocyanate	402-440-2	2094-99-7	Acute Tox. 2 * Skin Corr. 1B STOT RE 2 * Resp. Sens. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H330 H314 H373 ** H334 H317 H400 H410	GHS06 GHS08 GHS05 GHS09 Dgr	H330 H314 H373 ** H334 H317 H410			
006-076-00-1	mancozeb (ISO)	—	8018-01-7	STOT SE 3 Skin Sens. 1	H335 H317	GHS07 Wng	H335 H317			
006-077-00-7	maneb (ISO)	235-654-8	12427-38-2	STOT SE 3 Skin Sens. 1	H335 H317	GHS07 Wng	H335 H317			
006-078-00-2	zineb (ISO); zinc ethylenebis(dithiocarbamate) (polymeric)	235-180-1	12122-67-7	STOT SE 3 Skin Sens. 1	H335 H317	GHS07 Wng	H335 H317			
006-079-00-8	disulfiram; tetraethylthiuramdisulfide	202-607-8	97-77-8	Acute Tox. 4 * STOT RE 2 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H373 ** H317 H400 H410	GHS08 GHS07 GHS09 Wng	H302 H373 ** H317 H410			
006-080-00-3	tetramethylthiuram monosulphide	202-605-7	97-74-5	Acute Tox. 4 * Skin Sens. 1 Aquatic Chronic 2	H302 H317 H411	GHS07 GHS09 Wng	H302 H317 H411			
006-081-00-9	zinc bis(dibutylthiocarbamate)	205-232-8	136-23-2	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H319 H335 H315 H317 H400 H410	GHS07 GHS09 Wng	H319 H335 H315 H317 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
006-082-00-4	zinc bis(diethylthiocarbamate)	238-270-9	14324-55-1	Acute Tox. 4 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H319 H335 H315 H317 H400 H410	GHS07 GHS09 Wng	H302 H319 H335 H315 H317 H410			
006-083-00-X	butocarboxim (ISO); 3-(methylthio)-2-butanone O-[(methylamino)carbonyl]oxime	252-139-3	34681-10-2	Flam. Liq. 3 Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Eye Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H226 H331 H311 H301 H319 H400 H410	GHS02 GHS06 GHS09 Dgr	H226 H331 H311 H301 H319 H410			
006-084-00-5	carbosulfan (ISO); 2,3-dihydro-2,2-dimethyl-7-benzofuryl [(dibutylamino)thio]methylcarbamate	259-565-9	55285-14-8	Acute Tox. 3 * Acute Tox. 3 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H331 H301 H317 H400 H410	GHS06 GHS09 Dgr	H331 H301 H317 H410			
006-085-00-0	fenobucarb (ISO); 2-butylphenyl methylcarbamate	223-188-8	3766-81-2	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
006-086-00-6	ethyl [2-(4-phenoxyphenoxy)ethyl]carbamate; fenoxycarb	276-696-7	72490-01-8	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
006-087-00-1	2,3-dihydro-2,2-dimethyl-7-benzofuryl 2,4-dimethyl-6-oxa-5-oxo-3-thia-2,4-diazadecanoate; furathiocarb	265-974-3	65907-30-4	Acute Tox. 2 * Acute Tox. 3 * STOT RE 2 * Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H330 H301 H373 ** H319 H315 H317 H400 H410	GHS06 GHS08 GHS09 Dgr	H330 H301 H373 ** H319 H315 H317 H410			
006-088-00-7	benfuracarb; ethyl N-[2,3-dihydro-2,2-dimethylbenzofuran-7-yloxycarbonyl(methyl)aminothio]-N-isopropyl-β-alaninate	—	82560-54-1	Acute Tox. 3 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H331 H301 H400 H410	GHS06 GHS09 Dgr	H331 H301 H410			
006-089-00-2	chlorine dioxide	233-162-8	10049-04-4	Ox. Gas 1 Press. Gas Acute Tox. 2 * Skin Corr. 1B Aquatic Acute 1	H270 H330 H314 H400	GHS03 GHS04 GHS06 GHS05 GHS09 Dgr	H270 H330 H314 H400	EUH006	M=1000	U
006-089-01-X	chlorine dioxide . . . %	233-162-8	10049-04-4	Acute Tox. 3 * Skin Corr. 1B Aquatic Acute 1	H301 H314 H400	GHS06 GHS05 GHS09 Dgr	H301 H314 H400		Skin Corr. 1B; H314: C ≥ 10 % Skin Irrit. 2; H315: 3 % ≤ C < 10 % Eye Irrit. 2; H319: 0,3 % ≤ C < 10 % STOT SE 3; H335: C ≥ 3 % M=10	B
006-090-00-8	2-(3-iodoprop-2-yn-1-yloxy)ethyl phenyl-carbamate	408-010-0	88558-41-2	Acute Tox. 4 * Eye Dam. 1 Aquatic Chronic 3	H332 H318 H412	GHS05 GHS07 Dgr	H332 H318 H412			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
007-001-00-5	ammonia, anhydrous	231-635-3	7664-41-7	Flam. Gas 2 Press. Gas Acute Tox. 3 * Skin Corr. 1B Aquatic Acute 1	H221 H331 H314 H400	GHS04 GHS06 GHS05 GHS09 Dgr	H221 H331 H314 H400			U
007-001-01-2	ammonia ....%	215-647-6	1336-21-6	Skin Corr. 1B Aquatic Acute 1	H314 H400	GHS05 GHS09 Dgr	H314 H400		STOT SE 3; H335: C ≥ 5 %	B
007-002-00-0	nitrogen dioxide; [1] dinitrogen tetraoxide [2]	233-272-6 [1] 234-126-4 [2]	10102-44-0 [1] 10544-72-6 [2]	Press. Gas Acute Tox. 2 * Skin Corr. 1B	H330 H314	GHS04 GHS06 GHS05 Dgr	H330 H314		*	U 5
007-003-00-6	chlormequat chloride (ISO); 2-chloroethyltrimethylammonium chloride	213-666-4	999-81-5	Acute Tox. 4 * Acute Tox. 4 *	H312 H302	GHS07 Wng	H312 H302			
007-004-00-1	nitric acid ... %	231-714-2	7697-37-2	Ox. Liq. 3 Skin Corr. 1A	H272 H314	GHS03 GHS05 Dgr	H272 H314		Skin Corr. 1A; H314: C ≥ 20 % Skin Corr. 1B; H314: 5 % ≤ C < 20 % Ox. Liq. 3; H272: C ≥ 65 %	B
007-006-00-2	ethyl nitrite	203-722-6	109-95-5	Flam. Gas 1 Press. Gas Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 *	H220 H332 H312 H302	GHS02 GHS04 GHS07 Dgr	H220 H332 H312 H302			U
007-007-00-8	ethyl nitrate	210-903-3	625-58-1	Unst. Expl.	H200	GHS01 Dgr	H200			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
007-008-00-3	hydrazine	206-114-9	302-01-2	Flam. Liq. 3 Carc. 1B Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H226 H350 H331 H311 H301 H314 H317 H400 H410	GHS02 GHS06 GHS08 GHS05 GHS09 Dgr	H226 H350 H331 H311 H301 H314 H317 H410		Skin Corr. 1B; H314: C ≥ 10 % Skin Irrit. 2; H315: 3 % ≤ C < 10 % Eye Irrit. 2; H319: 3 % ≤ C < 10 %	
007-009-00-9	dicyclohexylammonium nitrite	221-515-9	3129-91-7	Acute Tox. 4 * Acute Tox. 4 *	H332 H302	GHS07 Wng	H332 H302		*	
007-010-00-4	sodium nitrite	231-555-9	7632-00-0	Ox. Sol. 3 Acute Tox. 3 * Aquatic Acute 1	H272 H301 H400	GHS03 GHS06 GHS09 Dgr	H272 H301 H400		*	
007-011-00-X	potassium nitrite	231-832-4	7758-09-0	Ox. Sol. 2 Acute Tox. 3 * Aquatic Acute 1	H272 H301 H400	GHS03 GHS06 GHS09 Dgr	H272 H301 H400		*	
007-012-00-5	N,N-dimethylhydrazine	200-316-0	57-14-7	Flam. Liq. 2 Carc. 1B Acute Tox. 3 * Acute Tox. 3 * Skin Corr. 1B Aquatic Chronic 2	H225 H350 H331 H301 H314 H411	GHS02 GHS06 GHS08 GHS05 GHS09 Dgr	H225 H350 H331 H301 H314 H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
007-013-00-0	1,2-dimethylhydrazine	—	540-73-8	Carc. 1B Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Aquatic Chronic 2	H350 H331 H311 H301 H411	GHS06 GHS08 GHS09 Dgr	H350 H331 H311 H301 H411		Carc. 1B; H350: C ≥ 0.01 %	
007-014-00-6	salts of hydrazine	—	—	Carc. 1B Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H350 H331 H311 H301 H317 H400 H410	GHS06 GHS08 GHS09 Dgr	H350 H331 H311 H301 H317 H410			A
007-015-00-1	O-ethylhydroxylamine	402-030-3	624-86-2	Flam. Liq. 2 Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 1 Eye Irrit. 2 Skin Sens. 1 Aquatic Acute 1	H225 H331 H311 H301 H372 ** H319 H317 H400	GHS02 GHS06 GHS08 GHS09 Dgr	H225 H331 H311 H301 H372 ** H319 H317 H400			
007-016-00-7	butyl nitrite	208-862-1	544-16-1	Flam. Liq. 2 Acute Tox. 3 * Acute Tox. 3 *	H225 H331 H301	GHS02 GHS06 Dgr	H225 H331 H301			
007-017-00-2	isobutyl nitrite	208-819-7	542-56-3	Flam. Liq. 2 Carc. 1B Muta. 2 Acute Tox. 4 * Acute Tox. 4 *	H225 H350 H341 H332 H302	GHS02 GHS08 GHS07 Dgr	H225 H350 H341 H332 H302			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
007-018-00-8	<i>sec</i> -butyl nitrite	213-104-8	924-43-6	Flam. Liq. 2 Acute Tox. 4 * Acute Tox. 4 *	H225 H332 H302	GHS02 GHS07 Dgr	H225 H332 H302			
007-019-00-3	<i>tert</i> -butyl nitrite	208-757-0	540-80-7	Flam. Liq. 2 Acute Tox. 4 * Acute Tox. 4 *	H225 H332 H302	GHS02 GHS07 Dgr	H225 H332 H302			
007-020-00-9	pentyl nitrite; [1] 'amyl nitrite', mixed isomers [2]	207-332-7 [1] 203-770-8 [2]	463-04-7 [1] 110-46-3 [2]	Flam. Liq. 2 Acute Tox. 4 * Acute Tox. 4 *	H225 H332 H302	GHS02 GHS07 Dgr	H225 H332 H302			
007-021-00-4	hydrazobenzene; 1,2-diphenylhydrazine	204-563-5	122-66-7	Carc. 1B Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H350 H302 H400 H410	GHS08 GHS07 GHS09 Dgr	H350 H302 H410			
007-022-00-X	hydrazine bis(3-carboxy-4-hydroxybenzenesulfonate)	405-030-1	—	Carc. 1B Acute Tox. 4 * Skin Corr. 1B Skin Sens. 1 Aquatic Chronic 3	H350 H302 H314 H317 H412	GHS08 GHS05 GHS07 Dgr	H350 H302 H314 H317 H412			
007-023-00-5	sodium 3,5-bis(3-(2,4-di- <i>tert</i> -pentylphenoxy)propylcarbamoyl)benzenesulfonate	405-510-0	—	Skin Irrit. 2 Skin Sens. 1	H315 H317	GHS07 Wng	H315 H317			
007-024-00-0	2-(decylthio)ethylammonium chloride	405-640-8	36362-09-1	STOT RE 2 * Skin Irrit. 2 Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H373 ** H315 H318 H400 H410	GHS08 GHS05 GHS09 Dgr	H373 ** H315 H318 H410			



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
007-025-00-6	(4-hydrazinophenyl)-N-methylmethanesulfonamide hydrochloride	406-090-1	81880-96-8	Muta. 2 Acute Tox. 3 * STOT RE 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H341 H301 H372 ** H317 H400 H410	GHS06 GHS08 GHS09 Dgr	H341 H301 H372 ** H317 H410			
007-026-00-1	oxo-((2,2,6,6-tetramethylpiperidin-4-yl)amino)carbonylaceto-hydrazide	413-230-5	122035-71-6	Eye Dam. 1 Skin Sens. 1	H318 H317	GHS05 GHS07 Dgr	H318 H317			
007-027-00-7	1,6-bis(3,3-bis((1-methylpentylidenimino)propyl)ureido)hexane	420-190-2	771478-66-1	Acute Tox. 4 * Acute Tox. 4 * STOT RE 2 * Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H373 ** H314 H317 H400 H410	GHS08 GHS05 GHS07 GHS09 Dgr	H312 H302 H373 ** H314 H317 H410			
008-001-00-8	oxygen	231-956-9	7782-44-7	Ox. Gas 1 Press. Gas	H270	GHS03 GHS04 Dgr	H270			U

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
008-003-00-9	hydrogen peroxide solution ... %	231-765-0	7722-84-1	Ox. Liq. 1 Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1A	H271 H332 H302 H314	GHS03 GHS05 GHS07 Dgr	H271 H332 H302 H314		Ox. Liq. 1; H271: C ≥ 70 %**** Ox. Liq. 2; H272: 50 % ≤ C < 70 % **** * Skin Corr. 1A; H314: C ≥ 70 % Skin Corr. 1B; H314: 50 % ≤ C < 70 % Skin Irrit. 2; H315: 35 % ≤ C < 50 % Eye Dam. 1; H318: 8 % ≤ C < 50 % Eye Irrit. 2; H319: 5 % ≤ C < 8 % STOT SE 3; H335; C ≥ 35 %	B
009-001-00-0	fluorine	231-954-8	7782-41-4	Ox. Gas 1 Press. Gas Acute Tox. 2 * Skin Corr. 1A	H270 H330 H314	GHS03 GHS04 GHS06 GHS05 Dgr	H270 H330 H314			U
009-002-00-6	hydrogen fluoride	231-634-8	7664-39-3	Acute Tox. 2 * Acute Tox. 1 Acute Tox. 2 * Skin Corr. 1A	H330 H310 H300 H314	GHS06 GHS05 Dgr	H330 H310 H300 H314			
009-003-00-1	hydrofluoric acid ... %	231-634-8	7664-39-3	Acute Tox. 2 * Acute Tox. 1 Acute Tox. 2 * Skin Corr. 1A	H330 H310 H300 H314	GHS06 GHS05 Dgr	H330 H310 H300 H314		Skin Corr. 1A; H314: C ≥ 7 % Skin Corr. 1B; H314: 1 % ≤ C < 7 % Eye Irrit. 2; H319: 0,1 % ≤ C < 1 %	B

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
009-004-00-7	sodium fluoride	231-667-8	7681-49-4	Acute Tox. 3 * Eye Irrit. 2 Skin Irrit. 2	H301 H319 H315	GHS06 Dgr	H301 H319 H315	EUH032		
009-005-00-2	potassium fluoride	232-151-5	7789-23-3	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 *	H331 H311 H301	GHS06 Dgr	H331 H311 H301			
009-006-00-8	ammonium fluoride	235-185-9	12125-01-8	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 *	H331 H311 H301	GHS06 Dgr	H331 H311 H301			
009-007-00-3	sodium bifluoride; sodium hydrogen difluoride	215-608-3	1333-83-1	Acute Tox. 3 * Skin Corr. 1B	H301 H314	GHS06 GHS05 Dgr	H301 H314		* Skin Corr. 1B; H314: C ≥ 1 % Skin Irrit. 2; H315: 0,1 % ≤ C < 1 % Eye Irrit. 2; H319: 0,1 % ≤ C < 1 %	
009-008-00-9	potassium bifluoride; potassium hydrogen difluoride	232-156-2	7789-29-9	Acute Tox. 3 * Skin Corr. 1B	H301 H314	GHS06 GHS05 Dgr	H301 H314		* Skin Corr. 1B; H314: C ≥ 1 % Skin Irrit. 2; H315: 0,1 % ≤ C < 1 % Eye Irrit. 2; H319: 0,1 % ≤ C < 1 %	
009-009-00-4	ammonium bifluoride; ammonium hydrogen difluoride	215-676-4	1341-49-7	Acute Tox. 3 * Skin Corr. 1B	H301 H314	GHS06 GHS05 Dgr	H301 H314		* Skin Corr. 1B; H314: C ≥ 1 % Skin Irrit. 2; H315: 0,1 % ≤ C < 1 % Eye Irrit. 2; H319: 0,1 % ≤ C < 1 %	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
009-010-00-X	fluoroboric acid ... %	240-898-3	16872-11-0	Skin Corr. 1B	H314	GHS05 Dgr	H314		Skin Corr. 1B; H314: C ≥ 25 % Skin Irrit. 2; H315: 10 % ≤ C < 25 % Eye Irrit. 2; H319: 10 % ≤ C < 25 %	B
009-011-00-5	fluorosilicic acid ... %	241-034-8	16961-83-4	Skin Corr. 1B	H314	GHS05 Dgr	H314			B
009-012-00-0	alkali fluorosilicates(Na); [1] alkali fluorosilicates(K); [2] alkali fluorosilicates(NH4) [3]	240-934-8 [1] 240-896-2 [2] 240-968-3 [3]	16893-85-9 [1] 16871-90-2 [2] 16919-19-0 [3]	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 *	H331 H311 H301	GHS06 Dgr	H331 H311 H301		*	A
009-013-00-6	fluorosilicates, with the exception of those specified elsewhere in this Annex	—	—	Acute Tox. 4 *	H302	GHS07 Wng	H302		*	A
009-014-00-1	lead hexafluorosilicate	247-278-1	25808-74-6	Repr. 1A Acute Tox. 4 * Acute Tox. 4 * STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H360-Df H332 H302 H373 ** H400 H410	GHS08 GHS07 GHS09 Dgr	H360Df H332 H302 H373 ** H410			1
009-015-00-7	sulphuryl difluoride	220-281-5	2699-79-8	Press. Gas Acute Tox. 3 * STOT RE 2 * Aquatic Acute 1	H331 H373 ** H400	GHS04 GHS06 GHS08 GHS09 Dgr	H331 H373 ** H400			U

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
009-016-00-2	trisodium hexafluoroaluminate; cryolite	237-410-6 239-148-8	13775-53-6 15096-52-3	STOT RE 1 Acute Tox. 4 * Acute Tox. 4 * Aquatic Chronic 2	H372 ** H332 H302 H411	GHS08 GHS07 GHS09 Dgr	H372 ** H332 H302 H411			C
009-017-00-8	potassium mu-fluoro-bis(triethylaluminium)	400-040-2	12091-08-6	Flam. Sol. 1 Water-react. 1 Skin Corr. 1A Acute Tox. 4 *	H228 H270 H314 H332	GHS02 GHS05 GHS07 Dgr	H228 H270 H314 H332	EUH014		T
009-018-00-3	magnesium hexafluorosilicate	241-022-2	16949-65-8	Acute Tox. 3 *	H301	GHS06 Dgr	H301		*	
011-001-00-0	sodium	231-132-9	7440-23-5	Water-react. 1 Skin Corr. 1B	H260 H314	GHS02 GHS05 Dgr	H260 H314	EUH014		
011-002-00-6	sodium hydroxide; caustic soda	215-185-5	1310-73-2	Skin Corr. 1A	H314	GHS05 Dgr	H314		Skin Corr. 1A; H314: C ≥ 5 % Skin Corr. 1B; H314: 2 % ≤ C < 5 % Skin Irrit. 2; H315: 0,5 % ≤ C < 2 % Eye Irrit. 2; H319: 0,5 % ≤ C < 2 %	
011-003-00-1	sodium peroxide	215-209-4	1313-60-6	Ox. Sol. 1 Skin Corr. 1A	H271 H314	GHS03 GHS05 Dgr	H271 H314			
011-004-00-7	sodium azide	247-852-1	26628-22-8	Acute Tox. 2 * Aquatic Acute 1 Aquatic Chronic 1	H300 H400 H410	GHS06 GHS09 Dgr	H300 H400 H410	EUH032		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
011-005-00-2	sodium carbonate	207-838-8	497-19-8	Eye Irrit. 2	H319	GHS07 Wng	H319			
011-006-00-8	sodium cyanate	213-030-6	917-61-3	Acute Tox. 4 * Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			
011-007-00-3	propoxycarbazone-sodium	—	181274-15-7	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410		M=10	
012-001-00-3	magnesium powder (pyrophoric)	231-104-6	7439-95-4	Water-react. 1 Pyr. Sol. 1	H260 H250	GHS02 Dgr	H260 H250			T
012-002-00-9	magnesium, powder or turnings	231-104-6	—	Flam. Sol. 1 Water-react. 2 Self-heat. 1	H228 H261 H252	GHS02 Dgr	H228 H261 H252			T
012-003-00-4	magnesium alkyls	—	—	Pyr. Liq. 1 Water-react. 1 Skin Corr. 1B	H250 H260 H314	GHS02 GHS05 Dgr	H250 H260 H314	EUH014		A
013-001-00-6	aluminium powder (pyrophoric)	231-072-3	7429-90-5	Water-react. 2 Pyr. Sol. 1	H261 H250	GHS02 Dgr	H261 H250			T
013-002-00-1	aluminium powder (stabilised)	231-072-3	—	Water-react. 2 Flam.Sol. 3	H261 H228	GHS02 Dgr	H261 H228			T
013-003-00-7	aluminium chloride, anhydrous	231-208-1	7446-70-0	Skin Corr. 1B	H314	GHS05 Dgr	H314			
013-004-00-2	aluminium alkyls	—	—	Pyr. Liq. 1 Water-react. 1 Skin Corr. 1B	H250 H260 H314	GHS02 GHS05 Dgr	H250 H260 H314	EUH014		A
013-005-00-8	diethyl(ethyltrimethylsilanolato)aluminium	401-160-8	55426-95-4	Water-react. 1 Pyr. Liq. 1 Skin Corr. 1A	H260 H250 H314	GHS02 GHS05 Dgr	H260 H250 H314	EUH014		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
013-006-00-3	(ethyl-3-oxobutanoato-O'1,O'3)(2-dimethylaminoethanolato)(1-methoxypropan-2-olato)aluminium(III), dimerised	402-370-2	—	Flam. Liq. 3 Eye Dam. 1	H226 H318	GHS02 GHS05 Dgr	H226 H318			
013-007-00-9	poly(oxo(2-butoxyethyl-3-oxobutanoato-O'1,O'3)aluminium)	403-430-0	—	Eye Dam. 1	H318	GHS05 Dgr	H318			
013-008-00-4	di-n-octylaluminium iodide	408-190-0	7585-14-0	Pyr. Liq. 1 Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H250 H314 H400 H410	GHS02 GHS05 GHS09 Dgr	H250 H314 H410	EUH014		
013-009-00-X	sodium (n-butyl)x(ethyl)y-1,5-dihydroaluminat x = 0.5 y = 1.5	418-720-2	—	Flam. Sol. 1 Water-react. 1 Pyr. Sol. 1 Acute Tox. 4 * Skin Corr. 1A	H228 H260 H250 H332 H314	GHS02 GHS05 GHS07 Dgr	H228 H260 H250 H332 H314	EUH014		T
014-001-00-9	trichlorosilane	233-042-5	10025-78-2	Flam. Liq. 1 Pyr. Liq. 1 Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1A	H224 H250 H332 H302 H314	GHS02 GHS05 GHS07 Dgr	H224 H250 H332 H302 H314	EUH014 EUH029	* STOT SE 3; H335: C ≥ 1 %	T
014-002-00-4	silicon tetrachloride	233-054-0	10026-04-7	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H319 H335 H315	GHS07 Wng	H319 H335 H315	EUH014		
014-003-00-X	dimethyldichlorosilane	200-901-0	75-78-5	Flam. Liq. 2 Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H225 H319 H335 H315	GHS02 GHS07 Dgr	H225 H319 H335 H315			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
014-004-00-5	trichloro(methyl)silane; methyltrichlorosilane	200-902-6	75-79-6	Flam. Liq. 2 Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H225 H319 H335 H315	GHS02 GHS07 Dgr	H225 H319 H335 H315	EUH014	Skin Irrit. 2; H315: C ≥ 1 % Eye Irrit. 2; H319: C ≥ 1 % STOT SE 3; H335: C ≥ 1 %	
014-005-00-0	tetraethyl silicate; ethyl silicate	201-083-8	78-10-4	Flam. Liq. 3 Acute Tox. 4 * Eye Irrit. 2 STOT SE 3	H226 H332 H319 H335	GHS02 GHS07 Wng	H226 H332 H319 H335			
014-006-00-6	bis(4-fluorophenyl)-methyl-(1,2,4-triazol-4-ylmethyl)silane hydrochloride	401-380-4	—	Eye Irrit. 2 Aquatic Chronic 2	H319 H411	GHS07 GHS09 Wng	H319 H411			
014-007-00-1	triethoxyisobutylsilane	402-810-3	17980-47-1	Skin Irrit. 2	H315	GHS07 Wng	H315			
014-008-00-7	(chloromethyl)bis(4-fluorophenyl)methylsilane	401-200-4	85491-26-5	Aquatic Chronic 2	H411	GHS09	H411			
014-009-00-2	isobutylisopropyl dimethoxysilane	402-580-4	111439-76-0	Flam. Liq. 3 Acute Tox. 4 * Skin Irrit. 2	H226 H332 H315	GHS02 GHS07 Wng	H226 H332 H315			
014-010-00-8	disodium metasilicate	229-912-9	6834-92-0	Skin Corr. 1B STOT SE 3	H314 H335	GHS05 GHS07 Dgr	H314 H335			
014-011-00-3	cyclohexyldimethoxymethylsilane	402-140-1	17865-32-6	Skin Irrit. 2 Aquatic Chronic 2	H315 H411	GHS07 GHS09 Wng	H315 H411			
014-012-00-9	bis(3-(trimethoxysilyl)propyl)amine	403-480-3	—	Eye Dam. 1 Aquatic Chronic 2	H318 H411	GHS05 GHS09 Dgr	H318 H411			



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
014-013-00-4	α-hydroxypoly(methyl-(3-(2,2,6,6-tetramethylpiperidin-4-yloxy)propyl)siloxane)	404-920-7	—	Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1B Aquatic Chronic 2	H312 H302 H314 H411	GHS05 GHS07 GHS09 Dgr	H312 H302 H314 H411			
014-014-00-X	etacelasil (ISO); 6-(2-chloroethyl)-6-(2-methoxyethoxy)-2,5,7,10-tetraoxa-6-silaundecane	253-704-7	37894-46-5	Repr. 1B Acute Tox. 4 * STOT RE 2 *	H360-D *** H302 H373 **	GHS08 GHS07 Dgr	H360D *** H302 H373 **			
014-015-00-5	α-trimethylsilyl-ω-trimethylsiloxypoly[oxy(methyl-3-(2-(2-methoxypropoxy)propoxy)propylsilyl)-co-oxy(dimethylsilyl)]	406-420-4	69430-40-6	Aquatic Chronic 4	H413	—	H413			
014-016-00-0	reaction mass of: 1,3-dihex-5-en-1-yl-1,1,3,3-tetramethyldisiloxane; 1,3-dihex-n-en-1-yl-1,1,3,3-tetramethyldisiloxane	406-490-6	—	Aquatic Chronic 2	H411	GHS09	H411			
014-017-00-6	flusilazole (ISO); bis(4-fluorophenyl)(methyl)(1H—1,2,4-triazol-1-ylmethyl)silane	—	85509-19-9	Carc. 2 Repr. 1B Acute Tox. 4 * Aquatic Chronic 2	H351 H360-D *** H302 H411	GHS08 GHS07 GHS09 Dgr	H351 H360D *** H302 H411			
014-018-00-1	octamethylcyclotetrasiloxane	209-136-7	556-67-2	Repr. 2 Aquatic Chronic 4	H361f *** H413	GHS08 Wng	H361f *** H413			
014-019-00-7	reaction mass of: 4-[[bis-(4-fluorophenyl)methylsilyl]methyl]-4H—1,2,4-triazole; 1-[[bis-(4-fluorophenyl)methylsilyl]methyl]-1H—1,2,4-triazole	403-250-2	—	Carc. 2 Repr. 1B Acute Tox. 4 * Aquatic Chronic 2	H351 H360-D *** H302 H411	GHS08 GHS07 GHS09 Dgr	H351 H360D *** H302 H411			
014-020-00-2	bis(1,1-dimethyl-2-propynyloxy)dimethylsilane	414-960-7	53863-99-3	Acute Tox. 4 *	H332	GHS07 Wng	H332			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
014-021-00-8	tris(isopropenyloxy)phenyl silane	411-340-8	52301-18-5	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H400 H410			
014-022-00-3	reaction product of: (2-hydroxy-4-(3-propenoxy)benzophenone and triethoxysilane) with (hydrolysis product of silica and methyltrimethoxysilane)	401-530-9	—	Flam. Sol. 1 STOT SE 1 Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 *	H228 H370 ** H332 H312 H302	GHS02 GHS08 GHS07 Dgr	H228 H370 ** H332 H312 H302			T
014-023-00-9	$\alpha$ , $\omega$ -dihydroxypoly(hex-5-en-1-ylmethylsiloxane)hoxysilane with (hydrolysis product of silica and methyltrimethoxysilane)iazole	408-160-7	125613-45-8	Aquatic Chronic 2	H411	GHS09	H411			
014-024-00-4	1-((3-(3-chloro-4-fluorophenyl)propyl)dime-thylsilanyl)-4-ethoxybenzene	412-620-2	121626-74-2	Aquatic Chronic 2	H411	GHS09	H411			
014-025-00-X	4-[3-(diethoxymethylsilylpropoxy)-2,2,6,6-tetramethyl]piperidine	411-400-3	102089-33-8	Acute Tox. 4 * STOT RE 2 * Skin Irrit. 2 Eye Dam. 1 Aquatic Chronic 3	H302 H373 ** H315 H318 H412	GHS08 GHS05 GHS07 Dgr	H302 H373 ** H315 H318 H412			
014-026-00-5	dichloro-(3-(3-chloro-4-fluorophenyl)propyl)methylsilane	407-180-3	770722-36-6	Skin Corr. 1A	H314	GHS05 Dgr	H314			
014-027-00-0	chloro(3-(3-chloro-4-fluorophenyl)propyl)dimethylsilane	410-270-5	770722-46-8	Skin Corr. 1A	H314	GHS05 Dgr	H314			
014-028-00-6	$\alpha$ -[3-(1-oxoprop-2-enyl)-1-oxypropyl]dimethoxysilyloxy- $\omega$ -[3(1-oxoprop-2-enyl)-1-oxypropyl]dimethoxysilyl poly(dimethylsiloxane)	415-290-8	193159-06-7	Skin Sens. 1	H317	GHS07 Wng	H317			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
014-029-00-1	O,O'-(ethenylmethylsilylene)di[(4-methylpentan-2-one)oxime]	421-870-1	156145-66-3	Repr. 2 Acute Tox. 4 * STOT RE 2 *	H361f *** H302 H373 **	GHS08 GHS07 Wng	H361f *** H302 H373 **			
014-030-00-7	[(dimethylsilylene)bis((1,2,3,3a,7a-η)-1H-inden-1-ylidene)dimethyl]hafnium	422-060-0	137390-08-0	Acute Tox. 2 *	H300	GHS06 Dgr	H300			
014-031-00-2	bis(1-methylethyl)-dimethoxysilane	421-540-7	18230-61-0	Flam. Liq. 3 Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 3	H226 H315 H317 H412	GHS02 GHS07 Wng	H226 H315 H317 H412			
014-032-00-8	dicyclopentylmethoxysilane	404-370-8	126990-35-0	Skin Irrit. 2 Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H315 H318 H400 H410	GHS05 GHS09 Dgr	H315 H318 H410			
015-001-00-1	white phosphorus	231-768-7	12185-10-3	Pyr. Sol. 1 Acute Tox. 2 * Acute Tox. 2 * Skin Corr. 1A Aquatic Acute 1	H250 H330 H300 H314 H400	GHS02 GHS06 GHS05 GHS09 Dgr	H250 H330 H300 H314 H400			
015-002-00-7	red phosphorus	231-768-7	7723-14-0	Flam. Sol. 1 Aquatic Chronic 3	H228 H412	GHS02 Dgr	H228 H412			
015-003-00-2	calcium phosphide; tricalcium diphosphide	215-142-0	1305-99-3	Water-react. 1 Acute Tox. 2 * Aquatic Acute 1	H260 H300 H400	GHS02 GHS06 GHS09 Dgr	H260 H300 H400	EUH029		T

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
015-004-00-8	aluminium phosphide	244-088-0	20859-73-8	Water-react. 1 Acute Tox. 2 * Aquatic Acute 1	H260 H300 H400	GHS02 GHS06 GHS09 Dgr	H260 H300 H400	EUH029 EUH032		T
015-005-00-3	magnesium phosphide; trimagnesium diphosphide	235-023-7	12057-74-8	Water-react. 1 Acute Tox. 2 * Aquatic Acute 1	H260 H300 H400	GHS02 GHS06 GHS09 Dgr	H260 H300 H400	EUH029		T
015-006-00-9	trizinc diphosphide; zinc phosphide	215-244-5	1314-84-7	Water-react. 1 Acute Tox. 2 * Aquatic Acute 1 Aquatic Chronic 1	H260 H300 H400 H410	GHS02 GHS06 GHS09 Dgr	H260 H300 H410	EUH029 EUH032		T
015-007-00-4	phosphorus trichloride	231-749-3	7719-12-2	Acute Tox. 2 * Acute Tox. 2 * STOT RE 2 * Skin Corr. 1A	H330 H300 H373 ** H314	GHS06 GHS08 GHS05 Dgr	H330 H300 H373 ** H314	EUH014 EUH029		
015-008-00-X	phosphorus pentachloride	233-060-3	10026-13-8	Acute Tox. 2 * Acute Tox. 4 * STOT RE 2 * Skin Corr. 1B	H330 H302 H373 ** H314	GHS06 GHS08 GHS05 Dgr	H330 H302 H373 ** H314	EUH014 EUH029		
015-009-00-5	phosphoryl trichloride	233-046-7	10025-87-3	Acute Tox. 2 * STOT RE 1 Acute Tox. 4 * Skin Corr. 1A	H330 H372 ** H302 H314	GHS06 GHS08 GHS05 Dgr	H330 H372 ** H302 H314	EUH014 EUH029		
015-010-00-0	phosphorus pentoxide	215-236-1	1314-56-3	Skin Corr. 1A	H314	GHS05 Dgr	H314			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
015-011-00-6	phosphoric acid ... %, orthophosphoric acid ... %	231-633-2	7664-38-2	Skin Corr. 1B	H314	GHS05 Dgr	H314		Skin Corr. 1B; H314: C ≥ 25 % Skin Irrit. 2; H315: 10 % ≤ C < 25 % Eye Irrit. 2; H319: 10 % ≤ C < 25 %	B
015-012-00-1	tetraphosphorus trisulphide; phosphorus sesquisulphid	215-245-0	1314-85-8	Flam. Sol. 2 Water-react. 1 Acute Tox. 4 * Aquatic Acute 1	H228 H260 H302 H400	GHS02 GHS07 GHS09 Dgr	H228 H260 H302 H400			T
015-013-00-7	triethyl phosphate	201-114-5	78-40-0	Acute Tox. 4 *	H302	GHS07 Wng	H302			
015-014-00-2	tributyl phosphate	204-800-2	126-73-8	Carc. 2 Acute Tox. 4 * Skin Irrit. 2	H351 H302 H315	GHS08 GHS07 Wng	H351 H302 H315			
015-015-00-8	tricresyl phosphate (o-o-o-, o-o-m-, o-o-p-, o-m-m-, o-m-p-, o-p-p-); tritolyl phosphate (o-o-o-, o-o-m-, o-o-p-, o-m-m-, o-m-p-, o-p-p-);	201-103-5	78-30-8	STOT SE 1 Aquatic Chronic 2	H370 H411	GHS08 GHS09 Dgr	H370 ** H411		STOT SE 1; H370: C ≥ 1 % STOT SE 2; H371: 0,2 % ≤ C < 1 %	C
015-016-00-3	tricresyl phosphate (m-m-m-, m-m-p-, m-p-p-, p-p-p-); tritolyl phosphate (m-m-m-, m-m-p-, m-p-p-, p-p-p-);	201-105-6	78-32-0	Acute Tox. 4 * Acute Tox. 4 * Aquatic Chronic 2	H312 H302 H411	GHS07 GHS09 Wng	H312 H302 H411		*	C
015-019-00-X	dichlorvos (ISO); 2,2-dichlorovinyl dimethyl phosphate	200-547-7	62-73-7	Acute Tox. 2 * Acute Tox. 3 * Acute Tox. 3 * Skin Sens. 1 Aquatic Acute 1	H330 H311 H301 H317 H400	GHS06 GHS09 Dgr	H330 H311 H301 H317 H400			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
015-020-00-5	mevinphos (ISO); 2-methoxycarbonyl-1-methylvinyl dimethyl phosphate	232-095-1	7786-34-7	Acute Tox. 1 Acute Tox. 2 * Aquatic Acute 1 Aquatic Chronic 1	H310 H300 H400 H410	GHS06 GHS09 Dgr	H310 H300 H410		M=10000	
015-021-00-0	trichlorfon (ISO); dimethyl 2,2,2-trichloro-1-hydroxyethylphosphonate	200-149-3	52-68-6	Acute Tox. 4 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H317 H400 H410	GHS07 GHS09 Wng	H302 H317 H400 H410		M=1000	
015-022-00-6	phosphamidon (ISO); 2-chloro-2-diethylcarbamoyl-1-methylvinyl dimethyl phosphate	236-116-5	13171-21-6	Muta. 2 Acute Tox. 2 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H341 H300 H311 H400 H410	GHS06 GHS08 GHS09 Dgr	H341 H300 H311 H410			
015-023-00-1	pyrazoxon; diethyl 3-methylpyrazol-5-yl phosphate	—	108-34-9	Acute Tox. 2 * Acute Tox. 1 Acute Tox. 2 *	H330 H310 H300	GHS06 Dgr	H330 H310 H300			
015-024-00-7	triamiphos (ISO); 5-amino-3-phenyl-1,2,4-triazol-1-yl-N,N,N',N'-tetramethylphosphonic diamide	—	1031-47-6	Acute Tox. 1 Acute Tox. 2 *	H310 H300	GHS06 Dgr	H310 H300			
015-025-00-2	TEPP (ISO); tetraethyl pyrophosphate	203-495-3	107-49-3	Acute Tox. 1 Acute Tox. 2 * Aquatic Acute 1	H310 H300 H400	GHS06 GHS09 Dgr	H310 H300 H400			
015-026-00-8	schradan (ISO); octamethylpyrophosphoramidate	205-801-0	152-16-9	Acute Tox. 1 Acute Tox. 2 *	H310 H300	GHS06 Dgr	H310 H300			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
015-027-00-3	sulfotep (ISO); O,O,O,O-tetraethyl dithiopyrophosphate	222-995-2	3689-24-5	Acute Tox. 1 Acute Tox. 2 * Aquatic Acute 1 Aquatic Chronic 1	H310 H300 H400 H410	GHS06 GHS09 Dgr	H310 H300 H410		M=1000	
015-028-00-9	demeton-O (ISO); O,O-diethyl-O-2-ethylthioethyl phosphorothioate	206-053-8	298-03-3	Acute Tox. 1 Acute Tox. 2 * Aquatic Acute 1	H310 H300 H400	GHS06 GHS09 Dgr	H310 H300 H400			
015-029-00-4	demeton-S (ISO); diethyl-S-2-ethylthioethyl phosphorothioate	204-801-8	126-75-0	Acute Tox. 1 Acute Tox. 2 *	H310 H300	GHS06 Dgr	H310 H300			
015-030-00-X	demeton-O-methyl (ISO); O-2-ethylthioethyl O,O-dimethyl phosphorothioate	212-758-1	867-27-6	Acute Tox. 3 *	H301	GHS06 Dgr	H301			
015-031-00-5	demeton-S-methyl (ISO); S-2-ethylthioethyl dimethyl phosphorothioate	213-052-6	919-86-8	Acute Tox. 3 * Acute Tox. 3 * Aquatic Chronic 2	H311 H301 H411	GHS06 GHS09 Dgr	H311 H301 H411			
015-032-00-0	prothoate (ISO); O,O-diethyl isopropylcarbamoylmethyl phosphorodithioate	218-893-2	2275-18-5	Acute Tox. 1 Acute Tox. 2 * Aquatic Chronic 3	H310 H300 H412	GHS06 Dgr	H310 H300 H412			
015-033-00-6	phorate (ISO); O,O-diethyl ethylthiomethyl phosphorodithioate	206-052-2	298-02-2	Acute Tox. 1 Acute Tox. 2 * Aquatic Acute 1 Aquatic Chronic 1	H310 H300 H400 H410	GHS06 GHS09 Dgr	H310 H300 H410		M=1000	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
015-034-00-1	parathion (ISO); O,O-diethyl O-4-nitrophenyl phosphorothioate	200-271-7	56-38-2	Acute Tox. 2 * Acute Tox. 2 * Acute Tox. 3 * STOT RE 1 Aquatic Acute 1 Aquatic Chronic 1	H330 H300 H311 H372 **	GHS06 GHS08 GHS09 Dgr	H330 H300 H311 H372 ** H410		M=100	
015-035-00-7	parathion — methyl (ISO); O,O-dimethyl O-4-nitrophenyl phosphorothioate	206-050-1	298-00-0	Flam. Liq. 3 Acute Tox. 2 * Acute Tox. 2 * Acute Tox. 3 * STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H226 H330 H300 H311 H373 **	GHS02 GHS06 GHS08 GHS09 Dgr	H226 H330 H300 H311 H373 ** H410		M=100	
015-036-00-2	O-ethyl O-4-nitrophenyl phenylphosphonothioate; EPN	218-276-8	2104-64-5	Acute Tox. 1 Acute Tox. 2 * Aquatic Acute 1 Aquatic Chronic 1	H310 H300 H400 H410	GHS06 GHS09 Dgr	H310 H300 H410			
015-037-00-8	phenkapton (ISO); S-(2,5-dichlorophenylthiomethyl) O,O-diethyl phosphorodithioate	218-892-7	2275-14-1	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H331 H311 H301 H400 H410	GHS06 GHS09 Dgr	H331 H311 H301 H410			
015-038-00-3	coumaphos (ISO); O-3-chloro-4-methylcoumarin-7-yl O,O-diethyl phosphorothioate	200-285-3	56-72-4	Acute Tox. 2 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H300 H312 H400 H410	GHS06 GHS09 Dgr	H300 H312 H410			



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
015-039-00-9	azinphos-methyl (ISO); O,O-dimethyl-4-oxobenzotriazin-3-ylmethyl phosphorodithioate	201-676-1	86-50-0	Acute Tox. 2 * Acute Tox. 2 * Acute Tox. 3 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H330 H300 H311 H317 H400 H410	GHS06 GHS09 Dgr	H330 H300 H311 H317 H410			
015-040-00-4	diazinon (ISO); O,O-diethyl O-2-isopropyl-6-methylpyrimidin-4-yl phosphorothioate	206-373-8	333-41-5	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H400 H410			
015-041-00-X	malathion (ISO); 1,2-bis (ethoxycarbonyl) ethyl O,O-dimethyl phosphorodithioate	204-497-7	121-75-5	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H400 H410		M=100	
015-042-00-5	chlorthion O-(3-chloro-4-nitrophenyl) O,O-dimethyl phosphorothioate	207-902-5	500-28-7	Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H332 H312 H302 H400 H410	GHS07 GHS09 Wng	H332 H312 H302 H410		M=100	
015-043-00-0	phosnichlor (ISO); O-4-chloro-3-nitrophenyl O,O-dimethyl phosphorothioate	—	5826-76-6	Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 *	H332 H312 H302	GHS07 Wng	H332 H312 H302			
015-044-00-6	carbophenothion (ISO); 4-chlorophenylthiomethyl O,O-diethyl phosphorodithioate	212-324-1	786-19-6	Acute Tox. 3 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H311 H301 H400 H410	GHS06 GHS09 Dgr	H311 H301 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
015-045-00-1	mecarbam (ISO); N-ethoxycarbonyl-N-methylcarbamoylmethyl O,O-diethyl phosphorodithioate	219-993-9	2595-54-2	Acute Tox. 3 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H311 H301 H400 H410	GHS06 GHS09 Dgr	H311 H301 H400 H410			
015-046-00-7	oxydemeton-methyl; S-2-(ethylsulphinyl)ethyl O,O-dimethyl phosphorothioate	206-110-7	301-12-2	Acute Tox. 3 * Acute Tox. 3 * Aquatic Acute 1	H311 H301 H400	GHS06 GHS09 Dgr	H311 H301 H400			
015-047-00-2	ethion (ISO); O,O,O',O'-tetraethyl S,S'-methylenedi (phosphorodithioate); diethion	209-242-3	563-12-2	Acute Tox. 3 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H301 H312 H400 H410	GHS06 GHS09 Dgr	H301 H312 H410		M=10000	
015-048-00-8	fenthion (ISO); O,O-dimethyl-O-(4-methylthion-m-tolyl) phosphorothioate	200-231-9	55-38-9	Muta. 2 Acute Tox. 3 * STOT RE 1 Acute Tox. 4 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H341 H331 H372 ** H312 H302 H400 H410	GHS06 GHS08 GHS09 Dgr	H341 H331 H372 ** H312 H302 H410			
015-049-00-3	endothion (ISO); S-5-methoxy-4-oxopyran-2-ylmethyl dimethyl phosphorothioate	220-472-3	2778-04-3	Acute Tox. 3 * Acute Tox. 3 *	H311 H301	GHS06 Dgr	H311 H301			
015-050-00-9	thiometon (ISO); S-2-ethylthioethyl O,O-dimethyl phosphorodithioate	211-362-6	640-15-3	Acute Tox. 3 * Acute Tox. 4 *	H301 H312	GHS06 Dgr	H301 H312			
015-051-00-4	dimethoate (ISO); O,O-dimethyl methylcarbamoylmethyl phosphorodithioate	200-480-3	60-51-5	Acute Tox. 4 * Acute Tox. 4 *	H312 H302	GHS07 Wng	H312 H302			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
015-052-00-X	fenchlorphos (ISO); O,O-dimethyl O—2,4,5-trichlorophenyl phosphorothioate	206-082-6	299-84-3	Acute Tox. 4 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H400 H410	GHS07 GHS09 Wng	H312 H302 H410			
015-053-00-5	menazon (ISO); S-[(4,6-diamino-1,3,5-triazin-2-yl)methyl] O, O-dimethyl phosphorodithioate	201-123-4	78-57-9	Acute Tox. 4 * Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			
015-054-00-0	fenitrothion (ISO); O,O-dimethyl O-4-nitro- <i>m</i> -tolyl phosphorothioate	204-524-2	122-14-5	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
015-055-00-6	naled (ISO); 1,2-dibromo-2,2-dichloroethyl dimethyl phosphate	206-098-3	300-76-5	Acute Tox. 4 * Acute Tox. 4 * Eye Irrit. 2 Skin Irrit. 2 Aquatic Acute 1	H312 H302 H319 H315 H400	GHS07 GHS09 Wng	H312 H302 H319 H315 H400		M=1000	
015-056-00-1	azinphos-ethyl (ISO); O,O-diethyl 4-oxobenzotriazin-3-ylmethyl phosphorodithioate	220-147-6	2642-71-9	Acute Tox. 2 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H300 H311 H400 H410	GHS06 GHS09 Dgr	H300 H311 H410			
015-057-00-7	formothion (ISO); N-formyl-N-methylcarbamoylmethyl O,O-dimethyl phosphorodithioate	219-818-6	2540-82-1	Acute Tox. 4 * Acute Tox. 4 *	H312 H302	GHS07 Wng	H312 H302			
015-058-00-2	morphothion (ISO); O,O-dimethyl-S-(morpholinocarbonylmethyl) phosphorodithioate	205-628-0	144-41-2	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H331 H311 H301 H400 H410	GHS06 GHS09 Dgr	H331 H311 H301 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
015-059-00-8	vamidotion (ISO); O,O-dimethyl S-2-(1-methylcarbamoylthylthio) ethyl phosphorothioate	218-894-8	2275-23-2	Acute Tox. 3 * Acute Tox. 4 * Aquatic Acute 1	H301 H312 H400	GHS06 GHS09 Dgr	H301 H312 H400			
015-060-00-3	disulfoton (ISO); O,O-diethyl 2-ethylthioethyl phosphorodithioate	206-054-3	298-04-4	Acute Tox. 1 Acute Tox. 2 * Aquatic Acute 1 Aquatic Chronic 1	H310 H300 H400 H410	GHS06 GHS09 Dgr	H310 H300 H410			
015-061-00-9	dimefox (ISO); tetramethylphosphorodiamidic fluoride	204-076-8	115-26-4	Acute Tox. 1 Acute Tox. 2 *	H310 H300	GHS06 Dgr	H310 H300			
015-062-00-4	mipafox (ISO); N,N'- di-isopropylphosphorodiamidic fluoride	206-742-3	371-86-8	STOT SE 1	H370 **	GHS08 Dgr	H370 **			
015-063-00-X	dioxathion (ISO); 1,4-dioxan-2,3-diyl-O,O',O'-tetraethyl di (phosphorodithioate)	201-107-7	78-34-2	Acute Tox. 2 * Acute Tox. 2 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H330 H300 H311 H400 H410	GHS06 GHS09 Dgr	H330 H300 H311 H410		M=1000	
015-064-00-5	bromophos-ethyl (ISO); O-4-bromo-2,5-dichlorophenyl O,O-diethyl phosphorothioate	225-399-0	4824-78-6	Acute Tox. 3 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H301 H312 H400 H410	GHS06 GHS09 Dgr	H301 H312 H410			
015-065-00-0	S-[2-(ethylsulphinyl)ethyl] O,O-dimethyl phosphorodithioate	—	2703-37-9	Acute Tox. 2 * Acute Tox. 1 Acute Tox. 2 * Aquatic Chronic 2	H330 H310 H300 H411	GHS06 GHS09 Dgr	H330 H310 H300 H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
015-066-00-6	omethoate (ISO); O,O-dimethyl S-methylcarbamoylmethyl phosphorothioate	214-197-8	1113-02-6	Acute Tox. 3 * Acute Tox. 4 * Aquatic Acute 1	H301 H312 H400	GHS06 GHS09 Dgr	H301 H312 H400			
015-067-00-1	phosalone (ISO); S-(6-chloro-2-oxobenzoxazolin-3-ylmethyl) O,O-diethyl phosphorodithioate	218-996-2	2310-17-0	Acute Tox. 3 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H301 H312 H400 H410	GHS06 GHS09 Dgr	H301 H312 H410			
015-068-00-7	dichlofenthion (ISO); O—2,4-dichlorophenyl O,O-diethyl phosphorothioate	202-564-5	97-17-6	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H400 H410			
015-069-00-2	methidathion (ISO); 2,3-dihydro-5-methoxy-2-oxo-1,3,4-thiadiazol-3-ylmethyl-O,O-dimethylphosphorodithioate	213-449-4	950-37-8	Acute Tox. 2 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H300 H312 H400 H410	GHS06 GHS09 Dgr	H300 H312 H410			
015-070-00-8	cyanthoate (ISO); S-(N-(1-cyano-1-methylethyl)carbamoylmethyl) O,O-diethyl phosphorothioate	223-099-4	3734-95-0	Acute Tox. 2 * Acute Tox. 3 *	H300 H311	GHS06 Dgr	H300 H311			
015-071-00-3	chlorfenvinphos (ISO); 2-chloro-1-(2,4 dichlorophenyl) vinyl diethyl phosphate	207-432-0	470-90-6	Acute Tox. 2 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H300 H311 H400 H410	GHS06 GHS09 Dgr	H300 H311 H410			
015-072-00-9	monocrotophos (ISO); dimethyl-1-methyl-2-(methylcarbamoyl) vinyl phosphate	230-042-7	6923-22-4	Muta. 2 Acute Tox. 2 * Acute Tox. 2 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H341 H330 H300 H311 H400 H410	GHS06 GHS08 GHS09 Dgr	H341 H330 H300 H311 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
015-073-00-4	dicrotophos (ISO); (Z)-2-dimethylcarbamoyl-1-methylvinyl dimethyl phosphate	205-494-3	141-66-2	Acute Tox. 2 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H300 H311 H400 H410	GHS06 GHS09 Dgr	H300 H311 H410			
015-074-00-X	crufomate (ISO); 4-tert-butyl-2-chlorophenyl methyl methylphosphoramidate	206-083-1	299-86-5	Acute Tox. 4 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H400 H410	GHS07 GHS09 Wng	H312 H302 H410			
015-075-00-5	S-[2-(isopropylsulphinyl)ethyl] O,O-dimethyl phosphorothioate	—	2635-50-9	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 *	H331 H311 H301	GHS06 Dgr	H331 H311 H301			
015-076-00-0	potasan; O, O-diethyl O-(4-methylcoumarin-7-yl) phosphorothioate	—	299-45-6	Acute Tox. 2 * Acute Tox. 1 Acute Tox. 2 * Aquatic Acute 1 Aquatic Chronic 1	H330 H310 H300 H400 H410	GHS06 GHS09 Dgr	H330 H310 H300 H410		M=1000	
015-077-00-6	2,2-dichlorovinyl 2-ethylsulphinylethyl methyl phosphate	—	7076-53-1	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 *	H331 H311 H301	GHS06 Dgr	H331 H311 H301			
015-078-00-1	demeton-S-methylsulphon (ISO); S-2-ethylsulphonylethyl dimethyl phosphorothioate	241-109-5	17040-19-6	Acute Tox. 3 * Acute Tox. 4 * Aquatic Chronic 2	H301 H312 H411	GHS06 GHS09 Dgr	H301 H312 H411			
015-079-00-7	acephate (ISO); O,S-dimethyl acetylphosphoramidothioate	250-241-2	30560-19-1	Acute Tox. 4 *	H302	GHS07 Wng	H302			
015-080-00-2	amidithion (ISO); 2-methoxyethylcarbamoylmethyl O,O-dimethyl phosphorodithioate	—	919-76-6	Acute Tox. 4 *	H302	GHS07 Wng	H302			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
015-081-00-8	O,O,O',O'-tetrapropyl dithiopyrophosphate	221-817-0	3244-90-4	Acute Tox. 4 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H400 H410	GHS07 GHS09 Wng	H312 H302 H410			
015-082-00-3	azothoate (ISO); O-4-(4-chlorophenylazo)phenyl O,O-dimethyl phosphorothioate	227-419-3	5834-96-8	Acute Tox. 4 * Acute Tox. 4 *	H332 H302	GHS07 Wng	H332 H302			
015-083-00-9	bensulide (ISO); O,O-diisopropyl 2-phenylsulfonylaminoethyl phosphorodithioate	212-010-4	741-58-2	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
015-084-00-4	chlorpyrifos (ISO); O,O-diethyl O—3,5,6-trichloro-2-pyridyl phosphorothioate	220-864-4	2921-88-2	Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H301 H400 H410	GHS06 GHS09 Dgr	H301 H400 H410		M=10000	
015-085-00-X	chlorphonium chloride (ISO); tributyl (2,4-dichlorobenzyl) phosphonium chloride	204-105-4	115-78-6	Acute Tox. 3 * Acute Tox. 4 * Eye Irrit. 2 Skin Irrit. 2	H301 H312 H319 H315	GHS06 Dgr	H301 H312 H319 H315			
015-086-00-5	coumithoate (ISO); O,O-diethyl O—7,8,9,10-tetrahydro-6-oxo-benzo(c)chromen-3-yl phosphorothioate	—	572-48-5	Acute Tox. 3 *	H301	GHS06 Dgr	H301			
015-087-00-0	cyanophos (ISO); O-4-cyanophenyl O,O-dimethyl phosphorothioate	220-130-3	2636-26-2	Acute Tox. 4 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H400 H410	GHS07 GHS09 Wng	H312 H302 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
015-088-00-6	dialifos (ISO); 2-chloro-1-phthalimidoethyl O,O-diethyl phosphorodithioate	233-689-3	10311-84-9	Acute Tox. 2 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H300 H311 H400 H410	GHS06 GHS09 Dgr	H300 H311 H400 H410			
015-089-00-1	ethoate-methyl (ISO); ethylcarbamoylmethyl O,O-dimethyl phosphorodithioate	204-121-1	116-01-8	Acute Tox. 4 * Acute Tox. 4 *	H312 H302	GHS07 Wng	H312 H302			
015-090-00-7	fensulfothion (ISO); O,O-diethyl O-4-methylsulfinylphenyl phosphorothioate	204-114-3	115-90-2	Acute Tox. 1 Acute Tox. 2 * Aquatic Acute 1 Aquatic Chronic 1	H310 H300 H400 H410	GHS06 GHS09 Dgr	H310 H300 H410			
015-091-00-2	fonofos (ISO); O-ethyl phenyl ethylphosphonodithioate	213-408-0	944-22-9	Acute Tox. 1 Acute Tox. 2 * Aquatic Acute 1 Aquatic Chronic 1	H310 H300 H400 H410	GHS06 GHS09 Dgr	H310 H300 H410			
015-092-00-8	phosacetim (ISO); O,O-bis(4-chlorophenyl) N-acetimidoylphosphoramidothioate	223-874-7	4104-14-7	Acute Tox. 1 Acute Tox. 2 * Aquatic Acute 1 Aquatic Chronic 1	H310 H300 H400 H410	GHS06 GHS09 Dgr	H310 H300 H410			
015-093-00-3	leptophos (ISO); O-4-bromo-2,5-dichlorophenyl O-methyl phenylphosphorothioate	244-472-8	21609-90-5	Acute Tox. 3 * STOT SE 1 Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H301 H370 ** H312 H400 H410	GHS06 GHS08 GHS09 Dgr	H301 H370 ** H312 H410			
015-094-00-9	mephosfolan (ISO); diethyl 4-methyl-1,3-dithiolan-2-ylidene-phosphoramidate	213-447-3	950-10-7	Acute Tox. 1 Acute Tox. 2 * Aquatic Chronic 2	H310 H300 H411	GHS06 GHS09 Dgr	H310 H300 H411			



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
015-095-00-4	methamidophos (ISO); O,S-dimethyl phosphoramidothioate	233-606-0	10265-92-6	Acute Tox. 2 * Acute Tox. 2 * Acute Tox. 3 * Aquatic Acute 1	H330 H300 H311 H400	GHS06 GHS09 Dgr	H330 H300 H311 H400			
015-096-00-X	oxydisulfoton (ISO); O, O-diethyl S-2-ethylsulphinylethyl phosphorodithioate	219-679-1	2497-07-6	Acute Tox. 2 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H300 H311 H400 H410	GHS06 GHS09 Dgr	H300 H311 H410		M=10	
015-097-00-5	phenthoate (ISO); ethyl 2-(dimethoxyphosphinothioylthio)-2-phenylacetate	219-997-0	2597-03-7	Acute Tox. 4 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H400 H410	GHS07 GHS09 Wng	H312 H302 H410		M=100	
015-098-00-0	trichloronate (ISO); O-ethyl O—2,4,5-trichlorophenyl ethylphosphonothioate	206-326-1	327-98-0	Acute Tox. 2 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H300 H311 H400 H410	GHS06 GHS09 Dgr	H300 H311 H410			
015-099-00-6	pirimiphos-ethyl (ISO); O,O-diethyl O-2-diethylamino-6-methylpyrimidin-4-yl phosphorothioate	245-704-0	23505-41-1	Acute Tox. 3 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H301 H312 H400 H410	GHS06 GHS09 Dgr	H301 H312 H410			
015-100-00-X	phoxim (ISO); α-(diethoxyphosphinothioylimino) phenylacetonitrile	238-887-3	14816-18-3	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410		M=1000	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
015-101-00-5	phosmet (ISO); O,O-dimethyl phthalimidomethyl S-phosphorodithioate	211-987-4	732-11-6	Acute Tox. 4 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H400 H410	GHS07 GHS09 Wng	H312 H302 H410		M=100	
015-102-00-0	tris(2-chloroethyl) phosphate	204-118-5	115-96-8	Carc. 2 Acute Tox. 4 * Aquatic Chronic 2	H351 H302 H411	GHS08 GHS07 GHS09 Wng	H351 H302 H411			
015-103-00-6	phosphorus tribromide	232-178-2	7789-60-8	Skin Corr. 1B STOT SE 3	H314 H335	GHS05 GHS07 Dgr	H314 H335	EUH014		
015-104-00-1	diphosphorus pentasulphide; phosphorus pentasulphide	215-242-4	1314-80-3	Flam. Sol. 1 Water-react. 1 Acute Tox. 4 * Acute Tox. 4 * Aquatic Acute 1	H228 H260 H332 H302 H400	GHS02 GHS07 GHS09 Dgr	H228 H260 H332 H302 H400	EUH029		T
015-105-00-7	triphenyl phosphite	202-908-4	101-02-0	Eye Irrit. 2 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H319 H315 H400 H410	GHS07 GHS09 Wng	H319 H315 H410		Skin Irrit. 2; H315: C ≥ 5 % Eye Irrit. 2; H319: C ≥ 5 %	
015-106-00-2	hexamethylphosphoric triamide; hexamethylphosphoramidate	211-653-8	680-31-9	Carc. 1B Muta. 1B	H350 H340	GHS08 Dgr	H350 H340		Carc. 1B; H350: C ≥ 0.01 %	
015-107-00-8	ethoprophos (ISO); ethyl-S,S-dipropyl phosphorodithioate	236-152-1	13194-48-4	Acute Tox. 2 * Acute Tox. 1 Acute Tox. 3 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H330 H310 H301 H317 H400 H410	GHS06 GHS09 Dgr	H330 H310 H301 H317 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
015-108-00-3	bromophos (ISO); O-4-bromo-2,5-dichlorophenyl O,O-dimethyl phosphorothioate	218-277-3	2104-96-3	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410		M=100	
015-109-00-9	crotoxyphos (ISO); 1-phenylethyl 3-(dimethoxyphosphinyloxy) isocrotonate	231-720-5	7700-17-6	Acute Tox. 3 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H311 H301 H400 H410	GHS06 GHS09 Dgr	H311 H301 H410		M=10	
015-110-00-4	cyanofenphos (ISO); O-4-cyanophenyl O-ethyl phenylphosphothioate	—	13067-93-1	Acute Tox. 3 * STOT SE 1 Acute Tox. 4 * Eye Irrit. 2 Aquatic Chronic 2	H301 H370 ** H312 H319 H411	GHS06 GHS08 GHS09 Dgr	H301 H370 ** H312 H319 H411			
015-111-00-X	phosfolan (ISO); diethyl 1,3-dithiolan-2-ylidenephosphorimidate	213-423-2	947-02-4	Acute Tox. 1 Acute Tox. 2 *	H310 H300	GHS06 Dgr	H310 H300			
015-112-00-5	thionazin (ISO); O,O-diethyl O-pyrazin-2-yl phosphorothioate;	206-049-6	297-97-2	Acute Tox. 1 Acute Tox. 2 *	H310 H300	GHS06 Dgr	H310 H300			
015-114-00-6	chlormephos (ISO); S-chloromethyl O,O-diethyl phosphorodithioate	246-538-1	24934-91-6	Acute Tox. 1 Acute Tox. 2 * Aquatic Acute 1 Aquatic Chronic 1	H310 H300 H400 H410	GHS06 GHS09 Dgr	H310 H300 H410			
015-115-00-1	chlorthiophos (ISO)	244-663-6	21923-23-9	Acute Tox. 2 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H300 H311 H400 H410	GHS06 GHS09 Dgr	H300 H311 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
015-116-00-7	demephion-O (ISO); O,O-dimethyl O-2-methylthioethyl phosphorothioate	211-666-9	682-80-4	Acute Tox. 2 * Acute Tox. 3 *	H300 H311	GHS06 Dgr	H300 H311			
015-117-00-2	demephion-S (ISO); O,O-dimethyl S-2-methylthioethyl phosphorothioate	219-971-9	2587-90-8	Acute Tox. 2 * Acute Tox. 3 *	H300 H311	GHS06 Dgr	H300 H311			
015-118-00-8	demeton	—	8065-48-3	Acute Tox. 1 Acute Tox. 2 * Aquatic Acute 1	H310 H300 H400	GHS06 GHS09 Dgr	H310 H300 H400			
015-119-00-3	dimethyl 4-(methylthio)phenyl phosphate	—	3254-63-5	Acute Tox. 1 Acute Tox. 2 *	H310 H300	GHS06 Dgr	H310 H300			
015-120-00-9	ditalimfos (ISO); O,O-diethyl phthalimidophosphonothioate	225-875-8	5131-24-8	Skin Irrit. 2 Skin Sens. 1	H315 H317	GHS07 Wng	H315 H317			
015-121-00-4	edifenphos (ISO); O-ethyl S,S-diphenyl phosphorodithioate	241-178-1	17109-49-8	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 4 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H331 H301 H312 H317 H400 H410	GHS06 GHS09 Dgr	H331 H301 H312 H317 H410			
015-122-00-X	etrimfos (ISO); O-6-ethoxy-2-ethylpyrimidin-4-yl O,O-dimethylphosphorothioate	253-855-9	38260-54-7	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410		M=10	
015-123-00-5	fenamiphos (ISO); ethyl-4-methylthio- <i>m</i> -tolyl isopropyl phosphoramidate	244-848-1	22224-92-6	Acute Tox. 2 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H300 H311 H400 H410	GHS06 GHS09 Dgr	H300 H311 H410		M=100	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
015-124-00-0	fosthietan (ISO); diethyl 1,3-dithietan-2-ylidenephosphoramidate	244-437-7	21548-32-3	Acute Tox. 1 Acute Tox. 2 *	H310 H300	GHS06 Dgr	H310 H300			
015-125-00-6	glyphosine (ISO); N,N-bis(phosphonomethyl)glycine	219-468-4	2439-99-8	Eye Dam. 1	H318	GHS05 Dgr	H318			
015-126-00-1	heptenophos (ISO); 7-chlorobicyclo(3.2.0)hepta-2,6-dien-6-yl dimethyl phosphate	245-737-0	23560-59-0	Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H301 H400 H410	GHS06 GHS09 Dgr	H301 H410		M=100	
015-127-00-7	iprobenfos(ISO); S-benzyl diisopropyl phosphorothioate	247-449-0	26087-47-8	Acute Tox. 4 * Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
015-128-00-2	IPSP; S-ethylsulphinylmethyl O,O-diisopropylphosphorodithioate	—	5827-05-4	Acute Tox. 1 Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H310 H301 H400 H410	GHS06 GHS09 Dgr	H310 H301 H410		M=100	
015-129-00-8	isofenphos (ISO); O-ethyl O-2-isopropoxycarbonylphenyl-isopropylphosphoramidothioate	246-814-1	25311-71-1	Acute Tox. 3 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H311 H301 H400 H410	GHS06 GHS09 Dgr	H311 H301 H410		M=100	
015-130-00-3	isothioate (ISO); S-2-isopropylthioethyl O,O-dimethyl phosphorodithioate;	—	36614-38-7	Acute Tox. 3 * Acute Tox. 3 *	H311 H301	GHS06 Dgr	H311 H301			
015-131-00-9	isoxathion (ISO); O,O-diethyl O-5-phenylisoxazol-3-ylphosphorothioate	242-624-8	18854-01-8	Acute Tox. 3 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H311 H301 H400 H410	GHS06 GHS09 Dgr	H311 H301 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
015-132-00-4	S-(chlorophenylthiomethyl) O,O-dimethylphosphorodithioate; methylcarbophenothione	—	953-17-3	Acute Tox. 3 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H311 H301 H400 H410	GHS06 GHS09 Dgr	H311 H301 H410		M=1000	
015-133-00-X	piperophos (ISO); S-2-methylpiperidinocarbonylmethyl-O,O-dipropyl phosphorodithioate	—	24151-93-7	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410		M=10	
015-134-00-5	pirimiphos-methyl (ISO); O-(2-diethylamino-6-methylpyrimidin-4-yl) O,O-dimethyl phosphorothioate	249-528-5	29232-93-7	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
015-135-00-0	profenofos (ISO) O-(4-bromo-2-chlorophenyl) O-ethyl S-propyl phosphorothioate;	255-255-2	41198-08-7	Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H332 H312 H302 H400 H410	GHS07 GHS09 Wng	H332 H312 H302 H410		M=1000	
015-136-00-6	<i>trans</i> -isopropyl-3-[[[(ethylamino)methoxyphosphinothioyl]oxy]crotonate; isopropyl 3-[[[(ethylamino)methoxyphosphinothioyl]oxy]isocrotonate; propetamphos (ISO)	250-517-2	31218-83-4	Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H301 H400 H410	GHS06 GHS09 Dgr	H301 H410		M=100	
015-137-00-1	pyrazophos (ISO); O,O-diethyl O-(6-ethoxycarbonyl-5-methylpyrazolo[2,3-a]pyrimidin-2-yl) phosphorothioate	236-656-1	13457-18-6	Acute Tox. 4 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H332 H302 H400 H410	GHS07 GHS09 Wng	H332 H302 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevaar­klasse en categorie	Gevaar­aan­duiding	Pictogram, sig­naal­woord	Gevaar­aan­duiding	Aanvullende gevaar­aan­duiding		
015-138-00-7	quinalphos (ISO); O,O-diethyl-O-quinoxalin-2-yl phosphorothioate	237-031-6	13593-03-8	Acute Tox. 3 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H301 H312 H400 H410	GHS06 GHS09 Dgr	H301 H312 H410		M=1000	
015-139-00-2	terbufos (ISO); S—tert-butylthiomethyl O, O-diethylphosphorodithioate;	235-963-8	13071-79-9	Acute Tox. 1 Acute Tox. 2 * Aquatic Acute 1 Aquatic Chronic 1	H310 H300 H400 H410	GHS06 GHS09 Dgr	H310 H300 H410		M=1000	
015-140-00-8	triazophos (ISO); O,O-diethyl-O-1-phenyl-1H,2,4-triazol-3-yl phosphorothioate	245-986-5	24017-47-8	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H331 H301 H312 H400 H410	GHS06 GHS09 Dgr	H331 H301 H312 H410			
015-141-00-3	ethylenediammonium O,O-bis(octyl) phosphorodithioate, mixed isomers	400-520-1	—	Skin Corr. 1B Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H314 H302 H400 H410	GHS05 GHS07 GHS09 Dgr	H314 H302 H410			
015-142-00-9	butyl (dialkyloxy(dibutoxyphosphoryloxy)) titanium (trialkyloxy)titanium phosphate	401-100-0	—	Flam. Liq. 2 Eye Irrit. 2 Aquatic Chronic 2	H225 H319 H411	GHS02 GHS07 GHS09 Dgr	H225 H319 H411			T
015-143-00-4	reaction mass of 2-chloroethyl chloropropyl 2-chloroethylphosphonate, reaction mass of isomers and 2-chloroethyl chloropropyl 2-chloropropylphosphonate, reaction mass of isomers	401-740-0	—	Acute Tox. 4 *	H302	GHS07 Wng	H302			
015-144-00-X	reaction mass of pentyl methylphosphinate and 2-methylbutyl methylphosphinate	402-090-0	87025-52-3	Skin Corr. 1B	H314	GHS05 Dgr	H314			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
015-145-00-5	reaction mass of copper(I) O,O-diisopropyl phosphorodithioate and copper(I) O-isopropyl O-(4-methylpent-2-yl) phosphorodithioate and copper(I) O,O-bis(4-methylpent-2-yl) phosphorodithioate	401-520-4	—	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
015-146-00-0	S-(tricyclo(5.2.1.0 <sup>2,6</sup> )deca-3-en-8(or 9)-yl O-(isopropyl or isobutyl or 2-ethylhexyl) O-(isopropyl or isobutyl or 2-ethylhexyl) phosphorodithioate	401-850-9	—	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
015-147-00-6	reaction mass of C <sub>12-14</sub> -tert-alkylammonium diphenyl phosphorothioate and dinonyl sulphide (or disulphide)	400-930-0	—	Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H315 H318 H317 H411	GHS05 GHS07 GHS09 Dgr	H315 H318 H317 H411			
015-148-00-1	2-(diphosphonomethyl)succinic acid	403-070-4	51395-42-7	Skin Corr. 1B Skin Sens. 1	H314 H317	GHS05 GHS07 Dgr	H314 H317			
015-149-00-7	reaction mass of: hexyldioctylphosphineoxide; dihexyloctylphosphineoxide; trioctylphosphineoxide	403-470-9	—	Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H314 H400 H410	GHS05 GHS09 Dgr	H314 H410			
015-150-00-2	(2-(1,3-dioxolan-2-yl)ethyl)triphenylphosphonium bromide	404-940-6	86608-70-0	Acute Tox. 4 * Eye Dam. 1 STOT RE 2 * Aquatic Chronic 3	H302 H318 H373 ** H412	GHS08 GHS05 GHS07 Dgr	H302 H318 H373 ** H412			
015-151-00-8	tris(isopropyl/tert-butylphenyl) phosphate	405-010-2	—	Aquatic Chronic 2	H411	GHS09	H411			
015-152-00-3	dioxabenzofos (ISO); 2-methoxy-4H—1,3,2-benzodioxaphosphorin 2-sulphide	223-292-3	3811-49-2	Acute Tox. 3 * Acute Tox. 3 * STOT SE 1 Aquatic Chronic 2	H311 H301 H370 ** H411	GHS06 GHS08 GHS09 Dgr	H311 H301 H370 ** H411			



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
015-153-00-9	isazofos (ISO); O-(5-chloro-1-isopropyl-1,2,4-triazol-3-yl) O,O-diethyl phosphorothioate	255-863-8	42509-80-8	Acute Tox. 2 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 2 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H330 H311 H301 H373 ** H317 H400 H410	GHS06 GHS08 GHS09 Dgr	H330 H311 H301 H373 ** H317 H410			
015-154-00-4	2-chloroethylphosphonic acid; ethephon	240-718-3	16672-87-0	Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1B Aquatic Chronic 3	H332 H312 H314 H412	GHS05 GHS07 Dgr	H332 H312 H314 H412		STOT SE 3; H335: C ≥ 5 %	
015-155-00-X	ammonium 2-amino-4-(hydroxymethylphosphinyl)butyrate; glufosinate ammonium	278-636-5	77182-82-2	Acute Tox. 4 *	H302	GHS07 Wng	H302			
015-156-00-5	methyl 3-[(dimethoxyphosphinothioyl)oxy]methacrylate; [1] methacrifos (ISO); methyl (E)-3-[(dimethoxyphosphinothioyl)oxy]methacrylate [2]	250-366-9 [1] — [2]	30864-28-9 [1] 62610-77-9 [2]	Acute Tox. 4 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H317 H400 H410	GHS07 GHS09 Wng	H302 H317 H410			
015-157-00-0	phosphonic acid; [1] phosphorous acid [2]	237-066-7 [1] 233-663-1 [2]	13598-36-2 [1] 10294-56-1 [2]	Acute Tox. 4 * Skin Corr. 1A	H302 H314	GHS05 GHS07 Dgr	H302 H314			
015-158-00-6	(η-cyclopentadienyl)(η-cumenyl)iron(1+) hexafluorophosphate(1-)	402-340-9	32760-80-8	Aquatic Chronic 3	H412	—	H412			
015-159-00-1	hydroxyphosphonoacetic acid	405-710-8	23783-26-8	Acute Tox. 4 * STOT RE 2 * Skin Corr. 1B Skin Sens. 1	H302 H373 ** H314 H317	GHS08 GHS05 GHS07 Dgr	H302 H373 ** H314 H317			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
015-160-00-7	vanadyl pyrophosphate	406-260-5	58834-75-6	Eye Irrit. 2 Skin Sens. 1 Aquatic Chronic 3	H319 H317 H412	GHS07 Wng	H319 H317 H412			
015-161-00-2	divanadyl pyrophosphate	407-130-0	65232-89-5	Acute Tox. 4 * Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H302 H318 H317 H411	GHS05 GHS07 GHS09 Dgr	H302 H318 H317 H411			
015-162-00-8	vanadium(IV) oxide hydrogen phosphate hemihydrate, lithium, zinc, molybdenum, iron and chlorine-doped	407-350-7	—	Acute Tox. 4 * STOT RE 2 * Eye Dam. 1 Aquatic Chronic 2	H332 H373 ** H318 H411	GHS08 GHS05 GHS07 GHS09 Dgr	H332 H373 ** H318 H411			
015-163-00-3	bis(2,6-dimethoxybenzoyl)-2,4,4-trimethylpentylphosphinoxide	412-010-6	145052-34-2	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
015-164-00-9	calcium P,P'-(1-hydroxyethylene)bis(hydrogen phosphonate)dihydrate	400-480-5	36669-85-9	Aquatic Chronic 3	H412	—	H412			
015-165-00-4	reaction mass of: thiobis(4,1-phenylene)-S,S,S',S'-tetraphenyldisulfonium bis(hexafluorophosphate); diphenyl(4-phenylthiophenyl)sulfonium hexafluorophosphate	404-986-7	—	Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H318 H400 H410	GHS05 GHS09 Dgr	H318 H410			
015-166-00-X	3,9-bis(2,6-di-tert-butyl-4-methylphenoxy)-2,4,8,10-tetraoxa-3,9-diphosphaspiro[5.5]undecane	410-290-4	80693-00-1	Aquatic Chronic 4	H413	—	H413			
015-167-00-5	3-(hydroxyphenylphosphinyl)propanoic acid	411-200-6	14657-64-8	Eye Dam. 1	H318	GHS05 Dgr	H318			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
015-168-00-0	fosthiazate (ISO); (RS)-S—sec-butyl-O-ethyl-2-oxo-1,3-thiazolidin-3-ylphosphonothioate	—	98886-44-3	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 4 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H331 H301 H312 H317 H400 H410	GHS06 GHS09 Dgr	H331 H301 H312 H317 H410	EUH070		
015-169-00-6	tributyltetradecylphosphonium tetrafluoroborate	413-520-1	—	Acute Tox. 4 * STOT RE 2 * Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H373 ** H314 H317 H400 H410	GHS08 GHS05 GHS07 GHS09 Dgr	H302 H373 ** H314 H317 H410			
015-170-00-1	reaction mass of: di-(1-octane-N,N,N-trimethylammonium) octylphosphate; 1-octane-N,N,N-trimethylammonium dioctylphosphate; 1-octane-N,N,N-trimethylammonium octylphosphate	407-490-9	—	Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1B	H312 H302 H314	GHS05 GHS07 Dgr	H312 H302 H314			
015-171-00-7	O,O,O-tris(2(or 4)-C <sub>9,10</sub> -isoalkylphenyl)phosphorothioate	406-940-1	—	Aquatic Chronic 2	H411	GHS09	H411			
015-172-00-2	reaction mass of: bis(isotridecylammonium) mono(di-(4-methylpent-2-yloxy)thiophosphorothionylisopropyl)phosphate; isotridecylammonium bis(di-(4-methylpent-2-yloxy)thiophosphorothionylisopropyl)phosphate	406-240-6	—	Flam. Liq. 3 Skin Corr. 1B Aquatic Chronic 2	H226 H314 H411	GHS02 GHS05 GHS09 Dgr	H226 H314 H411			
015-173-00-8	methyl [2-(1,1-dimethylethyl)-6-methoxypyrimidin-4-yl]ethylphosphonothioate	414-080-3	117291-73-3	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
015-174-00-3	1-chloro- <i>N,N</i> -diethyl-1,1-diphenyl-1-(phenylmethyl)phosphoramine	411-370-1	82857-68-9	Acute Tox. 3 * Eye Dam. 1 Aquatic Chronic 2	H301 H318 H411	GHS06 GHS05 GHS09 Dgr	H301 H318 H411			
015-175-00-9	<i>tert</i> -butyl (triphenylphosphoranylidene) acetate	412-880-7	35000-38-5	Acute Tox. 3 * STOT RE 2 * Eye Irrit. 2 Skin Sens. 1 Aquatic Chronic 2	H301 H373 ** H319 H317 H411	GHS06 GHS08 GHS09 Dgr	H301 H373 ** H319 H317 H411			
015-176-00-4	<i>P,P,P,P</i> -tetrakis-( <i>o</i> -methoxyphenyl)propane-1,3-diphosphine	413-430-2	116163-96-3	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
015-177-00-X	((4-phenylbutyl)hydroxyphosphoryl)acetic acid	412-170-7	83623-61-4	STOT RE 2 * Eye Dam. 1 Skin Sens. 1	H373 ** H318 H317	GHS08 GHS05 Dgr	H373 ** H318 H317			
015-178-00-5	( <i>R</i> )- $\alpha$ -phenylethylammonium (-)-(1 <i>R</i> , 2 <i>S</i> )-(1,2-epoxypropyl)phosphonate monohydrate	418-570-8	25383-07-7	Repr. 2 Aquatic Chronic 2	H361f *** H411	GHS08 GHS09 Wng	H361f *** H411			
015-179-00-0	UVCB condensation product of: tetrakis-hydroxymethylphosphonium chloride, urea and distilled hydrogenated C <sub>16-18</sub> tallow alkylamine	422-720-8	166242-53-1	Carc. 2 Acute Tox. 4 * STOT RE 2 * Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H351 H302 H373 ** H314 H317 H400 H410	GHS08 GHS05 GHS07 GHS09 Dgr	H351 H302 H373 ** H314 H317 H410			
015-180-00-6	[ <i>R</i> -( <i>R</i> *, <i>S</i> *)]-[[2-methyl-1-(1-oxopropoxy)propoxy]-(4-phenylbutyl)phosphinyl] acetic acid, (-)-cinchonidine (1:1) salt	415-820-8	137590-32-0	Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 3	H318 H317 H412	GHS05 GHS07 Dgr	H318 H317 H412			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
015-181-00-1	phosphine	232-260-8	7803-51-2	Flam. Gas 1 Press. Gas Acute Tox. 2 * Skin Corr. 1B Aquatic Acute 1	H220 H330 H314 H400	GHS02 GHS04 GHS06 GHS05 GHS09 Dgr	H220 H330 H314 H400			U
015-184-00-8	Salts of glyphosate, with the exception of those specified elsewhere in this Annex	—	—	Aquatic Chronic 2	H411	GHS09	H411			A
015-186-00-9	chlorpyrifos-methyl (ISO) O, O-dimethyl O—3,5,6-trichloro-2-pyridyl phosphorothioate	227-011-5	5598-13-0	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410		M=10000	
015-187-00-4	reaction mass of: tetrasodium(((2-hydroxyethyl)imino)bis(methylene))bisphosphonate, N-oxide; trisodium ((tetrahydro-2-hydroxy-4H—1,4,2-oxazaphosphorin-4-yl)-methyl)phosphonate, N-oxide, P-oxide	417-540-1	—	Eye Dam. 1 Aquatic Chronic 2	H318 H411	GHS05 GHS09 Dgr	H318 H411			
015-189-00-5	phenyl bis(2,4,6-trimethylbenzoyl)-phosphine oxide	423-340-5	162881-26-7	Skin Sens. 1 Aquatic Chronic 4	H317 H413	GHS07 Wng	H317 H413			
016-001-00-4	hydrogen sulphide	231-977-3	7783-06-4	Flam. Gas 1 Press. Gas Acute Tox. 2 * Aquatic Acute 1	H220 H330 H400	GHS02 GHS04 GHS06 GHS09 Dgr	H220 H330 H400			U
016-002-00-X	barium sulphide	244-214-4	21109-95-5	Acute Tox. 4 * Acute Tox. 4 * Aquatic Acute 1	H332 H302 H400	GHS07 GHS09 Wng	H332 H302 H400	EUH031		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
016-003-00-5	barium polysulphides	256-814-3	50864-67-0	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1	H319 H335 H315 H400	GHS07 GHS09 Wng	H319 H335 H315 H400	EUH031		
016-004-00-0	calcium sulphide	243-873-5	20548-54-3	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1	H319 H335 H315 H400	GHS07 GHS09 Wng	H319 H335 H315 H400	EUH031		
016-005-00-6	calcium polysulphides	215-709-2	1344-81-6	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1	H319 H335 H315 H400	GHS07 GHS09 Wng	H319 H335 H315 H400	EUH031		
016-006-00-1	dipotassium sulphide; potassium sulphide	215-197-0	1312-73-8	Skin Corr. 1B Aquatic Acute 1	H314 H400	GHS05 GHS09 Dgr	H314 H400	EUH031		
016-007-00-7	potassium polysulphides	253-390-1	37199-66-9	Skin Corr. 1B Aquatic Acute 1	H314 H400	GHS05 GHS09 Dgr	H314 H400	EUH031		
016-008-00-2	ammonium polysulphides	232-989-1	9080-17-5	Skin Corr. 1B Aquatic Acute 1	H314 H400	GHS05 GHS09 Dgr	H314 H400	EUH031	EUH031: C ≥ 1 %	
016-009-00-8	disodium sulphide; sodium sulphide	215-211-5	1313-82-2	Skin Corr. 1B Aquatic Acute 1	H314 H400	GHS05 GHS09 Dgr	H314 H400	EUH031		
016-010-00-3	sodium polysulphides	215-686-9	1344-08-7	Acute Tox. 3 * Skin Corr. 1B Aquatic Acute 1	H301 H314 H400	GHS06 GHS05 GHS09 Dgr	H301 H314 H400	EUH031		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etiketgeving			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
016-011-00-9	sulphur dioxide	231-195-2	7446-09-5	Press. Gas Acute Tox. 3 * Skin Corr. 1B	H331 H314	GHS04 GHS06 GHS05 Dgr	H331 H314		*	U 5
016-012-00-4	disulphur dichloride; sulfur monochloride	233-036-2	10025-67-9	Acute Tox. 3 * Acute Tox. 4 * Skin Corr. 1A Aquatic Acute 1	H301 H332 H314 H400	GHS06 GHS05 GHS09 Dgr	H301 H332 H314 H400	EUH014 EUH029	STOT SE 3; H335: C ≥ 1 %	
016-013-00-X	sulphur dichloride	234-129-0	10545-99-0	Skin Corr. 1B STOT SE 3 Aquatic Acute 1	H314 H335 H400	GHS05 GHS07 GHS09 Dgr	H314 H335 H400	EUH014	STOT SE 3; H335: C ≥ 5 %	
016-014-00-5	sulphur tetrachloride	—	13451-08-6	Skin Corr. 1B Aquatic Acute 1	H314 H400	GHS05 GHS09 Dgr	H314 H400	EUH014	STOT SE 3; H335: C ≥ 5 %	
016-015-00-0	thionyl dichloride; thionyl chloride	231-748-8	7719-09-7	Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1A	H332 H302 H314	GHS05 GHS07 Dgr	H332 H302 H314	EUH014 EUH029	STOT SE 3; H335: C ≥ 1 %	
016-016-00-6	sulphuryl chloride	232-245-6	7791-25-5	Skin Corr. 1B STOT SE 3	H314 H335	GHS05 GHS07 Dgr	H314 H335	EUH014		
016-017-00-1	chlorosulphonic acid	232-234-6	7790-94-5	Skin Corr. 1A STOT SE 3	H314 H335	GHS05 GHS07 Dgr	H314 H335	EUH014		
016-018-00-7	fluorosulphonic acid	232-149-4	7789-21-1	Acute Tox. 4 * Skin Corr. 1A	H332 H314	GHS05 GHS07 Dgr	H332 H314			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
016-019-00-2	oleum ... % SO <sub>3</sub>	—	—	Skin Corr. 1A STOT SE 3	H314 H335	GHS05 GHS07 Dgr	H314 H335	EUH014		B
016-020-00-8	sulphuric acid ... %	231-639-5	7664-93-9	Skin Corr. 1A	H314	GHS05 Dgr	H314		Skin Corr. 1A; H314: C ≥ 15 % Skin Irrit. 2; H315: 5 % ≤ C < 15 % Eye Irrit. 2; H319: 5 % ≤ C < 15 %	B
016-021-00-3	methanethiol; methyl mercaptan	200-822-1	74-93-1	Flam. Gas. 1 Press. Gas Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H220 H331 H400 H410	GHS02 GHS04 GHS06 GHS09 Dgr	H220 H331 H410			U
016-022-00-9	ethanethiol; ethyl mercaptan	200-837-3	75-08-1	Flam. Liq. 2 Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H225 H332 H400 H410	GHS02 GHS07 GHS09 Dgr	H225 H332 H410			
016-023-00-4	dimethyl sulphate	201-058-1	77-78-1	Carc. 1B Muta. 2 Acute Tox. 2 * Acute Tox. 3 * Skin Corr. 1B Skin Sens. 1	H350 H341 H330 H301 H314 H317	GHS06 GHS08 GHS05 Dgr	H350 H341 H330 H301 H314 H317		Carc. 1B; H350: C ≥ 0.01 % Muta. 2; H341: C ≥ 0.01 % STOT SE 3; H335: C ≥ 5 %	
016-024-00-X	dimexano(ISO); bis(methoxythiocarbonyl) disulphide	215-993-8	1468-37-7	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
016-025-00-5	disul (ISO); 2-(2,4-dichlorophenoxy)ethyl hydrogensulphate; 2,4-DES	205-259-5	149-26-8	Acute Tox. 4 * Skin Irrit. 2 Eye Dam. 1	H302 H315 H318	GHS05 GHS07 Dgr	H302 H315 H318			
016-026-00-0	sulphamidic acid; sulphamic acid; sulfamic acid	226-218-8	5329-14-6	Eye Irrit. 2 Skin Irrit. 2 Aquatic Chronic 3	H319 H315 H412	GHS07 Wng	H319 H315 H412			
016-027-00-6	diethyl sulphate	200-589-6	64-67-5	Carc. 1B Muta. 1B Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1B	H350 H340 H332 H312 H302 H314	GHS05 GHS08 GHS07 Dgr	H350 H340 H332 H312 H302 H314			
016-028-00-1	sodium dithionite; sodium hydrosulphite	231-890-0	7775-14-6	Self-heat. 1 Acute Tox. 4 *	H251 H302	GHS02 GHS07 Dgr	H251 H302	EUH031		
016-029-00-7	<i>p</i> -toluenesulphonic acid, containing more than 5 % H <sub>2</sub> SO <sub>4</sub>	—	—	Skin Corr. 1B	H314	GHS05 Dgr	H314		Skin Corr. 1B; H314: C ≥ 25 % Skin Irrit. 2; H315: 10 % ≤ C < 25 % Eye Irrit. 2; H319: 10 % ≤ C < 25 %	
016-030-00-2	<i>p</i> -toluenesulphonic acid (containing a maximum of 5 % H <sub>2</sub> SO <sub>4</sub> )	203-180-0	104-15-4	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H319 H335 H315	GHS07 Wng	H319 H335 H315		STOT SE 3; H335: C ≥ 20 %	
016-031-00-8	tetrahydrothiophene-1,1-dioxide; sulpholane	204-783-1	126-33-0	Acute Tox. 4 *	H302	GHS07 Wng	H302			
016-032-00-3	1,3-propanesultone; 1,2-oxathiolane 2,2-dioxide	214-317-9	1120-71-4	Carc. 1B Acute Tox. 4 * Acute Tox. 4 *	H350 H312 H302	GHS08 GHS07 Dgr	H350 H312 H302		Carc. 1B; H350: C ≥ 0,01 %	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
016-033-00-9	dimethylsulfamoylchloride	236-412-4	13360-57-1	Carc. 1B Acute Tox. 2 * Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1B	H350 H330 H312 H302 H314	GHS06 GHS05 GHS08 Dgr	H350 H330 H312 H302 H314			
016-034-00-4	tetrasodium 3,3'-(piperazine-1,4-diylbis((6-chloro-1,3,5-triazine-2,4-diyl)imino(2-acetamido)-4,1-phenyleneazo))bis(naphthalene-1,5-disulphonate)	400-010-9	81898-60-4	Skin Sens. 1	H317	GHS07 Wng	H317			
016-035-00-X	pentasodium 5-anilino-3-(4-(4-(6-chloro-4-(3-sulphonatoanilino)-1,3,5-triazin-2-ylamino)-2,5-dimethylphenylazo)-2,5-disulphonatophenylazo)-4-hydroxynaphthalene-2,7-disulphonate	400-120-7	—	Eye Irrit. 2	H319	GHS07 Wng	H319			
016-036-00-5	tetrasodium 5-(4,6-dichloro-5-cyanopyrimidin-2-ylamino)-4-hydroxy-2,3-azodinaphthalene-1,2,5,7-disulphonate	400-130-1	—	Resp. Sens. 1 Aquatic Chronic 2	H334 H411	GHS08 GHS09 Dgr	H334 H411			
016-037-00-0	disodium 1-amino-4-(4-benzenesulphonamido-3-sulphonatoanilino)anthraquinone-2-sulphonate	400-350-8	85153-93-1	Eye Dam. 1 Aquatic Chronic 3	H318 H412	GHS05 Dgr	H318 H412			
016-038-00-6	disodium 6-((4-chloro-6-(N-methyl)-2-toluidino)-1,3,5-triazin-2-ylamino)-1-hydroxy-2-(4-methoxy-2-sulphonatophenylazo)naphthalene-3-sulphonate	400-380-1	86393-35-3	Skin Sens. 1	H317	GHS07 Wng	H317			
016-039-00-1	tetrasodium 2-(6-chloro-4-(4-(2,5-dimethyl-4-(2,5-disulphonatophenylazo)phenylazo)-3-ureidoanilino)-1,3,5-triazin-2-ylamino)benzene-1,4-disulphonate	400-430-2	—	Skin Sens. 1	H317	GHS07 Wng	H317			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
016-040-00-7	reaction mass of disodium 6-(2,4-dihydroxyphenylazo)-3-(4-(4-(2,4-dihydroxyphenylazo)anilino)-3-sulphonatophenylazo)-4-hydroxynaphthalene-2-sulphonate and disodium 6-(2,4-diaminophenylazo)-3-(4-(4-(2,4-diaminophenylazo)anilino)-3-sulphonatophenylazo)-4-hydroxynaphthalene-2-sulphonate and trisodium 6-(2,4-dihydroxyphenylazo)-3-(4-(4-(7-(2,4-dihydroxyphenylazo)-1-hydroxy-3-sulphonato-2-naphthylazo)anilino)-3-sulphonatophenylazo)-4-hydroxynaphthalene-2-sulphonate	400-570-4	—	Eye Irrit. 2	H319	GHS07 Wng	H319			
016-041-00-2	calcium 2,5-dichloro-4-(4-((5-chloro-4-methyl-2-sulphonatophenyl)azo)-5-hydroxy-3-methylpyrazol-1-yl)benzenesulphonate	400-710-4	—	Acute Tox. 4 *	H332	GHS07 Wng	H332			
016-042-00-8	tetrasodium 5-benzamido-3-(5-(4-fluoro-6-(1-sulphonato-2-naphthylamino)-1,3,5-triazin-2-ylamino)-2-sulphonatophenylazo)-4-hydroxynaphthalene-2,7-disulphonate	400-790-0	85665-97-0	Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H319 H315 H317	GHS07 Wng	H319 H315 H317			
016-043-00-3	dilithium 6-acetamido-4-hydroxy-3-(4-((2-sulphonatooxy)ethylsulphonyl)phenylazo)naphthalene-2-sulphonate	401-010-1	—	Skin Sens. 1	H317	GHS07 Wng	H317			
016-044-00-9	disodium S,S-hexane-1,6-diyldi(thiosulphate) dihydrate	401-320-7	—	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
016-045-00-4	lithium sodium hydrogen 4-amino-6-(5-(5-chloro-2,6-difluoropyrimidin-4-ylamino)-2-sulphonatophenylazo)-5-hydroxy-3-(4-(2-(sulphonatooxy)ethylsulphonyl)phenylazo)naphthalene-2,7-disulphonate	401-560-2	108624-00-6	Skin Sens. 1	H317	GHS07 Wng	H317			
016-046-00-X	sodium hydrogensulphate	231-665-7	7681-38-1	Eye Dam. 1	H318	GHS05 Dgr	H318			
016-047-00-5	hexasodium 7-(4-(4-(4-(2,5-disulphonatoanilino)-6-fluoro-1,3,5-triazin-2-ylamino)-2-methylphenylazo)-7-sulphonatonaphthylazo)naphthalene-1,3,5-trisulphonate	401-650-1	85665-96-9	Skin Sens. 1	H317	GHS07 Wng	H317			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
016-048-00-0	sodium 3,5-dichloro-2-(5-cyano-2,6-bis(3-hydroxypropylamino)-4-methylpyridin-3-ylazo)benzenesulphonate	401-870-8	—	Eye Dam. 1 Aquatic Chronic 3	H318 H412	GHS05 Dgr	H318 H412			
016-049-00-6	calcium octadecylxylenesulphonate	402-040-8	—	Skin Corr. 1B Aquatic Chronic 2	H314 H411	GHS05 GHS09 Dgr	H314 H411			
016-050-00-1	potassium sodium 5-(4-chloro-6-(N-(4-(4-chloro-6-(5-hydroxy-2,7-disulphonato-6-(2-sulphonatophenylazo)-4-naphthylamino)-1,3,5-triazin-2-ylamino) phenyl-N-methylamino)-1,3,5-triazin-2-ylamino)-4-hydroxy-3-(2-sulphonatophenylazo)naphthalene-2,7-disulphonat	402-150-6	—	Eye Irrit. 2 Skin Sens. 1	H319 H317	GHS07 Wng	H319 H317			
016-051-00-7	trisodium 7-(4-(6-fluoro-4-(2-(2-vinylsulphonylethoxy)ethylamino)-1,3,5-triazin-2-ylamino)-2-ureidophenylazo)naphthalene-1,3,6-trisulphonate	402-170-5	106359-91-5	Skin Sens. 1	H317	GHS07 Wng	H317			
016-052-00-2	benzyltributylammonium 4-hydroxynaphthalene-1-sulphonate	402-240-5	102561-46-6	Acute Tox. 4 * Aquatic Chronic 2	H332 H411	GHS07 GHS09 Wng	H332 H411			
016-053-00-8	(C <sub>16</sub> or C <sub>18</sub> -n-alkyl)(C <sub>16</sub> or C <sub>18</sub> -n-alkyl) ammonium 2-((C <sub>16</sub> or C <sub>18</sub> -n-alkyl)(C <sub>16</sub> or C <sub>18</sub> -n-alkyl)carbamoyl)benzenesulphonate	402-460-1	—	Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 4	H315 H317 H413	GHS07 Wng	H315 H317 H413			
016-054-00-3	sodium 4-(2,4,4-trimethylpentylcarbonyloxy)benzenesulfonate	400-030-8	—	Acute Tox. 3 * STOT RE 1 Acute Tox. 4 * Eye Irrit. 2 STOT SE 3 Skin Sens. 1	H331 H372 ** H302 H319 H335 H317	GHS06 GHS08 Dgr	H331 H372 ** H302 H319 H335 H317			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
016-055-00-9	tetrasodium 4-amino-3,6-bis(5-(6-chloro-4-(2-hydroxyethylamino)-1,3,5-triazin-2-ylamino)-2-sulfonatophenylazo)-5-hydroxynaphthalene-2,7-sulfonate (containing > 35 % sodium chloride and sodium acetate)	400-510-7	—	Eye Dam. 1 Skin Sens. 1	H318 H317	GHS05 GHS07 Dgr	H318 H317			
016-056-00-4	potassium hydrogensulphate	231-594-1	7646-93-7	Skin Corr. 1B STOT SE 3	H314 H335	GHS05 GHS07 Dgr	H314 H335			
016-057-00-X	styrene-4-sulfonyl chloride	404-770-2	2633-67-2	Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1	H315 H318 H317	GHS05 GHS07 Dgr	H315 H318 H317			
016-058-00-5	thionyl chloride, reaction products with 1,3,4-thiadiazol-2,5-dithiol, <i>tert</i> -nonanethiol and C <sub>12-14</sub> — <i>tert</i> -alkylamine	404-820-3	—	Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 3	H315 H317 H412	GHS07 Wng	H315 H317 H412			
016-059-00-0	N,N,N',N'-tetramethyldithiobis(ethylene)diamine dihydrochloride	405-300-9	17339-60-5	Acute Tox. 4 * Eye Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H319 H317 H400 H410	GHS07 GHS09 Wng	H302 H319 H317 H410			
016-060-00-6	diammonium peroxodisulphate; ammonium persulphate	231-786-5	7727-54-0	Ox. Sol. 3 Acute Tox. 4 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Resp. Sens. 1 Skin Sens. 1	H272 H302 H319 H335 H315 H334 H317	GHS03 GHS08 GHS07 Dgr	H272 H302 H319 H335 H315 H334 H317			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevaar­klasse en categorie	Gevaar­aan­duiding	Pictogram, sig­naal­woord	Gevaar­aan­duiding	Aanvullende gevaar­aan­duiding		
016-061-00-1	dipotassium peroxodisulphate; potassium persulphate	231-781-8	7727-21-1	Ox. Sol. 3 Acute Tox. 4 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Resp. Sens. 1 Skin Sens. 1	H272 H302 H319 H335 H315 H334 H317	GHS03 GHS08 GHS07 Dgr	H272 H302 H319 H335 H315 H334 H317			
016-062-00-7	bensultap (ISO); 1,3-bis(phenylsulfonylthio)-2-(N,N-dimethylamino)propane	—	17606-31-4	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
016-063-00-2	sodium metabisulphite	231-673-0	7681-57-4	Acute Tox. 4 * Eye Dam. 1	H302 H318	GHS05 GHS07 Dgr	H302 H318	EUH031		
016-064-00-8	sodium hydrogensulphite . . . %; sodium bisulphite . . . %	231-548-0	7631-90-5	Acute Tox. 4 *	H302	GHS07 Wng	H302	EUH031		B
016-065-00-3	sodium 1-amino-4-[2-methyl-5-(4-methylphenylsulfonylamino)phenylamino]anthraquinone-2-sulfonate	400-100-8	84057-97-6	Aquatic Chronic 2	H411	GHS09	H411			
016-066-00-9	tetrasodium [5-((4-amino-6-chloro-1,3,5-triazin-2-yl)amino)-2-((2-hydroxy-3,5-disulfonatophenylazo)-2-sulfonatobenzylidenehydrazino)benzoate]copper(II)	404-070-7	116912-62-0	Aquatic Chronic 3	H412	—	H412			
016-067-00-4	(4-methylphenyl)mesitylene sulfonate	407-530-5	67811-06-7	Aquatic Chronic 4	H413	—	H413			
016-068-00-X	sodium 3,5-bis(tetradecyloxy­carbonyl)benzenesulfinate	407-720-8	155160-86-4	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
016-069-00-5	3,5-bis-(tetradecyloxy­carbonyl)benzenesulfonic acid	407-990-7	141915-64-2	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
016-070-00-0	4-benzyloxy-4'-(2,3-epoxy-2-methylprop-1-yloxy)diphenylsulfone	408-220-2	—	Aquatic Chronic 4	H413	—	H413			
016-071-00-6	trisodium 3-amino-6,13-dichloro-10-((3-((4-chloro-6-(2-sulfophenylamino)-1,3,5-triazin-2-yl)amino)propyl) amino)-4,11-triphenoxydioxazinedisulfonate	410-130-3	136248-03-8	Skin Sens. 1	H317	GHS07 Wng	H317			
016-072-00-1	3-amino-4-hydroxy-N-(2-methoxyethyl)benzenesulfonamide	411-520-6	112195-27-4	Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H318 H317 H411	GHS05 GHS07 GHS09 Dgr	H318 H317 H411			
016-073-00-7	tetrakis(phenylmethyl)thioperoxydi(carbathioamide)	404-310-0	10591-85-2	Aquatic Chronic 4	H413	—	H413			
016-074-00-2	6-fluoro-2-methyl-3-(4-methylthiobenzyl)indene	405-410-7	—	Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H315 H318 H317 H411	GHS05 GHS07 GHS09 Dgr	H315 H318 H317 H411			
016-075-00-8	2,2'-diallyl-4,4'-sulfonyldiphenol	411-570-9	41481-66-7	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
016-076-00-3	2,3-bis((2-mercaptoethyl)thio)-1-propanethiol	411-290-7	131538-00-6	Acute Tox. 4 * STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H302 H373 ** H400 H410	GHS08 GHS07 GHS09 Wng	H302 H373 ** H410			
016-077-00-9	2-chloro-p-toluenesulfochloride	412-890-1	42413-03-6	Skin Corr. 1B Skin Sens. 1 Aquatic Chronic 3	H314 H317 H412	GHS05 GHS07 Dgr	H314 H317 H412			
016-078-00-4	4-methyl-N,N-bis(2-(((4-methylphenyl)sulfonyl)amino)ethyl)benzenesulfonamide	413-300-5	56187-04-3	Aquatic Chronic 4	H413	—				

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
016-079-00-X	N,N-bis(2-(p-toluenesulfonyloxy)ethyl)-p-toluenesulfonamide	412-920-3	16695-22-0	Skin Sens. 1 Aquatic Chronic 4	H317 H413	GHS07 Wng	H317 H413			
016-080-00-5	sodium 2-anilino-5-(2-nitro-4-(N-phenylsulfamoyl)anilinobenzenesulfonate	412-320-1	31361-99-6	Eye Dam. 1 Aquatic Chronic 3	H318 H412	GHS05 Dgr	H318 H412			
016-081-00-0	hexahydrocyclopenta[c]pyrrole-1-(1H)-ammonium N-ethoxycarbonyl-N-(p-tolylsulfonyl)azanide	418-350-1	—	Muta. 2 Acute Tox. 4 * Eye Irrit. 2 Skin Sens. 1 Aquatic Chronic 2	H341 H302 H319 H317 H411	GHS08 GHS07 GHS09 Wng	H341 H302 H319 H317 H411			
016-082-00-6	ethoxysulfuron (ISO); 1-(4,6-dimethoxypyrimidin-2-yl)-3-(2-ethoxyphenoxysulfonyl)urea	—	126801-58-9	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
016-083-00-1	acibenzolar-S-methyl; benzo[1,2,3]thiadiazole-7-carbothioic acid S-methyl ester	420-050-0	135158-54-2	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H319 H335 H315 H317 H400 H410	GHS07 GHS09 Wng	H319 H335 H315 H317 H410			
016-084-00-7	prosulfuron; 1-(4-methoxy-6-methyl-1,3,5-triazin-2-yl)-3-[2-(3,3,3-trifluoropropyl)phenylsulfonyl]urea	—	94125-34-5	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
016-085-00-2	flazasulfuron (ISO); 1-(4,6-dimethoxypyrimidin-2-yl)-3-(3-trifluoromethyl-2-pyridylsulfonyl)urea	—	104040-78-0	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
016-086-00-8	tetrasodium 10-amino-6,13-dichloro-3-(3-(4-(2,5-disulfonatoanilino)-6-fluoro-1,3,5-triazin-2-ylamino)prop-3-ylamino)-5,12-dioxa-7,14-diazapentacene-4,11-disulfonate	402-590-9	109125-56-6	Eye Dam. 1	H318	GHS05 Dgr	H318			



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
016-087-00-3	reaction mass of: thiobis(4,1-phenylene)-S,S,S',S'-tetraphenyldisulfonium bishexafluorophosphate; diphenyl(4-phenylthiophenyl)sulfonium hexafluorophosphate; propylene carbonate	403-490-8	104558-95-4	Eye Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H319 H317 H400 H410	GHS07 GHS09 Wng	H319 H317 H410			
016-088-00-9	4-(bis(4-(diethylamino)phenyl)methyl)benzene-1,2-dimethanesulfonic acid	407-280-7	71297-11-5	Aquatic Chronic 3	H412	—	H412			
016-089-00-4	reaction mass of esters of 5,5',6,6',7,7'-hexahydroxy-3,3,3',3'-tetramethyl-1,1'-spirobiindan and 2-diazo-1,2-dihydro-1-oxo-5-sulfonaphthalene	413-840-1	—	Self-react. C**** Aquatic Chronic 4	H242 H413	GHS02 Dgr	H242 H413			
016-090-00-X	4-methyl-N-(methylsulfonyl)benzenesulfonamide	415-040-8	14653-91-9	Acute Tox. 4 * STOT SE 3 Eye Dam. 1	H302 H335 H318	GHS05 GHS07 Dgr	H302 H335 H318			
016-091-00-5	C <sub>12-14</sub> —tert-alkyl ammonium 1-amino-9,10-dihydro-9,10-dioxo-4-(2,4,6-trimethylanilino)-anthracen-2-sulfonate	414-110-5	—	Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H318 H400 H410	GHS05 GHS09 Dgr	H318 H410			
016-093-00-6	reaction mass of: 4-(7-hydroxy-2,4,4-trimethyl-2-chromanyl)resorcinol-4-yl-tris(6-diazo-5,6-dihydro-5-oxonaphthalen-1-sulfonate); 4-(7-hydroxy-2,4,4-trimethyl-2-chromanyl)resorcinolbis(6-diazo-5,6-dihydro-5-oxonaphthalen-1-sulfonate) (2:1)	414-770-4	140698-96-0	Self-react. C**** Carc. 2	H242 H351	GHS02 GHS08 Dgr	H242 H351			
016-095-00-7	reaction mass of: reaction product of 4,4'-methylenebis[2-(4-hydroxybenzyl)-3,6-dimethylphenol] and 6-diazo-5,6-dihydro-5-oxo-naphthalenesulfonate (1:2); Reaction product of 4,4'-methylenebis[2-(4-hydroxybenzyl)-3,6-dimethylphenol] and 6-diazo-5,6-dihydro-5-oxo-naphthalenesulfonate (1:3)	417-980-4	—	Self-react. C**** Carc. 2	H242 H351	GHS02 GHS08 Dgr	H242 H351			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
016-096-00-2	thifensulfuron-methyl (ISO); methyl 3-(4-methoxy-6-methyl-1,3,5-triazin-2-ylcarbamoylsulfamoyl)thiophene-2-carboxylate	—	79277-27-3	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
017-001-00-7	chlorine	231-959-5	7782-50-5	Ox. Gas 1 Press. Gas Acute Tox. 3 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1	H270 H331 H319 H335 H315 H400	GHS03 GHS04 GHS06 GHS09 Dgr	H270 H331 H319 H335 H315 H400			U
017-002-00-2	hydrogen chloride	231-595-7	7647-01-0	Press. Gas Acute Tox. 3 * Skin Corr. 1A	H331 H314	GHS04 GHS06 GHS05 Dgr	H331 H314			U 5
017-002-01-X	hydrochloric acid ... %	231-595-7	—	Skin Corr. 1B STOT SE 3	H314 H335	GHS05 GHS07 Dgr	H314 H335		Skin Corr. 1B; H314: C ≥ 25 % Skin Irrit. 2; H315: 10 % ≤ C < 25 % Eye Irrit. 2; H319: 10 % ≤ C < 25 % STOT SE 3; H335: C ≥ 10 %	B
017-003-00-8	barium chlorate	236-760-7	13477-00-4	Ox. Sol. 1 Acute Tox. 4 * Acute Tox. 4 * Aquatic Chronic 2	H271 H332 H302 H411	GHS03 GHS07 GHS09 Dgr	H271 H332 H302 H411			
017-004-00-3	potassium chlorate	223-289-7	3811-04-9	Ox. Sol. 1 Acute Tox. 4 * Acute Tox. 4 * Aquatic Chronic 2	H271 H332 H302 H411	GHS03 GHS07 GHS09 Dgr	H271 H332 H302 H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
017-005-00-9	sodium chlorate	231-887-4	7775-09-9	Ox. Sol. 1 Acute Tox. 4 * Aquatic Chronic 2	H271 H302 H411	GHS03 GHS07 GHS09 Dgr	H271 H302 H411			
017-006-00-4	perchloric acid ... %	231-512-4	7601-90-3	Ox. Liq. 1 Skin Corr. 1A	H271 H314	GHS03 GHS05 Dgr	H271 H314		Skin Corr. 1A; H314: C ≥ 50 % Skin Corr. 1B; H314: 10 % ≤ C < 50 % Skin Irrit. 2; H315: 1 % ≤ C < 10 % Eye Irrit. 2; H319: 1 % ≤ C < 10 % Ox. Liq. 1; H271: C > 50 %: Ox. Liq. 2; H272: C ≤ 50 %:	B
017-007-00-X	barium perchlorate	236-710-4	13465-95-7	Ox. Sol. 1 Acute Tox. 4 * Acute Tox. 4 *	H271 H332 H302	GHS03 GHS07 Dgr	H271 H332 H302			
017-008-00-5	potassium perchlorate	231-912-9	7778-74-7	Ox. Sol. 1 Acute Tox. 4 *	H271 H302	GHS03 GHS07 Dgr	H271 H302			
017-009-00-0	ammonium perchlorate	232-235-1	7790-98-9	Expl. 1.1 Ox. Sol. 1	H201 H271	GHS01 Dgr	H201 H271	EUH044		T
017-010-00-6	sodium perchlorate	231-511-9	7601-89-0	Ox. Sol. 1 Acute Tox. 4 *	H271 H302	GHS03 GHS07 Dgr	H271 H302			
017-011-00-1	sodium hypochlorite, solution ... % Cl active	231-668-3	7681-52-9	Skin Corr. 1B Aquatic Acute 1	H314 H400	GHS05 GHS09 Dgr	H314 H400	EUH031	EUH031: C ≥ 5 %	B

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
017-012-00-7	calcium hypochlorite	231-908-7	7778-54-3	Ox. Sol. 2 Acute Tox. 4 * Skin Corr. 1B Aquatic Acute 1	H272 H302 H314 H400	GHS03 GHS05 GHS07 GHS09 Dgr	H272 H302 H314 H400	EUH031	Skin Corr. 1B; H314: C ≥ 10 % Skin Irrit. 2; H315: 3 % ≤ C < 10 % Eye Dam. 1; H31: 3 % ≤ C < 10 % Eye Irrit. 2; H319: 0,5 % ≤ C < 3 % STOT SE 3; H335: C ≥ 3 %	T
017-013-00-2	calcium chloride	233-140-8	10043-52-4	Eye Irrit. 2	H319	GHS07 Wng	H319			
017-014-00-8	ammonium chloride	235-186-4	12125-02-9	Acute Tox. 4 * Eye Irrit. 2	H302 H319	GHS07 Wng	H302 H319			
017-015-00-3	(2-(aminomethyl)phenyl)acetylchloride hydrochloride	417-410-4	61807-67-8	Acute Tox. 4 * Skin Corr. 1A Skin Sens. 1	H302 H314 H317	GHS05 GHS07 Dgr	H302 H314 H317			
017-016-00-9	methyltriphenylphosphonium chloride	418-400-2	1031-15-8	Acute Tox. 4 * Acute Tox. 4 * Skin Irrit. 2 Eye Dam. 1 Aquatic Chronic 2	H312 H302 H315 H318 H411	GHS05 GHS07 GHS09 Dgr	H312 H302 H315 H318 H411			
017-017-00-4	(Z)-13-docosenyl-N,N-bis(2-hydroxyethyl)-N-methyl-ammonium-chloride	426-210-6	120086-58-0	Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H314 H400 H410	GHS05 GHS09 Dgr	H314 H410			
017-018-00-X	N,N,N-trimethyl-2,3-bis(stearoyloxy)propylammonium chloride	405-660-7	—	Aquatic Chronic 2	H411	GHS09	H411			
017-019-00-5	(R)-1,2,3,4-tetrahydro-6,7-dimethoxy-1-vertarylisoquinoline hydrochloride	415-110-8	54417-53-7	Acute Tox. 4 * Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
017-020-00-0	ethyl propoxy aluminium chloride	421-790-7	13014-29-4	Water-react. 1 Skin Corr. 1A	H260 H314	GHS02 GHS05 Dgr	H260 H314	EUH014		
017-021-00-6	behenamidopropyl-dimethyl-(dihydroxypropyl) ammonium chloride	423-420-1	136920-10-0	Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H318 H317 H400 H410	GHS05 GHS07 GHS09 Dgr	H318 H317 H410			
019-001-00-2	potassium	231-119-8	7440-09-7	Water-react. 1 Skin Corr. 1B	H260 H314	GHS02 GHS05 Dgr	H260 H314	EUH014		
019-002-00-8	potassium hydroxide; caustic potash	215-181-3	1310-58-3	Acute Tox. 4 * Skin Corr. 1A	H302 H314	GHS05 GHS07 Dgr	H302 H314		Skin Corr. 1A; H314: C ≥ 5 % Skin Corr. 1B; H314: 2 % ≤ C < 5 % Skin Irrit. 2; H315: 0,5 % ≤ C < 2 % Eye Irrit. 2; H319: 0,5 % ≤ C < 2 %	
020-001-00-X	calcium	231-179-5	7440-70-2	Water-react. 2	H261	GHS02 Dgr	H261			
020-002-00-5	calcium cyanide	209-740-0	592-01-8	Acute Tox. 2 * Aquatic Acute 1 Aquatic Chronic 1	H300 H400 H410	GHS06 GHS09 Dgr	H300 H410	EUH032		
020-003-00-0	reaction mass of: dicalcium (bis(2-hydroxy-5-tetra-propenylphenylmethyl)methylamine) dihydroxide; tri-calcium (tris(2-hydroxy-5-tetra-propenylphenylmethyl)methylamine)tri-hydroxide; poly[calcium ((2-hydroxy-5-tetra-propenylphenylmethyl)methylamine)hydroxide]	420-470-4	—	Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H319 H315 H317	GHS07 Wng	H319 H315 H317			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
022-001-00-5	titanium tetrachloride	231-441-9	7550-45-0	Skin Corr. 1B	H314	GHS05 Dgr	H314	EUH014		
022-002-00-0	titanium(4+) oxalate	403-260-7	—	Eye Dam. 1	H318	GHS05 Dgr	H318			
022-003-00-6	bis( $\eta^5$ -cyclopentadienyl)-bis(2,6-difluoro-3-[pyrrol-1-yl]-phenyl)titanium	412-000-1	125051-32-3	Flam. Sol. 1 Repr. 2 STOT RE 2 * Aquatic Chronic 2	H228 H361f *** H373 ** H411	GHS02 GHS08 GHS09 Dgr	H228 H361f *** H373 ** H411			T
023-001-00-8	divanadium pentaoxide; vanadium pentoxide	215-239-8	1314-62-1	Muta. 2 Repr. 2 STOT RE 1 Acute Tox. 4 * Acute Tox. 4 * STOT SE 3 Aquatic Chronic 2	H341 H361d *** H372 ** H332 H302 H335 H411	GHS08 GHS07 GHS09 Dgr	H341 H361d *** H372 ** H332 H302 H335 H411			
024-001-00-0	chromium (VI) trioxide	215-607-8	1333-82-0	Ox. Sol. 1 Carc. 1A Muta. 1B Repr. 2 Acute Tox. 2 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 1 Skin Corr. 1A Resp. Sens. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H271 H350 H340 H361f *** H330 H311 H301 H372 ** H314 H334 H317 H400 H410	GHS03 GHS06 GHS08 GHS05 GHS09 Dgr	H271 H350 H340 H361f *** H330 H311 H301 H372 ** H314 H334 H317 H410	STOT SE 3; H335: C $\geq$ 1 %		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
024-002-00-6	potassium dichromate	231-906-6	7778-50-9	Ox. Sol. 2 Carc. 1B Muta. 1B Repr. 1B Acute Tox. 2 * Acute Tox. 3 * STOT RE 1 Acute Tox. 4 * Skin Corr. 1B Resp. Sens. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H272 H350 H340 H360-FD H330 H301 H372 ** H312 H314 H334 H317 H400 H410	GHS03 GHS06 GHS08 GHS05 GHS09 Dgr	H272 H350 H340 H360FD H330 H301 H372 ** H312 H314 H334 H317 H410		STOT SE 3; H335: C ≥ 5 %	3
024-003-00-1	ammonium dichromate	232-143-1	7789-09-5	Ox. Sol. 2 **** Carc. 1B Muta. 1B Repr. 1B Acute Tox. 2 * Acute Tox. 3 * STOT RE 1 Acute Tox. 4 * Skin Corr. 1B Resp. Sens. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H272 H350 H340 H360-FD H330 H301 H372 ** H312 H314 H334 H317 H400 H410	GHS03 GHS06 GHS08 GHS05 GHS09 Dgr	H272 H350 H340 H360FD H330 H301 H372 ** H312 H314 H334 H317 H410		STOT SE 3; H335: C ≥ 5 % Resp. Sens.; H334: C ≥ % Skin Sens.; H317: C ≥ 0,2 %	G 3

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
024-004-00-7	sodium dichromate anhydrate	234-190-3	10588-01-9	Ox. Sol. 2 Carc. 1B Muta. 1B Repr. 1B Acute Tox. 2 * Acute Tox. 3 * STOT RE 1 Acute Tox. 4 * Skin Corr. 1B Resp. Sens. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H272 H350 H340 H360-FD H330 H301 H372 ** H312 H314 H334 H317 H400 H410	GHS03 GHS06 GHS08 GHS05 GHS09 Dgr	H272 H350 H340 H360FD H330 H301 H372 ** H312 H314 H334 H317 H410		STOT SE 3; H335: C ≥ 5 % Resp. Sens.; H334: C ≥ 0,2 % Skin Sens.; H317: C ≥ 0,2 %	3
024-004-01-4	sodium dichromate, dihydrate	234-190-3	7789-12-0	Ox. Sol. 2 Carc. 1B Muta. 1B Repr. 1B Acute Tox. 2 * Acute Tox. 3 * STOT RE 1 Acute Tox. 4 * Skin Corr. 1B Resp. Sens. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H272 H350 H340 H360-FD H330 H301 H372 ** H312 H314 H334 H317 H400 H410	GHS03 GHS06 GHS08 GHS05 GHS09 Dgr	H272 H350 H340 H360FD H330 H301 H372 ** H312 H314 H334 H317 H410		STOT SE 3; H335: C ≥ 5 % Resp. Sens.; H334: C ≥ 0,2 % Skin Sens.; H317: C ≥ 0,2 %	3



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
024-005-00-2	chromyl dichloride; chromic oxychloride	239-056-8	14977-61-8	Ox. Liq. 1 Carc. 1B Muta. 1B Skin Corr. 1A Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H271 H350i H340 H314 H317 H400 H410	GHS03 GHS08 GHS05 GHS07 GHS09 Dgr	H271 H350i H340 H314 H317 H410		Skin Corr. 1A; H314: C ≥ 10 % Skin Corr. 1B; H314: 5 % ≤ C < 10 % Skin Irrit. 2; H315: 0,5 % ≤ C < 5 % Eye Irrit. 2; H319: 0,5 % ≤ C < 5 % STOT SE 3; H335: 0,5 % ≤ C < 5 % Skin Sens. 1; H317: C ≥ 0,5 %	T 3
024-006-00-8	potassium chromate	232-140-5	7789-00-6	Carc. 1B Muta. 1B Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H350i H340 H319 H335 H315 H317 H400 H410	GHS08 GHS07 GHS09 Dgr	H350i H340 H319 H335 H315 H317 H410		Skin Sens. 1; H317: C ≥ 0,5 %	3
024-007-00-3	zinc chromates including zinc potassium chromate	—	—	Carc. 1A Acute Tox. 4 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H350 H302 H317 H400 H410	GHS08 GHS07 GHS09 Dgr	H350 H302 H317 H410			A
024-008-00-9	calcium chromate	237-366-8	13765-19-0	Carc. 1B Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H350 H302 H400 H410	GHS08 GHS07 GHS09 Dgr	H350 H302 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
024-009-00-4	strontium chromate	232-142-6	7789-06-2	Carc. 1B Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H350 H302 H400 H410	GHS08 GHS07 GHS09 Dgr	H350 H302 H400 H410			
024-010-00-X	dichromium tris(chromate); chromium III chromate; chromic chromate	246-356-2	24613-89-6	Ox. Sol. 1 Carc. 1B Skin Corr. 1A Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H271 H350 H314 H317 H400 H410	GHS03 GHS08 GHS05 GHS07 GHS09 Dgr	H271 H350 H314 H317 H410			T
024-011-00-5	ammonium bis(1-(3,5-dinitro-2-oxidophenylazo)-3-(N-phenylcarbamoyl)-2-naphtholato)chromate(1-)	400-110-2	109125-51-1	Self-react. C **** Aquatic Acute 1 Aquatic Chronic 1	H242 H400 H410	GHS02 GHS09 Dgr	H242 H410			
024-012-00-0	trisodium bis(7-acetamido-2-(4-nitro-2-oxidophenylazo)-3-sulphonato-1-naphtholato)chromate(1-)	400-810-8	—	Muta. 2	H341	GHS08 Wng	H341			
024-013-00-6	trisodium (6-anilino-2-(5-nitro-2-oxidophenylazo)-3-sulphonato-1-naphtholato)(4-sulphonato-1,1'-azodi-2,2'naphtholato)chromate(1-)	402-500-8	—	Eye Dam. 1 Aquatic Chronic 2	H318 H411	GHS05 GHS09 Dgr	H318 H411			
024-014-00-1	trisodium bis(2-(5-chloro-4-nitro-2-oxidophenylazo)-5-sulphonato-1-naphtholato)chromate(1-)	402-870-0	93952-24-0	Eye Dam. 1 Aquatic Chronic 3	H318 H412	GHS05 Dgr	H318 H412			
024-015-00-7	disodium (3-methyl-4-(5-nitro-2-oxidophenylazo)-1-phenylpyrazololato)(1-(3-nitro-2-oxido-5-sulphonatophenylazo)-2-naphtholato)chromate(1-)	404-930-1	—	Acute Tox. 4 * Eye Dam. 1 Aquatic Chronic 2	H332 H318 H411	GHS05 GHS07 GHS09 Dgr	H332 H318 H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
024-016-00-2	tetradecylammonium bis(1-(5-chloro-2-oxidophenylazo)-2-naphtholato)chromate(1-)	405-110-6	88377-66-6	STOT RE 2 * Aquatic Chronic 4	H373 ** H413	GHS08 Wng	H373 ** H413			
024-017-00-8	Chromium (VI) compounds, with the exception of barium chromate and of compounds specified elsewhere in this Annex	—	—	Carc. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H350i H317 H400 H410	GHS08 GHS07 GHS09 Dgr	H350i H317 H410			A
024-018-00-3	sodium chromate	231-889-5	7775-11-3	Carc. 1B Muta. 1B Repr. 1B Acute Tox. 2 * Acute Tox. 3 * STOT RE 1 Acute Tox. 4 * Skin Corr. 1B Resp. Sens. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H350 H340 H360FD H330 H301 H372 ** H312 H314 H334 H317 H410	GHS06 GHS08 GHS05 GHS09 Dgr	H350 H340 H360FD H330 H301 H372 ** H312 H314 H334 H317 H410	Resp. Sens.; H334: C ≥ 0,2 % Skin Sens.; H317: C ≥ 0,2 %		3

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
024-019-00-9	Main component: acetoacetic acid anilide/3-amino-1-hydroxybenzene (ATAN-MAP): trisodium {6-[(2 or 3 or 4)-amino-(4 or 5 or 6)-hydroxyphenylazo]-5'-(phenylsulfamoyl)-3-sulfonatonaphthalene-2-azobenzene-1,2'-diolato}-{6"-[1-(phenylcarbamoyl)ethylazo]-5'''-(phenylsulfamoyl)-3"-sulfonatonaphthalene-2"-azobenzene-1",2'''-diolato}chromate (III); by-product 1: acetoacetic acid anilide/ace-toacetic acid anilide (ATAN-ATAN): trisodium bis{6-[1-(phenylcarbamoyl)ethylazo]-5'-(phenylsulfonyl)-3-sulfonatonaphthalene-2-azobenzene-1,2'-diolato}chromate (III); by-product 2: 3-amino-1-hydroxybenzene/3-amino-1-hydroxybenzene (MAP-MAP): trisodium bis{6-[(2 or 3 or 4)-amino-(4 or 5 or 6)-hydroxyphenylazo]-5'-(phenylsulfamoyl)-3-sulfonatonaphthalene-2-azobenzene-1,2'-diolato} chromate (III)	419-230-1	—	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
024-020-00-4	trisodium bis[(3'-nitro-5'-sulfonato(6-amino-2-[4-(2-hydroxy-1-naphtylazo)phenylsulfonylamino]pyrimidin-5-azo)benzene-2',4'-diolato)]chromate(III)	418-220-4	—	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
025-001-00-3	manganese dioxide	215-202-6	1313-13-9	Acute Tox. 4 * Acute Tox. 4 *	H332 H302	GHS07 Wng	H332 H302			
025-002-00-9	potassium permanganate	231-760-3	7722-64-7	Ox. Sol. 2 Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H272 H302 H400 H410	GHS03 GHS07 GHS09 Dgr	H272 H302 H410			
025-003-00-4	manganese sulphate	232-089-9	7785-87-7	STOT RE 2 * Aquatic Chronic 2	H373 ** H411	GHS08 GHS09 Wng	H373 ** H411			
025-004-00-X	bis(N,N',N"-trimethyl-1,4,7-triazacyclononane)-trioxo-dimanganese (IV) di(hexafluorophosphate) monohydrate	411-760-1	116633-53-5	Aquatic Chronic 2	H411	GHS09	H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
025-005-00-5	reaction mass of: tri-sodium [29H, 31H-phthalocyanine-C,C,C-trisulfonato (6-)-N29, N30, N31, N32] manganate (3-); tetrasodium [29H, 31H-phthalocyanine-C,C,C,C-tetrasulfonato (6-)-N29, N30, N31, N32], manganate (3-); pentasodium [29H, 31H-phthalocyanine-C,C,C,C,C-pentasulfonato (6-)-N29, N30, N31, N32] manganate (3-)	417-660-4	—	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
026-001-00-6	(η-cumene)-(η-cyclopentadienyl)iron(II) hexafluoroantimonate	407-840-0	100011-37-8	Acute Tox. 4 * Eye Dam. 1 Aquatic Chronic 3	H302 H318 H412	GHS05 GHS07 Dgr	H302 H318 H412			
026-002-00-1	(η-cumene)-(η-cyclopentadienyl)iron(II) trifluoromethane-sulfonate	407-880-9	117549-13-0	Acute Tox. 4 * Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			
027-001-00-9	cobalt	231-158-0	7440-48-4	Resp. Sens. 1 Skin Sens. 1 Aquatic Chronic 4	H334 H317 H413	GHS08 Dgr	H334 H317 H413			
027-002-00-4	cobalt oxide	215-154-6	1307-96-6	Acute Tox. 4 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H317 H400 H410	GHS07 GHS09 Wng	H302 H317 H410			
027-003-00-X	cobalt sulphide	215-273-3	1317-42-6	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevaar­klasse en categorie	Gevaar­aan­duiding	Pictogram, signaal­woord	Gevaar­aan­duiding	Aanvullende gevaar­aan­duiding		
027-004-00-5	cobalt dichloride	231-589-4	7646-79-9	Carc. 1B Acute Tox. 4 * Resp. Sens. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H350i H302 H334 H317 H400 H410	GHS08 GHS07 GHS09 Dgr	H350i H302 H334 H317 H410		Carc. 1B; H350i: C ≥ 0,01 % *	1
027-005-00-0	cobalt sulphate	233-334-2	10124-43-3	Carc. 1B Acute Tox. 4 * Resp. Sens. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H350i H302 H334 H317 H400 H410	GHS08 GHS07 GHS09 Dgr	H350i H302 H334 H317 H410		Carc. 1B; H350i: C ≥ 0,01 %	1
028-001-00-1	tetracarbonylnickel; nickel tetracarbonyl	236-669-2	13463-39-3	Flam. Liq. 2 Carc. 2 Repr. 1B Acute Tox. 2 * Aquatic Acute 1 Aquatic Chronic 1	H225 H351 H360D *** H330 H400 H410	GHS02 GHS06 GHS08 GHS09 Dgr	H225 H351 H360D *** H330 H410			
028-002-00-7	nickel	231-111-4	7440-02-0	Carc. 2 Skin Sens. 1	H351 H317	GHS08 GHS07 Wng	H351 H317			
028-003-00-2	nickel monoxide	215-215-7	1313-99-1	Carc. 1Ai Skin Sens. 1 Aquatic Chronic 4	H350i H317 H413	GHS08 GHS07 Dgr	H350i H317 H413			
028-004-00-8	nickel dioxide	234-823-3	12035-36-8	Carc. 1Ai Skin Sens. 1 Aquatic Chronic 4	H350i H317 H413	GHS08 GHS07 Dgr	H350i H317 H413			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
028-005-00-3	dinickel trioxide	215-217-8	1314-06-3	Carc. 1Ai Skin Sens. 1 Aquatic Chronic 4	H350i H317 H413	GHS08 GHS07 Dgr	H350i H317 H413			
028-006-00-9	nickel sulphide	240-841-2	16812-54-7	Carc. 1Ai Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H350i H317 H400 H410	GHS08 GHS07 GHS07 GHS09 Dgr	H350i H317 H410			
028-007-00-4	nickel subsulphide; trinickel disulphide	234-829-6	12035-72-2	Carc. 1Ai Skin Sens. 1 Aquatic Chronic 2	H350i H317 H411	GHS08 GHS07 GHS09 Dgr	H350i H317 H411			
028-008-00-X	nickel dihydroxide	235-008-5	12054-48-7	Carc. 2 Acute Tox. 4 * Acute Tox. 4 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H351 H332 H302 H317 H400 H410	GHS08 GHS07 GHS09 Wng	H351 H332 H302 H317 H410			
028-009-00-5	nickel sulphate	232-104-9	7786-81-4	Carc. 2 Acute Tox. 4 * Resp. Sens. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H351 H302 H334 H317 H400 H410	GHS08 GHS07 GHS09 Dgr	H351 H302 H334 H317 H410			
028-010-00-0	nickel carbonate	222-068-2	3333-67-3	Carc. 2 Acute Tox. 4 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H351 H302 H317 H400 H410	GHS08 GHS07 GHS09 Wng	H351 H302 H317 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
029-001-00-4	copper chloride; copper (I) chloride; cuprous chloride	231-842-9	7758-89-6	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H400 H410			
029-002-00-X	dicopper oxide; copper (I) oxide	215-270-7	1317-39-1	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
029-003-00-5	Naphthenic acids, copper salts; copper naphthenate	215-657-0	1338-02-9	Flam. Liq. 3 Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H226 H302 H400 H410	GHS02 GHS07 GHS09 Wng	H226 H302 H410			
029-004-00-0	copper sulphate	231-847-6	7758-98-7	Acute Tox. 4 * Eye Irrit. 2 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H302 H319 H315 H400 H410	GHS07 GHS09 Wng	H302 H319 H315 H410			
029-005-00-6	(tris(chloromethyl)phthalocyaninato)copper (II), reaction products with N-methylpiperazine and methoxyacetic acid	401-260-1	—	Eye Irrit. 2	H319	GHS07 Wng	H319			
029-006-00-1	tris(octadec-9-enylammonium) (trisulfonatophthalocyaninato)copper(II)	403-210-4	—	Eye Dam. 1 Aquatic Chronic 2	H318 H411	GHS05 GHS09 Dgr	H318 H411			
029-007-00-7	(trisodium (2-((3-(6-(2-chloro-5-sulfonato)anilino)-4-(3-carboxypyridinio)-1,3,5-triazin-2-ylamino)-2-oxido-5-sulfonatophenylazo)phenylmethylazo)-4-sulfonatobenzooato)copper(3-) hydroxide	404-670-9	89797-01-3	Skin Sens. 1	H317	GHS07 Wng	H317			G



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevaar­klasse en categorie	Gevaar­aan­duiding	Pictogram, sig­naal­woord	Gevaar­aan­duiding	Aanvullende gevaar­aan­duiding		
029-008-00-2	copper(II) methanesulfonate	405-400-2	54253-62-2	Acute Tox. 4 * Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H318 H400 H410	GHS05 GHS07 GHS09 Dgr	H302 H318 H410			
029-009-00-8	phthalocyanine-N-[3-(diethylamino)propyl] sulfonamide copper complex	413-650-9	93971-95-0	Aquatic Chronic 3	H412	—	H412			
029-010-00-3	reaction mass of compounds from (dodecakis(p-tolylthio)phthalocyaninato)copper(II) to (hexadecakis(p-tolylthio)phthalocyaninato)copper(II)	407-700-9	101408-30-4	Skin Sens. 1	H317	GHS07 Wng	H317			
029-011-00-9	sodium [29H,31H-phthalocyaninato-(2-)-N29,N30,N31,N32]-((3-(N-methyl-N-(2-hydroxyethyl)amino)propyl)amino)sulfonyl-sulfonato, copper complex	412-730-0	150522-10-4	Skin Corr. 1B	H314	GHS05 Dgr	H314			
029-012-00-4	sodium ((N-(3-trimethylammoniopropyl)sulfamoyl)methylsulfonatophthalocyaninato)copper(II)	407-340-2	124719-24-0	Eye Dam. 1	H318	GHS05 Dgr	H318			
029-013-00-X	trisodium(2-(α-(3-(4-chloro-6-(2-(2-(vinylsulfonyl)ethoxy)ethylamino)-1,3,5-triazin-2-ylamino)-2-oxido-5-sulfonatophenylazo)benzylidenehydrazino)-4-sulfonatobenzooato)copper(II)	407-580-8	130201-51-3	Eye Dam. 1 Aquatic Chronic 3	H318 H412	GHS05 Dgr	H318 H412			
030-001-00-1	zinc powder — zinc dust (pyrophoric)	231-175-3	7440-66-6	Water-react. 1 Pyr. Sol. 1 Aquatic Acute 1 Aquatic Chronic 1	H260 H250 H400 H410	GHS02 GHS09 Dgr	H260 H250 H410			T
030-001-01-9	zinc powder — zinc dust (stabilised)	231-175-3	7440-66-6	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
030-003-00-2	zinc chloride	231-592-0	7646-85-7	Acute Tox. 4 * Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H302 H314 H400 H410	GHS05 GHS07 GHS09 Dgr	H302 H314 H410		STOT SE 3; H335: C ≥ 5 %	
030-004-00-8	dimethylzinc; [1] diethylzinc [2]	208-884-1 [1] 209-161-3 [2]	544-97-8 [1] 557-20-0 [2]	Pyr. Liq. 1 Water-react. 1 Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H250 H260 H314 H400 H410	GHS02 GHS05 GHS09 Dgr	H250 H260 H314 H410	EUH014		
030-005-00-3	diamminediisocyanatozinc	401-610-3	—	Acute Tox. 4 * Eye Dam. 1 Resp. Sens. 1 Skin Sens. 1 Aquatic Acute 1	H302 H318 H334 H317 H400	GHS05 GHS08 GHS07 GHS09 Dgr	H302 H318 H334 H317 H400			
030-006-00-9	zinc sulphate (hydrous) (mono-, hexa- and hepta hydrate); [1] zinc sulphate (anhydrous) [2]	231-793-3 [1] 231-793-3 [2]	7446-19-7 [1] 7733-02-0 [2]	Acute Tox. 4 * Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H318 H400 H410	GHS05 GHS07 GHS09 Dgr	H302 H318 H410			
030-007-00-4	bis(3,5-di-tert-butylsalicylato-O <sup>1</sup> ,O <sup>2</sup> )zinc	403-360-0	42405-40-3	Flam. Sol. 1 Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H228 H302 H400 H410	GHS02 GHS07 GHS09 Dgr	H228 H302 H410			T
030-008-00-X	hydroxo(2-(benzenesulfonamido)benzoato)zinc(II)	403-750-0	113036-91-2	Acute Tox. 4 * Aquatic Chronic 2	H332 H411	GHS07 GHS09 Wng	H332 H411			
030-011-00-6	trizinc bis(orthophosphate)	231-944-3	7779-90-0	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevaar­klasse en categorie	Gevaar­aan­duiding	Pictogram, sig­naal­woord	Gevaar­aan­duiding	Aanvullende gevaar­aan­duiding		
030-013-00-7	zinc oxide	215-222-5	1314-13-2	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
033-001-00-X	arsenic	231-148-6	7440-38-2	Acute Tox. 3 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H331 H301 H400 H410	GHS06 GHS09 Dgr	H331 H301 H410			
033-002-00-5	arsenic compounds, with the exception of those specified elsewhere in this Annex	—	—	Acute Tox. 3 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H331 H301 H400 H410	GHS06 GHS09 Dgr	H331 H301 H410	*		A 1
033-003-00-0	diarsenic trioxide; arsenic trioxide	215-481-4	1327-53-3	Carc. 1A Acute Tox. 2 * Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H350 H300 H314 H400 H410	GHS06 GHS08 GHS05 GHS09 Dgr	H350 H300 H314 H410			
033-004-00-6	diarsenic pentaoxide; arsenic pentoxide; arsenic oxide	215-116-9	1303-28-2	Carc. 1A Acute Tox. 3 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H350 H331 H301 H400 H410	GHS06 GHS08 GHS09 Dgr	H350 H331 H301 H410			
033-005-00-1	arsenic acid and its salts	—	—	Carc. 1A Acute Tox. 3 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H350 H331 H301 H400 H410	GHS06 GHS08 GHS09 Dgr	H350 H331 H301 H410			A

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
033-006-00-7	arsine	232-066-3	7784-42-1	Flam. Gas 1 Press. Gas Acute Tox. 2 * STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H220 H330 H373 ** H400 H410	GHS02 GHS04 GHS06 GHS08 GHS09 Dgr	H220 H330 H373 ** H410			U
033-007-00-2	tert-butylarsine	423-320-6	4262-43-5	Pyr. Liq. 1 Acute Tox. 2 *	H250 H330	GHS02 GHS06 Dgr	H250 H330			
034-001-00-2	selenium	231-957-4	7782-49-2	Acute Tox. 3 * Acute Tox. 3 * STOT RE 2 * Aquatic Chronic 4	H331 H301 H373 ** H413	GHS06 GHS08 Dgr	H331 H301 H373 ** H413			
034-002-00-8	selenium compounds except cadmium sulphoselenide	—	—	Acute Tox. 3 * Acute Tox. 3 * STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H331 H301 H373 ** H400 H410	GHS06 GHS08 GHS09 Dgr	H331 H301 H373 ** H410			A
034-003-00-3	sodium selenite	233-267-9	10102-18-8	Acute Tox. 2 * Acute Tox. 3 * Skin Sens. 1 Aquatic Chronic 2	H300 H331 H317 H411	GHS06 GHS09 Dgr	H300 H331 H317 H411	EUH031		
035-001-00-5	bromine	231-778-1	7726-95-6	Acute Tox. 2 * Skin Corr. 1A Aquatic Acute 1	H330 H314 H400	GHS06 GHS05 GHS09 Dgr	H330 H314 H400			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
035-002-00-0	hydrogen bromide	233-113-0	10035-10-6	Press. Gas Skin Corr. 1A STOT SE 3	H314 H335	GHS04 GHS05 GHS07 Dgr	H314 H335			U
035-002-01-8	hydrobromic acid ... %	—	—	Skin Corr. 1B STOT SE 3	H314 H335	GHS05 GHS07 Dgr	H314 H335		Skin Corr. 1B; H314: C ≥ 40 % Skin Irrit. 2; H315: 10 % ≤ C < 40 % Eye Irrit. 2; H319: 10 % ≤ C < 40 % STOT SE 3; H335: C ≥ 10 %	B
035-003-00-6	potassium bromate	231-829-8	7758-01-2	Ox. Sol. 1 Carc. 1B Acute Tox. 3 *	H271 H350 H301	GHS03 GHS06 GHS08 Dgr	H271 H350 H301			
035-004-00-1	2-hydroxyethylammonium perbromide	407-440-6	—	Ox. Sol. 2 **** Acute Tox. 4 * Skin Corr. 1A Skin Sens. 1 Aquatic Acute 1	H272 H302 H314 H317 H400	GHS03 GHS05 GHS07 GHS09 Dgr	H272 H302 H314 H317 H400			
040-001-00-3	zirconium powder (pyrophoric)	231-176-9	7440-67-7	Water-react. 1 Pyr. Sol. 1	H260 H250	GHS02 Dgr	H260 H250			T
040-002-00-9	zirconium powder, dry (non pyrophoric)	—	—	Self-heat. 1	H251	GHS02 Dgr	H251			T
042-001-00-9	molybdenum trioxide	215-204-7	1313-27-5	STOT RE 2 * Eye Irrit. 2 STOT SE 3	H373 ** H319 H335	GHS08 GHS07 Wng	H373 ** H319 H335			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
042-002-00-4	tetrakis(dimethylditetradecylammonium) hexa- $\mu$ -oxotetra- $\mu$ 3-oxodi- $\mu$ 5-oxotetradecaooctamolybdate(4-)	404-760-8	117342-25-3	Acute Tox. 3 * Eye Dam. 1 Aquatic Chronic 4	H331 H318 H413	GHS06 GHS05 Dgr	H331 H318 H413			
042-003-00-X	tetrakis(trimethylhexadecylammonium) hexa- $\mu$ -oxotetra- $\mu$ 3-oxodi- $\mu$ 5-oxotetradecaooctamolybdate(4-)	404-860-1	116810-46-9	Flam. Sol. 1 Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H228 H318 H400 H410	GHS02 GHS05 GHS09 Dgr	H228 H318 H410			T
042-004-00-5	Reaction product of ammonium molybdate and C <sub>12</sub> -C <sub>24</sub> -diethoxylated alkylamine (1:5-1:3)	412-780-3	—	Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 2	H315 H317 H411	GHS07 GHS09 Wng	H315 H317 H411			
047-001-00-2	silver nitrate	231-853-9	7761-88-8	Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H314 H400 H410	GHS05 GHS09 Dgr	H314 H410			
048-001-00-5	cadmium compounds, with the exception of cadmium sulphoselenide (xCdS.yCdSe), reaction mass of cadmium sulphide with zinc sulphide (xCdS.yZnS), reaction mass of cadmium sulphide with mercury sulphide (xCdS.yHgS), and those specified elsewhere in this Annex	—	—	Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H332 H312 H302 H400 H410	GHS07 GHS09 Wng	H332 H312 H302 H410	*		A 1
048-002-00-0	cadmium (non-pyrophoric); [1] cadmium oxide (non-pyrophoric) [2]	231-152-8 [1] 215-146-2 [2]	7440-43-9 [1] 1306-19-0 [2]	Carc. 1B Muta. 2 Repr. 2 Acute Tox. 2 * STOT RE 1 Aquatic Acute 1 Aquatic Chronic 1	H350 H341 H361fd H330 H372 ** H400 H410	GHS06 GHS08 GHS09 Dgr	H350 H341 H361fd H330 H372 ** H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
048-003-00-6	cadmium diformate; cadmiumformate	224-729-0	4464-23-7	Acute Tox. 3 * Acute Tox. 3 * Carc. 2 STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H331 H301 H351 H373 ** H400 H410	GHS06 GHS08 GHS09 Dgr	H331 H301 H351 H373 ** H410		* STOT RE 2; H373: C ≥ 0,25 %	
048-004-00-1	cadmium cyanide	208-829-1	542-83-6	Acute Tox. 2 * Acute Tox. 1 Acute Tox. 2 * Carc. 2 STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H330 H310 H300 H351 H373 ** H400 H410	GHS06 GHS08 GHS09 Dgr	H330 H310 H300 H351 H373 ** H410	EUH032	STOT RE 2; H373: C ≥ 0,1 % EUH032: C ≥ 1 %	
048-005-00-7	cadmiumhexafluorosilicate(2-); cadmium fluorosilica	241-084-0	17010-21-8	Acute Tox. 3 * Acute Tox. 3 * Carc. 2 STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H331 H301 H351 H373 ** H400 H410	GHS06 GHS08 GHS09 Dgr	H331 H301 H351 H373 ** H410		* STOT RE 2; H373: C ≥ 0,1 %	
048-006-00-2	cadmium fluoride	232-222-0	7790-79-6	Carc. 1B Muta. 1B Repr. 1B Acute Tox. 2 * Acute Tox. 3 * STOT RE 1 Aquatic Acute 1 Aquatic Chronic 1	H350 H340 H360FD H330 H301 H372 ** H400 H410	GHS06 GHS08 GHS09 Dgr	H350 H340 H360FD H330 H301 H372 ** H410		Carc. 1B; H350: C ≥ 0.01 % * oral STOT RE 1; H372: C ≥ 7 % STOT RE 2: 0,1 % ≤ C < 7 %	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
048-007-00-8	cadmium iodide	232-223-6	7790-80-9	Acute Tox. 3 * Acute Tox. 3 * Carc. 2 STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H331 H301 H351 H373 ** H400 H410	GHS06 GHS08 GHS09 Dgr	H331 H301 H351 H373 ** H410		* STOT RE 2; H373: C ≥ 0,1 %	
048-008-00-3	cadmium chloride	233-296-7	10108-64-2	Carc. 1B Muta. 1B Repr. 1B Acute Tox. 2 * Acute Tox. 3 * STOT RE 1 Aquatic Acute 1 Aquatic Chronic 1	H350 H340 H360-FD H330 H301 H372 ** H400 H410	GHS06 GHS08 GHS09 Dgr	H350 H340 H360FD H330 H301 H372 ** H410		Carc. 1B; H350: C ≥ 0,01 % * oral STOT RE 1; H372: C ≥ 7 % STOT RE 2; H373: 0,1 % ≤ C < 7 %	
048-009-00-9	cadmium sulphate	233-331-6	10124-36-4	Carc. 1B Muta. 1B Repr. 1B Acute Tox. 2 * Acute Tox. 3 * STOT RE 1 Aquatic Acute 1 Aquatic Chronic 1	H350 H340 H360-FD H330 H301 H372 ** H400 H410	GHS06 GHS08 GHS09 Dgr	H350 H340 H360FD H330 H301 H372 ** H410		Carc. 1B; H350: C ≥ 0,01 % * oral STOT RE 1; H372: C ≥ 7 % STOT RE 2; H373: 0,1 % ≤ C < 7 %	
048-010-00-4	cadmium sulphide	215-147-8	1306-23-6	Carc. 1B Muta. 2 Repr. 2 STOT RE 1 Acute Tox. 4 * Aquatic Chronic 4	H350 H341 H361fd H372 ** H302 H413	GHS08 GHS07 Dgr	H350 H341 H361fd H372 ** H302 H413		* STOT RE 1; H372: C ≥ 10 % STOT RE 2; H373: 0,1 % ≤ C < 10 %	1



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
048-011-00-X	cadmium (pyrophoric)	231-152-8	7440-43-9	Pyr. Sol. 1 Carc. 1B Muta. 2 Repr. 2 Acute Tox. 2 * STOT RE 1 Aquatic Acute 1 Aquatic Chronic 1	H250 H350 H341 H361fd H330 H372 ** H400 H410	GHS02 GHS06 GHS08 GHS09 Dgr	H250 H350 H341 H361fd H330 H372 ** H410			
050-001-00-5	tin tetrachloride; stannic chloride	231-588-9	7646-78-8	Skin Corr. 1B Aquatic Chronic 3	H314 H412	GHS05 Dgr	H314 H412		STOT SE 3; H335: C ≥ 5 %	
050-002-00-0	cyhexatin (ISO); hydroxytricyclohexylstannane; tri(cyclohexyl)tin hydroxide	236-049-1	13121-70-5	Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H332 H312 H302 H400 H410	GHS07 GHS09 Wng	H332 H312 H302 H410			
050-003-00-6	fentin acetate (ISO); triphenyltin acetate	212-984-0	900-95-8	Carc. 2 Repr. 2 Acute Tox. 2 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 1 STOT SE 3 Skin Irrit. 2 Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H351 H361d *** H330 H311 H301 H372 ** H335 H315 H318 H400 H410	GHS06 GHS08 GHS05 GHS09 Dgr	H351 H361d *** H330 H311 H301 H372 ** H335 H315 H318 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
050-004-00-1	fentin hydroxide (ISO); triphenyltin hydroxide	200-990-6	76-87-9	Carc. 2 Repr. 2 Acute Tox. 2 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 1 STOT SE 3 Skin Irrit. 2 Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H351 H361d *** H330 H311 H301 H372 ** H335 H315 H318 H410	GHS06 GHS08 GHS05 GHS09 Dgr	H351 H361d *** H330 H311 H301 H372 ** H335 H315 H318 H410			
050-005-00-7	trimethyltin compounds, with the exception of those specified elsewhere in this Annex	—	—	Acute Tox. 2 * Acute Tox. 1 Acute Tox. 2 * Aquatic Acute 1 Aquatic Chronic 1	H330 H310 H300 H400 H410	GHS06 GHS09 Dgr	H330 H310 H300 H410	*	A 1	
050-006-00-2	triethyltin compounds, with the exception of those specified elsewhere in this Annex	—	—	Acute Tox. 2 * Acute Tox. 1 Acute Tox. 2 * Aquatic Acute 1 Aquatic Chronic 1	H330 H310 H300 H400 H410	GHS06 GHS09 Dgr	H330 H310 H300 H410	*	A 1	
050-007-00-8	tripropyltin compounds, with the exception of those specified elsewhere in this Annex	—	—	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H331 H311 H301 H400 H410	GHS06 GHS09 Dgr	H331 H311 H301 H410	*	A 1	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
050-008-00-3	tributyltin compounds, with the exception of those specified elsewhere in this Annex	—	—	Acute Tox. 3 * STOT RE 1 Acute Tox. 4 * Eye Irrit. 2 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H301 H372 ** H312 H319 H315 H400 H410	GHS06 GHS08 GHS09 Dgr	H301 H372 ** H312 H319 H315 H410		* oral STOT RE 1; H372: C ≥ 1 % STOT RE 2; H373: 0,25 % ≤ C < 1 % * dermal Eye Irrit. 2; H319: C ≥ 1 % Skin Irrit. 2; H315: C ≥ 1 %	A 1
050-009-00-9	fluorotripentylstannane; [1] hexapentylstannoxane [2]	243-546-7 [1] 247-143-7 [2]	20153-49-5 [1] 25637-27-8 [2]	Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H332 H312 H302 H400 H410	GHS07 GHS09 Wng	H332 H312 H302 H410		*	1
050-010-00-4	fluorotrihexylstannane	243-547-2	20153-50-8	Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H332 H312 H302 H400 H410	GHS07 GHS09 Wng	H332 H312 H302 H410		*	1
050-011-00-X	triphenyltin compounds, with the exception of those specified elsewhere in this Annex	—	—	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H331 H311 H301 H400 H410	GHS06 GHS09 Dgr	H331 H311 H301 H410		*	A 1
050-012-00-5	tetracyclohexylstannane; [1] chlorotricyclohexylstannane; [2] butyltricyclohexylstannane [3]	215-910-5 [1] 221-437-5 [2] 230-358-5 [3]	1449-55-4 [1] 3091-32-5 [2] 7067-44-9 [3]	Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H332 H312 H302 H400 H410	GHS07 GHS09 Wng	H332 H312 H302 H410		*	A 1

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
050-013-00-0	trioctyltin compounds, with the exception of those specified elsewhere in this Annex	—	—	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Chronic 4	H319 H335 H315 H413	GHS07 Wng	H319 H335 H315 H413		Skin Irrit. 2; H315: C ≥ 1 % Eye Irrit. 2; H319: C ≥ 1 % STOT SE 3; H335: C ≥ 1 %	A 1
050-017-00-2	fenbutatin oxide (ISO); bis(tris(2-methyl-2-phenylpropyl)tin)oxide	236-407-7	13356-08-6	Acute Tox. 2 * Eye Irrit. 2 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H330 H319 H315 H400 H410	GHS06 GHS09 Dgr	H330 H319 H315 H410			
050-018-00-8	tin(II) methanesulphonate	401-640-7	53408-94-9	Skin Corr. 1B Acute Tox. 4 * Skin Sens. 1	H314 H302 H317	GHS05 GHS07 Dgr	H314 H302 H317			
050-019-00-3	azocyclotin (ISO); 1-(tricyclohexylstannyl)-1H—1,2,4-triazole	255-209-1	41083-11-8	Acute Tox. 2 * Acute Tox. 3 * STOT SE 3 Skin Irrit. 2 Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H330 H301 H335 H315 H318 H400 H410	GHS06 GHS05 GHS09 Dgr	H330 H301 H335 H315 H318 H410			
050-020-00-9	trioctylstannane	413-320-4	869-59-0	STOT RE 1 Skin Irrit. 2 Aquatic Chronic 4	H372 ** H315 H413	GHS08 GHS07 Dgr	H372 ** H315 H413			
051-001-00-8	antimony trichloride	233-047-2	10025-91-9	Skin Corr. 1B Aquatic Chronic 2	H314 H411	GHS05 GHS09 Dgr	H314 H411		STOT SE 3; H335: C ≥ 5 %	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
051-002-00-3	antimony pentachloride	231-601-8	7647-18-9	Skin Corr. 1B Aquatic Chronic 2	H314 H411	GHS05 GHS09 Dgr	H314 H411		STOT SE 3; H335: C ≥ 5 %	
051-003-00-9	antimony compounds, with the exception of the tetroxide (Sb <sub>2</sub> O <sub>4</sub> ), pentoxide (Sb <sub>2</sub> O <sub>5</sub> ), trisulphide (Sb <sub>2</sub> S <sub>3</sub> ), pentasulphide (Sb <sub>2</sub> S <sub>5</sub> ) and those specified elsewhere in this Annex	—	—	Acute Tox. 4 * Acute Tox. 4 * Aquatic Chronic 2	H332 H302 H411	GHS07 GHS09 Wng	H332 H302 H411		*	A 1
051-004-00-4	antimony trifluoride	232-009-2	7783-56-4	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Aquatic Chronic 2	H331 H311 H301 H411	GHS06 GHS09 Dgr	H331 H311 H301 H411			
051-005-00-X	antimony trioxide	215-175-0	1309-64-4	Carc. 2	H351	GHS08 Wng	H351			
051-006-00-5	diphenyl(4-phenylthiophenyl)sulfonium hexafluoroantimonate	403-500-0	—	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
051-007-00-0	bis(4-dodecylphenyl)iodonium hexafluoroantimonate	404-420-9	71786-70-4	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
053-001-00-3	iodine	231-442-4	7553-56-2	Acute Tox. 4 * Acute Tox. 4 * Aquatic Acute 1	H332 H312 H400	GHS07 GHS09 Wng	H332 H312 H400			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
053-002-00-9	hydrogen iodide	233-109-9	10034-85-2	Press. Gas Skin Corr. 1A	H314	GHS04 GHS05 Dgr	H314		Skin Corr. 1A; H314: C ≥ 10 % Skin Corr. 1B; H314: 0,2 % ≤ C < 10 % Skin Irrit. 2; H315: 0,02 % ≤ C < 0,2 % Eye Irrit. 2; H319: 0,02 % ≤ C < 0,2 % STOT SE 3; H335: C ≥ 0,02 %	U 5
053-002-01-6	hydriodic acid ... %	—	—	Skin Corr. 1B	H314	GHS05 Dgr			Skin Corr. 1B; H314: C ≥ 25 % Skin Irrit. 2; H315: 10 % ≤ C < 25 % Eye Irrit. 2; H319: 10 % ≤ C < 25 %	B
053-005-00-5	(4-(1-methylethyl)phenyl)-(4-methylphenyl)iodonium tetrakis(pentafluorophenyl)borate (1-)	422-960-3	178233-72-2	Acute Tox. 4 * Acute Tox. 4 * STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H373 ** H400 H410	GHS08 GHS07 GHS09 Wng	H312 H302 H373 ** H410			
056-001-00-1	barium peroxide	215-128-4	1304-29-6	Ox. Sol. 2 Acute Tox. 4 * Acute Tox. 4 *	H272 H332 H302	GHS03 GHS07 Dgr	H272 H332 H302			
056-002-00-7	barium salts, with the exception of barium sulphate, salts of 1-azo-2-hydroxynaphthalenyl aryl sulphonic acid, and of salts specified elsewhere in this Annex	—	—	Acute Tox. 4 * Acute Tox. 4 *	H332 H302	GHS07 Wng	H332 H302		*	A 1
056-003-00-2	barium carbonate	208-167-3	513-77-9	Acute Tox. 4 *	H302	GHS07 Wng	H302			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
056-004-00-8	barium chloride	233-788-1	10361-37-2	Acute Tox. 3 * Acute Tox. 4 *	H301 H332	GHS06 Dgr	H301 H332			
072-001-00-4	hafnium tetra- <i>n</i> -butoxide	411-740-2	22411-22-9	Eye Dam. 1 Skin Sens. 1	H318 H317	GHS05 GHS07 Dgr	H318 H317			
074-001-00-X	hexasodium tungstate hydrate	412-770-9	12141-67-2	Acute Tox. 4 * Eye Dam. 1 Aquatic Chronic 3	H302 H318 H412	GHS05 GHS07 Dgr	H302 H318 H412			
074-002-00-5	Reaction products of tungsten hexachloride with 2-methylpropan-2-ol, nonylphenol and pentane-2,4-dione	408-250-6	—	Flam. Liq. 2 Acute Tox. 4 * Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H225 H332 H314 H317 H400 H410	GHS02 GHS05 GHS07 GHS09 Dgr	H225 H332 H314 H317 H410			
076-001-00-5	osmium tetroxide; osmic acid	244-058-7	20816-12-0	Acute Tox. 2 * Acute Tox. 1 Acute Tox. 2 * Skin Corr. 1B	H330 H310 H300 H314	GHS06 GHS05 Dgr	H330 H310 H300 H314			
078-001-00-0	tetrachloroplatinates with the exception of those specified elsewhere in this Annex	—	—	Acute Tox. 3 * Eye Dam. 1 Resp. Sens. 1 Skin Sens. 1	H301 H318 H334 H317	GHS06 GHS05 GHS08 Dgr	H301 H318 H334 H317			A
078-002-00-6	diammonium tetrachloroplatinate	237-499-1	13820-41-2	Acute Tox. 3 * Skin Irrit. 2 Eye Dam. 1 Resp. Sens. 1 Skin Sens. 1	H301 H315 H318 H334 H317	GHS06 GHS05 GHS08 Dgr	H301 H315 H318 H334 H317			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevaar­klasse en categorie	Gevaar­aan­duiding	Pictogram, sig­naal­woord	Gevaar­aan­duiding	Aanvullende gevaar­aan­duiding		
078-003-00-1	disodium tetrachloroplatinate	233-051-4	10026-00-3	Acute Tox. 3 * Skin Irrit. 2 Eye Dam. 1 Resp. Sens. 1 Skin Sens. 1	H301 H315 H318 H334 H317	GHS06 GHS05 GHS08 Dgr	H301 H315 H318 H334 H317			
078-004-00-7	dipotassium tetrachloroplatinate	233-050-9	10025-99-7	Acute Tox. 3 * Skin Irrit. 2 Eye Dam. 1 Resp. Sens. 1 Skin Sens. 1	H301 H315 H318 H334 H317	GHS06 GHS05 GHS08 Dgr	H301 H315 H318 H334 H317			
078-005-00-2	hexachloroplatinates with the exception of those specified elsewhere in this Annex	—	—	Acute Tox. 3 * Eye Dam. 1 Resp. Sens. 1 Skin Sens. 1	H301 H318 H334 H317	GHS06 GHS05 GHS08 Dgr	H301 H318 H334 H317		A	
078-006-00-8	disodium hexachloroplatinate	240-983-5	16923-58-3	Acute Tox. 3 * Eye Dam. 1 Resp. Sens. 1 Skin Sens. 1	H301 H318 H334 H317	GHS06 GHS05 GHS08 Dgr	H301 H318 H334 H317			
078-007-00-3	dipotassium hexachloroplatinate	240-979-3	16921-30-5	Acute Tox. 3 * Eye Dam. 1 Resp. Sens. 1 Skin Sens. 1	H301 H318 H334 H317	GHS06 GHS05 GHS08 Dgr	H301 H318 H334 H317			
078-008-00-9	diammonium hexachloroplatinate	240-973-0	16919-58-7	Acute Tox. 3 * Eye Dam. 1 Resp. Sens. 1 Skin Sens. 1	H301 H318 H334 H317	GHS06 GHS05 GHS08 Dgr	H301 H318 H334 H317			
078-009-00-4	hexachloroplatinic acid	241-010-7	16941-12-1	Acute Tox. 3 * Skin Corr. 1B Resp. Sens. 1 Skin Sens. 1	H301 H314 H334 H317	GHS06 GHS05 GHS08 Dgr	H301 H314 H334 H317			



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
080-001-00-0	mercury	231-106-7	7439-97-6	Acute Tox. 3 * STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H331 H373 ** H400 H410	GHS06 GHS08 GHS09 Dgr	H331 H373 ** H410			
080-002-00-6	inorganic compounds of mercury with the exception of mercuric sulphide and those specified elsewhere in this Annex	—	—	Acute Tox. 2 * Acute Tox. 1 Acute Tox. 2 * STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H330 H310 H300 H373 ** H400 H410	GHS06 GHS08 GHS09 Dgr	H330 H310 H300 H373 ** H410	* STOT RE 2; H373: C ≥ 0,1 %	A 1	
080-003-00-1	dimercury dichloride; mercurous chloride; calomel	233-307-5	10112-91-1	Acute Tox. 4 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H302 H319 H335 H315 H400 H410	GHS07 GHS09 Wng	H302 H319 H335 H315 H410			
080-004-00-7	organic compounds of mercury with the exception of those specified elsewhere in this Annex	—	—	Acute Tox. 2 * Acute Tox. 1 Acute Tox. 2 * STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H330 H310 H300 H373 ** H400 H410	GHS06 GHS08 GHS09 Dgr	H330 H310 H300 H373 ** H410	* STOT RE 2; H373: C ≥ 0,1 %	A 1	
080-005-00-2	mercury difulminate; mercuric fulminate; fulminate of mercury	211-057-8	628-86-4	Unst. Expl. Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H200 H331 H311 H301 H373 ** H400 H410	GHS01 GHS06 GHS08 GHS09 Dgr	H200 H331 H311 H301 H373 ** H400 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
080-005-01-X	mercury difulminate; mercuric fulminate; fulminate of mercury [ $\geq 20$ % phlegmatiser]	211-057-8	628-86-4	Expl. 1.1 Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H201 H331 H311 H301 H373 ** H400 H410	GHS01 GHS06 GHS08 GHS09 Dgr	H201 H331 H311 H301 H373 ** H400 H410			
080-006-00-8	dimercury dicyanide oxide; mercuric oxycyanide	215-629-8	1335-31-5	Expl. 1.1 Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H201 H331 H311 H301 H373 ** H400 H410	GHS01 GHS06 GHS08 GHS09 Dgr	H201 H331 H311 H301 H373 ** H410		T	
080-007-00-3	dimethylmercury; [1] diethylmercury [2]	209-805-3 [1] 211-000-7 [2]	593-74-8 [1] 627-44-1 [2]	Acute Tox. 2 * Acute Tox. 1 Acute Tox. 2 * STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H330 H310 H300 H373 ** H400 H410	GHS06 GHS08 GHS09 Dgr	H330 H310 H300 H373 ** H410	* STOT RE 2; H373: C $\geq 0,05$ %	1	
080-008-00-9	phenylmercury nitrate; [1] phenylmercury hydroxide; [2] basic phenylmercury nitrate [3]	200-242-9 [1] 202-866-7 [2] — [3]	55-68-5 [1] 100-57-2 [2] 8003-05-2 [3]	Acute Tox. 3 * STOT RE 1 Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H301 H372 ** H314 H400 H410	GHS06 GHS08 GHS05 GHS09 Dgr	H301 H372 ** H314 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevaar­klasse en categorie	Gevaar­aan­duiding	Pictogram, sig­naal­woord	Gevaar­aan­duiding	Aanvullende gevaar­aan­duiding		
080-009-00-4	2-methoxyethylmercury chloride	204-659-7	123-88-6	Acute Tox. 3 * STOT RE 1 Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H301 H372 ** H314 H400 H410	GHS06 GHS08 GHS05 GHS09 Dgr	H301 H372 ** H314 H410			
080-010-00-X	mercury dichloride; mercuric chloride	231-299-8	7487-94-7	Acute Tox. 2 * STOT RE 1 Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H300 H372 ** H314 H400 H410	GHS06 GHS08 GHS05 GHS09 Dgr	H300 H372 ** H314 H410			
080-011-00-5	phenylmercury acetate	200-532-5	62-38-4	Acute Tox. 3 * STOT RE 1 Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H301 H372 ** H314 H400 H410	GHS06 GHS08 GHS05 GHS09 Dgr	H301 H372 ** H314 H410			
081-001-00-3	thallium	231-138-1	7440-28-0	Acute Tox. 2 * Acute Tox. 2 * STOT RE 2 * Aquatic Chronic 4	H330 H300 H373 ** H413	GHS06 GHS08 Dgr	H330 H300 H373 ** H413			
081-002-00-9	thallium compounds, with the exception of those specified elsewhere in this Annex	—	—	Acute Tox. 2 * Acute Tox. 2 * STOT RE 2 * Aquatic Chronic 2	H330 H300 H373 ** H411	GHS06 GHS08 GHS09 Dgr	H330 H300 H373 ** H411			A
081-003-00-4	dithallium sulphate; thallic sulphate	231-201-3	7446-18-6	Acute Tox. 2 * STOT RE 1 Skin Irrit. 2 Aquatic Chronic 2	H300 H372 ** H315 H411	GHS06 GHS08 GHS09 Dgr	H300 H372 ** H315 H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
082-001-00-6	lead compounds with the exception of those specified elsewhere in this Annex	—	—	Repr. 1A Acute Tox. 4 * Acute Tox. 4 * STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H360Df H332 H302 H373 ** H400 H410	GHS08 GHS07 GHS09 Dgr	H360Df H332 H302 H373 ** H410		Repr. 2; H361f: C $\geq$ 2,5 % * STOT RE 2; H373: C $\geq$ 0,5 %	A 1
082-002-00-1	lead alkyls	—	—	Repr. 1A Acute Tox. 2 * Acute Tox. 1 Acute Tox. 2 * STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H360Df H330 H310 H300 H373 ** H400 H410	GHS06 GHS08 GHS09 Dgr	H360Df H330 H310 H300 H373 ** H410		Repr. 1A; H360D: C $\geq$ 0,1 % * STOT RE 2; H373: C $\geq$ 0,05 %	A 1
082-003-00-7	lead diazide; lead azide	236-542-1	13424-46-9	Unst. Expl. Repr. 1A Acute Tox. 4 * Acute Tox. 4 * STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H200 H360Df H332 H302 H373 ** H400 H410	GHS01 GHS08 GHS07 GHS09 Dgr	H200 H360Df H332 H302 H373 ** H410			1
082-003-01-4	lead diazide; lead azide [ $\geq$ 20 % phlegmatiser]	236-542-1	13424-46-9	Expl. 1.1 Repr. 1A Acute Tox. 4 * Acute Tox. 4 * STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H201 H360Df H332 H302 H373 ** H400 H410	GHS01 GHS08 GHS07 GHS09 Dgr	H201 H360Df H332 H302 H373 ** H410			1

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
082-004-00-2	lead chromate	231-846-0	7758-97-6	Carc. 2 Repr. 1A STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H351 H360Df H373 ** H400 H410	GHS08 GHS09 Dgr	H351 H360Df H373 ** H410			1
082-005-00-8	lead di(acetate)	206-104-4	301-04-2	Repr. 1A STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H360Df H373 ** H400 H410	GHS08 GHS09 Dgr	H360Df H373 ** H410			1
082-006-00-3	trilead bis(orthophosphate)	231-205-5	7446-27-7	Repr. 1A STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H360Df H373 ** H400 H410	GHS08 GHS09 Dgr	H360Df H373 ** H410			1
082-007-00-9	lead acetate, basic	215-630-3	1335-32-6	Carc. 2 Repr. 1A STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H351 H360Df H373 ** H400 H410	GHS08 GHS09 Dgr	H351 H360Df H373 ** H410			1
082-008-00-4	lead(II) methanesulphonate	401-750-5	17570-76-2	Repr. 1A Acute Tox. 4 * Acute Tox. 4 * STOT RE 2 * Skin Irrit. 2 Eye Dam. 1	H360Df H332 H302 H373 ** H315 H318	GHS08 GHS05 GHS07 Dgr	H360Df H332 H302 H373 ** H315 H318			1

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
082-009-00-X	Lead sulfochromate yellow; C.I. Pigment Yellow 34; [This substance is identified in the Colour Index by Colour Index Constitution Number, C.I. 77603.]	215-693-7	1344-37-2	Carc. 2 Repr. 1A STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H351 H360Df H373 ** H400 H410	GHS08 GHS09 Dgr	H351 H360Df H373 ** H410			1
082-010-00-5	Lead chromate molybdate sulfate red; C.I. Pigment Red 104; [This substance is identified in the Colour Index by Colour Index Constitution Number, C.I. 77605.]	235-759-9	12656-85-8	Carc. 2 Repr. 1A STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H351 H360Df H373 ** H400 H410	GHS08 GHS09 Dgr	H351 H360Df H373 ** H410			1
082-011-00-0	lead hydrogen arsenate	232-064-2	7784-40-9	Carc. 1A Repr. 1A Acute Tox. 3 * Acute Tox. 3 * STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H350 H360Df H331 H301 H373 ** H400 H410	GHS06 GHS08 GHS09 Dgr	H350 H360Df H331 H301 H373 ** H410			1
092-001-00-8	uranium	231-170-6	7440-61-1	Acute Tox. 2 * Acute Tox. 2 * STOT RE 2 * Aquatic Chronic 4	H330 H300 H373 ** H413	GHS06 GHS08 Dgr	H330 H300 H373 ** H413			
092-002-00-3	uranium compounds	—	—	Acute Tox. 2 * Acute Tox. 2 * STOT RE 2 * Aquatic Chronic 2	H330 H300 H373 ** H411	GHS06 GHS08 GHS09 Dgr	H330 H300 H373 ** H411			A

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
601-001-00-4	methane	200-812-7	74-82-8	Flam. Gas 1 Press. Gas	H220	GHS02 GHS04 Dgr	H220			U
601-002-00-X	ethane	200-814-8	74-84-0	Flam. Gas 1 Press. Gas	H220	GHS02 GHS04 Dgr	H220			U
601-003-00-5	propane	200-827-9	74-98-6	Flam. Gas 1 Press. Gas	H220	GHS02 GHS04 Dgr	H220			U
601-004-00-0	butane; [1] and isobutane [2]	203-448-7 [1] 200-857-2 [2]	106-97-8 [1] 75-28-5 [2]	Flam. Gas 1 Press. Gas	H220	GHS02 GHS04 Dgr	H220			C U
601-004-01-8	butane (containing $\geq$ 0.1 % butadiene (203-450-8)); [1] isobutane (containing $\geq$ 0.1 % butadiene (203-450-8)) [2]	203-448-7 [1] 200-857-2 [2]	106-97-8 [1] 75-28-5 [2]	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			C S U
601-005-00-6	2,2-dimethylpropane; neopentane	207-343-7	463-82-1	Flam. Gas 1 Press. Gas Aquatic Chronic 2	H220 H411	GHS02 GHS04 GHS09 Dgr	H220 H411			U
601-006-00-1	pentane	203-692-4	109-66-0	Flam. Liq. 2 Asp. Tox. 1 STOT SE 3 Aquatic Chronic 2	H225 H304 H336 H411	GHS02 GHS08 GHS07 GHS09 Dgr	H225 H304 H336 H411	EUH066		C

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
601-007-00-7	hexane, reaction mass of isomers (containing < 5 % n-hexane (203-777-6))	—	—	Flam. Liq. 2 Asp. Tox. 1 Skin Irrit. 2 STOT SE 3 Aquatic Chronic 2	H225 H304 H315 H336 H411	GHS02 GHS08 GHS07 GHS09 Dgr	H225 H304 H315 H336 H411			C
601-008-00-2	heptane [and isomers] [1]	205-563-8 [1] 203-548-0 [2] 207-346-3 [3] 209-230-8 [4] 209-280-0 [5] 209-643-3 [6] 209-680-5 [7] 209-730-6 [8] 210-529-0 [9] 250-610-8 [10]	142-82-5 [1] 108-08-7 [2] 464-06-2 [3] 562-49-2 [4] 565-59-3 [5] 589-34-4 [6] 590-35-2 [7] 591-76-4 [8] 617-78-7 [9] 31394-54-4 [10]	Flam. Liq. 2 Asp. Tox. 1 Skin Irrit. 2 STOT SE 3 Aquatic Acute 1 Aquatic Chronic 1	H225 H304 H315 H336 H400 H410	GHS02 GHS08 GHS07 GHS09 Dgr	H225 H304 H315 H336 H410			C



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
601-009-00-8	octane [and isomers] [1]	203-892-1 [1] 208-759-1 [2] 209-207-2 [3] 209-243-9 [4] 209-266-4 [5] 209-292-6 [6] 209-504-7 [7] 209-547-1 [8] 209-649-6 [9] 209-650-1 [10] 209-660-6 [11] 209-689-4 [12] 209-745-8 [13] 209-747-9 [14] 209-855-6 [15] 210-187-2 [16] 210-621-0 [17] 213-923-0 [18] 247-861-0 [19]	111-65-9 [1] 540-84-1 [2] 560-21-4 [3] 563-16-6 [4] 564-02-3 [5] 565-75-3 [6] 583-48-2 [7] 584-94-1 [8] 589-43-5 [9] 589-53-7 [10] 589-81-1 [11] 590-73-8 [12] 592-13-2 [13] 592-27-8 [14] 594-82-1 [15] 609-26-7 [16] 619-99-8 [17] 1067-08-9 [18] 26635-64-3 [19]	Flam. Liq. 2 Asp. Tox. 1 Skin Irrit. 2 STOT SE 3 Aquatic Acute 1 Aquatic Chronic 1	H225 H304 H315 H336 H400 H410	GHS02 GHS08 GHS07 GHS09 Dgr	H225 H304 H315 H336 H410		C	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
601-010-00-3	ethylene	200-815-3	74-85-1	Flam. Gas 1 Press. Gas STOT SE 3	H220 H336	GHS02 GHS04 GHS07 Dgr	H220 H336			U
601-011-00-9	propene; propylene	204-062-1	115-07-1	Flam. Gas 1 Press. Gas	H220	GHS02 GHS04 Dgr	H220			U
601-012-00-4	but-1-ene; [1] butene, mixed-1-and-2-isomers; [2] 2-methylpropene; [3] (Z)-but-2-ene; [4] (E)-but-2-ene [5]	203-449-2 [1] 203-452-9 [2] 204-066-3 [3] 209-673-7 [4] 210-855-3 [5]	106-98-9 [1] 107-01-7 [2] 115-11-7 [3] 590-18-1 [4] 624-64-6 [5]	Flam. Gas 1 Press. Gas	H220	GHS02 GHS04 Dgr	H220			C U
601-013-00-X	1,3-butadiene; buta-1,3-diene	203-450-8	106-99-0	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			D U
601-014-00-5	isoprene (stabilised) 2-methyl-1,3-butadiene	201-143-3	78-79-5	Flam. Liq. 1 Carc. 1B Muta. 2 Aquatic Chronic 3	H224 H350 H341 H412	GHS02 GHS08 Dgr	H224 H350 H341 H412			D
601-015-00-0	acetylene; ethyne	200-816-9	74-86-2	Flam. Gas 1 Press. Gas	H220	GHS02 GHS04 Dgr	H220	EUH006		U
601-016-00-6	cyclopropane	200-847-8	75-19-4	Flam. Gas 1 Press. Gas	H220	GHS02 GHS04 Dgr	H220			U

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
601-017-00-1	cyclohexane	203-806-2	110-82-7	Flam. Liq. 2 Asp. Tox. 1 Skin Irrit. 2 STOT SE 3 Aquatic Acute 1 Aquatic Chronic 1	H225 H304 H315 H336 H400 H410	GHS02 GHS08 GHS07 GHS09 Dgr	H225 H304 H315 H336 H410			
601-018-00-7	methylcyclohexane	203-624-3	108-87-2	Flam. Liq. 2 Asp. Tox. 1 Skin Irrit. 2 STOT SE 3 Aquatic Chronic 2	H225 H304 H315 H336 H411	GHS02 GHS08 GHS07 GHS09 Dgr	H225 H304 H315 H336 H411			
601-019-00-2	1,4-dimethylcyclohexane	209-663-2	589-90-2	Flam. Liq. 2 Asp. Tox. 1 Skin Irrit. 2 STOT SE 3 Aquatic Chronic 2	H225 H304 H315 H336 H411	GHS02 GHS08 GHS07 GHS09 Dgr	H225 H304 H315 H336 H411			
601-020-00-8	benzene	200-753-7	71-43-2	Flam. Liq. 2 Carc. 1A Muta. 1B STOT RE 1 Asp. Tox. 1 Eye Irrit. 2 Skin Irrit. 2	H225 H350 H340 H372 ** H304 H319 H315	GHS02 GHS08 GHS07 Dgr	H225 H350 H340 H372 ** H304 H319 H315			E

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
601-021-00-3	toluene	203-625-9	108-88-3	Flam. Liq. 2 Repr. 2 Asp. Tox. 1 STOT RE 2 * Skin Irrit. 2 STOT SE 3	H225 H361d *** H304 H373 ** H315 H336	GHS02 GHS08 GHS07 Dgr	H225 H361d *** H304 H373 ** H315 H336			
601-022-00-9	<i>o</i> -xylene; [1] <i>p</i> -xylene; [2] <i>m</i> -xylene; [3] xylene [4]	202-422-2 [1] 203-396-5 [2] 203-576-3 [3] 215-535-7 [4]	95-47-6 [1] 106-42-3 [2] 108-38-3 [3] 1330-20-7 [4]	Flam. Liq. 3 Acute Tox. 4 * Acute Tox. 4 * Skin Irrit. 2	H226 H332 H312 H315	GHS02 GHS07 Wng	H226 H332 H312 H315	*		C
601-023-00-4	ethylbenzene	202-849-4	100-41-4	Flam. Liq. 2 Acute Tox. 4 *	H225 H332	GHS02 GHS07 Dgr	H225 H332			
601-024-00-X	cumene; [1] propylbenzene [2]	202-704-5 [1] 203-132-9 [2]	98-82-8 [1] 103-65-1 [2]	Flam. Liq. 3 Asp. Tox. 1 STOT SE 3 Aquatic Chronic 2	H226 H304 H335 H411	GHS02 GHS08 GHS07 GHS09 Dgr	H226 H304 H335 H411			C
601-025-00-5	mesitylene; 1,3,5-trimethylbenzene	203-604-4	108-67-8	Flam. Liq. 3 STOT SE 3 Aquatic Chronic 2	H226 H335 H411	GHS02 GHS07 GHS09 Wng	H226 H335 H411		STOT SE 3; H335: C ≥ 25 %	
601-026-00-0	styrene	202-851-5	100-42-5	Flam. Liq. 3 Acute Tox. 4 * Eye Irrit. 2 Skin Irrit. 2	H226 H332 H319 H315	GHS02 GHS07 Wng	H226 H332 H319 H315	*		D

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
601-027-00-6	2-phenylpropene; α-methylstyrene	202-705-0	98-83-9	Flam. Liq. 3 Eye Irrit. 2 STOT SE 3 Aquatic Chronic 2	H226 H319 H335 H411	GHS02 GHS07 GHS09 Wng	H226 H319 H335 H411		STOT SE 3; H335: C ≥ 25 %	
601-028-00-1	2-methylstyrene; 2-vinyltoluene	210-256-7	611-15-4	Acute Tox. 4 * Aquatic Chronic 2	H332 H411	GHS07 GHS09 Wng	H332 H411			
601-029-00-7	dipentene; limonene; [1] (R)-p-mentha-1,8-diene; d-limonene; [2] (S)-p-mentha-1,8-diene; l-limonene; [3] trans-1-methyl-4-(1-methylvinyl)cyclohexene; [4] (±)-1-methyl-4-(1-methylvinyl)cyclohexene [5]	205-341-0 [1] 227-813-5 [2] 227-815-6 [3] 229-977-3 [4] 231-732-0 [5]	138-86-3 [1] 5989-27-5 [2] 5989-54-8 [3] 6876-12-6 [4] 7705-14-8 [5]	Flam. Liq. 3 Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H226 H315 H317 H400 H410	GHS02 GHS07 GHS09 Wng	H226 H315 H317 H410			C
601-030-00-2	cyclopentane	206-016-6	287-92-3	Flam. Liq. 2 Aquatic Chronic 3	H225 H412	GHS02 Dgr	H225 H412			
601-031-00-8	2,4,4-trimethylpent-1-ene	203-486-4	107-39-1	Flam. Liq. 2 Aquatic Chronic 2	H225 H411	GHS02 GHS09 Dgr	H225 H411			
601-032-00-3	benzo[a]pyrene; benzo[def]chrysene	200-028-5	50-32-8	Carc. 1B Muta. 1B Repr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H350 H340 H360-FD H317 H400 H410	GHS08 GHS07 GHS09 Dgr	H350 H340 H360FD H317 H410		Carc. 1B; H350: C ≥ 0,01 %	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevaar­klasse en categorie	Gevaar­aan­duiding	Pictogram, sig­naal­woord	Gevaar­aan­duiding	Aanvullende gevaar­aan­duiding		
601-033-00-9	benz[a]anthracene	200-280-6	56-55-3	Carc. 1B Aquatic Acute 1 Aquatic Chronic 1	H350 H400 H410	GHS08 GHS09 Dgr	H350 H410			
601-034-00-4	benz[e]acephenanthrylene	205-911-9	205-99-2	Carc. 1B Aquatic Acute 1 Aquatic Chronic 1	H350 H400 H410	GHS08 GHS09 Dgr	H350 H410			
601-035-00-X	benzo[j]fluoranthene	205-910-3	205-82-3	Carc. 1B Aquatic Acute 1 Aquatic Chronic 1	H350 H400 H410	GHS08 GHS09 Dgr	H350 H410			
601-036-00-5	benzo[k]fluoranthene	205-916-6	207-08-9	Carc. 1B Aquatic Acute 1 Aquatic Chronic 1	H350 H400 H410	GHS08 GHS09 Dgr	H350 H410			
601-037-00-0	n-hexane	203-777-6	110-54-3	Flam. Liq. 2 Repr. 2 Asp. Tox. 1 STOT RE 2 * Skin Irrit. 2 STOT SE 3 Aquatic Chronic 2	H225 H361f *** H304 H373 ** H315 H336 H411	GHS02 GHS08 GHS07 GHS09 Dgr	H225 H361f *** H304 H373 ** H315 H336 H411		STOT RE 2; H373: C ≥ 5 %	
601-041-00-2	dibenz[a,h]anthracene	200-181-8	53-70-3	Carc. 1B Aquatic Acute 1 Aquatic Chronic 1	H350 H400 H410	GHS08 GHS09 Dgr	H350 H410		Carc. 1B; H350: C ≥ 0,01 %	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
601-042-00-8	biphenyl; diphenyl	202-163-5	92-52-4	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H319 H335 H315 H400 H410	GHS07 GHS09 Wng	H319 H335 H315 H410			
601-043-00-3	1,2,4-trimethylbenzene	202-436-9	95-63-6	Flam. Liq. 3 Acute Tox. 4 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Chronic 2	H226 H332 H319 H335 H315 H411	GHS02 GHS07 GHS09 Wng	H226 H332 H319 H335 H315 H411			
601-044-00-9	3a,4,7,7a-tetrahydro-4,7-methanoindene	201-052-9	77-73-6	Flam. Liq. 2 Acute Tox. 4 * Acute Tox. 4 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Chronic 2	H225 H332 H302 H319 H335 H315 H411	GHS02 GHS07 GHS09 Dgr	H225 H332 H302 H319 H335 H315 H411			
601-045-00-4	1,2,3,4-tetrahydronaphthalene	204-340-2	119-64-2	Eye Irrit. 2 Skin Irrit. 2 Aquatic Chronic 2	H319 H315 H411	GHS07 GHS09 Wng	H319 H315 H411	EUH019		
601-046-00-X	7-methylocta-1,6-diene	404-210-7	42152-47-6	Flam. Liq. 3 Aquatic Acute 1 Aquatic Chronic 1	H226 H400 H410	GHS02 GHS09 Wng	H226 H410			
601-047-00-5	m-mentha-1,3(8)-diene	404-150-1	17092-80-7	Skin Irrit. 2 Aquatic Chronic 2	H315 H411	GHS07 GHS09 Wng	H315 H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
601-048-00-0	chrysene	205-923-4	218-01-9	Carc. 1B Muta. 2 Aquatic Acute 1 Aquatic Chronic 1	H350 H341 H400 H410	GHS08 GHS09 Dgr	H350 H341 H410			
601-049-00-6	benzo[e]pyrene	205-892-7	192-97-2	Carc. 1B Aquatic Acute 1 Aquatic Chronic 1	H350 H400 H410	GHS08 GHS09 Dgr	H350 H410			
601-051-00-7	4-phenylbut-1-ene	405-980-7	768-56-9	Skin Irrit. 2 Aquatic Chronic 2	H315 H411	GHS07 GHS09 Wng	H315 H411			
601-052-00-2	naphthalene	202-049-5	91-20-3	Carc. 2 Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H351 H302 H400 H410	GHS07 GHS08 GHS09 Wng	H351 H302 H410			
601-053-00-8	nonylphenol; [1] 4-nonylphenol, branched [2]	246-672-0 [1] 284-325-5 [2]	25154-52-3 [1] 84852-15-3 [2]	Repr. 2 Acute Tox. 4 * Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H361fd H302 H314 H400 H410	GHS08 GHS05 GHS07 GHS09 Dgr	H361fd H302 H314 H410			
601-054-00-3	reaction mass of isomers of: dibenzylbenzene; dibenzyl(methyl)benzene; dibenzyl(dimethyl)benzene; dibenzyl(trimethyl)benzene	405-570-8	—	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
601-055-00-9	reaction mass of isomers of: mono-(2-tetradecyl)naphthalenes; di-(2-tetradecyl)naphthalenes; tri-(2-tetradecyl)naphthalenes	410-190-0	132983-41-6	Eye Irrit. 2 Aquatic Chronic 4	H319 H413	GHS07 Wng	H319 H413			



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
601-056-00-4	reaction mass of isomers of: methyl diphenylmethane; dimethyldiphenylmethane	405-470-4	73807-39-3	Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H315 H400 H410	GHS07 GHS09 Wng	H315 H410			
601-057-00-X	N-dodecyl-[3-(4-(dimethylamino)benzamido)-propyl]dimethylammonium tosylate	421-130-8	156679-41-3	Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H318 H317 H400 H410	GHS05 GHS07 GHS09 Dgr	H318 H317 H410			
601-058-00-5	di-L-para-menthene	417-870-6	83648-84-4	Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H315 H317 H400 H410	GHS07 GHS09 Wng	H315 H317 H410			
601-059-00-0	methyl 2-benzylidene-3-oxobutyrate	420-940-9	15768-07-7	Eye Irrit. 2 Skin Irrit. 2 Aquatic Chronic 2	H319 H315 H411	GHS07 GHS09 Wng	H319 H315 H411			
601-060-00-6	1,2-bis[4-fluoro-6-(4-sulfo-5-(2-(4-sulfonaphthalene-3-ylazo)-1-hydroxy-3,6-disulfo-8-aminonaphthalene-7-ylazo)phenylamino)-1,3,5-triazin-2-ylamino]ethane; x-sodium, y-potassium salts x = 7,755 y = 0,245	417-610-1	155522-09-1	Skin Sens. 1	H317	GHS07 Wng	H317			
601-061-00-1	(ethyl-1,2-ethanediyyl)-2-[[[(2-hydroxyethyl)methylamino]acetyl]-propyl]ω-(nonylphenoxy)poly[oxy-(methyl-1,2-ethanediyyl)]	418-960-8	—	Skin Corr. 1B Skin Sens. 1 Aquatic Chronic 2	H314 H317 H411	GHS05 GHS07 GHS09 Dgr	H314 H317 H411			
601-062-00-7	reaction mass of: branched triacontane; branched dotriacontane; branched tetratriacontane; branched hexatriacontane	417-030-9	151006-59-6	Aquatic Chronic 4	H413	—	H413			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
601-063-00-2	reaction mass of isomers of branched tetracosane	417-060-2	151006-61-0	Acute Tox. 4 * Aquatic Chronic 4	H332 H413	GHS07 Wng	H332 H413			
601-064-00-8	branched hexatriacontane	417-070-7	151006-62-1	Aquatic Chronic 4	H413	—	H413			
601-065-00-3	reaction mass of: (1'- $\alpha$ ,3'- $\alpha$ ,6'- $\alpha$ -2,2,3',7',7'-pentamethylspiro(1,3-dioxane-5,2'-norcarane); (1' $\alpha$ ,3' $\beta$ ,6' $\alpha$ )-2,2,3',7',7'-pentamethylspiro(1,3-dioxane-5,2'-norcarane)	416-930-9	—	STOT RE 2 * Eye Dam. 1 Aquatic Chronic 2	H373 ** H318 H411	GHS08 GHS05 GHS09 Dgr	H373 ** H318 H411			
601-066-00-9	1-(4-(trans-4-heptylcyclohexyl)phenyl) ethanone	426-820-2	78531-60-9	Skin Sens. 1 Aquatic Chronic 4	H317 H413	GHS07 Wng	H317 H413			
601-067-00-4	triethyl arsenate	427-700-2	15606-95-8	Carc. 1A Acute Tox. 3 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H350 H331 H301 H400 H410	GHS06 GHS08 GHS09 Dgr	H350 H331 H301 H410			
601-068-00-X	1,2-diacetoxybut-3-ene	421-720-5	18085-02-4	Acute Tox. 4 *	H302	GHS07 Wng	H302			
601-069-00-5	2-ethyl-1-(2-(1,3-dioxanyl)ethyl)-pyridinium bromide	422-680-1	287933-44-2	Aquatic Chronic 3	H412	—	H412			
601-071-00-6	1-dimethoxymethyl-2-nitro-benzene	423-830-9	20627-73-0	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
601-073-00-7	1-bromo-3,5-difluorobenzene	416-710-2	461-96-1	Flam. Liq. 3 Acute Tox. 4 * STOT RE 2 * Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H226 H302 H373 ** H315 H317 H400 H410	GHS02 GHS08 GHS07 GHS09 Wng	H226 H302 H373 ** H315 H317 H410			
601-074-00-2	reaction mass of: 4-(2,2,3-trimethylcyclopent-3-en-1-yl)-1-methyl-2-oxabicyclo[2.2.2]octane; 1-(2,2,3-trimethylcyclopent-3-en-1-yl)-5-methyl-6-oxabicyclo[3.2.1]octane; spiro[cyclohex-3-en-1-yl-[(4,5,6,6a-tetrahydro-3,6',6'a-tetramethyl)-1,3'(3'aH)-[2H]cyclopenta[b]furan]; spiro[cyclohex-3-en-1-yl-[4,5,6,6a-tetrahydro-4,6',6'a-tetramethyl)-1,3'(3'aH)-[2H]cyclopenta[b]furan]	422-040-1	—	Eye Irrit. 2 Skin Irrit. 2 Aquatic Chronic 2	H319 H315 H411	GHS07 GHS09 Wng	H319 H315 H411			
601-085-00-2	isopentane; 2-methylbutane	201-142-8	78-78-4	Flam. Liq. 1 Asp. Tox. 1 STOT SE 3 Aquatic Chronic 2	H224 H304 H336 H411	GHS02 GHS08 GHS07 GHS09 Dgr	H224 H304 H336 H411	EUH066		
602-001-00-7	chloromethane; methyl chloride	200-817-4	74-87-3	Flam. Gas 1 Press. Gas Carc. 2 STOT RE 2 *	H220 H351 H373 **	GHS02 GHS04 GHS08 Dgr	H220 H351 H373 **		U	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
602-002-00-2	bromomethane; methylbromide	200-813-2	74-83-9	Press. Gas Muta. 2 Acute Tox. 3 * Acute Tox. 3 * STOT RE 2 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1 Ozone	H341 H331 H301 H373 ** H319 H335 H315 H400 EU- H059	GHS04 GHS06 GHS08 GHS09 Dgr	H341 H331 H301 H373 ** H319 H335 H315 H400	EUH059		U
602-003-00-8	dibromomethane	200-824-2	74-95-3	Acute Tox. 4 * Aquatic Chronic 3	H332 H412	GHS07 Wng	H332 H412		*	
602-004-00-3	dichloromethane; methylene chloride	200-838-9	75-09-2	Carc. 2	H351	GHS08 Wng	H351			
602-005-00-9	methyl iodide; iodomethane	200-819-5	74-88-4	Carc. 2 Acute Tox. 4 * Acute Tox. 3 * Acute Tox. 3 * STOT SE 3 Skin Irrit. 2	H351 H312 H331 H301 H335 H315	GHS06 GHS08 Dgr	H351 H312 H331 H301 H335 H315			
602-006-00-4	trichloromethane; chloroform	200-663-8	67-66-3	Carc. 2 Acute Tox. 4 * STOT RE 2 * STOT RE 2 * Skin Irrit. 2	H351 H302 H373 H373 ** H315	GHS07 GHS08 Wng	H351 H302 H373 ** H373 ** H315		* STOT RE 2; H373: C ≥ 5 %	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
602-007-00-X	bromoform; tribromomethane	200-854-6	75-25-2	Acute Tox. 3 * Eye Irrit. 2 Skin Irrit. 2 Aquatic Chronic 2	H331 H319 H315 H411	GHS06 GHS09 Dgr	H331 H319 H315 H411			
602-008-00-5	carbon tetrachloride; tetrachloromethane	200-262-8	56-23-5	Carc. 2 Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 1 Aquatic Chronic 3 Ozone	H351 H331 H311 H301 H372 ** H412 EU- H059	GHS06 GHS08 Dgr	H351 H331 H311 H301 H372 ** H412	EUH059	* STOT RE 1; H372: C ≥ 1 % STOT RE 2; H373: 0,2 % ≤ C < 1 %	
602-009-00-0	chloroethane	200-830-5	75-00-3	Flam. Gas 1 Press. Gas Carc. 2 Aquatic Chronic 3	H220 H351 H412	GHS02 GHS04 GHS08 Dgr	H220 H351 H412			U
602-010-00-6	1,2-dibromoethane	203-444-5	106-93-4	Carc. 1B Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Chronic 2	H350 H331 H311 H301 H319 H335 H315 H411	GHS06 GHS08 GHS09 Dgr	H350 H331 H311 H301 H319 H335 H315 H411		*	
602-011-00-1	1,1-dichloroethane	200-863-5	75-34-3	Flam. Liq. 2 Acute Tox. 4 * Eye Irrit. 2 STOT SE 3 Aquatic Chronic 3	H225 H302 H319 H335 H412	GHS02 GHS07 Dgr	H225 H302 H319 H335 H412		*	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
602-012-00-7	1,2-dichloroethane; ethylene dichloride	203-458-1	107-06-2	Flam. Liq. 2 Carc. 1B Acute Tox. 4 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H225 H350 H302 H319 H335 H315	GHS02 GHS08 GHS07 Dgr	H225 H350 H302 H319 H335 H315			
602-013-00-2	1,1,1-trichloroethane; methyl chloroform	200-756-3	71-55-6	Acute Tox. 4 * Ozone	H332 EU-H059	GHS07 Wng	H332	EUH059		F
602-014-00-8	1,1,2-trichloroethane	201-166-9	79-00-5	Carc. 2 Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 *	H351 H332 H312 H302	GHS08 GHS07 Wng	H351 H332 H312 H302	EUH066	*	
602-015-00-3	1,1,2,2-tetrachloroethane	201-197-8	79-34-5	Acute Tox. 2 * Acute Tox. 1 Aquatic Chronic 2	H330 H310 H411	GHS06 GHS09 Dgr	H330 H310 H411			
602-016-00-9	1,1,2,2-tetrabromoethane	201-191-5	79-27-6	Acute Tox. 2 * Eye Irrit. 2 Aquatic Chronic 3	H330 H319 H412	GHS06 Dgr	H330 H319 H412			
602-017-00-4	pentachloroethane	200-925-1	76-01-7	Carc. 2 STOT RE 1 Aquatic Chronic 2	H351 H372 ** H411	GHS08 GHS09 Dgr	H351 H372 ** H411		STOT RE 1; H372: C ≥ 1 % STOT RE 2; H373: 0,2 % ≤ C < 1 %	
602-018-00-X	1-chloropropane; [1] 2-chloropropane [2]	208-749-7 [1] 200-858-8 [2]	540-54-5 [1] 75-29-6 [2]	Flam. Liq. 2 Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 *	H225 H332 H312 H302	GHS02 GHS07 Dgr	H225 H332 H312 H302			C

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
602-019-00-5	1-bromopropane; n-propyl bromide	203-445-0	106-94-5	Flam. Liq. 2 Repr. 1B STOT RE 2 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 STOT SE 3	H225 H360FD H373 **	GHS02 GHS08 GHS07 Dgr	H225 H360FD H373 ** H319 H335 H315 H336			
602-020-00-0	1,2-dichloropropane; propylene dichloride	201-152-2	78-87-5	Flam. Liq. 2 Acute Tox. 4 * Acute Tox. 4 *	H225 H332 H302	GHS02 GHS07 Dgr	H225 H332 H302			
602-021-00-6	1,2-dibromo-3-chloropropane	202-479-3	96-12-8	Carc. 1B Muta. 1B Repr. 1A Acute Tox. 3 * STOT RE 2 * Aquatic Chronic 3	H350 H340 H360F *** H301 H373 ** H412	GHS06 GHS08 Dgr	H350 H340 H360F *** H301 H373 ** H412			
602-022-00-1	1-chloropentane; [1] 2-chloropentane; [2] 3-chloropentane [3]	208-846-4 [1] 210-885-7 [2] 210-467-4 [3]	543-59-9 [1] 625-29-6 [2] 616-20-6 [3]	Flam. Liq. 2 Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 *	H225 H332 H312 H302	GHS02 GHS07 Dgr	H225 H332 H312 H302			C
602-023-00-7	vinyl chloride; chloroethylene	200-831-0	75-01-4	Press. Gas Flam. Gas 1 Carc. 1A	H220 H350	GHS02 GHS08 Dgr	H220 H350			D U
602-024-00-2	bromoethylene	209-800-6	593-60-2	Press. Gas Flam. Gas 1 Carc. 1B	H220 H350	GHS02 GHS08 Dgr	H220 H350			U

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
602-025-00-8	1,1-dichloroethylene; vinylidene chloride	200-864-0	75-35-4	Flam. Liq. 1 Carc. 2 Acute Tox. 4 *	H224 H351 H332	GHS02 GHS08 GHS07 Dgr	H224 H351 H332		*	D
602-026-00-3	1,2-dichloroethylene; [1] cis-dichloroethylene; [2] trans-dichloroethylene [3]	208-750-2 [1] 205-859-7 [2] 205-860-2 [3]	540-59-0 [1] 156-59-2 [2] 156-60-5 [3]	Flam. Liq. 2 Acute Tox. 4 * Aquatic Chronic 3	H225 H332 H412	GHS02 GHS07 Dgr	H225 H332 H412		*	C
602-027-00-9	trichloroethylene; trichloroethene	201-167-4	79-01-6	Carc. 1B Muta. 2 Eye Irrit. 2 Skin Irrit. 2 STOT SE 3 Aquatic Chronic 3	H350 H341 H319 H315 H336 H412	GHS08 GHS07 Dgr	H350 H341 H319 H315 H336 H412			
602-028-00-4	tetrachloroethylene	204-825-9	127-18-4	Carc. 2 Aquatic Chronic 2	H351 H411	GHS08 GHS09 Wng	H351 H411			
602-029-00-X	3-chloropropene; allyl chloride	203-457-6	107-05-1	Flam. Liq. 2 Carc. 2 Muta. 2 Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * STOT RE 2 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1	H225 H351 H341 H332 H312 H302 H373 ** H319 H335 H315 H400	GHS02 GHS08 GHS07 GHS09 Dgr	H225 H351 H341 H332 H312 H302 H373 ** H319 H335 H315 H400			D



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
602-030-00-5	1,3-dichloropropene; [1] (Z)-1,3-dichloropropene [2]	208-826-5 [1] 233-195-8 [2]	542-75-6 [1] 10061-01-5 [2]	Flam. Liq. 3 Acute Tox. 3 * Acute Tox. 4 * Acute Tox. 4 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H226 H301 H332 H312 H319 H335 H315 H317 H400 H410	GHS02 GHS06 GHS09 Dgr	H226 H301 H332 H312 H319 H335 H315 H317 H410			C D
602-031-00-0	1,1-dichloropropene	209-253-3	563-58-6	Flam. Liq. 2 Acute Tox. 3 * Aquatic Chronic 3	H225 H301 H412	GHS02 GHS06 Dgr	H225 H301 H412			
602-032-00-6	3-chloro-2-methylpropene	209-251-2	563-47-3	Flam. Liq. 2 Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1B Skin Sens. 1 Aquatic Chronic 2	H225 H332 H302 H314 H317 H411	GHS02 GHS05 GHS07 GHS09 Dgr	H225 H332 H302 H314 H317 H411			
602-033-00-1	chlorobenzene	203-628-5	108-90-7	Flam. Liq. 3 Acute Tox. 4 * Aquatic Chronic 2	H226 H332 H411	GHS02 GHS07 GHS09 Wng	H226 H332 H411		*	
602-034-00-7	1,2-dichlorobenzene; o-dichlorobenzene	202-425-9	95-50-1	Acute Tox. 4 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H302 H319 H335 H315 H400 H410	GHS07 GHS09 Wng	H302 H319 H335 H315 H410		*	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
602-035-00-2	1,4-dichlorobenzene; p-dichlorobenzene	203-400-5	106-46-7	Carc. 2 Eye Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H351 H319 H400 H410	GHS08 GHS09 Wng	H351 H319 H410			
602-036-00-8	chloroprene (stabilised); 2-chlorobuta-1,3-diene (stabilised)	204-818-0	126-99-8	Flam. Liq. 2 Carc. 1B Acute Tox. 4 * Acute Tox. 4 * STOT RE 2 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H225 H350 H332 H302 H373 ** H319 H335 H315	GHS02 GHS08 GHS07 Dgr	H225 H350 H332 H302 H373 ** H319 H335 H315			D
602-037-00-3	α-chlorotoluene; benzyl chloride	202-853-6	100-44-7	Carc. 1B Acute Tox. 3 * Acute Tox. 4 * STOT RE 2 * STOT SE 3 Skin Irrit. 2 Eye Dam. 1	H350 H331 H302 H373 ** H335 H315 H318	GHS06 GHS08 GHS05 Dgr	H350 H331 H302 H373 ** H335 H315 H318			
602-038-00-9	α, α,α-trichlorotoluene; benzotrichloride	202-634-5	98-07-7	Carc. 1B Acute Tox. 3 * Acute Tox. 4 * STOT SE 3 Skin Irrit. 2 Eye Dam. 1	H350 H331 H302 H335 H315 H318	GHS06 GHS08 GHS05 Dgr	H350 H331 H302 H335 H315 H318			
602-039-00-4	polychlorobiphenyls; PCB	215-648-1	1336-36-3	STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H373 ** H400 H410	GHS08 GHS09 Wng	H373 ** H410		STOT RE 2; H373: C ≥ 0,005 %	C

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
602-040-00-X	2-chlorotoluene; [1] 3-chlorotoluene; [2] 4-chlorotoluene; [3] chlorotoluene [4]	202-424-3 [1] 203-580-5 [2] 203-397-0 [3] 246-698-2 [4]	95-49-8 [1] 108-41-8 [2] 106-43-4 [3] 25168-05-2 [4]	Acute Tox. 4 * Aquatic Chronic 2	H332 H411	GHS07 GHS09 Wng	H332 H411			C
602-041-00-5	pentachloronaphthalene	215-320-8	1321-64-8	Acute Tox. 4 * Acute Tox. 4 * Eye Irrit. 2 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H319 H315 H400 H410	GHS07 GHS09 Wng	H312 H302 H319 H315 H410			C
602-042-00-0	1,2,3,4,5,6-hexachlorocyclohexanes with the exception of those specified elsewhere in this Annex	—	—	Carc. 2 Acute Tox. 3 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H351 H301 H312 H400 H410	GHS06 GHS08 GHS09 Dgr	H351 H301 H312 H410			A C
602-043-00-6	lindane (ISO); γ-HCH or γ-BHC; γ-1,2,3,4,5,6-hexachlorocyclohexane	200-401-2	58-89-9	Acute Tox. 3 * Acute Tox. 4 * Acute Tox. 4 * STOT RE 2 * Lact. Aquatic Acute 1 Aquatic Chronic 1	H301 H332 H312 H373 ** H362 H400 H410	GHS06 GHS08 GHS09 Dgr	H301 H332 H312 H373 ** H362 H410	M=10		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
602-044-00-1	camphechlor (ISO); toxaphene;	232-283-3	8001-35-2	Carc. 2 Acute Tox. 3 * Acute Tox. 4 * STOT SE 3 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H351 H301 H312 H335 H315 H400 H410	GHS06 GHS08 GHS09 Dgr	H351 H301 H312 H335 H315 H410			
602-045-00-7	DDT (ISO); clofenotane (INN); dicophane; 1,1,1-trichloro-2,2-bis(4-chlorophenyl) ethane; dichlorodiphenyltrichloroethane	200-024-3	50-29-3	Carc. 2 Acute Tox. 3 * STOT RE 1 Aquatic Acute 1 Aquatic Chronic 1	H351 H301 H372 ** H400 H410	GHS06 GHS08 GHS09 Dgr	H351 H301 H372 ** H410			
602-046-00-2	heptachlor (ISO); 1,4,5,6,7,8,8-heptachloro-3a,4,7,7a-tetrahydro-4,7-methanoindene	200-962-3	76-44-8	Carc. 2 Acute Tox. 3 * Acute Tox. 3 * STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H351 H311 H301 H373 ** H400 H410	GHS06 GHS08 GHS09 Dgr	H351 H311 H301 H373 ** H410			
602-047-00-8	chlordane (ISO); 1,2,4,5,6,7,8,8-octachloro-3a,4,7,7a-tetrahydro-4,7-methanoindan	200-349-0	57-74-9	Carc. 2 Acute Tox. 4 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H351 H312 H302 H400 H410	GHS08 GHS07 GHS09 Wng	H351 H312 H302 H410			
602-048-00-3	aldrin (ISO)	206-215-8	309-00-2	Carc. 2 Acute Tox. 3 * Acute Tox. 3 * STOT RE 1 Aquatic Acute 1 Aquatic Chronic 1	H351 H311 H301 H372 ** H400 H410	GHS06 GHS08 GHS09 Dgr	H351 H311 H301 H372 ** H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
602-049-00-9	dieldrin (ISO)	200-484-5	60-57-1	Carc. 2 Acute Tox. 1 Acute Tox. 3 * STOT RE 1 Aquatic Acute 1 Aquatic Chronic 1	H351 H310 H301 H372 ** H400 H410	GHS06 GHS08 GHS09 Dgr	H351 H310 H301 H372 ** H410			
602-050-00-4	(1 $\alpha$ ,4 $\alpha$ ,4 $\alpha\beta$ ,5 $\beta$ ,8 $\beta$ ,8 $\alpha\beta$ )-1,2,3,4,10,10-hexachloro-1,4,4a,5,8,8a-hexahydro-1,4:5,8-dimethanonaphthalene; isodrin	207-366-2	465-73-6	Acute Tox. 2 * Acute Tox. 1 Acute Tox. 2 * Aquatic Acute 1 Aquatic Chronic 1	H330 H310 H300 H400 H410	GHS06 GHS09 Dgr	H330 H310 H300 H410			
602-051-00-X	endrin (ISO); 1,2,3,4,10,10-hexachloro-6,7-epoxy-1,4,4a,5,6,7,8,8a-octahydro-1,4:5,8-dimethanonaphthalene	200-775-7	72-20-8	Acute Tox. 2 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H300 H311 H400 H410	GHS06 GHS09 Dgr	H300 H311 H410			
602-052-00-5	endosulfan (ISO); 1,2,3,4,7,7-hexachloro-8,9,10-trinorborn-2-en-5,6-ylenedimethyl sulphite	204-079-4	115-29-7	Acute Tox. 3 * Acute Tox. 3 * Eye Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H311 H301 H319 H400 H410	GHS06 GHS09 Dgr	H311 H301 H319 H410			
602-053-00-0	isobenzan (ISO); 1,3,4,5,6,7,8,8-octachloro-1,3,3a,4,7,7a-hexahydro-4,7-methanoisobenzofuran	206-045-4	297-78-9	Acute Tox. 1 Acute Tox. 2 * Aquatic Acute 1	H310 H300 H400	GHS06 GHS09 Dgr	H310 H300 H400			
602-054-00-6	3-iodpropene; allyl iodide	209-130-4	556-56-9	Flam. Liq. 2 Skin Corr. 1B	H226 H314	GHS02 GHS05 Dgr	H226 H314			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
602-055-00-1	bromoethane; ethyl bromide	200-825-8	74-96-4	Flam. Liq. 2 Carc. 2 Acute Tox. 4 * Acute Tox. 4 *	H225 H351 H332 H302	GHS02 GHS08 GHS07 Dgr	H225 H351 H332 H302			
602-056-00-7	$\alpha$ , $\alpha$ -trifluorotoluene; benzotrifluoride	202-635-0	98-08-8	Flam. Liq. 2 Aquatic Chronic 2	H225 H411	GHS02 GHS09 Dgr	H225 H411			
602-057-00-2	$\alpha$ -bromotoluene; benzyl bromide	202-847-3	100-39-0	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H319 H335 H315	GHS07 Wng	H319 H335 H315			
602-058-00-8	$\alpha$ , $\alpha$ -dichlorotoluene; benzylidene chloride; benzal chloride	202-709-2	98-87-3	Carc. 2 Acute Tox. 3 * Acute Tox. 4 * STOT SE 3 Skin Irrit. 2 Eye Dam. 1	H351 H331 H302 H335 H315 H318	GHS06 GHS08 GHS05 Dgr	H351 H331 H302 H335 H315 H318			
602-059-00-3	1-chlorobutane; butyl chloride	203-696-6	109-69-3	Flam. Liq. 2	H225	GHS02 Dgr	H225			
602-060-00-9	bromobenzene	203-623-8	108-86-1	Flam. Liq. 3 Skin Irrit. 2 Aquatic Chronic 2	H226 H315 H411	GHS02 GHS07 GHS09 Wng	H226 H315 H411			
602-061-00-4	hexafluoropropene; hexafluoropropylene	204-127-4	116-15-4	Press. Gas Acute Tox. 4 * STOT SE 3	H332 H335	GHS07 Wng	H332 H335			U

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevaar­klasse en categorie	Ge­vaar­aan­duiding	Pictogram, sig­naal­woord	Gevaar­aan­duiding	Aanvullende gevaar­aan­duiding		
602-062-00-X	1,2,3-trichloropropane	202-486-1	96-18-4	Carc. 1B Repr. 1B Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 *	H350 H360F *** H332 H312 H302	GHS08 GHS07 Dgr	H350 H360F *** H332 H312 H302			D
602-063-00-5	heptachlor epoxide; 2,3-epoxy-1,4,5,6,7,8,8-heptachloro- 3a,4,7,7a-tetrahydro-4,7-methanoindane	213-831-0	1024-57-3	Carc. 2 Acute Tox. 3 * STOT RE 2 * Aquatic Acute 1 Aquatic Chro­nic 1	H351 H301 H373 ** H400 H410	GHS06 GHS08 GHS09 Dgr	H351 H301 H373 ** H410			
602-064-00-0	1,3-dichloro-2-propanol	202-491-9	96-23-1	Carc. 1B Acute Tox. 3 * Acute Tox. 4 *	H350 H301 H312	GHS06 GHS08 Dgr	H350 H301 H312			
602-065-00-6	hexachlorobenzene	204-273-9	118-74-1	Carc. 1B STOT RE 1 Aquatic Acute 1 Aquatic Chro­nic 1	H350 H372 ** H400 H410	GHS08 GHS09 Dgr	H350 H372 ** H410			
602-066-00-1	tetrachloro-p-benzoquinone	204-274-4	118-75-2	Eye Irrit. 2 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chro­nic 1	H319 H315 H400 H410	GHS07 GHS09 Wng	H319 H315 H410			
602-067-00-7	1,3-dichlorbenzene	208-792-1	541-73-1	Acute Tox. 4 * Aquatic Chro­nic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
602-068-00-2	ethylene bis(trichloroacetate)	219-732-9	2514-53-6	Skin Irrit. 2	H315	GHS07 Wng	H315			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
602-069-00-8	dichloroacetylene	—	7572-29-4	Unst. Expl. Carc. 2 STOT RE 2 *	H200 H351 H373 **	GHS01 GHS08 Wng	H200 H351 H373 **			
602-070-00-3	3-chloro-4,5,a, $\alpha,\alpha$ -pentafluorotoluene	401-930-3	77227-99-7	Flam. Liq. 3 Acute Tox. 4 * Acute Tox. 4 * Aquatic Acute 1	H226 H332 H302 H400	GHS02 GHS07 GHS09 Wng	H226 H332 H302 H400			
602-071-00-9	bromobenzylbromotoluene, reaction mass of isomers	402-210-1	99688-47-8	STOT RE 2 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H373 ** H317 H400 H410	GHS08 GHS07 GHS09 Wng	H373 ** H317 H410			
602-072-00-4	dichloro [(dichlorophenyl)methyl]methylbenzene, reaction mass of isomers; (dichlorophenyl)(dichlorotolyl)methane, reaction mass of isomers (IUPAC)	278-404-3	76253-60-6	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
602-073-00-X	1,4-dichlorobut-2-ene	212-121-8	764-41-0	Carc. 1B Acute Tox. 2 * Acute Tox. 3 * Acute Tox. 3 * Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H350 H330 H311 H301 H314 H400 H410	GHS06 GHS08 GHS05 GHS09 Dgr	H350 H330 H311 H301 H314 H410	Carc. 1B; H350: C $\geq$ 0,01 % STOT SE 3; H335: C $\geq$ 5 %		
602-074-00-5	pentachlorobenzene	210-172-0	608-93-5	Flam. Sol. 1 Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H228 H302 H400 H410	GHS02 GHS07 GHS09 Dgr	H228 H302 H410			T



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevaarlijkheidsklasse en categorie	Gevaarlijkheidsaanduiding	Pictogram, signaalwoord	Gevaarlijkheidsaanduiding	Aanvullende gevaarlijkheidsaanduiding		
602-075-00-0	4,4,5,5-tetrachloro-1,3-dioxolan-2-one	404-060-2	22432-68-4	Acute Tox. 2 * Acute Tox. 4 * Skin Corr. 1B	H330 H302 H314	GHS06 GHS05 Dgr	H330 H302 H314			
602-076-00-6	2,3,4-trichlorobut-1-ene	219-397-9	2431-50-7	Carc. 2 Acute Tox. 3 * Acute Tox. 4 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H351 H331 H302 H319 H335 H315 H400 H410	GHS06 GHS08 GHS09 Dgr	H351 H331 H302 H319 H335 H315 H410	Carc. 2; H351: C ≥ 0,1 %		
602-077-00-1	dodecachloropentacyclo[5.2.1.0 <sup>2,6</sup> .0 <sup>3,9</sup> .0 <sup>5,8</sup> ] decane; mirex	219-196-6	2385-85-5	Carc. 2 Repr. 2 Lact. Acute Tox. 4 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H351 H361fd H362 H312 H302 H400 H410	GHS08 GHS07 GHS09 Wng	H351 H361fd H362 H312 H302 H410			
602-078-00-7	hexachlorocyclopentadiene	201-029-3	77-47-4	Acute Tox. 2 * Acute Tox. 3 * Acute Tox. 4 * Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H330 H311 H302 H314 H400 H410	GHS06 GHS05 GHS09 Dgr	H330 H311 H302 H314 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
602-079-00-2	2,3-dichloropropene; 2,3-dichloropropylene	201-153-8	78-88-6	Flam. Liq. 2 Muta. 2 Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * STOT SE 3 Skin Irrit. 2 Eye Dam. 1 Aquatic Chronic 3	H225 H341 H332 H312 H302 H335 H315 H318 H412	GHS02 GHS08 GHS05 GHS07 Dgr	H225 H341 H332 H312 H302 H335 H315 H318 H412			
602-080-00-8	alkanes, C <sub>10-13</sub> , chloro	287-476-5	85535-84-8	Carc. 2 Aquatic Acute 1 Aquatic Chronic 1	H351 H400 H410	GHS08 GHS09 Wng	H351 H410			
602-081-00-3	2-chloro-4,5-difluorobenzoic acid	405-380-5	—	Acute Tox. 4 * Acute Tox. 4 * Eye Dam. 1 Skin Sens. 1	H312 H302 H318 H317	GHS05 GHS07 Dgr	H312 H302 H318 H317			
602-082-00-9	2,2,6,6-tetrakis(bromomethyl)-4-oxaheptane-1,7-diol	408-020-5	109678-33-3	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
602-083-00-4	diphenyl ether, pentabromo derivative pentabromodiphenyl ether	251-084-2	32534-81-9	STOT RE 2 * Lact. Aquatic Acute 1 Aquatic Chronic 1	H373 ** H362 H400 H410	GHS08 GHS09 Wng	H373 ** H362 H410			
602-084-00-X	1,1-dichloro-1-fluoroethane	404-080-1	1717-00-6	Aquatic Chronic 3 Ozone	H412 EU-H059	—	H412	EUH059		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etiketgeving			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
602-085-00-5	2-bromopropane	200-855-1	75-26-3	Flam. Liq. 2 Repr. 1A STOT RE 2 *	H225 H360F *** H373 **	GHS02 GHS08 Dgr	H225 H360F *** H373 **	EUH066		
602-086-00-0	trifluoriodomethane; trifluoromethyl iodide	219-014-5	2314-97-8	Muta. 2	H341	GHS08 Wng	H341			
602-087-00-6	1,2,4-trichlorobenzene	204-428-0	120-82-1	Acute Tox. 4 * Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H302 H315 H400 H410	GHS07 GHS09 Wng	H302 H315 H410			
602-088-00-1	2,3-dibromopropan-1-ol; 2,3-dibromo-1-propanol	202-480-9	96-13-9	Carc. 1B Repr. 2 Acute Tox. 3 * Acute Tox. 4 * Acute Tox. 4 * Aquatic Chronic 3	H350 H361f *** H311 H332 H302 H412	GHS08 GHS07 Dgr	H350 H361f *** H311 H332 H302 H412			
602-089-00-7	4-bromo-2-chlorofluorobenzene	405-580-2	60811-21-4	Acute Tox. 4 * Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H302 H315 H400 H410	GHS07 GHS09 Wng	H302 H315 H410			
602-090-00-2	1-allyl-3-chloro-4-fluorobenzene	406-630-6	121626-73-1	Skin Irrit. 2 Aquatic Chronic 2	H315 H411	GHS07 GHS09 Wng	H315 H411			
602-091-00-8	1,3-dichloro-4-fluorobenzene	406-160-1	1435-48-9	Acute Tox. 4 * STOT RE 2 * Skin Irrit. 2	H302 H373 ** H315 H411	GHS08 GHS07 Wng	H302 H373 ** H315 H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
602-092-00-3	1-bromo-3,4,5-trifluorobenzene	418-480-9	138526-69-9	Flam. Liq. 3 Carc. 2 Skin Irrit. 2 Eye Dam. 1 Aquatic Chronic 2	H226 H351 H315 H318 H411	GHS02 GHS08 GHS05 GHS09 Dgr	H226 H351 H315 H318 H411			
602-093-00-9	$\alpha$ , $\alpha$ , $\alpha$ ,4-tetrachlorotoluene; p-chlorobenzotrichloride	226-009-1	5216-25-1	Carc. 1B Repr. 2 STOT RE 1 Acute Tox. 4 * Acute Tox. 4 * STOT SE 3 Skin Irrit. 2	H350 H361f *** H372 ** H312 H302 H335 H315	GHS08 GHS07 Dgr	H350 H361f *** H372 ** H312 H302 H335 H315			
602-094-00-4	diphenylether; octabromo derivate	251-087-9	32536-52-0	Repr. 1B	H360Df	GHS08 Dgr	H360Df			
602-096-00-5	malachite green hydrochloride; [1] malachite green oxalate [2]	209-322-8 [1] 219-441-7 [2]	569-64-2 [1] 2437-29-8 [2]	Repr. 2 Acute Tox. 4 * Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H361d *** H302 H318 H400 H410	GHS08 GHS05 GHS07 GHS09 Dgr	H361d *** H302 H318 H410			
602-097-00-0	1-bromo-9-(4,4,5,5,5-pentafluoropentylthio)nonane	422-850-5	148757-89-5	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
603-001-00-X	methanol	200-659-6	67-56-1	Flam. Liq. 2 Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * STOT SE 1	H225 H331 H311 H301 H370 **	GHS02 GHS06 GHS08 Dgr	H225 H331 H311 H301 H370 **		*	STOT SE 1; H370: C $\geq$ 10 % STOT SE 2; H371: 3 % $\leq$ C < 10 %

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
603-002-00-5	ethanol; ethyl alcohol	200-578-6	64-17-5	Flam. Liq. 2	H225	GHS02 Dgr	H225			
603-003-00-0	propan-1-ol; <i>n</i> -propanol	200-746-9	71-23-8	Flam. Liq. 2 Eye Dam. 1 STOT SE 3	H225 H318 H336	GHS02 GHS05 GHS07 Dgr	H225 H318 H336			
603-004-00-6	butan-1-ol; <i>n</i> -butanol	200-751-6	71-36-3	Flam. Liq. 3 Acute Tox. 4 * STOT SE 3 Skin Irrit. 2 Eye Dam. 1 STOT SE 3	H226 H302 H335 H315 H318 H336	GHS02 GHS05 GHS07 Dgr	H226 H302 H335 H315 H318 H336			
603-005-00-1	2-methylpropan-2-ol; <i>tert</i> -butyl alcohol	200-889-7	75-65-0	Flam. Liq. 2 Acute Tox. 4 *	H225 H332	GHS02 GHS07 Dgr	H225 H332			
603-006-00-7	pentanol isomers, with the exception of those specified elsewhere in this Annex	250-378-8		Flam. Liq. 3 Acute Tox. 4 * STOT SE 3	H226 H332 H335	GHS02 GHS07 Wng	H226 H332 H335	EUH066		C
603-007-00-2	2-methylbutan-2-ol; <i>tert</i> -pentanol	200-908-9	75-85-4	Flam. Liq. 2 Acute Tox. 4 * STOT SE 3 Skin Irrit. 2	H225 H332 H335 H315	GHS02 GHS07 Dgr	H225 H332 H335 H315			
603-008-00-8	4-methylpentan-2-ol; methyl isobutyl carbinol	203-551-7	108-11-2	Flam. Liq. 3 STOT SE 3	H226 H335	GHS02 GHS07 Wng	H226 H335		STOT SE 3; H335: C ≥ 25 %	
603-009-00-3	cyclohexanol	203-630-6	108-93-0	Acute Tox. 4 * Acute Tox. 4 * STOT SE 3 Skin Irrit. 2	H332 H302 H335 H315	GHS07 Wng	H332 H302 H335 H315			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
603-010-00-9	2-methylcyclohexanol, mixed isomers; [1] <i>cis</i> -2-methylcyclohexanol; [2] <i>trans</i> -2-methylcyclohexanol [3]	209-512-0 [1] 231-187-9 [2] 231-186-3 [3]	583-59-5 [1] 7443-70-1 [2] 7443-52-9 [3]	Acute Tox. 4 *	H332	GHS07 Wng	H332			C
603-011-00-4	2-methoxyethanol; ethylene glycol monomethyl ether	203-713-7	109-86-4	Flam. Liq. 3 Repr. 1B Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 *	H226 H360-FD H332 H312 H302	GHS02 GHS08 GHS07 Dgr	H226 H360FD H332 H312 H302			
603-012-00-X	2-ethoxyethanol; ethylene glycol monoethyl ether	203-804-1	110-80-5	Flam. Liq. 3 Repr. 1B Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 *	H226 H360-FD H332 H312 H302	GHS02 GHS08 GHS07 Dgr	H226 H360FD H332 H312 H302			
603-013-00-5	2-isopropoxyethanol; ethylene glycol monoisopropyl ether	203-685-6	109-59-1	Acute Tox. 4 * Acute Tox. 4 * Eye Irrit. 2	H332 H312 H319	GHS07 Wng	H332 H312 H319			
603-014-00-0	2-butoxyethanol; ethylene glycol monobutyl ether; butyl cellosolve	203-905-0	111-76-2	Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Eye Irrit. 2 Skin Irrit. 2	H332 H312 H302 H319 H315	GHS07 Wng	H332 H312 H302 H319 H315			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevaar­klasse en categorie	Gevaar­aan­duiding	Pictogram, sig­naal­woord	Gevaar­aan­duiding	Aanvullende gevaar­aan­duiding		
603-015-00-6	allyl alcohol	203-470-7	107-18-6	Flam. Liq. 2 Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1	H225 H331 H311 H301 H319 H335 H315 H400	GHS02 GHS06 GHS09 Dgr	H225 H331 H311 H301 H319 H335 H315 H400			
603-016-00-1	4-hydroxy-4-methylpentan-2-one; diacetone alcohol	204-626-7	123-42-2	Eye Irrit. 2	H319	GHS07 Wng	H319		Eye Irrit. 2; H319: C ≥ 10 %	
603-018-00-2	furfuryl alcohol	202-626-1	98-00-0	Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 *	H332 H312 H302	GHS07 Wng	H332 H312 H302		*	
603-019-00-8	dimethyl ether	204-065-8	115-10-6	Flam. Gas 1 Press. Gas	H220	GHS02 GHS04 Dgr	H220			U
603-020-00-3	ethyl methyl ether	—	540-67-0	Flam. Gas 1 Press. Gas	H220	GHS02 GHS04 Dgr	H220			U
603-021-00-9	methyl vinyl ether	203-475-4	107-25-5	Flam. Gas 1 Press. Gas	H220	GHS02 GHS04 Dgr	H220			D U
603-022-00-4	diethyl ether; ether	200-467-2	60-29-7	Flam. Liq. 1 Acute Tox. 4 * STOT SE 3	H224 H302 H336	GHS02 GHS07 Dgr	H224 H302 H336	EUH019 EUH066		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
603-023-00-X	ethylene oxide; oxirane	200-849-9	75-21-8	Flam. Gas 1 Press. Gas Carc. 1B Muta. 1B Acute Tox. 3 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H220 H350 H340 H331 H319 H335 H315	GHS02 GHS04 GHS06 GHS08 Dgr	H220 H350 H340 H331 H319 H335 H315			U
603-024-00-5	1,4-dioxane	204-661-8	123-91-1	Flam. Liq. 2 Carc. 2 Eye Irrit. 2 STOT SE 3	H225 H351 H319 H335	GHS02 GHS08 GHS07 Dgr	H225 H351 H319 H335	EUH019 EUH066		D
603-025-00-0	tetrahydrofuran	203-726-8	109-99-9	Flam. Liq. 2 Eye Irrit. 2 STOT SE 3	H225 H319 H335	GHS02 GHS07 Dgr	H225 H319 H335	EUH019	Eye Irrit. 2; H319: C ≥ 25 % STOT SE 3; H335: C ≥ 25 %	
603-026-00-6	1-chloro-2,3-epoxypropane; epichlorhydrin	203-439-8	106-89-8	Flam. Liq. 3 Carc. 1B Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Skin Corr. 1B Skin Sens. 1	H226 H350 H331 H311 H301 H314 H317	GHS02 GHS06 GHS08 GHS05 Dgr	H226 H350 H331 H311 H301 H314 H317		*	
603-027-00-1	ethanediol; ethylene glycol	203-473-3	107-21-1	Acute Tox. 4 *	H302	GHS07 Wng	H302			
603-028-00-7	2-chloroethanol; ethylene chlorohydrin	203-459-7	107-07-3	Acute Tox. 2 * Acute Tox. 1 Acute Tox. 2 *	H330 H310 H300	GHS06 Dgr	H330 H310 H300			



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
603-029-00-2	bis(2-chloroethyl) ether	203-870-1	111-44-4	Carc. 2 Acute Tox. 2 * Acute Tox. 1 Acute Tox. 2 *	H351 H330 H310 H300	GHS06 GHS08 Dgr	H351 H330 H310 H300			
603-030-00-8	2-aminoethanol; ethanolamine	205-483-3	141-43-5	Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1B	H332 H312 H302 H314	GHS05 GHS07 Dgr	H332 H312 H302 H314		STOT SE 3; H335: C ≥ 5 %	
603-031-00-3	1,2-dimethoxyethane; ethylene glycol dimethyl ether; EGDME	203-794-9	110-71-4	Flam. Liq. 2 Repr. 1B Acute Tox. 4 *	H225 H360- FD H332	GHS02 GHS08 GHS07 Dgr	H225 H360FD H332	EUH019		
603-032-00-9	ethylene dinitrate; ethylene glycol dinitrate	211-063-0	628-96-6	Unst. Expl. Acute Tox. 2 * Acute Tox. 1 Acute Tox. 2 * STOT RE 2 *	H200 H330 H310 H300 H373 **	GHS01 GHS06 GHS08 Dgr	H200 H330 H310 H300 H373 **			
603-033-00-4	oxydiethylene dinitrate; diethylene glycol dinitrate; digol dinitrate	211-745-8	693-21-0	Unst. Expl Acute Tox. 2 * Acute Tox. 1 Acute Tox. 2 * STOT RE 2 * Aquatic Chronic 3	H200 H330 H310 H300 H373 ** H412	GHS01 GHS06 GHS08 Dgr	H200 H330 H310 H300 H373 ** H412			
603-033-01-1	oxydiethylene dinitrate; diethylene glycol dinitrate; digol dinitrate; [>25 % phlegmatiser]	211-745-8	693-21-0	Expl. 1.1 Acute Tox. 2 * Acute Tox. 1 Acute Tox. 2 * STOT RE 2 * Aquatic Chronic 3	H201 H330 H310 H300 H373 ** H412	GHS01 GHS06 GHS08 Dgr	H201 H330 H310 H300 H373 ** H412			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
603-034-00-X	glycerol trinitrate; nitroglycerine	200-240-8	55-63-0	Unst. Expl. Acute Tox. 2 * Acute Tox. 1 Acute Tox. 2 * STOT RE 2 * Aquatic Chronic 2	H200 H330 H310 H300 H373 ** H411	GHS01 GHS06 GHS08 GHS09 Dgr	H200 H330 H310 H300 H373 ** H411			
603-034-01-7	glycerol trinitrate; nitroglycerine; [>40 % phlegmatiser]	200-240-8	55-63-0	Expl. 1.1 Acute Tox. 2 * Acute Tox. 1 Acute Tox. 2 * STOT RE 2 * Aquatic Chronic 2	H201 H330 H310 H300 H373 ** H411	GHS01 GHS06 GHS08 GHS09 Dgr	H201 H330 H310 H300 H373 ** H411			
603-035-00-5	pentaerythritol tetranitrate; pentaerythrite tetranitrate; P.E.T.N.	201-084-3	78-11-5	Unst. Expl.	H200	GHS01 Dgr	H200			
603-035-01-2	pentaerythritol tetranitrate; pentaerythrite tetranitrate; P.E.T.N.; [>20 % phlegmatiser]	201-084-3	78-11-5	Expl. 1.1	H201	GHS01 Dgr	H201			T
603-036-00-0	mannitol hexanitrate; nitromannite	239-924-6	15825-70-4	Unst. Expl.	H200	GHS01 Dgr	H200			
603-036-01-8	mannitol hexanitrate; nitromannite; [≥40 % phlegmatiser]	239-924-6	15825-70-4	Expl. 1.1	H201	GHS01 Dgr	H201			
603-037-00-6	cellulose nitrate;	—	—	Expl. 1.1	H201	GHS01 Dgr	H201	EUH001		T

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
603-038-00-1	allyl glycidyl ether; allyl 2,3-epoxypropyl ether; prop-2-en-1-yl 2,3-epoxypropyl ether	203-442-4	106-92-3	Flam. Liq. 3 Carc. 2 Muta. 2 Repr. 2 Acute Tox. 4 * Acute Tox. 4 * STOT SE 3 Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 3	H226 H351 H341 H361f *** H332 H302 H335 H315 H318 H317 H412	GHS02 GHS08 GHS05 GHS07 Dgr	H226 H351 H341 H361f *** H332 H302 H335 H315 H318 H317 H412			
603-039-00-7	butyl glycidyl ether; butyl 2,3-epoxypropyl ether	219-376-4	2426-08-6	Flam. Liq. 3 Carc. 2 Muta. 2 Acute Tox. 4 * Acute Tox. 4 * STOT SE 3 Skin Sens. 1 Aquatic Chronic 3	H226 H351 H341 H332 H302 H335 H317 H412	GHS02 GHS08 GHS07 Wng	H226 H351 H341 H332 H302 H335 H317 H412			
603-040-00-2	sodium methanolate; sodium methoxide; [1] potassium methanolate; potassium methoxide; [2] lithium methanolate; lithium methoxide [3]	204-699-5 [1] 212-736-1 [2] 212-737-7 [3]	124-41-4 [1] 865-33-8 [2] 865-34-9 [3]	Self-heat 1 Skin Corr. 1B	H251 H314	GHS02 GHS05 Dgr	H251 H314	EUH014		T
603-041-00-8	potassium ethanolate; potassium ethoxide; [1] sodium ethanolate; sodium ethoxide [2]	213-029-0 [1] 205-487-5 [2]	917-58-8 [1] 141-52-6 [2]	Self-heat 1 Skin Corr. 1B	H251 H314	GHS02 GHS05 Dgr	H251 H314	EUH014		T
603-042-00-3	aluminium-tri-isopropoxide	209-090-8	555-31-7	Flam. Sol. 1	H228	GHS02 Dgr	H228			T

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
603-043-00-9	triarimol (ISO); 2,4-dichloro- $\alpha$ -(pyrimidin-5-yl) benzhydryl alcohol	—	26766-27-8	Acute Tox. 4 *	H302	GHS07 Wng	H302			
603-044-00-4	dicofol (ISO); 2,2,2-trichloro-1,1-bis(4-chlorophenyl)ethanol	204-082-0	115-32-2	Acute Tox. 4 * Acute Tox. 4 * Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H315 H317 H400 H410	GHS07 GHS09 Wng	H312 H302 H315 H317 H410			
603-045-00-X	diisopropyl ether; [1] dipropyl ether [2]	203-560-6 [1] 203-869-6 [2]	108-20-3 [1] 111-43-3 [2]	Flam. Liq. 2 STOT SE 3	H225 H336	GHS02 GHS07 Dgr	H225 H336	EUH019 EUH066		C
603-046-00-5	bis (chloromethyl) ether; oxybis(chloromethane)	208-832-8	542-88-1	Flam. Liq. 2 Carc. 1A Acute Tox. 2 * Acute Tox. 3 * Acute Tox. 4 *	H225 H350 H330 H311 H302	GHS02 GHS06 GHS08 Dgr	H225 H350 H330 H311 H302		Carc. 1A; H350: C $\geq$ 0,001 %	
603-047-00-0	2-dimethylaminoethanol; N,N-dimethylethanolamine	203-542-8	108-01-0	Flam. Liq. 3 Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1B	H226 H332 H312 H302 H314	GHS02 GHS05 GHS07 Dgr	H226 H332 H312 H302 H314		STOT SE 3; H335: C $\geq$ 5 %	
603-048-00-6	2-diethylaminoethanol; N,N-diethylethanolamine	202-845-2	100-37-8	Flam. Liq. 3 Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1B	H226 H332 H312 H302 H314	GHS02 GHS05 GHS07 GHS09 Dgr	H226 H332 H312 H302 H314		STOT SE 3; H335: C $\geq$ 5 %	
603-049-00-1	chlorfenethol (ISO); 1,1-bis (4-chlorophenyl) ethanol	201-246-3	80-06-8	Acute Tox. 4 * Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
603-050-00-7	1-(2-butoxypropoxy)propan-2-ol	246-011-6	24083-03-2	Acute Tox. 4 * Acute Tox. 4 *	H312 H302	GHS07 Wng	H312 H302			
603-051-00-2	2-ethylbutan-1-ol	202-621-4	97-95-0	Acute Tox. 4 * Acute Tox. 4 *	H312 H302	GHS07 Wng	H312 H302			
603-052-00-8	3-butoxypropan-2-ol; propylene glycol monobutyl ether	225-878-4	5131-66-8	Eye Irrit. 2 Skin Irrit. 2	H319 H315	GHS07 Wng	H319 H315			
603-053-00-3	2-methylpentane-2,4-diol	203-489-0	107-41-5	Eye Irrit. 2 Skin Irrit. 2	H319 H315	GHS07 Wng	H319 H315			
603-054-00-9	di- <i>n</i> -butyl ether; dibutyl ether	205-575-3	142-96-1	Flam. Liq. 3 Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Chronic 3	H226 H319 H335 H315 H412	GHS02 GHS07 Wng	H226 H319 H335 H315 H412		STOT SE 3; H335: C ≥ 10 %	
603-055-00-4	propylene oxide; 1,2-epoxypropane; methyloxirane	200-879-2	75-56-9	Flam. Liq. 1 Carc. 1B Muta. 1B Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H224 H350 H340 H332 H312 H302 H319 H335 H315	GHS02 GHS08 GHS07 Dgr	H224 H350 H340 H332 H312 H302 H319 H335 H315			
603-056-00-X	[( <i>p</i> -tolyloxy)methyl]oxirane; [1] [( <i>m</i> -tolyloxy)methyl]oxirane; [2] 2,3-epoxypropyl <i>o</i> -tolyl ether; [3] [(tolyloxy)methyl]oxirane; cresyl glycidyl ether [4]	218-574-8 [1] 218-575-3 [2] 218-645-3 [3] 247-711-4 [4]	2186-24-5 [1] 2186-25-6 [2] 2210-79-9 [3] 26447-14-3 [4]	Muta. 2 Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 2	H341 H315 H317 H411	GHS08 GHS07 GHS09 Wng	H341 H315 H317 H411			C

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
603-057-00-5	benzyl alcohol	202-859-9	100-51-6	Acute Tox. 4 * Acute Tox. 4 *	H332 H302	GHS07 Wng	H332 H302			
603-058-00-0	1,3-propylene oxide	207-964-3	503-30-0	Flam. Liq. 2 Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 *	H225 H332 H312 H302	GHS02 GHS07 Dgr	H225 H332 H312 H302			
603-059-00-6	hexan-1-ol	203-852-3	111-27-3	Acute Tox. 4 *	H302	GHS07 Wng	H302			
603-060-00-1	2,2'-bioxirane; 1,2:3,4-diepoxybutane	215-979-1	1464-53-5	Carc. 1B Muta. 1B Acute Tox. 2 * Acute Tox. 3 * Acute Tox. 3 * Skin Corr. 1B	H350 H340 H330 H311 H301 H314	GHS06 GHS08 GHS05 Dgr	H350 H340 H330 H311 H301 H314			
603-061-00-7	tetrahydro-2-furylmethanol; tetrahydrofurfuryl alcohol	202-625-6	97-99-4	Eye Irrit. 2	H319	GHS07 Wng	H319			
603-062-00-2	tetrahydrofuran-2,5-diylidimethanol	203-239-0	104-80-3	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H319 H335 H315	GHS07 Wng	H319 H335 H315		STOT SE 3; H335: C ≥ 10 %	
603-063-00-8	2,3-epoxypropan-1-ol; glycidol; oxiranemethanol	209-128-3	556-52-5	Carc. 1B Muta. 2 Repr. 1B Acute Tox. 3 * Acute Tox. 4 * Acute Tox. 4 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H350 H341 H360F *** H331 H312 H302 H319 H319 H335 H315	GHS06 GHS08 Dgr	H350 H341 H360F *** H331 H312 H302 H319 H335 H315			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
603-064-00-3	1-methoxy-2-propanol; monopropylene glycol methyl ether	203-539-1	107-98-2	Flam. Liq. 3	H226	GHS02 Wng	H226			
603-065-00-9	resorcinol diglycidyl ether; 1,3-bis(2,3-epoxypropoxy)benzene	202-987-5	101-90-6	Carc. 2 Muta. 2 Acute Tox. 4 * Acute Tox. 4 * Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 3	H351 H341 H312 H302 H319 H315 H317 H412	GHS08 GHS07 Wng	H351 H341 H312 H302 H319 H315 H317 H412			
603-066-00-4	1,2-epoxy-4-epoxyethylcyclohexane; vinylcyclohexane diepoxide	203-437-7	106-87-6	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Carc. 2	H331 H311 H301 H351	GHS06 GHS08 Dgr	H331 H311 H301 H351	*		
603-067-00-X	phenyl glycidyl ether; 2,3-epoxypropyl phenyl ether; 1,2-epoxy-3-phenoxypropane	204-557-2	122-60-1	Carc. 1B Muta. 2 Acute Tox. 4 * STOT SE 3 Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 3	H350 H341 H332 H335 H315 H317 H412	GHS08 GHS07 Dgr	H350 H341 H332 H335 H315 H317 H412			
603-068-00-5	2,3-epoxypropyl-2-ethylcyclohexyl ether; ethylcyclohexylglycidyl ether	—	130014-35-6	Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H319 H315 H317	GHS07 Wng	H319 H315 H317			
603-069-00-0	2,4,6-tris(dimethylaminomethyl)phenol	202-013-9	90-72-2	Acute Tox. 4 * Eye Irrit. 2 Skin Irrit. 2	H302 H319 H315	GHS07 Wng	H302 H319 H315			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
603-070-00-6	2-amino-2-methylpropanol	204-709-8	124-68-5	Eye Irrit. 2 Skin Irrit. 2 Aquatic Chronic 3	H319 H315 H412	GHS07 Wng	H319 H315 H412			
603-071-00-1	2,2'-iminodiethanol; diethanolamine	203-868-0	111-42-2	Acute Tox. 4 * STOT RE 2 * Skin Irrit. 2 Eye Dam. 1	H302 H373 ** H315 H318	GHS08 GHS05 GHS07 Dgr	H302 H373 ** H315 H318			
603-072-00-7	1,4-bis(2,3 epoxypropoxy)butane; butanedioldiglycidyl ether	219-371-7	2425-79-8	Acute Tox. 4 * Acute Tox. 4 * Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H332 H312 H319 H315 H317	GHS07 Wng	H332 H312 H319 H315 H317			
603-073-00-2	bis-[4-(2,3-epoxipropoxy)phenyl]propane	216-823-5	1675-54-3	Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H319 H315 H317	GHS07 Wng	H319 H315 H317		Eye Irrit. 2; H319: C ≥ 5 % Skin Irrit. 2; H315: C ≥ 5 %	
603-074-00-8	reaction product: bisphenol-A-(epichlorhydrin); epoxy resin (number average molecular weight ≤ 700)	500-033-5	25068-38-6	Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 2	H319 H315 H317 H411	GHS07 GHS09 Wng	H319 H315 H317 H411		Eye Irrit. 2; H319: C ≥ 5 % Skin Irrit. 2; H315: C ≥ 5 %	
603-075-00-3	chlormethyl methyl ether; chlorodimethyl ether	203-480-1	107-30-2	Flam. Liq. 2 Carc. 1A Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 *	H225 H350 H332 H312 H302	GHS02 GHS08 GHS07 Dgr	H225 H350 H332 H312 H302			



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
603-076-00-9	but-2-yne-1,4-diol; 2-butyne-1,4-diol	203-788-6	110-65-6	Skin Corr. 1B Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 4 * STOT RE 2 * Skin Sens. 1	H314 H331 H301 H312 H373 ** H317	GHS06 GHS05 GHS08 Dgr	H314 H331 H301 H312 H373 ** H317		Skin Corr. 1B; H314: C ≥ 50 % Skin Irrit. 2; H315: 25 % ≤ C < 50 % Eye Irrit. 2; H319: 25 % ≤ C < 50 %	D
603-077-00-4	1-dimethylaminopropan-2-ol; dimepranol (INN)	203-556-4	108-16-7	Flam. Liq. 3 Acute Tox. 4 * Skin Corr. 1B	H226 H302 H314	GHS02 GHS05 GHS07 Dgr	H226 H302 H314			
603-078-00-X	prop-2-yn-1-ol; propargyl alcohol	203-471-2	107-19-7	Flam. Liq. 3 Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Skin Corr. 1B Aquatic Chronic 2	H226 H331 H311 H301 H314 H411	GHS02 GHS06 GHS05 GHS09 Dgr	H226 H331 H311 H301 H314 H411			
603-079-00-5	2,2'-(methylimino)diethanol; N-methyldiethanolamine	203-312-7	105-59-9	Eye Irrit. 2	H319	GHS07 Wng	H319			
603-080-00-0	2-methylaminoethanol; N-methylethanolamine; N-methyl-2-ethanolamine; N-methyl-2-amino ethanol; 2-(methylamino)ethanol	203-710-0	109-83-1	Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1B	H312 H302 H314	GHS05 GHS07 Dgr	H312 H302 H314		STOT SE 3; H335: C ≥ 5 %	
603-081-00-6	2,2'-thiodiethanol; thiodiglycol	203-874-3	111-48-8	Eye Irrit. 2	H319	GHS07 Wng	H319			
603-082-00-1	1-aminopropan-2-ol; isopropanolamine	201-162-7	78-96-6	Skin Corr. 1B	H314	GHS05 Dgr	H314			
603-083-00-7	1,1'-iminodipropan-2-ol; di-isopropanolamine	203-820-9	110-97-4	Eye Irrit. 2	H319	GHS07 Wng	H319			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevaar­klasse en categorie	Gevaar­aan­duiding	Pictogram, sig­naal­woord	Gevaar­aan­duiding	Aanvullende gevaar­aan­duiding		
603-084-00-2	styrene oxide; (epoxyethyl)benzene; phenyloxirane	202-476-7	96-09-3	Carc. 1B Acute Tox. 4 * Eye Irrit. 2	H350 H312 H319	GHS08 GHS07 Dgr	H350 H312 H319			
603-085-00-8	bronopol (INN); 2-bromo-2-nitropropane-1,3-diol	200-143-0	52-51-7	Acute Tox. 4 * Acute Tox. 4 * STOT SE 3 Skin Irrit. 2 Eye Dam. 1 Aquatic Acute 1	H312 H302 H335 H315 H318 H400	GHS05 GHS07 GHS09 Dgr	H312 H302 H335 H315 H318 H400			
603-086-00-3	ethirimol (ISO); 5-butyl-2-ethylamino-6-methylpyrimidin-4-ol	245-949-3	23947-60-6	Acute Tox. 4 *	H312	GHS07 Wng	H312			
603-087-00-9	2-ethylhexane-1,3-diol; octylene glycol; ethoexadiol	202-377-9	94-96-2	Eye Dam. 1	H318	GHS05 Dgr	H318			
603-088-00-4	2-(octylthio)ethanol; 2-hydroxyethyl octyl sulphide	222-598-4	3547-33-9	Eye Dam. 1	H318	GHS05 Dgr	H318			
603-089-00-X	7,7-dimethyl-3-oxa-6-azaoc­tan-1-ol	400-390-6	—	Skin Corr. 1A Acute Tox. 4 *	H314 H302	GHS05 GHS07 Dgr	H314 H302			
603-090-00-5	2-(2-bromoethoxy)anisole	402-010-4	4463-59-6	Acute Tox. 4 * Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			
603-091-00-0	exo-1-methyl-4-(1-methylethyl)-7-oxabicyclo[2.2.1]heptan-2-ol	402-470-6	87172-89-2	Acute Tox. 4 * Eye Dam. 1	H302 H318	GHS05 GHS07 Dgr	H302 H318			
603-092-00-6	2-methyl-4-phenylpentanol	402-770-7	92585-24-5	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
603-093-00-1	cinmethylin (ISO); <i>exo</i> -(±)-1-methyl-2-(2-methylbenzyloxy)-4-isopropyl-7-oxabicyclo(2.2.1)heptane	402-410-9	87818-31-3	Acute Tox. 4 * Aquatic Chronic 2	H332 H411	GHS07 GHS09 Dgr	H332 H411			
603-094-00-7	1,3-bis(2,3-epoxypropoxy)-2,2-dimethylpropane	241-536-7	17557-23-2	Skin Irrit. 2 Skin Sens. 1	H315 H317	GHS07 Wng	H315 H317			
603-095-00-2	2-(propyloxy)ethanol; EGPE	220-548-6	2807-30-9	Acute Tox. 4 * Eye Irrit. 2	H312 H319	GHS07 Wng	H312 H319			
603-096-00-8	2-(2-butoxyethoxy)ethanol; diethylene glycol monobutyl ether	203-961-6	112-34-5	Eye Irrit. 2	H319	GHS07 Wng	H319			
603-097-00-3	1,1',1"-nitriilotripropan-2-ol; triisopropanolamine	204-528-4	122-20-3	Eye Irrit. 2 Aquatic Chronic 3	H319 H412	GHS07 Wng	H319 H412			
603-098-00-9	2-phenoxyethanol	204-589-7	122-99-6	Acute Tox. 4 * Eye Irrit. 2	H302 H319	GHS07 Wng	H302 H319			
603-099-00-4	3-(N-methyl-N-(4-methylamino-3-nitrophenyl)amino)propane-1,2-diol hydrochloride	403-440-5	93633-79-5	Acute Tox. 4 * Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			
603-100-00-8	1,2-dimethoxypropane	404-630-0	7778-85-0	Flam. Liq. 2	H225	GHS02 Dgr	H225	EUH019		
603-101-00-3	tetrahydro-2-isobutyl-4-methylpyran-4-ol, mixed isomers ( <i>cis</i> and <i>trans</i> )	405-040-6	—	Eye Irrit. 2	H319	GHS07 Wng	H319			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
603-102-00-9	1,2-epoxybutane	203-438-2	106-88-7	Flam. Liq. 2 Carc. 2 Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Chronic 3	H225 H351 H332 H312 H302 H319 H335 H315 H412	GHS02 GHS08 GHS07 Dgr	H225 H351 H332 H312 H302 H319 H335 H315 H412			
603-103-00-4	oxirane, mono[(C <sub>12-14</sub> -alkyloxy)methyl] derivs.	271-846-8	68609-97-2	Skin Irrit. 2 Skin Sens. 1	H315 H317	GHS07 Wng	H315 H317			
603-104-00-X	fenarimol (ISO); 2,4'-dichloro- $\alpha$ -(pyrimidin-5-yl)benzhydryl alcohol	262-095-7	60168-88-9	Repr. 2 Lact. Aquatic Chronic 2	H361fd H362 H411	GHS08 GHS09 Wng	H361fd H362 H411			
603-105-00-5	furan	203-727-3	110-00-9	Flam. Liq. 1 Carc. 1B Muta. 2 Acute Tox. 4 * Acute Tox. 4 * STOT RE 2 * Skin Irrit. 2 Aquatic Chronic 3	H224 H350 H341 H332 H302 H373 ** H315 H412	GHS02 GHS08 GHS07 Dgr	H224 H350 H341 H332 H302 H373 ** H315 H412	EUH019		
603-106-00-0	2-methoxypropanol	216-455-5	1589-47-5	Flam. Liq. 3 Repr. 1B STOT SE 3 Skin Irrit. 2 Eye Dam. 1	H226 H360D *** H335 H315 H318	GHS02 GHS08 GHS05 GHS07 Dgr	H226 H360D *** H335 H315 H318			
603-107-00-6	2-(2-methoxyethoxy)ethanol; diethylene glycol monomethyl ether	203-906-6	111-77-3	Repr. 2	H361d ***	GHS08 Wng	H361d ***			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
603-108-00-1	2-methylpropan-1-ol; iso-butanol	201-148-0	78-83-1	Flam. Liq. 3 STOT SE 3 Skin Irrit. 2 Eye Dam. 1 STOT SE 3	H226 H335 H315 H318 H336	GHS02 GHS05 GHS07 Dgr	H226 H335 H315 H318 H336			
603-117-00-0	propan-2-ol; isopropyl alcohol; isopropanol	200-661-7	67-63-0	Flam. Liq. 2 Eye Irrit. 2 STOT SE 3	H225 H319 H336	GHS02 GHS07 Dgr	H225 H319 H336			
603-118-00-6	6-dimethylaminohexan-1-ol	404-680-3	1862-07-3	Acute Tox. 4 * Skin Corr. 1B Aquatic Chronic 3	H302 H314 H412	GHS05 GHS07 Dgr	H302 H314 H412			
603-119-00-1	1,1'-(1,3-phenylenedioxy)bis(3-(2-(prop-2-enyl)phenoxy)propan-2-ol)	405-840-5	—	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
603-120-00-7	2-methyl-5-phenylpentanol	405-890-8	25634-93-9	Eye Irrit. 2 Skin Irrit. 2	H319 H315	GHS07 Wng	H319 H315			
603-121-00-2	4-[4-(1,3-dihydroxyprop-2-yl)phenylamino]-1,8-dihydroxy-5-nitroanthraquinone	406-057-1	114565-66-1	Carc. 2 Skin Sens. 1 Aquatic Chronic 4	H351 H317 H413	GHS08 GHS07 Wng	H351 H317 H413			
603-122-00-8	sodium 2-ethylhexanolate	406-150-7	38411-13-1	Flam. Sol. 1 Skin Corr. 1B Aquatic Chronic 3	H228 H314 H412	GHS02 GHS05 Dgr	H228 H314 H412		T	
603-123-00-3	4-methyl-8-methylenetricyclo[3.3.1.1 <sup>3,7</sup> ]decan-2-ol	406-330-5	122760-84-3	Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 2	H315 H317 H411	GHS07 GHS09 Wng	H315 H317 H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
603-124-00-9	1,4-bis[2-(vinyl-oxy)ethoxy]benzene	406-900-3	84563-49-5	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
603-125-00-4	2-(2,4-dichlorophenyl)-1-(1 <i>H</i> -1,2,4-triazol-1-yl)pent-4-en-2-ol	407-850-5	89544-40-1	Acute Tox. 4 * Eye Dam. 1 Aquatic Chronic 2	H302 H318 H411	GHS05 GHS07 GHS09 Dgr	H302 H318 H411			
603-126-00-X	2-((4-methyl-2-nitrophenyl)amino)ethanol	408-090-7	100418-33-5	Acute Tox. 4 * Skin Sens. 1 Aquatic Chronic 3	H302 H317 H412	GHS07 Wng	H302 H317 H412			
603-127-00-5	butan-2-ol; [1] ( <i>S</i> )-butan-2-ol; [2] ( <i>R</i> )-butan-2-ol; [3] (±)-butan-2-ol [4]	201-158-5 [1] 224-168-1 [2] 238-967-8 [3] 240-029-8 [4]	78-92-2 [1] 4221-99-2 [2] 14898-79-4 [3] 15892-23-6 [4]	Flam. Liq. 3 Eye Irrit. 2 STOT SE 3 STOT SE 3	H226 H319 H335 H336	GHS02 GHS07 Wng	H226 H319 H335 H336			C
603-128-00-0	2-(phenylmethoxy)naphthalene	405-490-3	613-62-7	Aquatic Chronic 4	H413	—	H413			
603-129-00-6	1- <i>tert</i> -butoxypropan-2-ol	406-180-0	57018-52-7	Flam. Liq. 3 Eye Dam. 1	H226 H318	GHS02 GHS05 Dgr	H226 H318			
603-130-00-1	reaction mass of isomers of: α-((dimethyl) biphenyl)-ω-hydroxypoly(oxyethylene)	406-325-8	—	Acute Tox. 4 * Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			
603-131-00-7	reaction mass of: 1-deoxy-1-[methyl-(1-oxododecyl)amino]-D-glucitol; 1-deoxy-1-[methyl-(1-oxotetradecyl)amino]-D-glucitol (3:1)	407-290-1	—	Eye Dam. 1	H318	GHS05 Dgr	H318			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
603-132-00-2	2-hydroxymethyl-9-methyl-6-(1-methylethyl)-1,4-dioxaspiro[4.5]decane	408-200-3	63187-91-7	Skin Irrit. 2 Eye Dam. 1 Aquatic Chronic 3	H315 H318 H412	GHS05 Dgr	H315 H318 H412			
603-133-00-8	reaction mass of: 3-[(4-amino-2-chloro-5-nitrophenyl)amino]-propane-1,2-diol; 3,3'-(2-chloro-5-nitro-1,4-phenylenedii-mino)bis(propan-1,2-diol)	408-240-1	—	Acute Tox. 4 * Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			
603-134-00-3	reaction mass of substituted dodecyl and/or tetradecyl, diphenyl ethers. The substance is produced by the Friedel Crafts reaction. The catalyst is removed from the reaction product. Diphenyl ether is substituted by C <sub>1</sub> -C <sub>10</sub> alkyl groups. The alkyl groups are bonded randomly between C <sub>1</sub> and C <sub>6</sub> . Linear C <sub>12</sub> and C <sub>14</sub> , 50/50 used.	410-450-3	—	Aquatic Chronic 4	H413	—	H413			
603-135-00-9	bis[[2,2',2''-nitrilotris-[ethanolato]]-1-N,O]-bis[2-(2-methoxyethoxy)ethoxy]-titanium	410-500-4	—	Eye Dam. 1 Aquatic Chronic 2	H318 H411	GHS05 GHS09 Dgr	H318 H411			
603-136-00-4	3-((4-(bis(2-hydroxyethyl)amino)-2-nitrophenyl)amino)-1-propanol	410-910-3	104226-19-9	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
603-137-00-X	reaction mass of: 1-deoxy-1-[methyl-(1-oxohexadecyl)amino]-D-glucitol; 1-deoxy-1-[methyl-(1-oxooctadecyl)amino]-D-glucitol	411-130-6	—	Eye Dam. 1	H318	GHS05 Dgr	H318			
603-138-00-5	3-(2,2-dimethyl-3-hydroxypropyl)toluene; (alt.): 2,2-dimethyl-3-(3-methylphenyl)propanol	403-140-4	103694-68-4	Aquatic Chronic 3	H412	—	H412			
603-139-00-0	bis(2-methoxyethyl) ether	203-924-4	111-96-6	Flam. Liq. 3 Repr. 1B	H226 H360-FD	GHS02 GHS08 Dgr	H226 H360FD	EUH019		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
603-140-00-6	2,2' -oxybisethanol; diethylene glycol	203-872-2	111-46-6	Acute Tox. 4 *	H302	GHS07 Wng	H302			
603-141-00-1	reaction mass of: dodecyloxy-1-methyl-1-[oxy-poly-(2-hydroxymethylethanoxy)]pentadecane; dodecyloxy-1-methyl-1-[oxy-poly-(2-hydroxymethylethanoxy)]heptadecane	413-780-6	—	Aquatic Chronic 3	H412	—	H412			
603-142-00-7	2-(2-(2-hydroxyethoxy)ethyl)-2-aza-bicyclo [2.2.1]heptane	407-360-1	116230-20-7	Acute Tox. 4 * Acute Tox. 4 * STOT RE 2 * Skin Irrit. 2 Eye Dam. 1	H312 H302 H373 ** H315 H318	GHS06 GHS08 GHS05 Dgr	H312 H302 H373 ** H315 H318			
603-143-00-2	R—2,3-epoxy-1-propanol	404-660-4	57044-25-4	Self-react. C **** Carc. 1B Muta. 2 Repr. 1B Acute Tox. 3 * Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1B	H242 H350 H341 H360F *** H331 H312 H302 H314	GHS02 GHS06 GHS08 GHS05 Dgr	H242 H350 H341 H360F *** H331 H312 H302 H314			
603-144-00-8	reaction mass of: 2,6,9-trimethyl-2,5,9-cyclododecatrien-1-ol; 6,9-dimethyl-2-methylen-5,9-cyclododecatien-1-ol	413-530-6	111850-00-1	Aquatic Chronic 2	H411	GHS09	H411			
603-145-00-3	2-isopropyl-2-(1-methylbutyl)-1,3-dimethoxypropane	406-970-5	129228-11-1	Skin Irrit. 2 Aquatic Chronic 2	H315 H411	GHS07 GHS09 Wng	H315 H411			
603-146-00-9	2-[(2-[2-(dimethylamino)ethoxy]ethyl)methylamino]ethanol	406-080-7	83016-70-0	Acute Tox. 4 * Skin Corr. 1B Aquatic Chronic 3	H302 H314 H412	GHS05 GHS07 Dgr	H302 H314 H412			



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
603-147-00-4	(-)- <i>trans</i> -4-(4'-fluorophenyl)-3-hydroxymethyl-N-methylpiperidine	406-030-4	105812-81-5	Acute Tox. 4 * Eye Dam. 1 Aquatic Chronic 2	H302 H318 H411	GHS05 GHS07 GHS09 Dgr	H302 H318 H411			
603-148-00-X	1,4-bis[(vinyloxy)methyl]cyclohexane	413-370-7	17351-75-6	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
603-149-00-5	reaction mass of diastereoisomers of 1-(1-hydroxyethyl)-4-(1-methylethyl)cyclohexane	407-640-3	63767-86-2	Eye Irrit. 2 Skin Irrit. 2 Aquatic Chronic 2	H319 H315 H411	GHS07 GHS09 Wng	H319 H315 H411			
603-150-00-0	(±) <i>trans</i> -3,3-dimethyl-5-(2,2,3-trimethylcyclopent-3-en-1-yl)-pent-4-en-2-ol	411-580-3	107898-54-4	Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H315 H400 H410	GHS07 GHS09 Wng	H315 H410			
603-151-00-6	(±)-2-(2,4-dichlorophenyl)-3-(1 <i>H</i> -1,2,4-triazol-1-yl)propan-1-ol	413-570-4	—	Aquatic Chronic 3	H412	—	H412			
603-152-00-1	2-(4- <i>tert</i> -butylphenyl)ethanol	410-020-5	5406-86-0	Repr. 2 STOT RE 2 * Eye Dam. 1 Aquatic Chronic 2	H361f *** H373 ** H318 H411	GHS08 GHS05 GHS09 Dgr	H361f *** H373 ** H318 H411			
603-153-00-7	3-((2-nitro-4-(trifluoromethyl)phenyl)amino)propane-1,2-diol	410-010-0	104333-00-8	Acute Tox. 4 * Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			
603-154-00-2	1-[(2- <i>tert</i> -butyl)cyclohexyloxy]-2-butanol	412-300-2	139504-68-0	Aquatic Chronic 2	H411	GHS09	H411			
603-155-00-8	Reaction products of 2-(4,6-bis(2,4-dimethylphenyl)-1,3,5-triazin-2-yl)-5-hydroxyphenol with ((C <sub>10-16</sub> , rich in C <sub>12-13</sub> alkyloxy)methyl)oxyrane	410-560-1	—	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
603-156-00-3	2-(2,4-dichlorophenyl)-2-(2-propenyl)oxirane	411-210-0	89544-48-9	Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H315 H317 H400 H410	GHS07 GHS09 Wng	H315 H317 H410			
603-157-00-9	6,9-bis(hexadecyloxymethyl)-4,7-dioxanane-1,2,9-triol	411-450-6	143747-72-2	Aquatic Chronic 4	H413	—	H413			
603-158-00-4	reaction mass of 4 diastereoisomers of 2,7-dimethyl-10-(1-methylethyl)-1-oxaspiro [4.5]deca-3,6-diene	412-460-3	—	Skin Irrit. 2 Aquatic Chronic 2	H315 H411	GHS07 GHS09 Wng	H315 H411			
603-159-00-X	2-cyclododecylpropan-1-ol	411-410-8	118562-73-5	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
603-160-00-5	1,2-diethoxypropane	412-180-1	10221-57-5	Flam. Liq. 2	H225	GHS02 Dgr	H225	EUH019		
603-161-00-0	1,3-diethoxypropane	413-140-6	3459-83-4	Flam. Liq. 3	H226	GHS02 Wng	H226			
603-162-00-6	$\alpha$ [2-[[[(2-hydroxyethyl)methylamino]acetyl]amino]propyl]- $\omega$ nonylphenoxy)poly[oxo(methyl-1,2-ethanediy)]	413-420-8	144736-29-8	Skin Corr. 1B Skin Sens. 1 Aquatic Chronic 2	H314 H317 H411	GHS05 GHS07 GHS09 Dgr	H314 H317 H411			
603-163-00-1	2-phenyl-1,3-propanediol	411-810-2	1570-95-2	Eye Dam. 1	H318	GHS05 Dgr	H318			
603-164-00-7	2-butyl-4-chloro-4,5-dihydro-5-hydroxymethyl-1-[2'-(2-triphenylmethyl-1,2,3,4-2H-tetrazol-5-yl)-1,1'-biphenyl-4-methyl]-1H-imidazole	412-420-5	133909-99-6	Aquatic Chronic 4	H413	—	H413			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
603-165-00-2	reaction mass of: 4-allyl-2,6-bis(2,3-epoxypropyl)phenol; 4-allyl-6-[3-[6-[3-[3-(4-allyl-2,6-bis(2,3-epoxypropyl)phenoxy)-2-hydroxypropyl]-4-allyl-2-(2,3-epoxypropyl)phenoxy]-2-hydroxypropyl]-4-allyl-2-(2,3-epoxypropyl)phenoxy]-2-hydroxypropyl]-2-(2,3-epoxypropyl)phenol; 4-allyl-6-[3-(4-allyl-2,6-bis(2,3-epoxypropyl)phenoxy)-2-hydroxypropyl]-2-(2,3-epoxypropyl)phenol; 4-allyl-6-[3-[6-[3-(4-allyl-2,6-bis(2,3-epoxypropyl)phenoxy)-2-hydroxypropyl]-4-allyl-2-(2,3-epoxypropyl)phenoxy]-2-hydroxypropyl]-2-(2,3-epoxypropyl)phenol	417-470-1	—	Muta. 2 Skin Sens. 1	H341 H317	GHS08 GHS07 Wng	H341 H317			
603-166-00-8	R-1-chloro-2,3-epoxypropane	424-280-2	51594-55-9	Flam. Liq. 3 Carc. 1B Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Skin Corr. 1B Skin Sens. 1	H226 H350 H331 H311 H301 H314 H317	GHS02 GHS06 GHS08 GHS05 Dgr	H226 H350 H331 H311 H301 H314 H317			
603-167-00-3	3,3',5,5'-tetra- <i>tert</i> -butylbiphenyl-2,2'-diol	407-920-5	6390-69-8	Aquatic Chronic 4	H413	GHS05 Dgr	H413			
603-168-00-9	3-(2-ethylhexyloxy)propane-1,2-diol	408-080-2	70445-33-9	Eye Dam. 1 Aquatic Chronic 3	H318 H412	GHS05 Dgr	H318 H412			
603-169-00-4	(±)- <i>trans</i> -4-(4-fluorophenyl)-3-hydroxymethyl- <i>N</i> -methylpiperidine	415-550-0	109887-53-8	Acute Tox. 4 * Eye Dam. 1 Aquatic Chronic 2	H302 H318 H411	GHS05 GHS07 GHS09 Dgr	H302 H318 H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
603-170-00-X	reaction mass of: 2-methyl-1-(6-methylbicyclo[2.2.1]hept-5-en-2-yl)pent-1-en-3-ol; 2-methyl-1-(1-methylbicyclo[2.2.1]hept-5-en-2-yl)-pent-1-en-3-ol; 2-methyl-1-(5-methylbicyclo[2.2.1]hept-5-en-2-yl)pent-1-en-3-ol	415-990-3	67739-11-1	Eye Irrit. 2 Aquatic Chronic 2	H319 H411	GHS07 GHS09 Wng	H319 H411			
603-171-00-5	5-thiazolylmethanol	414-780-9	38585-74-9	Eye Dam. 1 Aquatic Chronic 3	H318 H412	GHS05 Dgr	H318 H412			
603-172-00-0	mono-2-[2-(4-dibenzo[b,f][1,4]thiazepin-11-yl)piperazinium-1-yl]ethoxyethanol <i>trans</i> -butenedioate	415-180-1	773058-82-5	Acute Tox. 4 * Eye Dam. 1 Aquatic Chronic 2	H302 H318 H411	GHS05 GHS07 GHS09 Dgr	H302 H318 H411			
603-173-00-6	4,4-dimethyl-3,5,8-trioxabicyclo[5.1.0]octane	421-750-9	57280-22-5	Eye Irrit. 2 Skin Sens. 1	H319 H317	GHS07 Wng	H319 H317			
603-174-00-1	4-cyclohexyl-2-methyl-2-butanol	420-630-3	83926-73-2	Eye Dam. 1 Aquatic Chronic 2	H318 H411	GHS05 GHS09 Dgr	H318 H411			
603-175-00-7	2-(2-hexyloxyethoxy)ethanol; DEGHE; diethylene glycol monohexyl ether; 3,6-dioxa-1-dodecanol; hexyl carbitol; 3,6-dioxadodecan-1-ol	203-988-3	112-59-4	Acute Tox. 4 * Eye Dam. 1	H312 H318	GHS05 GHS07 Dgr	H312 H318			
603-176-00-2	1,2-bis(2-methoxyethoxy)ethane; TEGDME; triethylene glycol dimethyl ether; triglyme	203-977-3	112-49-2	Repr. 1B	H360- Df	GHS08 Dgr	H360Df	EUH019		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
603-177-00-8	1-ethoxypropan-2-ol; 2PG1EE; 1-ethoxy-2-propanol; propylene glycol monoethyl ether; [1] 2-ethoxy-1-methylethyl acetate; 2PG1EEA [2]	216-374-5 [1] 259-370-9 [2]	1569-02-4 [1] 54839-24-6 [2]	Flam. Liq. 3 STOT SE 3	H226 H336	GHS02 GHS07 Wng	H226 H336			
603-178-00-3	2-hexyloxyethanol; ethylene glycol monoethyl ether; n-hexylglycol	203-951-1	112-25-4	Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1B	H312 H302 H314	GHS05 GHS07 Dgr	H312 H302 H314			
603-179-00-9	ergocalciferol (ISO); Vitamin D2	200-014-9	50-14-6	Acute Tox. 2 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 1	H330 H311 H301 H372 **	GHS06 GHS08 Dgr	H330 H311 H301 H372 **			
603-180-00-4	colecalfiferol; Vitamin D3	200-673-2	67-97-0	Acute Tox. 2 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 1	H330 H311 H301 H372 **	GHS06 GHS08 Dgr	H330 H311 H301 H372 **			
603-181-00-X	<i>tert</i> -butyl methyl ether; MTBE; 2-methoxy-2-methylpropane	216-653-1	1634-04-4	Flam. Liq. 2 Skin Irrit. 2	H225 H315	GHS02 GHS07 Dgr	H225 H315			
603-183-00-0	2-[2-(2-butoxyethoxy)ethoxy]ethanol; TEGBE; triethylene glycol monobutyl ether; butoxytriethylene glycol	205-592-6	143-22-6	Eye Dam. 1	H318	GHS05 Dgr	H318		Eye Dam. 1; H318: C ≥ 30 % Eye Irrit. 2; H319: 20 % ≤ C < 30 %	
603-184-00-6	2-(hydroxymethyl)-2-[[2-hydroxy-3-(isooctadecyloxy)propoxy]methyl]-1,3-propanediol	416-380-1	146925-83-9	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
603-185-00-1	2,4-dichloro-3-ethyl-6-nitrophenol	420-740-1	99817-36-4	Acute Tox. 3 * Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H301 H318 H317 H400 H410	GHS06 GHS05 GHS09 Dgr	H301 H318 H317 H410			
603-186-00-7	trans-(5RS,6SR)-6-amino-2,2-dimethyl-1,3-dioxepan-5-ol	419-050-3	79944-37-9	Skin Sens. 1	H317	GHS07 Wng	H317			
603-187-00-2	2-((4,6-bis(4-(2-(1-methylpyridinium-4-yl)vinyl)phenylamino)-1,3,5-triazin-2-yl)(2-hydroxyethyl)amino)ethanol dichloride	419-360-9	163661-77-6	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
603-189-00-3	reaction mass of complexes of: titanium, 2,2'-oxydiethanol, ammonium lactate, nitrotris(2-propanol) and ethylene glycol	405-250-8	—	Aquatic Chronic 2	H411	GHS09	H411			
603-191-00-4	2-(4,6-bis(2,4-dimethylphenyl)-1,3,5-triazin-2-yl)-5-(3-((2-ethylhexyl)oxy)-2-hydroxypropoxy)phenol	419-740-4	137658-79-8	Aquatic Chronic 4	H413	—	H413			
603-195-00-6	2-[4-(4-methoxyphenyl)-6-phenyl-1,3,5-triazin-2-yl]-phenol	430-810-3	154825-62-4	Aquatic Chronic 3	H412	—	H412			
603-196-00-1	2-(7-ethyl-1H-indol-3-yl)ethanol	431-020-1	41340-36-7	Acute Tox. 4 * STOT RE 2 * Aquatic Chronic 2	H302 H373 ** H411	GHS08 GHS07 GHS09 Wng	H302 H373 ** H411			
603-197-00-7	tebuconazole (ISO); 1-(4-chlorophenyl)-4,4-dimethyl-3-(1,2,4-triazol-1-ylmethyl)pentan-3-ol	403-640-2	107534-96-3	Repr. 2 Acute Tox. 4 * Aquatic Chronic 2	H361d *** H302 H411	GHS08 GHS07 GHS09 Wng	H361d *** H302 H411			
603-199-00-8	etoxazol (ISO); (RS)-5-tert-butyl-2-[2-(2,6-difluorophenyl)-4,5-dihydro-1,3-oxazol-4-yl]phenetole	—	153233-91-1	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410		M=100	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
604-001-00-2	phenol; carbolic acid; monohydroxybenzene; phenylalcohol	203-632-7	108-95-2	Muta. 2 Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 2 * Skin Corr. 1B	H341 H331 H311 H301 H373 ** H314	GHS06 GHS08 GHS05 Dgr	H341 H331 H311 H301 H373 ** H314		* Skin Corr. 1B; H314: C ≥ 3 % Skin Irrit. 2; H315: 1 % ≤ C < 3 % Eye Irrit. 2; H319: 1 % ≤ C < 3 %	
604-002-00-8	pentachlorophenol	201-778-6	87-86-5	Carc. 2 Acute Tox. 2 * Acute Tox. 3 * Acute Tox. 3 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H351 H330 H311 H301 H319 H335 H315 H400 H410	GHS06 GHS08 GHS09 Dgr	H351 H330 H311 H301 H319 H335 H315 H410			
604-003-00-3	sodium pentachlorophenolate; [1] potassium pentachlorophenolate [2]	205-025-2 [1] 231-911-3 [2]	131-52-2 [1] 7778-73-6 [2]	Carc. 2 Acute Tox. 2 * Acute Tox. 3 * Acute Tox. 3 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H351 H330 H311 H301 H319 H335 H315 H400 H410	GHS06 GHS08 GHS09 Dgr	H351 H330 H311 H301 H319 H335 H315 H410			
604-004-00-9	<i>m</i> -cresol; [1] <i>o</i> -cresol; [2] <i>p</i> -cresol; [3] mix-cresol [4]	203-577-9 [1] 202-423-8 [2] 203-398-6 [3] 215-293-2 [4]	108-39-4 [1] 95-48-7 [2] 106-44-5 [3] 1319-77-3 [4]	Acute Tox. 3 * Acute Tox. 3 * Skin Corr. 1B	H311 H301 H314	GHS06 GHS05 Dgr	H311 H301 H314		*	C

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
604-005-00-4	1,4-dihydroxybenzene; hydroquinone; quinol	204-617-8	123-31-9	Carc. 2 Muta. 2 Acute Tox. 4 * Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1	H351 H341 H302 H318 H317 H400	GHS08 GHS05 GHS07 GHS09 Dgr	H351 H341 H302 H318 H317 H400			
604-006-00-X	3,4-xyleenol; [1] 2,5-xyleenol; [2] 2,4-xyleenol; [3] 2,3-xyleenol; [4] 2,6-xyleenol; [5] xyleenol; [6] 2,4(or 2,5)-xyleenol [7]	202-439-5 [1] 202-461-5 [2] 203-321-6 [3] 208-395-3 [4] 209-400-1 [5] 215-089-3 [6] 276-245-4 [7]	95-65-8 [1] 95-87-4 [2] 105-67-9 [3] 526-75-0 [4] 576-26-1 [5] 1300-71-6 [6] 71975-58-1 [7]	Acute Tox. 3 * Acute Tox. 3 * Skin Corr. 1B Aquatic Chronic 2	H311 H301 H314 H411	GHS06 GHS05 GHS09 Dgr	H311 H301 H314 H411			C
604-007-00-5	2-naphthol	205-182-7	135-19-3	Acute Tox. 4 * Acute Tox. 4 * Aquatic Acute 1	H332 H302 H400	GHS07 GHS09 Wng	H332 H302 H400			
604-008-00-0	2-chlorophenol; [1] 4-chlorophenol; [2] 3-chlorophenol; [3] chlorophenol [4]	202-433-2 [1] 203-402-6 [2] 203-582-6 [3] 246-691-4 [4]	95-57-8 [1] 106-48-9 [2] 108-43-0 [3] 25167-80-0 [4]	Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Aquatic Chronic 2	H332 H312 H302 H411	GHS07 GHS09 Wng	H332 H312 H302 H411			C



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
604-009-00-6	pyrogallol; 1,2,3-trihydroxybenzene	201-762-9	87-66-1	Muta. 2 Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Aquatic Chronic 3	H341 H332 H312 H302 H412	GHS08 GHS07 Wng	H341 H332 H312 H302 H412		*	
604-010-00-1	resorcinol; 1,3-benzenediol	203-585-2	108-46-3	Acute Tox. 4 * Eye Irrit. 2 Skin Irrit. 2 Aquatic Acute 1	H302 H319 H315 H400	GHS07 GHS09 Wng	H302 H319 H315 H400		*	
604-011-00-7	2,4-dichlorophenol	204-429-6	120-83-2	Acute Tox. 3 * Acute Tox. 4 * Skin Corr. 1B Aquatic Chronic 2	H311 H302 H314 H411	GHS06 GHS05 GHS09 Dgr	H311 H302 H314 H411			
604-012-00-2	4-chloro- <i>o</i> -cresol; 4-chloro-2-methyl phenol	216-381-3	1570-64-5	Acute Tox. 3 * Skin Corr. 1A Aquatic Acute 1	H331 H314 H400	GHS06 GHS05 GHS09 Dgr	H331 H314 H400		STOT SE 3; H335: C ≥ 1 %	
604-013-00-8	2,3,4,6-tetrachlorophenol	200-402-8	58-90-2	Acute Tox. 3 * Eye Irrit. 2 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H301 H319 H315 H400 H410	GHS06 GHS09 Dgr	H301 H319 H315 H410		* Eye Irrit. 2; H319: C ≥ 5 % Skin Irrit. 2; H315: C ≥ 5 %	
604-014-00-3	chlorocresol; 4-chloro- <i>m</i> -cresol; 4-chloro-3-methylphenol	200-431-6	59-50-7	Acute Tox. 4 * Acute Tox. 4 * Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1	H312 H302 H318 H317 H400	GHS05 GHS07 GHS09 Dgr	H312 H302 H318 H317 H400		*	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
604-015-00-9	2,2'-methylenebis-(3,4,6-trichlorophenol); hexachlorophene	200-733-8	70-30-4	Acute Tox. 3 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H311 H301 H400 H410	GHS06 GHS09 Dgr	H311 H301 H410		*	
604-016-00-4	1,2-dihydroxybenzene; pyrocatechol	204-427-5	120-80-9	Acute Tox. 4 * Acute Tox. 4 * Eye Irrit. 2 Skin Irrit. 2	H312 H302 H319 H315	GHS07 Wng	H312 H302 H319 H315			
604-017-00-X	2,4,5-trichlorophenol	202-467-8	95-95-4	Acute Tox. 4 * Eye Irrit. 2 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H302 H319 H315 H400 H410	GHS07 GHS09 Wng	H302 H319 H315 H410		* Eye Irrit. 2; H319: C ≥ 5 % Skin Irrit. 2; H315: C ≥ 5 %	
604-018-00-5	2,4,6-trichlorophenol	201-795-9	88-06-2	Carc. 2 Acute Tox. 4 * Eye Irrit. 2 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H351 H302 H319 H315 H400 H410	GHS08 GHS07 GHS09 Wng	H351 H302 H319 H315 H410			
604-019-00-0	dichlorophen (ISO)	202-567-1	97-23-4	Acute Tox. 4 * Eye Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H302 H319 H400 H410	GHS07 GHS09 Wng	H302 H319 H410			
604-020-00-6	2-phenylphenol (ISO) biphenyl-2-ol; 2-hydroxybiphenyl;	201-993-5	90-43-7	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1	H319 H335 H315 H400	GHS07 GHS09 Wng	H319 H335 H315 H400			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
604-021-00-1	sodium 2-biphenylate; 2-phenylphenol, sodium salt	205-055-6	132-27-4	Acute Tox. 4 * STOT SE 3 Skin Irrit. 2 Eye Dam. 1 Aquatic Acute 1	H302 H335 H315 H318 H400	GHS05 GHS07 GHS09 Wng	H302 H335 H315 H318 H400			
604-022-00-7	2,2-dimethyl-1,3-benzodioxol-4-ol	400-900-7	22961-82-6	Eye Dam. 1	H318	GHS05 Dgr	H318			
604-023-00-2	2,4-dichloro-3-ethylphenol	401-060-4	—	Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H314 H400 H410	GHS05 GHS09 Dgr	H314 H410			
604-024-00-8	4,4-isobutylethylidenediphenol	401-720-1	6807-17-6	Repr. 1B Eye Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H360F *** H319 H400 H410	GHS08 GHS09 Dgr	H360F *** H319 H410			
604-025-00-3	2,5-bis(1,1-dimethylbutyl)hydroquinone	400-220-0	—	Aquatic Chronic 2	H411	GHS09	H411			
604-026-00-9	2,2-spirobi(6-hydroxy-4,4,7-trimethylchromane)	400-270-3	—	Aquatic Chronic 2	H411	GHS09	H411			
604-027-00-4	2-methyl-5-(1,1,3,3-tetramethylbutyl)hydroquinone	400-530-6	—	Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H318 H317 H411	GHS05 GHS07 GHS09 Dgr	H318 H317 H411			
604-028-00-X	4-amino-3-fluorophenol	402-230-0	399-95-1	Carc. 1B Acute Tox. 4 * Skin Sens. 1 Aquatic Chronic 2	H350 H302 H317 H411	GHS08 GHS07 GHS09 Dgr	H350 H302 H317 H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
604-029-00-5	1-naphthol	201-969-4	90-15-3	Acute Tox. 4 * Acute Tox. 4 * STOT SE 3 Skin Irrit. 2 Eye Dam. 1	H312 H302 H335 H315 H318	GHS05 GHS07 Dgr	H312 H302 H335 H315 H318			
604-030-00-0	bisphenol A; 4,4'-isopropylidenediphenol	201-245-8	80-05-7	Repr. 2 STOT SE 3 Eye Dam. 1 Skin Sens. 1	H361f *** H335 H318 H317	GHS08 GHS05 GHS07 Dgr	H361f *** H335 H318 H317			
604-031-00-6	guaiacol	201-964-7	90-05-1	Acute Tox. 4 * Eye Irrit. 2 Skin Irrit. 2	H302 H319 H315	GHS07 Wng	H302 H319 H315			
604-032-00-1	thymol	201-944-8	89-83-8	Acute Tox. 4 * Skin Corr. 1B Aquatic Chronic 2	H302 H314 H411	GHS05 GHS07 GHS09 Dgr	H302 H314 H411			
604-033-00-7	isobutyl but-3-enoate	401-170-2	24342-03-8	Flam. Liq. 3	H226	GHS02 Wng	H226			
604-034-00-2	4,4'-thiodi-o-cresol	403-330-7	24197-34-0	Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H318 H400 H410	GHS05 GHS09 Dgr	H318 H410			
604-035-00-8	4-nonylphenol, reaction products with formaldehyde and dodecane-1-thiol	404-160-6	—	Skin Sens. 1 Aquatic Chronic 4	H317 H413	GHS07 Wng	H317 H413			
604-036-00-3	4,4'-oxybis(ethylenethio)diphenol	404-590-4	90884-29-0	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etiketgeving			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
604-037-00-9	3,5-xyleenol; 3,5-dimethylphenol	203-606-5	108-68-9	Acute Tox. 3 * Acute Tox. 3 * Skin Corr. 1B	H311 H301 H314	GHS06 GHS05 Dgr	H311 H301 H314			
604-038-00-4	4-chloro-3,5-dimethylphenol; [1] chloroxylenol [2]	201-793-8 [1] 215-316-6 [2]	88-04-0 [1] 1321-23-9 [2]	Acute Tox. 4 * Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H302 H319 H315 H317	GHS07 Wng	H302 H319 H315 H317			
604-039-00-X	ethyl 2-[4-[(6-chlorobenzoxazol-2-yl)oxy]phenoxy]propionate; fenoxaprop-ethyl	266-362-9	66441-23-4	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
604-040-00-5	fomesafen (ISO); 5-[2-chloro-4-(trifluoromethyl)phenoxy]-N-(methylsulphonyl)-2-nitrobenzamide	276-439-9	72178-02-0	Acute Tox. 4 *	H302	GHS07 Wng	H302			
604-041-00-0	acifluorfen (ISO); 5-[2-chloro-4-(trifluoromethyl)phenoxy]-2-nitrobenzoic acid [1] sodium 5-[2-chloro-4-(trifluoromethyl)phenoxy]-2-nitrobenzoate; acifluorfen-sodium [2]	256-634-5 [1] 263-560-7 [2]	50594-66-6 [1] 62476-59-9 [2]	Acute Tox. 4 * Skin Irrit. 2 Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H315 H318 H400 H410	GHS05 GHS07 GHS09 Dgr	H302 H315 H318 H410			
604-042-00-6	4-nitrosophenol	203-251-6	104-91-6	Muta. 2 Acute Tox. 4 * Eye Dam. 1 Aquatic Chronic 2	H341 H302 H318 H411	GHS08 GHS05 GHS07 GHS09 Dgr	H341 H302 H318 H411			
604-043-00-1	monobenzone; 4-hydroxyphenyl benzyl ether; hydroquinone monobenzyl ether	203-083-3	103-16-2	Eye Irrit. 2 Skin Sens. 1	H319 H317	GHS07 Wng	H319 H317			
604-044-00-7	mequinol; 4-methoxyphenol; hydroquinone monomethyl ether	205-769-8	150-76-5	Acute Tox. 4 * Eye Irrit. 2 Skin Sens. 1	H302 H319 H317	GHS07 Wng	H302 H319 H317			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
604-045-00-2	2,3,5-trimethylhydroquinone	211-838-3	700-13-0	Acute Tox. 4 * STOT SE 3 Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H332 H335 H315 H318 H317 H400 H410	GHS05 GHS07 GHS09 Dgr	H332 H335 H315 H318 H317 H410			
604-046-00-8	4-(4-isopropoxyphenylsulfonyl)phenol	405-520-5	95235-30-6	Aquatic Chronic 2	H411	GHS09	H411			
604-047-00-3	4-(4-tolyloxy)biphenyl	405-730-7	51601-57-1	STOT RE 2 * Aquatic Chronic 4	H373 ** H413	GHS08 Wng	H373 ** H413			
604-048-00-9	4,4',4''-(ethan-1,1,1-triyl)triphenol	405-800-7	27955-94-8	Aquatic Chronic 2	H411	GHS09	H411			
604-049-00-4	4-4'-methylenebis(oxyethylenethio)diphenol	407-480-4	93589-69-6	Aquatic Chronic 2	H411	GHS09	H411			
604-051-00-5	3,5-bis((3,5-di-tert-butyl-4-hydroxy)benzyl)-2,4,6-trimethylphenol	401-110-5	87113-78-8	Aquatic Chronic 3	H412	—	H412			
604-052-00-0	2,2'-methylenebis(6-(2H-benzotriazol-2-yl)-4-(1,1,3,3-tetramethylbutyl)phenol)	403-800-1	103597-45-1	Aquatic Chronic 4	H413	—	H413			
604-053-00-6	2-methyl-4-(1,1-dimethylethyl)-6-(1-methylpentadecyl)-phenol	410-760-9	157661-93-3	Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H315 H317 H400 H410	GHS07 GHS09 Wng	H315 H317 H410			
604-054-00-1	reaction mass of: 2-methoxy-4-(tetrahydro-4-methylene-2H-pyran-2-yl)-phenol; 4-(3,6-dihydro-4-methyl-2H-pyran-2-yl)-2-methoxyphenol	412-020-0	—	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
604-055-00-7	2,2'-((3,3',5,5'-tetramethyl-(1,1'-biphenyl)-4,4'-diyl)-bis(oxymethylene))-bis-oxirane	413-900-7	85954-11-6	Muta. 2	H341	GHS08 Wng	H341			
604-056-00-2	2-(2-hydroxy-3,5-dinitroanilino)ethanol	412-520-9	99610-72-7	Flam. Sol. 2 Repr. 2 Acute Tox. 4 *	H228 H361f *** H302	GHS02 GHS07 GHS08 Dgr	H228 H361f *** H302			
604-057-00-8	reaction mass of: isomers of 2-(2H-benzotriazol-2-yl)-4-methyl-(n)-dodecylphenol; isomers of 2-(2H-benzotriazol-2-yl)-4-methyl-(n)-tetracosylphenol; isomers of 2-(2H-benzotriazol-2-yl)-4-methyl-5,6-didodecyl-phenol. n=5 or 6	401-680-5	—	Aquatic Chronic 2	H411	GHS09	H411			
604-058-00-3	1,2-bis(3-methylphenoxy)ethane	402-730-9	54914-85-1	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
604-059-00-9	2-n-hexadecylhydroquinone	406-400-5	—	STOT RE 2 * Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 4	H373 ** H315 H317 H413	GHS08 GHS07 Wng	H373 ** H315 H317 H413			
604-060-00-4	9,9-bis(4-hydroxyphenyl)fluorene	406-950-6	3236-71-3	Eye Irrit. 2 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H319 H315 H400 H410	GHS07 GHS09 Wng	H319 H315 H410			
604-061-00-X	reaction mass of: 2-chloro-5-sec-tetradecylhydroquinones where sec-tetradecyl= 1-methyltridecyl; 1-ethyl-dodecyl; 1-propylundecyl; 1-butyldecyl; 1-pentyl-nonyl; 1-hexyloctyl	407-740-7	—	Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 3	H315 H317 H412	GHS07 Wng	H315 H317 H412			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
604-062-00-5	2,4-dimethyl-6-(1-methyl-pentadecyl)phenol	411-220-5	—	Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H315 H317 H400 H410	GHS07 GHS09 Wng	H315 H317 H410			
604-063-00-0	5,6-dihydroxyindole	412-130-9	3131-52-0	Acute Tox. 4 * Eye Dam. 1 Aquatic Chronic 2	H302 H318 H411	GHS05 GHS07 GHS09 Dgr	H302 H318 H411			
604-064-00-6	2-(4,6-diphenyl-1,3,5-triazin-2-yl)-5-(hexyloxy)-phenol	411-380-6	147315-50-2	Aquatic Chronic 4	H413	—	H413			
604-065-00-1	4,4',4''-(1-methylpropan-1-yl-3-ylidene)tris(2-cyclohexyl-5-methylphenol)	407-460-5	111850-25-0	Aquatic Chronic 2	H411	GHS09	H411			
604-066-00-7	reaction mass of: phenol, 6-(1,1-dimethylethyl)-4-tetrapropyl-2-[(2-hydroxy-5-tetrapropylphenyl)methyl] (C <sub>41</sub> -compound) and methane, 2,2'-bis[6-(1,1-dimethyl-ethyl)-1-hydroxy-4-tetrapropyl-phenyl]- (C <sub>45</sub> -compound); 2,6-bis(1,1-dimethylethyl)-4-tetra-propyl-phenol and 2-(1,1-dimethylethyl)-4-tetrapropyl-phenol; 2,6-bis[(6-(1,1-dimethylethyl)-1-hydroxy-4-tetrapropylphenyl)methyl]-4-(tetrapropyl)phenol and 2-[(6-(1,1-dimethylethyl)-1-hydroxy-4-tetrapropylphenyl)methyl]-6-[1-hydroxy-4-tetrapropylphenyl)methyl]-4-(tetrapropyl)phenol	414-550-8	—	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
604-067-00-2	reaction mass of: 2,2'-[[[(2-hydroxyethyl)imino]bis(methylene)bis[4-dodecylphenol]]; formaldehyde, oligomer with 4-dodecylphenol and 2-aminoethanol(n = 2); formaldehyde, oligomer with 4-dodecylphenol and 2-aminoethanol(n = 3, 4 and higher)	414-520-4	—	Skin Irrit. 2 Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H315 H318 H400 H410	GHS05 GHS09 Dgr	H315 H318 H410			



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
604-068-00-8	(±)-4-[2-[[3-(4-hydroxyphenyl)-1-methylpropyl]amino]-1-hydroxyethyl]phenol hydrochloride	415-170-5	90274-24-1	Acute Tox. 4 * Acute Tox. 4 * Skin Sens. 1	H332 H302 H317	GHS07 Wng	H332 H302 H317			
604-069-00-3	2-(1-methylpropyl)-4-tert-butylphenol	421-740-4	51390-14-8	Skin Corr. 1B Aquatic Chronic 2	H314 H411	GHS05 GHS09 Dgr	H314 H411			
604-070-00-9	triclosan; 2,4,4'-trichloro-2'-hydroxy-diphenyl-ether; 5-chloro-2-(2,4-dichlorophenoxy)phenol	222-182-2	3380-34-5	Eye Irrit. 2 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H319 H315 H400 H410	GHS07 GHS09 Wng	H319 H315 H410		M=100	
605-001-00-5	formaldehyde ...%	200-001-8	50-00-0	Carc. 2 Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Skin Corr. 1B Skin Sens. 1	H351 H331 H311 H301 H314 H317	GHS06 GHS08 GHS05 Dgr	H351 H331 H311 H301 H314 H317		* Skin Corr. 1B; H314: C ≥ 25 % Skin Irrit. 2; H315: 5 % ≤ C < 25 % Eye Irrit. 2; H319: 5 % ≤ C < 25 % STOT SE 3; H335: C ≥ 5 % Skin Sens. 1; H317: C ≥ 0,2 %	B D
605-002-00-0	1,3,5-trioxan; trioxymethylene	203-812-5	110-88-3	Flam. Sol. 1 Repr. 2 STOT SE 3	H228 H361d *** H335	GHS02 GHS08 GHS07 Dgr	H228 H361d *** H335			T
605-003-00-6	acetaldehyde; ethanal	200-836-8	75-07-0	Flam. Liq. 1 Carc. 2 Eye Irrit. 2 STOT SE 3	H224 H351 H319 H335	GHS02 GHS08 GHS07 Dgr	H224 H351 H319 H335			
605-004-00-1	2,4,6-trimethyl-1,3,5-trioxan; paraldehyde	204-639-8	123-63-7	Flam. Liq. 3	H226	GHS02 Dgr	H226			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevaar­klasse en categorie	Gevaar­aan­duiding	Pictogram, sig­naal­woord	Gevaar­aan­duiding	Aanvullende gevaar­aan­duiding		
605-005-00-7	2,4,6,8-tetramethyl-1,3,5,7-tetraoxacyclooctane; metaldehyde	203-600-2	108-62-3	Flam. Sol. 2 Acute Tox. 4 *	H228 H302	GHS02 GHS07 Wng	H228 H302			
605-006-00-2	butyraldehyde	204-646-6	123-72-8	Flam. Liq. 2	H225	GHS02 Dgr	H225			
605-007-00-8	1,1-dimethoxyethane; dimethyl acetal	208-589-8	534-15-6	Flam. Liq. 2	H225	GHS02 Dgr	H225			
605-008-00-3	acrylaldehyde; acrolein; prop-2-enal	203-453-4	107-02-8	Flam. Liq. 2 Acute Tox. 2 * Acute Tox. 3 * Acute Tox. 3 * Skin Corr. 1B Aquatic Acute 1	H225 H330 H311 H301 H314 H400	GHS02 GHS06 GHS05 GHS09 Dgr	H225 H330 H311 H301 H314 H400			D
605-009-00-9	crotonaldehyde; 2-butenal; [1] (E)-2-butenal; (E)-crotonaldehyde [2]	224-030-0 [1] 204-647-1 [2]	4170-30-3 [1] 123-73-9 [2]	Flam. Liq. 2 Muta. 2 Acute Tox. 2 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 2 * STOT SE 3 Skin Irrit. 2 Eye Dam. 1 Aquatic Acute 1	H225 H341 H330 H311 H301 H373 ** H335 H315 H318 H318 H400	GHS02 GHS06 GHS08 GHS05 GHS09 Dgr	H225 H341 H330 H311 H301 H373 ** H335 H315 H318 H400			
605-010-00-4	2-furaldehyde	202-627-7	98-01-1	Carc. 2 Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 4 * Eye Irrit. 2 STOT SE 3	H351 H331 H301 H312 H319 H335	GHS06 GHS08 Dgr	H351 H331 H301 H312 H319 H335		*	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
605-011-00-X	2-chlorobenzaldehyde; o-chlorobenzaldehyde	201-956-3	89-98-5	Skin Corr. 1B	H314	GHS05 Dgr	H314			
605-012-00-5	benzaldehyde	202-860-4	100-52-7	Acute Tox. 4 *	H302	GHS07 Wng	H302			
605-013-00-0	chloralose (INN); (R)-1,2-O-(2,2,2-trichloroethylidene)- $\alpha$ -D-glucofuranose; glucochloralose; anhydroglucochloral	240-016-7	15879-93-3	Acute Tox. 4 * Acute Tox. 4 *	H332 H302	GHS07 Wng	H332 H302			
605-014-00-6	chloral hydrate; 2,2,2-trichloroethane-1,1-diol	206-117-5	302-17-0	Acute Tox. 3 * Eye Irrit. 2 Skin Irrit. 2	H301 H319 H315	GHS06 Dgr	H301 H319 H315			
605-015-00-1	1,1-diethoxyethane; acetal	203-310-6	105-57-7	Flam. Liq. 2 Eye Irrit. 2 Skin Irrit. 2	H225 H319 H315	GHS02 GHS07 Dgr	H225 H319 H315			
605-016-00-7	glyoxal...%; ethandial...%	203-474-9	107-22-2	Muta. 2 Acute Tox. 4 * Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H341 H332 H319 H315 H317	GHS07 GHS08 Wng	H341 H332 H319 H315 H317	*	B	
605-017-00-2	1,3-dioxolane	211-463-5	646-06-0	Flam. Liq. 2	H225	GHS02 Dgr	H225			
605-018-00-8	propanal; propionaldehyde	204-623-0	123-38-6	Flam. Liq. 2 Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H225 H319 H335 H315	GHS02 GHS07 Dgr	H225 H319 H335 H315			
605-019-00-3	citral	226-394-6	5392-40-5	Skin Irrit. 2 Skin Sens. 1	H315 H317	GHS07 Wng	H315 H317			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevaar­klasse en categorie	Gevaar­aan­duiding	Pictogram, sig­naal­woord	Gevaar­aan­duiding	Aanvullende gevaar­aan­duiding		
605-020-00-9	safrole; 5-allyl-1,3-benzodioxole	202-345-4	94-59-7	Carc. 1B Muta. 2 Acute Tox. 4 *	H350 H341 H302	GHS08 GHS07 Dgr	H350 H341 H302			
605-021-00-4	formaldehyde, reaction products with butylphenol	294-145-9	91673-30-2	Skin Sens. 1	H317	GHS07 Wng	H317			
605-022-00-X	glutaral; glutaraldehyde; 1,5-pentanedial	203-856-5	111-30-8	Acute Tox. 3 * Acute Tox. 3 * Skin Corr. 1B Resp. Sens. 1 Skin Sens. 1 Aquatic Acute 1	H331 H301 H314 H334 H317 H400	GHS06 GHS08 GHS05 GHS09 Dgr	H331 H301 H314 H334 H317 H400			* Skin Corr. 1B; H314: C ≥ 10 % Skin Irrit. 2; H315: 0,5 % ≤ C < 10 % Eye Dam. ; H318: 2 % ≤ C < 10 % Eye Irrit. 2; H319: 0,5 % ≤ C < 2 % STOT SE; H335: C ≥ 0,5 % Skin Sens. 1; H317: C ≥ 0,5 %
605-025-00-6	chloroacetaldehyde	203-472-8	107-20-0	Carc. 2 Acute Tox. 2 * Acute Tox. 3 * Acute Tox. 3 * Skin Corr. 1B Aquatic Acute 1	H351 H330 H311 H301 H314 H400	GHS06 GHS08 GHS05 GHS09 Dgr	H351 H330 H311 H301 H314 H400			STOT SE 3; H335: C ≥ 5 %
605-026-00-1	2,5,7,7-tetramethyloctanal	405-690-0	114119-97-0	Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 2	H315 H317 H411	GHS07 GHS09 Wng	H315 H317 H411			
605-027-00-7	reaction mass of: 3a,4,5,6,7,7a-hexahydro-4,7-methano-1H-indene-6-carboxaldehyde; 3a,4,5,6,7,7a-hexahydro-4,7-methano-1H-indene-5-carboxaldehyde	410-480-7	—	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
605-028-00-2	$\beta$ -methyl-3-(1-methylethyl)-benzenepropanal	412-050-4	125109-85-5	Aquatic Chronic 2	H411	GHS09	H411			
605-029-00-8	2-cyclohexylpropanal	412-270-0	2109-22-0	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
605-030-00-3	1-(p-methoxyphenyl)acetaldehyde oxime	411-510-1	3353-51-3	Skin Sens. 1	H317	GHS07 Wng	H317			
605-031-00-9	reaction mass of: 2,2-dimethoxyethanal [this component is considered to be anhydrous in terms of identity, structure and composition. However, 2,2-dimethoxyethanal will exist in a hydrated form. 60 % anhydrous is equivalent to 70.4 % hydrate; water(Including free water and water in hydrated 2,2-dimethoxyethanal)]	421-890-0	—	Skin Sens. 1	H317	GHS07 Wng	H317			
606-001-00-8	acetone; propan-2-one; propanone	200-662-2	67-64-1	Flam. Liq. 2 Eye Irrit. 2 STOT SE 3	H225 H319 H336	GHS02 GHS07 Dgr	H225 H319 H336	EUH066		
606-002-00-3	butanone; ethyl methyl ketone	201-159-0	78-93-3	Flam. Liq. 2 Eye Irrit. 2 STOT SE 3	H225 H319 H336	GHS02 GHS07 Dgr	H225 H319 H336	EUH066		
606-003-00-9	heptan-3-one; butyl ethyl ketone	203-388-1	106-35-4	Flam. Liq. 3 Acute Tox. 4 * Eye Irrit. 2	H226 H332 H319	GHS02 GHS07 Wng	H226 H332 H319			
606-004-00-4	4-methylpentan-2-one; isobutyl methyl ketone	203-550-1	108-10-1	Flam. Liq. 2 Acute Tox. 4 * Eye Irrit. 2 STOT SE 3	H225 H332 H319 H335	GHS02 GHS07 Dgr	H225 H332 H319 H335	EUH066		
606-005-00-X	2,6-dimethylheptan-4-one; di-isobutyl ketone	203-620-1	108-83-8	Flam. Liq. 3 STOT SE 3	H226 H335	GHS02 GHS07 Wng	H226 H335		STOT SE 3; H335: C $\geq$ 10 %	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
606-006-00-5	pentan-3-one; diethyl ketone	202-490-3	96-22-0	Flam. Liq. 2 STOT SE 3 STOT SE 3	H225 H335 H336	GHS02 GHS07 Dgr	H225 H335 H336	EUH066		
606-007-00-0	3-methylbutan-2-one; methyl isopropyl ketone	209-264-3	563-80-4	Flam. Liq. 2	H225	GHS02 Dgr	H225			
606-009-00-1	4-methylpent-3-en-2-one; mesityl oxide	205-502-5	141-79-7	Flam. Liq. 3 Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 *	H226 H332 H312 H302	GHS02 GHS07 Wng	H226 H332 H312 H302		*	
606-010-00-7	cyclohexanone	203-631-1	108-94-1	Flam. Liq. 3 Acute Tox. 4 *	H226 H332	GHS02 GHS07 Wng	H226 H332			
606-011-00-2	2-methylcyclohexanone	209-513-6	583-60-8	Flam. Liq. 3 Acute Tox. 4 *	H226 H332	GHS02 GHS07 Wng	H226 H332			
606-012-00-8	3,5,5-trimethylcyclohex-2-enone; isophorone	201-126-0	78-59-1	Carc. 2 Acute Tox. 4 * Acute Tox. 4 * Eye Irrit. 2 STOT SE 3	H351 H312 H302 H319 H335	GHS08 GHS07 Wng	H351 H312 H302 H319 H335		STOT SE 3; H335: C ≥ 10 %	
606-013-00-3	p-benzoquinone; quinone	203-405-2	106-51-4	Acute Tox. 3 * Acute Tox. 3 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1	H331 H301 H319 H335 H315 H400	GHS06 GHS09 Dgr	H331 H301 H319 H335 H315 H400			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
606-014-00-9	chlorophacinone (ISO); 2-(2-(4-chlorophenyl)phenylacetyl)indan-1,3-dione	223-003-0	3691-35-8	Acute Tox. 1 Acute Tox. 2 * Acute Tox. 3 * STOT RE 1 Aquatic Acute 1 Aquatic Chronic 1	H310 H300 H331 H372 **	GHS06 GHS08 GHS09 Dgr	H310 H300 H331 H372 ** H410			
606-016-00-X	pindone (ISO); 2-pivaloylindan-1,3-dione	201-462-8	83-26-1	Acute Tox. 3 * STOT RE 1 Aquatic Acute 1 Aquatic Chronic 1	H301 H372 ** H400 H410	GHS06 GHS08 GHS09 Dgr	H301 H372 ** H410			
606-017-00-5	diketene; diketen	211-617-1	674-82-8	Flam. Liq. 3 Acute Tox. 4 *	H226 H332	GHS02 GHS07 Wng	H226 H332			D
606-018-00-0	dichlone (ISO); 2,3-dichloro-1,4-naphthoquinone	204-210-5	117-80-6	Acute Tox. 4 * Eye Irrit. 2 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H302 H319 H315 H400 H410	GHS07 GHS09 Wng	H302 H319 H315 H410			
606-019-00-6	chlordecone (ISO); perchloropentacyclo[5,3,0,0 <sup>2,6</sup> ,0 <sup>3,9</sup> ,0 <sup>4,8</sup> ] decan-5-one; decachloropentacyclo[5,2,1,0 <sup>2,6</sup> ,0 <sup>3,9</sup> ,0 <sup>5,8</sup> ] decan-4-one	205-601-3	143-50-0	Carc. 2 Acute Tox. 3 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H351 H311 H301 H400 H410	GHS06 GHS08 GHS09 Dgr	H351 H311 H301 H410			
606-020-00-1	5-methylheptan-3-one	208-793-7	541-85-5	Flam. Liq. 3 Eye Irrit. 2 STOT SE 3	H226 H319 H335	GHS02 GHS07 Wng	H226 H319 H335		STOT SE 3; H335: C ≥ 10 %	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
606-021-00-7	N-methyl-2-pyrrolidone	212-828-1	872-50-4	Eye Irrit. 2 Skin Irrit. 2	H319 H315	GHS07 Wng	H319 H315			
606-022-00-2	1-phenyl-3-pyrazolidone	202-155-1	92-43-3	Acute Tox. 4 * Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
606-023-00-8	4-methoxy-4-methylpentan-2-one	203-512-4	107-70-0	Flam. Liq. 3 Acute Tox. 4 *	H226 H332	GHS02 GHS07 Wng	H226 H332			
606-024-00-3	heptan-2-one; methyl amyl ketone	203-767-1	110-43-0	Flam. Liq. 3 Acute Tox. 4 * Acute Tox. 4 *	H226 H332 H302	GHS02 GHS07 Wng	H226 H332 H302			
606-025-00-9	cyclopentanone	204-435-9	120-92-3	Flam. Liq. 3 Eye Irrit. 2 Skin Irrit. 2	H226 H319 H315	GHS02 GHS07 Wng	H226 H319 H315			
606-026-00-4	5-methylhexan-2-one; isoamyl methyl ketone	203-737-8	110-12-3	Flam. Liq. 3 Acute Tox. 4 *	H226 H332	GHS02 GHS07 Wng	H226 H332			
606-027-00-X	heptan-4-one; di-n-propyl ketone	204-608-9	123-19-3	Flam. Liq. 3 Acute Tox. 4 *	H226 H332	GHS02 GHS07 Wng	H226 H332			
606-028-00-5	2,4-dimethylpentan-3-one; di-isopropyl ketone	209-294-7	565-80-0	Flam. Liq. 2 Acute Tox. 4 *	H225 H332	GHS02 GHS07 Dgr	H225 H332			
606-029-00-0	pentane-2,4-dione; acetylacetone	204-634-0	123-54-6	Flam. Liq. 3 Acute Tox. 4 *	H226 H302	GHS02 GHS07 Wng	H226 H302			



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
606-030-00-6	hexan-2-one; methyl butyl ketone; butyl methyl ketone; methyl- <i>n</i> -butyl ketone	209-731-1	591-78-6	Flam. Liq. 3 Repr. 2 STOT RE 1 STOT SE 3	H226 H361f *** H372 ** H336	GHS02 GHS08 GHS07 Dgr	H226 H361f *** H372 ** H336			
606-031-00-1	3-propanolide; 1,3-propiolactone	200-340-1	57-57-8	Carc. 1B Acute Tox. 2 * Eye Irrit. 2 Skin Irrit. 2	H350 H330 H319 H315	GHS06 GHS08 Dgr	H350 H330 H319 H315			
606-032-00-7	hexachloroacetone	204-129-5	116-16-5	Acute Tox. 4 * Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
606-033-00-2	2-(3,4-dichlorophenyl)-4-methyl-1,2,4-oxadiazolidinedione; methazole	243-761-6	20354-26-1	Acute Tox. 4 * Acute Tox. 4 * Eye Irrit. 2 Skin Irrit. 2 Aquatic Chronic 2	H312 H302 H319 H315 H411	GHS07 GHS09 Wng	H312 H302 H319 H315 H411			
606-034-00-8	metribuzin (ISO); 4-amino-6- <i>tert</i> -butyl-3-methylthio-1,2,4-triazin-5(4 <i>H</i> )-one; 4-amino-4,5-dihydro-6-(1,1-dimethylethyl)-3-methylthio-1,2,4-triazin-5-one	244-209-7	21087-64-9	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
606-035-00-3	chloridazon (ISO); 5-amino-4-chloro-2-phenylpyridazine-3-(2 <i>H</i> )-one; pyrazon	216-920-2	1698-60-8	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
606-036-00-9	quinomethionate; chinomethionat (ISO); 6-methyl-1,3-dithiolo(4,5- <i>b</i> )quinoxalin-2-one	219-455-3	2439-01-2	Repr. 2 Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * STOT RE 2 * Eye Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H361f *** H332 H312 H302 H373 ** H319 H317 H400 H410	GHS08 GHS07 GHS09 Wng	H361f *** H332 H312 H302 H373 ** H319 H317 H410			
606-037-00-4	triadimefon (ISO); 1-(4-chlorophenoxy)-3,3-dimethyl-1-(1,2,4-triazol-1-yl)butanone	256-103-8	43121-43-3	Acute Tox. 4 * Skin Sens. 1 Aquatic Chronic 2	H302 H317 H411	GHS07 GHS09 Wng	H302 H317 H411			
606-038-00-X	diphacinone (ISO); 2-diphenylacetylindan-1,3-dione	201-434-5	82-66-6	Acute Tox. 2 * STOT RE 1	H300 H372 **	GHS06 GHS08 Dgr	H300 H372 **			
606-039-00-5	5(or 6)- <i>tert</i> -butyl-2'-chloro-6'-ethylamino-3',7'-dimethylspiro(isobenzofuran-1(1 <i>H</i> ),9'-xanthene)-3-one	400-680-2	—	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H332 H400 H410	GHS07 GHS09 Wng	H332 H410			
606-040-00-0	( <i>N</i> -benzyl- <i>N</i> -ethyl)amino-3-hydroxyacetophenone hydrochloride	401-840-4	55845-90-4	Eye Dam. 1 Aquatic Chronic 2	H318 H411	GHS05 GHS09 Dgr	H318 H411			
606-041-00-6	2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one	400-600-6	71868-10-5	Acute Tox. 4 * Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
606-042-00-1	acetophenone	202-708-7	98-86-2	Acute Tox. 4 * Eye Irrit. 2	H302 H319	GHS07 Wng	H302 H319			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
606-043-00-7	2,4-di- <i>tert</i> -butylcyclohexanone	405-340-7	13019-04-0	Skin Irrit. 2 Aquatic Chronic 2	H315 H411	GHS07 GHS09 Wng	H315 H411			
606-044-00-2	2,4,6-trimethylbenzophenone	403-150-9	954-16-5	Acute Tox. 4 * Eye Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H302 H319 H400 H410	GHS07 GHS09 Wng	H302 H319 H410			
606-045-00-8	oxadiazon (ISO); 3-[2,4-dichloro-5-(1-methylethoxy)phenyl]- 5-(1,1-dimethylethyl)-1,3,4-oxadiazol-2 (3 <i>H</i> )-one	243-215-7	19666-30-9	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
606-046-00-3	reaction mass of <i>cis</i> - and <i>trans</i> -cyclohexadec- 8-en-1-one	401-700-2	3100-36-5	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
606-047-00-9	2-benzyl-2-dimethylamino-4-morpholino- butyrophenone	404-360-3	119313-12-1	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
606-048-00-4	2'-anilino-3'-methyl-6'-dipentylaminospiro (isobenzofuran-1(1 <i>H</i> ),9'-xanthen)-3-one	406-480-1	—	Aquatic Chronic 4	H413	—	H413			
606-049-00-X	4-( <i>trans</i> -4-propylcyclohexyl)acetophenone	406-700-6	78531-61-0	Skin Sens. 1 Aquatic Chronic 4	H317 H413	GHS07 Wng	H317 H413			
606-050-00-5	6-anilino-1-benzoyl-4-(4- <i>tert</i> -pentylphenoxy) naphtho[1,2,3- <i>de</i> ]quinoline-2,7-(3 <i>H</i> )- dione	412-480-2	72453-58-8	Aquatic Chronic 2	H411	GHS09	H411			
606-051-00-0	4-pentylcyclohexanone	406-670-4	61203-83-6	Aquatic Chronic 2	H411	GHS09	H411			
606-052-00-6	4-( <i>N,N</i> -dibutylamino)-2-hydroxy-2'-carbo- xybenzophenone	410-410-5	54574-82-2	Aquatic Chronic 3	H412	—	H412			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
606-053-00-1	flurtamone (ISO); (RS)-5-methylamino-2-phenyl-4-( $\alpha$ , $\alpha$ , $\alpha$ -trifluoro- <i>m</i> -tolyl)furan-3(2 <i>H</i> )-one	—	96525-23-4	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
606-054-00-7	isoxaflutole (ISO); 5-cyclopropyl-1,2-oxazol-4-yl $\alpha$ , $\alpha$ , $\alpha$ -trifluoro-2-mesyl- <i>p</i> -tolyl ketone	—	141112-29-0	Repr. 2 Aquatic Acute 1 Aquatic Chronic 1	H361d *** H400 H410	GHS08 GHS09 Wng	H361d *** H410			
606-055-00-2	1-(2,3-dihydro-1,3,3,6-tetramethyl-1-(1-methylethyl)-1 <i>H</i> -inden-5-yl)ethanone	411-180-9	92836-10-7	Acute Tox. 4 * STOT RE 2 * Aquatic Chronic 2	H302 H373 ** H411	GHS08 GHS07 GHS09 Wng	H302 H373 ** H411			
606-056-00-8	4-chloro-3',4'-dimethoxybenzophenone	404-610-1	116412-83-0	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
606-057-00-3	4-propylcyclohexanone	406-810-4	40649-36-3	Skin Irrit. 2 Aquatic Chronic 3	H315 H412	GHS07 Wng	H315 H412			
606-058-00-9	4'-fluoro-2,2-dimethoxyacetophenone	407-500-1	21983-80-2	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
606-059-00-4	2,4-difluoro- $\alpha$ -(1 <i>H</i> -1,2,4-triazol-1-yl)acetophenone hydrochloride	412-390-3	86386-75-6	Acute Tox. 4 * Eye Dam. 1 Skin Sens. 1	H302 H318 H317	GHS05 GHS07 Dgr	H302 H318 H317			
606-060-00-X	reaction mass of: <i>trans</i> -2,4-dimethyl-2-(5,6,7,8-tetrahydro-5,5,8,8-tetramethylnaphthalene-2-yl)-1,3-dioxolane; <i>cis</i> -2,4-dimethyl-2-(5,6,7,8-tetrahydro-5,5,8,8-tetramethylnaphthalene-2-yl)-1,3-dioxolane	412-950-7	—	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
606-061-00-5	(3-chlorophenyl)-(4-methoxy-3-nitrophenyl) methanone	423-290-4	66938-41-8	Muta. 2 Aquatic Acute 1 Aquatic Chronic 1	H341 H400 H410	GHS08 GHS09 Wng	H341 H410			
606-062-00-0	tetrahydrothiopyran-3-carboxaldehyde	407-330-8	61571-06-0	Repr. 1B Eye Dam. 1 Aquatic Chronic 3	H360D *** H318 H412	GHS08 GHS05 Dgr	H360D *** H318 H412			
606-063-00-6	(E)-3-(2-chlorophenyl)-2-(4-fluorophenyl) propenal	410-980-5	112704-51-5	Eye Irrit. 2 Skin Sens. 1	H319 H317	GHS07 Wng	H319 H317			
606-064-00-1	pregn-5-ene-3,20-dione bis(ethylene ketal)	407-450-0	7093-55-2	Aquatic Chronic 4	H413	—	H413			
606-065-00-7	1-(4-morpholinophenyl)butan-1-one	413-790-0	—	Aquatic Chronic 2	H411	GHS09	H411			
606-066-00-2	(E)-5[(4-chlorophenyl)methylene]-2,2-dimethylcyclopentanone	410-440-9	164058-20-2	Aquatic Chronic 2	H411	GHS09	H411			
606-067-00-8	reaction mass of: 1-(2,3,6,7,8,9-hexahydro-1,1-dimethyl-1H-benz(g)inden-4-yl)ethanone; 1-(2,3,5,6,7,8-hexahydro-1,1-dimethyl-1H-benz(f)inden-4-yl)ethanone; 1-(2,3,6,7,8,9-hexahydro-1,1-dimethyl-1H-benz(g)inden-5-yl)ethanone; 1-(2,3,6,7,8,9-hexahydro-3,3-dimethyl-1H-benz(g)inden-5-yl)ethanone	414-870-8	96792-67-5	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
606-068-00-3	2,7,11-trimethyl-1,3-(2,6,6-trimethylcyclohex-1-en-1-yl)tridecahexaen-2,4,6,8,10,12-al	415-770-7	1638-05-7	STOT RE 2 * Skin Sens. 1 Aquatic Chronic 3	H373 ** H317 H412	GHS08 GHS07 Wng	H373 ** H317 H412			
606-069-00-9	spiro[1,3-dioxolane-2,5'-(4',4',8',8'-tetramethyl-hexahydro-3',9'-methanonaphthalene)]	415-460-1	154171-76-3	Aquatic Chronic 2	H411	GHS09	H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
606-070-00-4	butoxydim (ISO); 5-(3-butyryl-2,4,6-trimethylphenyl)-2-[1-(ethoxyimino)propyl]-3-hydroxycyclohex-2-en-1-one	414-790-3	138164-12-2	Repr. 2 Acute Tox. 4 * Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H361fd H302 H315 H400 H410	GHS08 GHS07 GHS09 Wng	H361fd H302 H315 H410			
606-071-00-X	17-spiro(5,5-dimethyl-1,3-dioxan-2-yl)androsta-1,4-diene-3-one	421-050-3	13258-43-0	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
606-072-00-5	3-acetyl-1-phenyl-pyrrolidine-2,4-dione	421-600-2	719-86-8	STOT RE 2 * Aquatic Chronic 2	H373 ** H411	GHS08 GHS09 Wng	H373 ** H411			
606-073-00-0	4,4'-bis(dimethylamino)benzophenone; Michler's ketone	202-027-5	90-94-8	Carc. 1B Muta. 2 Eye Dam. 1	H350 H341 H318	GHS08 GHS05 Dgr	H350 H341 H318			
606-075-00-1	1-benzyl-5-ethoxyimidazolidine-2,4-dione	417-340-4	65855-02-9	Acute Tox. 4 *	H302	GHS07 Wng	H302			
606-076-00-7	1-((2-quinolinyl-carbonyl)oxy)-2,5-pyrrolidinedione	418-630-3	136465-99-1	Eye Dam. 1 Skin Sens. 1	H318 H317	GHS05 GHS07 Dgr	H318 H317			
606-077-00-2	(3S,4S)-3-hexyl-4-[(R)-2-hydroxytridecyl]-2-oxetanone	418-650-2	104872-06-2	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
606-078-00-8	1-octylazepin-2-one	420-040-6	59227-88-2	Skin Corr. 1B Skin Sens. 1 Aquatic Chronic 2	H314 H317 H411	GHS05 GHS07 GHS09 Dgr	H314 H317 H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
606-079-00-3	2- <i>n</i> -butyl-benzo[ <i>d</i> ]isothiazol-3-one	420-590-7	4299-07-4	Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H314 H317 H400 H410	GHS05 GHS07 GHS09 Dgr	H314 H317 H410			
606-080-00-9	Reaction product of: 3-hydroxy-5,7-di- <i>tert</i> -butylbenzofuran-2-one with <i>o</i> -xylene	417-100-9	—	Aquatic Chronic 4	H413		H413			
606-081-00-4	(3 $\beta$ , 5 $\alpha$ , 6 $\beta$ )-3-(acetyloxy)-5-bromo-6-hydroxy-androstan-17-one	419-790-7	4229-69-0	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
606-082-00-X	reaction mass of: butan-2-one oxime; syn- <i>O,O'</i> -di(butan-2-one oxime)diethoxysilane	406-930-7		STOT RE 1 Skin Sens. 1 Aquatic Chronic 3	H372 ** H317 H412	GHS08 GHS07 Dgr	H372 ** H317 H412			
606-083-00-5	2-chloro-5- <i>sec</i> -hexadecylhydroquinone	407-750-1	137193-60-3	Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 3	H319 H315 H317 H412	GHS07 Wng	H319 H315 H317 H412			
606-084-00-0	1-(4-methoxy-5-benzofuranyl)-3-phenyl-1,3-propanedione	414-540-3	484-33-3	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
606-085-00-6	(1 <i>R</i> ,4 <i>S</i> )-2-azabicyclo[2.2.1]hept-5-en-3-one	418-530-1	79200-56-9	Acute Tox. 4 * Eye Dam. 1 Skin Sens. 1	H302 H318 H317	GHS05 GHS07 Dgr	H302 H318 H317			
606-086-00-1	1-(3,3-dimethylcyclohexyl)pent-4-en-1-one	422-330-8	56973-87-6	Aquatic Chronic 2	H411	GHS09	H411			
606-087-00-7	6-ethyl-5-fluoro-4(3 <i>H</i> )-pyrimidone	422-460-5	137234-87-8	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
606-088-00-2	2,4,4,7-tetramethyl-6-octen-3-one	422-520-0	74338-72-0	Skin Irrit. 2 Aquatic Chronic 2	H315 H411	GHS07 GHS09 Wng	H315 H411			
606-089-00-8	reaction mass of: 1,4-diamino-2-chloro-3-phenoxyanthraquinone; 1,4-diamino-2,3-bis-phenoxyanthraquinone	423-220-2	12223-77-7	Aquatic Chronic 4	H413	—	H413			
606-091-00-9	6-chloro-5-(2-chloroethyl)-1,3-dihydroindol-2-one	421-320-0	118289-55-7	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
606-092-00-4	reaction mass of: (E)-oxacyclohexadec-12-en-2-one; (E)-oxacyclohexadec-13-en-2-one; a) (Z)-oxacyclohexadec-(12)-en-2-one and b) (Z)-oxacyclohexadec-(13)-en-2-one	422-320-3		Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
607-001-00-0	formic acid ... %	200-579-1	64-18-6	Skin Corr. 1A	H314	GHS05 Dgr	H314		Skin Corr. 1A; H314: C ≥ 90 % Skin Corr. 1B; H314: 10 % ≤ C < 90 % Skin Irrit. 2; H315: 2 % ≤ C < 10 % Eye Irrit. 2; H319: 2 % ≤ C < 10 %	B
607-002-00-6	acetic acid ... %	200-580-7	64-19-7	Flam. Liq. 3 Skin Corr. 1A	H226 H314	GHS02 GHS05 Dgr	H226 H314		Skin Corr. 1A; H314: C ≥ 90 % Skin Corr. 1B; H314: 25 % ≤ C < 90 % Skin Irrit. 2; H315: 10 % ≤ C < 25 % Eye Irrit. 2; H319: 10 % ≤ C < 25 %	B



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-003-00-1	chloroacetic acid	201-178-4	79-11-8	Acute Tox. 3 * Skin Corr. 1B Aquatic Acute 1	H301 H314 H400	GHS06 GHS05 GHS09 Dgr	H301 H314 H400			
607-004-00-7	TCA (ISO); trichloroacetic acid	200-927-2	76-03-9	Skin Corr. 1A Aquatic Acute 1 Aquatic Chronic 1	H314 H400 H410	GHS05 GHS09 Dgr	H314 H410		STOT SE 3; H335: C ≥ 1 %	
607-005-00-2	TCA-sodium (ISO); sodium trichloroacetate	211-479-2	650-51-1	STOT SE 3 Aquatic Acute 1 Aquatic Chronic 1	H335 H400 H410	GHS07 GHS09 Wng	H335 H410			
607-006-00-8	oxalic acid	205-634-3	144-62-7	Acute Tox. 4 * Acute Tox. 4 *	H312 H302	GHS07 Wng	H312 H302		*	
607-007-00-3	salts of oxalic acid	—	—	Acute Tox. 4 * Acute Tox. 4 *	H312 H302	GHS07 Wng	H312 H302		*	A
607-008-00-9	acetic anhydride	203-564-8	108-24-7	Flam. Liq. 3 Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1B	H226 H332 H302 H314	GHS02 GHS05 GHS07 Dgr	H226 H332 H302 H314		Skin Corr. 1B; H314: C ≥ 25 % Skin Irrit. 2; H315: 5 % ≤ C < 25 % Eye Dam. 1; H318: 5 % ≤ C < 25 % Eye Irrit. 2; H319: 1 % ≤ C < 5 % STOT SE 3; H335: C ≥ 5 %	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-009-00-4	phthalic anhydride	201-607-5	85-44-9	Acute Tox. 4 * STOT SE 3 Skin Irrit. 2 Eye Dam. 1 Resp. Sens. 1 Skin Sens. 1	H302 H335 H315 H318 H334 H317	GHS08 GHS05 GHS07 Dgr	H302 H335 H315 H318 H334 H317			
607-010-00-X	propionic anhydride	204-638-2	123-62-6	Skin Corr. 1B	H314	GHS05 Dgr	H314		Skin Corr. 1B; H314: C ≥ 25 % Skin Irrit. 2; H315: 10 % ≤ C < 25 % Eye Irrit. 2; H319: 10 % ≤ C < 25 %	
607-011-00-5	acetyl chloride	200-865-6	75-36-5	Flam. Liq. 2 Skin Corr. 1B	H225 H314	GHS02 GHS05 Dgr	H225 H314	EUH014		
607-012-00-0	benzoyl chloride	202-710-8	98-88-4	Skin Corr. 1B	H314	GHS05 Dgr	H314			
607-013-00-6	dimethyl carbonate	210-478-4	616-38-6	Flam. Liq. 2	H225	GHS02 Dgr	H225			
607-014-00-1	methyl formate	203-481-7	107-31-3	Flam. Liq. 1 Acute Tox. 4 * Acute Tox. 4 * Eye Irrit. 2 STOT SE 3	H224 H332 H302 H319 H335	GHS02 GHS07 Dgr	H224 H332 H302 H319 H335			
607-015-00-7	ethyl formate	203-721-0	109-94-4	Flam. Liq. 2 Acute Tox. 4 * Acute Tox. 4 * Eye Irrit. 2 STOT SE 3	H225 H332 H302 H319 H335	GHS02 GHS07 Dgr	H225 H332 H302 H319 H335			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etiketgeving			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-016-00-2	propyl formate; [1] isopropyl formate [2]	203-798-0 [1] 210-901-2 [2]	110-74-7 [1] 625-55-8 [2]	Flam. Liq. 2 Eye Irrit. 2 STOT SE 3 STOT SE 3	H225 H319 H335 H336	GHS02 GHS07 Dgr	H225 H319 H335 H336			C
607-017-00-8	butyl formate; [1] tert-butyl formate; [2] isobutyl formate [3]	209-772-5 [1] 212-105-0 [2] 208-818-1 [3]	592-84-7 [1] 762-75-4 [2] 542-55-2 [3]	Flam. Liq. 2 Eye Irrit. 2 STOT SE 3	H225 H319 H335	GHS02 GHS07 Dgr	H225 H319 H335			C
607-018-00-3	isopentyl formate; [1] 2-methylbutyl formate [2]	203-769-2 [1] 252-343-2 [2]	110-45-2 [1] 35073-27-9 [2]	Flam. Liq. 2 Eye Irrit. 2 STOT SE 3	H225 H319 H335	GHS02 GHS07 Dgr	H225 H319 H335			C
607-019-00-9	methyl chloroformate	201-187-3	79-22-1	Flam. Liq. 2 Acute Tox. 2 * Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1B	H225 H330 H312 H302 H314	GHS02 GHS06 GHS05 Dgr	H225 H330 H312 H302 H314			
607-020-00-4	ethyl chloroformate	208-778-5	541-41-3	Flam. Liq. 2 Acute Tox. 2 * Acute Tox. 4 * Skin Corr. 1B	H225 H330 H302 H314	GHS02 GHS06 GHS05 Dgr	H225 H330 H302 H314			
607-021-00-X	methyl acetate	201-185-2	79-20-9	Flam. Liq. 2 Eye Irrit. 2 STOT SE 3	H225 H319 H336	GHS02 GHS07 Dgr	H225 H319 H336	EUH066		
607-022-00-5	ethyl acetate	205-500-4	141-78-6	Flam. Liq. 2 Eye Irrit. 2 STOT SE 3	H225 H319 H336	GHS02 GHS07 Dgr	H225 H319 H336	EUH066		
607-023-00-0	vinyl acetate	203-545-4	108-05-4	Flam. Liq. 2	H225	GHS02 Dgr	H225			D

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-024-00-6	propyl acetate; [1] isopropyl acetate [2]	203-686-1 [1] 203-561-1 [2]	109-60-4 [1] 108-21-4 [2]	Flam. Liq. 2 Eye Irrit. 2 STOT SE 3	H225 H319 H336	GHS02 GHS07 Dgr	H225 H319 H336	EUH066		C
607-025-00-1	n-butyl acetate	204-658-1	123-86-4	Flam. Liq. 3 STOT SE 3	H226 H336	GHS02 GHS07 Wng	H226 H336	EUH066		
607-026-00-7	sec-butyl acetate; [1] isobutyl acetate; [2] tert-butyl acetate [3]	203-300-1 [1] 203-745-1 [2] 208-760-7 [3]	105-46-4 [1] 110-19-0 [2] 540-88-5 [3]	Flam. Liq. 2	H225	GHS02 Dgr	H225	EUH066		C
607-027-00-2	methyl propionate	209-060-4	554-12-1	Flam. Liq. 2 Acute Tox. 4 *	H225 H332	GHS02 GHS07 Dgr	H225 H332			
607-028-00-8	ethyl propionate	203-291-4	105-37-3	Flam. Liq. 2	H225	GHS02 Dgr	H225			
607-029-00-3	n-butyl propionate; [1] sec-butyl propionate; [2] iso-butyl propionate [3]	209-669-5 [1] [2] 208-746-0 [3]	590-01-2 [1] 591-34-4 [2] 540-42-1 [3]	Flam. Liq. 3	H226	GHS02 Wng	H226			C
607-030-00-9	propyl propionate	203-389-7	106-36-5	Flam. Liq. 3 Acute Tox. 4 *	H226 H332	GHS02 GHS07 Wng	H226 H332			
607-031-00-4	butyl butyrate	203-656-8	109-21-7	Flam. Liq. 3	H226	GHS02 Wng	H226			C

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-032-00-X	ethyl acrylate	205-438-8	140-88-5	Flam. Liq. 2 Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Skin Sens. 1	H225 H332 H312 H302 H319 H335 H315 H317	GHS02 GHS07 Dgr	H225 H332 H312 H302 H319 H335 H315 H317		Skin Irrit. 2; H315: C ≥ 5 % Eye Irrit. 2; H319: C ≥ 5 % STOT SE 3; H335: C ≥ 5 %	D
607-033-00-5	n-butyl methacrylate	202-615-1	97-88-1	Flam. Liq. 3 Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Skin Sens. 1	H226 H319 H335 H315 H317	GHS02 GHS07 Wng	H226 H319 H335 H315 H317			D
607-034-00-0	methyl acrylate; methyl propenoate	202-500-6	96-33-3	Flam. Liq. 2 Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Skin Sens. 1	H225 H332 H312 H302 H319 H335 H315 H317	GHS02 GHS07 Dgr	H225 H332 H312 H302 H319 H335 H315 H317			D
607-035-00-6	methyl methacrylate; methyl 2-methylprop-2-enoate; methyl 2-methylpropenoate	201-297-1	80-62-6	Flam. Liq. 2 STOT SE 3 Skin Irrit. 2 Skin Sens. 1	H225 H335 H315 H317	GHS02 GHS07 Dgr	H225 H335 H315 H317			D
607-036-00-1	2-methoxyethyl acetate; methylglycol acetate	203-772-9	110-49-6	Repr. 1B Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 *	H360- FD H332 H312 H302	GHS08 GHS07 Dgr	H360FD H332 H312 H302			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-037-00-7	2-ethoxyethyl acetate; ethylglycol acetate	203-839-2	111-15-9	Repr. 1B Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 *	H360FD H332 H312 H302	GHS08 GHS07 Dgr	H360FD H332 H312 H302			
607-038-00-2	2-butoxyethyl acetate; butylglycol acetate	203-933-3	112-07-2	Acute Tox. 4 * Acute Tox. 4 *	H332 H312	GHS07 Wng	H332 H312			
607-039-00-8	2,4-D (ISO); 2,4-dichlorophenoxyacetic acid	202-361-1	94-75-7	Acute Tox. 4 * STOT SE 3 Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 3	H302 H335 H318 H317 H412	GHS05 GHS07 Dgr	H302 H335 H318 H317 H412			
607-040-00-3	salts of 2,4-D	—	—	Acute Tox. 4 * Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H302 H318 H317 H411	GHS05 GHS07 GHS09 Dgr	H302 H318 H317 H411			A
607-041-00-9	2,4,5-T (ISO); 2,4,5-trichlorophenoxy acetic acid	202-273-3	93-76-5	Acute Tox. 4 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H302 H319 H335 H315 H400 H410	GHS07 GHS09 Wng	H302 H319 H335 H315 H410			
607-042-00-4	salts and esters of 2,4,5-T; salts and esters of 2,4,5-trichlorophenoxy acetic acid	—	—	Acute Tox. 4 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H302 H319 H335 H315 H400 H410	GHS07 GHS09 Wng	H302 H319 H335 H315 H410			A

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etiketgeving			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-043-00-X	dicamba (ISO); 2,5-dichloro-6-methoxybenzoic acid; 3,6-dichloro-2-methoxybenzoic acid	217-635-6	1918-00-9	Acute Tox. 4 * Eye Dam. 1 Aquatic Chronic 3	H302 H318 H412	GHS05 GHS07 Dgr	H302 H318 H412			
607-044-00-5	3,6-dichloro- <i>o</i> -anisic acid, compound with dimethylamine (1:1); [1] potassium 3,6-dichloro- <i>o</i> -anisate [2]	218-951-7 [1] 233-002-7 [2]	2300-66-5 [1] 10007-85-9 [2]	Eye Irrit. 2 Aquatic Chronic 3	H319 H412	GHS07 Wng	H319 H412			
607-045-00-0	dichlorprop (ISO); 2-(2,4-dichlorophenoxy) propionic acid	204-390-5	120-36-5	Acute Tox. 4 * Acute Tox. 4 * Skin Irrit. 2 Eye Dam. 1	H312 H302 H315 H318	GHS05 GHS07 Dgr	H312 H302 H315 H318			
607-046-00-6	salts of dichlorprop	—	—	Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 *	H332 H312 H302	GHS07 Wng	H332 H312 H302			A
607-047-00-1	fenoprop (ISO); 2-(2,4,5-trichlorophenoxy)propionic acid	202-271-2	93-72-1	Acute Tox. 4 * Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H302 H315 H400 H410	GHS07 GHS09 Wng	H302 H315 H410			
607-048-00-7	salts of fenoprop; salts of 2-(2,4,5-trichlorophenoxy)propionic acid	—	—	Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H332 H312 H302 H400 H410	GHS07 GHS09 Wng	H332 H312 H302 H410			A
607-049-00-2	mecoprop (ISO); 2-(4-chloro- <i>o</i> -tolylxy) propionic acid; ( <i>RS</i> )-2-(4-chloro- <i>o</i> -tolylxy)propionic acid; [1] 2-(4-chloro-2-methylphenoxy)propionic acid [2]	230-386-8 [1] 202-264-4 [2]	7085-19-0 [1] 708519-0 [2]	Acute Tox. 4 * Skin Irrit. 2 Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H315 H318 H400 H410	GHS05 GHS07 GHS09 Dgr	H302 H315 H318 H410		M=100	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-050-00-8	salts of mecoprop	—	—	Acute Tox. 4 * Skin Irrit. 2 Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H315 H318 H400 H410	GHS05 GHS07 GHS09 Dgr	H302 H315 H318 H410			A
607-051-00-3	MCPA (ISO); 4-chloro- <i>o</i> -toloxyacetic acid	202-360-6	94-74-6	Acute Tox. 4 * Skin Irrit. 2 Eye Dam. 1	H302 H315 H318	GHS05 GHS07 Dgr	H302 H315 H318			
607-052-00-9	salts and esters of MCPA	—	—	Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 *	H332 H312 H302	GHS07 Wng	H332 H312 H302			A
607-053-00-4	MCPB (ISO); 4-(4-chloro- <i>o</i> -toloxy) butyric acid	202-365-3	94-81-5	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
607-054-00-X	salts and esters of MCPB	—	—	Acute Tox. 4 *	H302	GHS07 Wng	H302			A
607-055-00-5	endothal-sodium (ISO); disodium 7-oxabicyclo(2,2,1)heptane-2,3-dicarboxylate	204-959-8	129-67-9	Acute Tox. 3 * Acute Tox. 4 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H301 H312 H319 H335 H315	GHS06 Dgr	H301 H312 H319 H335 H315			
607-056-00-0	warfarin (ISO); [1] ( <i>S</i> )-4-hydroxy-3-(3-oxo-1-phenylbutyl)-2-benzopyrone; [2] ( <i>R</i> )-4-hydroxy-3-(3-oxo-1-phenylbutyl)-2-benzopyrone [3]	201-377-6 [1] 226-907-3 [2] 226-908-9 [3]	81-81-2 [1] 5543-57-7 [2] 5543-58-8 [3]	Repr. 1A STOT RE 1 Aquatic Chronic 3	H360D *** H372 ** H412	GHS08 Dgr	H360D *** H372 ** H412			
607-057-00-6	coumachlor (ISO); 3-[1-(4-chlorophenyl)-3-oxobutyl]-4-hydroxycoumarin	201-378-1	81-82-3	STOT RE 2 * Aquatic Chronic 3	H373 ** H412	GHS08 Wng	H373 ** H412			



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-058-00-1	coumafuryl (ISO); fumarin; (RS)-3-(1-(2-furyl)-3-oxobutyl)4-hydroxycoumarin; 4-hydroxy-3-[3-oxo-1-(2-furyl) butyl]coumarin	204-195-5	117-52-2	Acute Tox. 3 * STOT RE 1 Aquatic Chronic 3	H301 H372 ** H412	GHS06 GHS08 Dgr	H301 H372 ** H412			
607-059-00-7	coumatetralyl; 4-hydroxy-3-(1,2,3,4-tetrahydro-1-naphthyl)coumarin	227-424-0	5836-29-3	Acute Tox. 1 Acute Tox. 2 * STOT RE 1 Aquatic Chronic 3	H310 H300 H372 ** H412	GHS06 GHS08 Dgr	H310 H300 H372 ** H412			
607-060-00-2	dicoumarol; 4,4'-dihydroxy-3,3'-methylenebis(2H-chromen-2-one)	200-632-9	66-76-2	STOT RE 1 Acute Tox. 4 * Aquatic Chronic 2	H372 ** H302 H411	GHS08 GHS07 GHS09 Dgr	H372 ** H302 H411			
607-061-00-8	acrylic acid; prop-2-enoic acid	201-177-9	79-10-7	Flam. Liq. 3 Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1A Aquatic Acute 1	H226 H332 H312 H302 H314 H400	GHS02 GHS05 GHS07 GHS09 Dgr	H226 H332 H312 H302 H314 H400	STOT SE 3; H335: C ≥ 1 %	D	
607-062-00-3	n-butyl acrylate	205-480-7	141-32-2	Flam. Liq. 3 Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Skin Sens. 1	H226 H319 H335 H315 H317	GHS02 GHS07 Wng	H226 H319 H335 H315 H317			D
607-063-00-9	isobutyric acid	201-195-7	79-31-2	Acute Tox. 4 * Acute Tox. 4 *	H312 H302	GHS07 Wng	H312 H302			
607-064-00-4	benzyl chloroformate	207-925-0	501-53-1	Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H314 H400 H410	GHS05 GHS09 Dgr	H314 H410	STOT SE 3; H335: C ≥ 5 %		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-065-00-X	bromoacetic acid	201-175-8	79-08-3	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Skin Corr. 1A Aquatic Acute 1	H331 H311 H301 H314 H400	GHS06 GHS05 GHS09 Dgr	H331 H311 H301 H314 H400			
607-066-00-5	dichloroacetic acid	201-207-0	79-43-6	Skin Corr. 1A Aquatic Acute 1	H314 H400	GHS05 GHS09 Dgr	H314 H400			
607-067-00-0	dichloroacetyl chloride	201-199-9	79-36-7	Skin Corr. 1A Aquatic Acute 1	H314 H400	GHS05 GHS09 Dgr	H314 H400			
607-068-00-6	iodoacetic acid	200-590-1	64-69-7	Acute Tox. 3 * Skin Corr. 1A	H301 H314	GHS06 GHS05 Dgr	H301 H314			
607-069-00-1	ethyl bromoacetate	203-290-9	105-36-2	Acute Tox. 2 * Acute Tox. 1 Acute Tox. 2 *	H330 H310 H300	GHS06 Dgr	H330 H310 H300			
607-070-00-7	ethyl chloroacetate	203-294-0	105-39-5	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Aquatic Acute 1	H331 H311 H301 H400	GHS06 GHS09 Dgr	H331 H311 H301 H400			
607-071-00-2	ethyl methacrylate	202-597-5	97-63-2	Flam. Liq. 2 Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Skin Sens. 1	H225 H319 H335 H315 H317	GHS02 GHS07 Dgr	H225 H319 H335 H315 H317			D
607-072-00-8	2-hydroxyethyl acrylate	212-454-9	818-61-1	Acute Tox. 3 * Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1	H311 H314 H317 H400	GHS06 GHS05 GHS09 Dgr	H311 H314 H317 H400		* Skin Sens. 1; H317: C ≥ 0,2 %	D

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-073-00-3	4-CPA (ISO); 4-chlorophenoxyacetic acid	204-581-3	122-88-3	Acute Tox. 4 *	H302	GHS07 Wng	H302			
607-074-00-9	chlorfenac(ISO); 2,3,6-trichlorophenylacetic acid	201-599-3	85-34-7	Acute Tox. 4 * Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
607-075-00-4	chlorfenprop-methyl; methyl 2-chloro-3-(4-chlorophenyl)propionate	238-413-5	14437-17-3	Acute Tox. 4 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H400 H410	GHS07 GHS09 Wng	H312 H302 H410			
607-076-00-X	dodine(ISO); dodecylguanidinium acetate	219-459-5	2439-10-3	Acute Tox. 4 * Eye Irrit. 2 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H302 H319 H315 H400 H410	GHS07 GHS09 Wng	H302 H319 H315 H410			
607-077-00-5	erbon (ISO); 2-(2,4,5-trichlorophenoxy)ethyl 2,2-dichloropropionate	—	136-25-4	Acute Tox. 4 * Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
607-078-00-0	fluenetil (ISO); 2-fluoroethyl biphenyl-4-ylacetate	—	4301-50-2	Acute Tox. 1 Acute Tox. 2 *	H310 H300	GHS06 Dgr	H310 H300			
607-079-00-6	kelevan (ISO); ethyl 5-(perchloro-5-hydroxypentacyclo [5,3,0,0 <sup>2,6</sup> ,0 <sup>3,9</sup> ,0 <sup>4,8</sup> ]decan-5-yl)-4-oxopentanoate; ethyl 5-(1,2,3,5,6,7,8,9,10,10-decachloro-4-hydroxypentacyclo(5,2,1,0 <sup>2,6</sup> ,0 <sup>3,9</sup> ,0 <sup>5,8</sup> )dec-4-yl)-4-oxoalderate	—	4234-79-1	Acute Tox. 3 * Acute Tox. 4 * Aquatic Chronic 2	H311 H302 H411	GHS06 GHS09 Dgr	H311 H302 H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-080-00-1	chloroacetyl chloride	201-171-6	79-04-9	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 1 Skin Corr. 1A Aquatic Acute 1	H331 H311 H301 H372 ** H314 H400	GHS06 GHS08 GHS05 GHS09 Dgr	H331 H311 H301 H372 ** H314 H400	EUH014 EUH029		
607-081-00-7	fluoroacetic acid	205-631-7	144-49-0	Acute Tox. 2 * Aquatic Acute 1	H300 H400	GHS06 GHS09 Dgr	H300 H400			
607-082-00-2	fluoroacetates, soluble	—	—	Acute Tox. 2 * Aquatic Acute 1	H300 H400	GHS06 GHS09 Dgr	H300 H400			A
607-083-00-8	2,4-DB (ISO); 4-(2,4-dichlorophenoxy)butyric acid	202-366-9	94-82-6	Acute Tox. 4 * Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
607-084-00-3	salts of 2,4-DB	—	—	Acute Tox. 4 * Eye Dam. 1 Aquatic Chronic 2	H302 H318 H411	GHS05 GHS07 GHS09 Dgr	H302 H318 H411			A
607-085-00-9	benzyl benzoate	204-402-9	120-51-4	Acute Tox. 4 *	H302	GHS07 Wng	H302			
607-086-00-4	diallyl phthalate	205-016-3	131-17-9	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
607-088-00-5	methacrylic acid; 2-methylpropenoic acid	201-204-4	79-41-4	Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1A	H312 H302 H314	GHS05 GHS07 Dgr	H312 H302 H314		STOT SE 3; H335: C ≥ 1 %	D

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-089-00-0	propionic acid ... %	201-176-3	79-09-4	Skin Corr. 1B	H314	GHS05 Dgr	H314		Skin Corr. 1B; H314: C ≥ 25 % Skin Irrit. 2; H319: 10 % ≤ C < 25 % Eye Irrit. 2; H319: 10 % ≤ C < 25 % STOT SE 3; H335: C ≥ 10 %	B
607-090-00-6	thioglycolic acid	200-677-4	68-11-1	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Skin Corr. 1B	H331 H311 H301 H314	GHS06 GHS05 Dgr	H331 H311 H301 H314		*	
607-091-00-1	trifluoroacetic acid . . . %	200-929-3	76-05-1	Acute Tox. 4 *	H332	GHS05	H332		*	B
				Skin Corr. 1A Aquatic Chronic 3	H314 H412	GHS07 Dgr	H314 H412			
607-092-00-7	methyl lactate; [1] methyl (±)-lactate; [2] methyl (R)-lactate; [3] methyl (S)-(-)-lactate [4]	208-930-0 [1] 218-449-8 [2] 241-420-6 [3] 248-704-9 [4]	547-64-8 [1] 2155-30-8 [2] 17392-83-5 [3] 27871-49-4 [4]	Flam. Liq. 3 Eye Irrit. 2 STOT SE 3	H226 H319 H335	GHS02 GHS07 Wng	H226 H319 H335			C
607-093-00-2	propionyl chloride	201-170-0	79-03-8	Flam. Liq. 2 Skin Corr. 1B	H225 H314	GHS02 GHS05 Dgr	H225 H314	EUH014		B D

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etiketgeving			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-094-00-8	peracetic acid . . . %	201-186-8	79-21-0	Flam. Liq. 3 Org. Perox. D *** Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1A Aquatic Acute 1	H226 H242 H332 H312 H302 H314 H400	GHS02 GHS05 GHS07 GHS09 Dgr	H226 H242 H332 H312 H302 H314 H400		* STOT SE 3; H335: C ≥ 1 %	B D
607-095-00-3	maleic acid	203-742-5	110-16-7	Acute Tox. 4 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H302 H319 H335 H315	GHS07 Wng	H302 H319 H335 H315			
607-096-00-9	maleic anhydride	203-571-6	108-31-6	Acute Tox. 4 * Skin Corr. 1B Resp. Sens. 1 Skin Sens. 1	H302 H314 H334 H317	GHS08 GHS05 GHS07 Dgr	H302 H314 H334 H317			
607-097-00-4	benzene-1,2,4-tricarboxylic acid 1,2-anhydride; trimellitic anhydride	209-008-0	552-30-7	STOT SE 3 Eye Dam. 1 Resp. Sens. 1 Skin Sens. 1	H335 H318 H334 H317	GHS08 GHS05 GHS07 Dgr	H335 H318 H334 H317			
607-098-00-X	benzene-1,2:4,5-tetracarboxylic dianhydride; benzene-1,2:4,5-tetracarboxylic dianhydride; pyromellitic dianhydride	201-898-9	89-32-7	Eye Dam. 1 Resp. Sens. 1 Skin Sens. 1	H318 H334 H317	GHS08 GHS05 Dgr	H318 H334 H317			
607-099-00-5	1,2,3,6-tetrahydrophthalic anhydride; [1] cis-1,2,3,6-tetrahydrophthalic anhydride; [2] 3,4,5,6-tetrahydrophthalic anhydride; [3] tetrahydrophthalic anhydride [4]	201-605-4 [1] 213-308-7 [2] 219-374-3 [3] 247-570-9 [4]	85-43-8 [1] 935-79-5 [2] 2426-02-0 [3] 26266-63-7 [4]	Eye Dam. 1 Resp. Sens. 1 Skin Sens. 1 Aquatic Chronic 3	H318 H334 H317 H412	GHS08 GHS05 Dgr	H318 H334 H317 H412			C

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-100-00-9	benzophenone-3,3',4,4'-tetracarboxylic dianhydride; 4,4'-carbonyldi(phthalic anhydride)	219-348-1	2421-28-5	Eye Irrit. 2 STOT SE 3	H319 H335	GHS07 Wng	H319 H335		Eye Irrit. 2; H319: C ≥ 1 % STOT SE 3; H335: C ≥ 1 %	
607-101-00-4	1,4,5,6,7,7-hexachlorobicyclo [2,2,1]hept-5-ene-2,3-dicarboxylic anhydride chlorendic anhydride	204-077-3	115-27-5	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H319 H335 H315	GHS07 Wng	H319 H335 H315		Skin Irrit. 2; H315: C ≥ 1 % Eye Irrit. 2; H319: C ≥ 1 % STOT SE 3; H335: C ≥ 1 %	
607-102-00-X	cyclohexane-1,2-dicarboxylic anhydride; [1] <i>cis</i> -cyclohexane-1,2-dicarboxylic anhydride; [2] <i>trans</i> -cyclohexane-1,2-dicarboxylic anhydride [3]	201-604-9 [1] 236-086-3 [2] 238-009-9 [3]	85-42-7 [1] 13149-00-3 [2] 14166-21-3 [3]	Eye Dam. 1 Resp. Sens. 1 Skin Sens. 1	H318 H334 H317	GHS08 GHS05 Dgr	H318 H334 H317			C
607-103-00-5	succinic anhydride	203-570-0	108-30-5	Eye Irrit. 2 STOT SE 3	H319 H335	GHS07 Wng	H319 H335		Eye Irrit. 2; H319: C ≥ 1 % STOT SE 3; H335: C ≥ 1 %	
607-104-00-0	cyclopentane-1,2,3,4-tetracarboxylic dianhydride	227-964-7	6053-68-5	Eye Irrit. 2 STOT SE 3	H319 H335	GHS07 Wng	H319 H335		Eye Irrit. 2; H319: C ≥ 1 % STOT SE 3; H335: C ≥ 1 %	
607-105-00-6	8,9,10-trinorborn-5-ene-2,3-dicarboxylic anhydride; [1] 1,2,3,6-tetrahydro-3,6-methanophthalic anhydride; [2] (1 $\alpha$ ,2 $\alpha$ ,3 $\beta$ ,6 $\beta$ )-1,2,3,6-tetrahydro-3,6-methanophthalic anhydride [3]	204-957-7 [1] 212-557-9 [2] 220-384-5 [3]	129-64-6 [1] 826-62-0 [2] 2746-19-2 [3]	Eye Dam. 1 Resp. Sens. 1 Skin Sens. 1	H318 H334 H317	GHS08 GHS05 Dgr	H318 H334 H317			C
607-106-00-1	8,9-dinorborn-5-ene-2,3-dicarboxylic anhydride	—	123748-85-6	Acute Tox. 4 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Resp. Sens. 1	H302 H319 H335 H315 H334	GHS08 GHS07 Dgr	H302 H319 H335 H315 H334		STOT SE 3; H335: C ≥ 10 %	C

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-107-00-7	2-ethylhexyl acrylate	203-080-7	103-11-7	STOT SE 3 Skin Irrit. 2 Skin Sens. 1	H335 H315 H317	GHS07 Wng	H335 H315 H317			D
607-108-00-2	2-hydroxy-1-methylethylacrylate; [1] 2-hydroxypropylacrylate; [2] acrylic acid, monoester with propane-1,2-diol [3]	220-852-9 [1] 213-663-8 [2] 247-118-0 [3]	2918-23-2 [1] 999-61-1 [2] 25584-83-2 [3]	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Skin Corr. 1B Skin Sens. 1	H331 H311 H301 H314 H317	GHS06 GHS05 Dgr	H331 H311 H301 H314 H317		* Skin Sens. 1; H317: C ≥ 0,2 %	C D
607-109-00-8	hexamethylene diacrylate; hexane-1,6-diol diacrylate	235-921-9	13048-33-4	Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H319 H315 H317	GHS07 Wng	H319 H315 H317			D
607-110-00-3	pentaerythritol triacrylate	222-540-8	3524-68-3	Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H319 H315 H317	GHS07 Wng	H319 H315 H317			D
607-111-00-9	2,2-bis(acryloyloxymethyl)butyl acrylate; trimethylolpropane triacrylate	239-701-3	15625-89-5	Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H319 H315 H317	GHS07 Wng	H319 H315 H317			D
607-112-00-4	2,2-dimethyltrimethylene diacrylate; neopentyl glycol diacrylate	218-741-5	2223-82-7	Acute Tox. 3 * Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H311 H319 H315 H317	GHS06 Dgr	H311 H319 H315 H317		*	D
607-113-00-X	isobutyl methacrylate	202-613-0	97-86-9	Flam. Liq. 3 Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1	H226 H319 H335 H315 H317 H400	GHS02 GHS07 GHS09 Wng	H226 H319 H335 H315 H317 H400			D
607-114-00-5	ethylene dimethacrylate	202-617-2	97-90-5	STOT SE 3 Skin Sens. 1	H335 H317	GHS07 Wng	H335 H317		STOT SE 3; H335: C ≥ 10 %	D



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-115-00-0	isobutyl acrylate	203-417-8	106-63-8	Flam. Liq. 3 Acute Tox. 4 * Acute Tox. 4 * Skin Irrit. 2 Skin Sens. 1	H226 H332 H312 H315 H317	GHS02 GHS07 Wng	H226 H332 H312 H315 H317			D
607-116-00-6	cyclohexyl acrylate	221-319-3	3066-71-5	STOT SE 3 Skin Irrit. 2 Aquatic Chronic 2	H335 H315 H411	GHS07 GHS09 Wng	H335 H315 H411		STOT SE 3; H335: C ≥ 10 %	D
607-117-00-1	2,3-epoxypropyl acrylate; glycidyl acrylate	203-440-3	106-90-1	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Skin Corr. 1B Skin Sens. 1	H331 H311 H301 H314 H317	GHS06 GHS05 Dgr	H331 H311 H301 H314 H317		* Skin Sens. 1; H317: C ≥ 0,2 %	D
607-118-00-7	1-methyltrimethylene diacrylate; 1,3-butylene glycol diacrylate	243-105-9	19485-03-1	Acute Tox. 4 * Skin Corr. 1B Skin Sens. 1	H312 H314 H317	GHS05 GHS07 Dgr	H312 H314 H317			D
607-119-00-2	tetramethylene diacrylate; 1,4-butylene glycol diacrylate	213-979-6	1070-70-8	Acute Tox. 4 * Skin Corr. 1B Skin Sens. 1	H312 H314 H317	GHS05 GHS07 Dgr	H312 H314 H317			D
607-120-00-8	2,2'-oxydiethyl diacrylate; diethylene glycol diacrylate	223-791-6	4074-88-8	Acute Tox. 3 * Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H311 H319 H315 H317	GHS06 Dgr	H311 H319 H315 H317		* Skin Sens. 1; H317: C ≥ 0,2 %	D
607-121-00-3	8,9,10-trinorborn-2-yl acrylate	—	10027-06-2	Acute Tox. 4 * Skin Irrit. 2 Skin Sens. 1	H312 H315 H317	GHS07 Wng	H312 H315 H317			D
607-122-00-9	pentaerythritol tetraacrylate	225-644-1	4986-89-4	Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H319 H315 H317	GHS07 Wng	H319 H315 H317			D

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-123-00-4	2,3-epoxypropyl methacrylate; glycidyl methacrylate	203-441-9	106-91-2	Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H332 H312 H302 H319 H315 H317	GHS07 Wng	H332 H312 H302 H319 H315 H317			D
607-124-00-X	2-hydroxyethyl methacrylate	212-782-2	868-77-9	Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H319 H315 H317	GHS07 Wng	H319 H315 H317			D
607-125-00-5	2-hydroxypropyl methacrylate; [1] 3-hydroxypropyl methacrylate [2]	213-090-3 [1] 220-426-2 [2]	923-26-2 [1] 2761-09-3 [2]	Eye Irrit. 2 Skin Sens. 1	H319 H317	GHS07 Wng	H319 H317			C D
607-126-00-0	2,2'-(ethylenedioxy)diethyl diacrylate; triethylene glycol diacrylate	216-853-9	1680-21-3	Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H319 H315 H317	GHS07 Wng	H319 H315 H317			D
607-127-00-6	2-diethylaminoethyl methacrylate	203-275-7	105-16-8	Acute Tox. 4 * Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H332 H319 H315 H317	GHS07 Wng	H332 H319 H315 H317			D
607-128-00-1	2-tert-butylaminoethyl methacrylate	223-228-4	3775-90-4	Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H319 H315 H317	GHS07 Wng	H319 H315 H317			D
607-129-00-7	ethyl lactate; ethyl DL-lactate; [1] ethyl (S)-2-hydroxypropionate; ethyl L-lactate; ethyl-(S)-lactate [2]	202-598-0 [1] 211-694-1 [2]	97-64-3 [1] 687-47-8 [2]	Flam. Liq. 3 STOT SE 3 Eye Dam. 1	H226 H335 H318	GHS02 GHS05 GHS07 Dgr	H226 H335 H318			C

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-130-00-2	pentyl acetate; [1] isopentyl acetate; [2] 1-methylbutyl acetate; [3] 2-methylbutyl acetat; [4] 2(or 3)-methylbutyl acetate [5]	211-047-3 [1] 204-662-3 [2] 210-946-8 [3] 210-843-8 [4] 282-263-3 [5]	628-63-7 [1] 123-92-2 [2] 626-38-0 [3] 624-41-9 [4] 84145-37-9 [5]	Flam. Liq. 3	H226	GHS02 Wng	H226	EUH066		C
607-131-00-8	isopentyl propionate; [1] pentyl propionate; [2] 2-methylbutyl propionate [3]	203-322-1 [1] 210-852-7 [2] 219-449-0 [3]	105-68-0 [1] 624-54-4 [2] 2438-20-2 [3]	Flam. Liq. 3	H226	GHS02 Wng	H226			C
607-132-00-3	2-dimethylaminoethyl methacrylate	220-688-8	2867-47-2	Acute Tox. 4 * Acute Tox. 4 * Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H312 H302 H319 H315 H317	GHS07 Wng	H312 H302 H319 H315 H317			D
607-133-00-9	monoalkyl or monoaryl or monoalkylaryl esters of acrylic acid with the exception of those specified elsewhere in this Annex	—	—	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Chronic 2	H319 H335 H315 H411	GHS07 GHS09 Wng	H319 H335 H315 H411		STOT SE 3; H335: C ≥ 10 %	A
607-134-00-4	monoalkyl or monoaryl or monoalkylaryl esters of methacrylic acid with the exception of those specified elsewhere in this Annex	—	—	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H319 H335 H315	GHS07 Wng	H319 H335 H315		STOT SE 3; H335: C ≥ 10 %	A
607-135-00-X	butyric acid	203-532-3	107-92-6	Skin Corr. 1B	H314	GHS05 Dgr	H314			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-136-00-5	butyryl chloride	205-498-5	141-75-3	Flam. Liq. 2 Skin Corr. 1B	H225 H314	GHS02 GHS05 Dgr	H225 H314			
607-137-00-0	methyl acetoacetate	203-299-8	105-45-3	Eye Irrit. 2	H319	GHS07 Wng	H319			
607-138-00-6	butyl chloroformate; chloroformic acid butyl ester	209-750-5	592-34-7	Flam. Liq. 3 Acute Tox. 3 * Skin Corr. 1B	H226 H331 H314	GHS02 GHS06 GHS05 Dgr	H226 H331 H314			
607-139-00-1	2-chloropropionic acid	209-952-3	598-78-7	Acute Tox. 4 * Skin Corr. 1A	H302 H314	GHS05 GHS07 Dgr	H302 H314			
607-140-00-7	isobutyryl chloride	201-194-1	79-30-1	Flam. Liq. 2 Skin Corr. 1A	H225 H314	GHS02 GHS05 Dgr	H225 H314			
607-141-00-2	oxydiethylene bis(chloroformate)	203-430-9	106-75-2	Acute Tox. 4 * Skin Irrit. 2 Eye Dam. 1 Aquatic Chronic 2	H302 H315 H318 H411	GHS05 GHS07 GHS09 Dgr	H302 H315 H318 H411			
607-142-00-8	propyl chloroformate; chloroformic acid propylester; <i>n</i> -propyl chloroformate	203-687-7	109-61-5	Flam. Liq. 2 Acute Tox. 3 * Skin Corr. 1B	H225 H331 H314	GHS02 GHS06 GHS05 Dgr	H225 H331 H314			
607-143-00-3	valeric acid	203-677-2	109-52-4	Skin Corr. 1B Aquatic Chronic 3	H314 H412	GHS05 Dgr	H314 H412			
607-144-00-9	adipic acid	204-673-3	124-04-9	Eye Irrit. 2	H319	GHS07 Wng	H319			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-145-00-4	methanesulphonic acid	200-898-6	75-75-2	Skin Corr. 1B	H314	GHS05 Dgr	H314			
607-146-00-X	fumaric acid	203-743-0	110-17-8	Eye Irrit. 2	H319	GHS07 Wng	H319			
607-147-00-5	oxalic acid diethylester; diethyl oxalate	202-464-1	95-92-1	Acute Tox. 4 * Eye Irrit. 2	H302 H319	GHS07 Wng	H302 H319			
607-148-00-0	guanidinium chloride; guanadine hydrochloride	200-002-3	50-01-1	Acute Tox. 4 * Eye Irrit. 2 Skin Irrit. 2	H302 H319 H315	GHS07 Wng	H302 H319 H315			
607-149-00-6	urethane (INN); ethyl carbamate	200-123-1	51-79-6	Carc. 1B	H350	GHS08 Dgr	H350			
607-150-00-1	endothal (ISO); 7-oxabicyclo(2,2,1)heptane-2,3-dicarboxylic acid	205-660-5	145-73-3	Acute Tox. 3 * Acute Tox. 4 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H301 H312 H319 H335 H315	GHS06 Dgr	H301 H312 H319 H335 H315			
607-151-00-7	propargite (ISO); 2-(4-tert-butylphenoxy) cyclohexyl prop-2-ynyl sulphite	219-006-1	2312-35-8	Carc. 2 Acute Tox. 3 * Skin Irrit. 2 Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H351 H331 H315 H318 H400 H410	GHS06 GHS08 GHS05 GHS09 Dgr	H351 H331 H315 H318 H410		M=10	
607-152-00-2	2,3,6-TBA (ISO); 2,3,6-trichlorobenzoic acid	200-026-4	50-31-7	Acute Tox. 4 * Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
607-153-00-8	benazolin (ISO); 4-chloro-2,3-dihydro-2-oxo-1,3-benzothiazol-3-ylacetic acid	223-297-0	3813-05-6	Eye Irrit. 2 Skin Irrit. 2 Aquatic Chronic 3	H319 H315 H412	GHS07 Wng	H319 H315 H412			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-154-00-3	ethyl N-benzoyl-N-(3,4-dichlorophenyl)-DL-alaninate; benzoylprop-ethyl (ISO)	244-845-5	22212-55-1	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
607-155-00-9	3-(3-amino-5-(1-methylguanidino)-1-oxopentylamino-6-(4-amino-2-oxo-2,3-dihydro-pyrimidin-1-yl)-2,3-dihydro-(6H)-pyran-2-carboxylic acid; blasticidin-s	—	2079-00-7	Acute Tox. 2 *	H300	GHS06 Dgr	H300			
607-156-00-4	chlorfenson (ISO); 4-chlorophenyl 4-chlorobenzenesulfonate	201-270-4	80-33-1	Acute Tox. 4 * Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H302 H315 H400 H410	GHS07 GHS09 Wng	H302 H315 H410			
607-157-00-X	3-(3-biphenyl-4-yl-1,2,3,4-tetrahydro-1-naphthyl)-4-hydroxycoumarin; difenacoum	259-978-4	56073-07-5	Acute Tox. 2 * STOT RE 1 Aquatic Acute 1 Aquatic Chronic 1	H300 H372 ** H400 H410	GHS06 GHS08 GHS09 Dgr	H300 H372 ** H410			
607-158-00-5	sodium salt of chloroacetic acid; sodium chloroacetate	223-498-3	3926-62-3	Acute Tox. 3 * Skin Irrit. 2 Aquatic Acute 1	H301 H315 H400	GHS06 GHS09 Dgr	H301 H315 H400			
607-159-00-0	chlorobenzilate (ISO); ethyl 2,2-di(4-chlorophenyl)-2-hydroxyacetate; ethyl 4,4'-dichlorobenzilate	208-110-2	510-15-6	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
607-160-00-6	isobutyl 2-(4-(4-chlorophenoxy)phenoxy)propionate; clofop-isobutyl (ISO)	—	51337-71-4	Acute Tox. 4 *	H302	GHS07 Wng	H302			
607-161-00-1	diethanolamine salt of 4-CPA	—	—	Acute Tox. 4 *	H302	GHS07 Wng	H302			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-162-00-7	2,2-dichloropropionice acid; dalapon	200-923-0	75-99-0	Acute Tox. 4 * Skin Irrit. 2 Eye Dam. 1 Aquatic Chronic 3	H302 H315 H318 H412	GHS05 GHS07 Dgr	H302 H315 H318 H412			
607-163-00-2	3-acetyl-6-methyl-2H-pyran-2,4(3H)-dione; dehydracetic acid	208-293-9	520-45-6	Acute Tox. 4 *	H302	GHS07 Wng	H302			
607-164-00-8	sodium 1-(3,4-dihydro-6-methyl-2,4-dioxo-2H-pyran-3-ylidene)ethonolate; sodium dehydracetate	224-580-1	4418-26-2	Acute Tox. 4 *	H302	GHS07 Wng	H302			
607-165-00-3	diclofop-methyl (ISO) methyl 2-(4-(2,4-dichlorophenoxy)phenoxy) propionate; methyl (RS)-2-[4-(2,4-dichlorophenoxy)phenoxy]propionate;	257-141-8	51338-27-3	Acute Tox. 4 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H317 H400 H410	GHS07 GHS09 Wng	H302 H317 H410			
607-166-00-9	medinoterb acetate (ISO); 6-tert-butyl-3-methyl-2,4-dinitrophenyl acetate	219-634-6	2487-01-6	Acute Tox. 3 * Acute Tox. 4 *	H301 H312	GHS06 Dgr	H301 H312			
607-167-00-4	sodium 3-chloroacrylate	—	4312-97-4	Acute Tox. 4 * Acute Tox. 4 *	H312 H302	GHS07 Wng	H312 H302			
607-168-00-X	dipropyl 6,7-methylenedioxy-1,2,3,4-tetrahydro-3-methylnaphthalene-1,2-dicarboxylate; propylisome	—	83-59-0	Acute Tox. 3 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H311 H302 H400 H410	GHS06 GHS09 Dgr	H311 H302 H410			
607-169-00-5	sodium fluoroacetate	200-548-2	62-74-8	Acute Tox. 2 * Acute Tox. 1 Acute Tox. 2 * Aquatic Acute 1	H330 H310 H300 H400	GHS06 GHS09 Dgr	H330 H310 H300 H400			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-170-00-0	bis(1,2,3-trithiacyclohexyldimethylammonium) oxalate; thiocyclam-oxalate	250-859-2	31895-22-4	Acute Tox. 4 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H400 H410	GHS07 GHS09 Wng	H312 H302 H410			
607-172-00-1	4-hydroxy-3-(3-(4'-bromo-4-biphenyl)-1,2,3,4-tetrahydro-1-naphthyl)coumarin; brodifacoum	259-980-5	56073-10-0	Acute Tox. 1 Acute Tox. 2 * STOT RE 1 Aquatic Acute 1 Aquatic Chronic 1	H310 H300 H372 ** H400 H410	GHS06 GHS08 GHS09 Dgr	H310 H300 H372 ** H410			
607-173-00-7	dimethyl (3-methyl-4-(5-nitro-3-ethoxycarbonyl-2-thienyl)azo)phenylnitridodipropionate	400-460-6	—	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
607-174-00-2	reaction mass of dodecyl 3-(2,2,4,4-tetramethyl-21-oxo-7-oxa-3,20-diazadispiro(5,1,11,2)hencicosan-20-yl)propionate and tetradecyl 3-(2,2,4,4-tetramethyl-21-oxo-7-oxa-3,20-diazadispiro(5,1,11,2)hencicosan-20-yl)propionate	400-580-9	—	Skin Irrit. 2 Aquatic Chronic 2	H315 H411	GHS07 GHS09 Wng	H315 H411			
607-175-00-8	methyl 2-(2-nitrobenzylidene)acetoacetate	400-650-9	39562-27-1	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
607-176-00-3	reaction mass of $\alpha$ -3-(3-(2H-benzotriazol-2-yl)-5-tert-butyl-4-hydroxyphenyl)propionyl- $\omega$ -hydroxypoly(oxyethylene) and $\alpha$ -3-(3-(2H-benzotriazol-2-yl)-5-tert-butyl-4-hydroxyphenyl)propionyl- $\omega$ -3-(3-(2H-benzotriazol-2-yl)-5-tert-butyl-4-hydroxyphenyl)propionyloxypoly(oxyethylene)	400-830-7	—	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
607-177-00-9	methyl 2-(3-(4-methoxy-6-methyl-1,3,5-triazin-2-yl)3-methylureidosulphonyl)benzoate	401-190-1	101200-48-0	Skin Sens. 1	H317	GHS07 Wng	H317			



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-178-00-4	methyl $\alpha$ -((4,6-dimethoxy-2-pyrimidinyl)ureidosulphonyl)- <i>o</i> -toluate	401-340-6	83055-99-6	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
607-179-00-X	(benzothiazol-2-ylthio)succinic acid	401-450-4	95154-01-1	Skin Sens. 1	H317	GHS07 Wng	H317			
607-180-00-5	potassium 2-hydroxycarbazole-1-carboxylate	401-630-2	96566-70-0	Acute Tox. 4 * Eye Irrit. 2 STOT SE 3 Aquatic Chronic 3	H302 H319 H335 H412	GHS07 Wng	H302 H319 H335 H412			
607-181-00-0	3,5-dichloro-2,4-difluorobenzoyl fluoride	401-800-6	101513-70-6	Acute Tox. 3 * Skin Corr. 1B Acute Tox. 4 * Skin Sens. 1 Aquatic Chronic 3	H331 H314 H302 H317 H412	GHS06 GHS05 Dgr	H331 H314 H302 H317 H412	EUH029		
607-182-00-6	methyl 3-sulphamoyl-2-thenoate	402-050-2	—	Skin Sens. 1	H317	GHS07 Wng	H317			
607-183-00-1	zinc 2-hydroxy-5-C <sub>13-18</sub> alkylbenzoate	402-280-3	—	Eye Irrit. 2 Skin Irrit. 2 Aquatic Chronic 2	H319 H315 H411	GHS07 GHS09 Wng	H319 H315 H411			
607-184-00-7	S-(3-trimethoxysilyl)propyl 19-isocyanato-11-(6-isocyanatohexyl)-10,12-dioxo-2,9,11,13-tetraazanadecanethioate	402-290-8	85702-90-5	Flam. Liq. 3 Resp. Sens. 1 Skin Sens. 1	H226 H334 H317	GHS02 GHS08 Dgr	H226 H334 H317			
607-185-00-2	ethyl <i>trans</i> -3-dimethylaminoacrylate	402-650-4	1117-37-9	Skin Sens. 1	H317	GHS07 Wng	H317			
607-186-00-8	quinclorac (ISO); 3,7-dichloroquinoline-8-carboxylic acid	402-780-1	84087-01-4	Skin Sens. 1	H317	GHS07 Wng	H317			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-187-00-3	bis(2,2,6,6-tetramethyl-4-piperidyl) succinate	402-940-0	62782-03-0	Eye Irrit. 2 Aquatic Chronic 3	H319 H412	GHS07 Wng	H319 H412			
607-188-00-9	hydrogen sodium N-carboxylatoethyl-N-octadec-9-enylmaleamate	402-970-4	—	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
607-189-00-4	trimethyleendiaminetetraacetic acid	400-400-9	1939-36-2	Acute Tox. 4 * Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H318 H400 H410	GHS05 GHS07 GHS09 Dgr	H302 H318 H410			
607-190-00-X	methyl acrylamidomethoxyacetate (containing $\geq 0,1$ % acrylamid)	401-890-7	77402-03-0	Carc. 1B Muta. 1B Acute Tox. 4 * Eye Irrit. 2	H350 H340 H302 H319	GHS08 GHS07 Dgr	H350 H340 H302 H319			
607-191-00-5	isobutyl 3,4-epoxybutyrate	401-920-9	100181-71-3	Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H315 H317 H400 H410	GHS07 GHS09 Wng	H315 H317 H410			
607-192-00-0	disodium N-carboxymethyl-N-(2-(2-hydroxyethoxy)ethyl)glycinate	402-360-8	92511-22-3	Eye Dam. 1	H318	GHS05 Dgr	H318			
607-194-00-1	propylene carbonate	203-572-1	108-32-7	Eye Irrit. 2	H319	GHS07 Wng	H319			
607-195-00-7	2-methoxy-1-methylethyl acetate	203-603-9	108-65-6	Flam. Liq. 3 Eye Irrit. 2	H226 H319	GHS02 GHS07 Wng	H226 H319			
607-196-00-2	heptanoic acid	203-838-7	111-14-8	Skin Corr. 1B	H314	GHS05 Dgr	H314			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-197-00-8	nonanoic acid	203-931-2	112-05-0	Skin Corr. 1B	H314	GHS05 Dgr	H314			
607-198-00-3	propyl 3,4,5-trihydroxybenzoate	204-498-2	121-79-9	Acute Tox. 4 * Skin Sens. 1	H302 H317	GHS07 Wng	H302 H317			
607-199-00-9	octyl 3,4,5-trihydroxybenzoate	213-853-0	1034-01-1	Acute Tox. 4 * Skin Sens. 1	H302 H317	GHS07 Wng	H302 H317			
607-200-00-2	dodecyl 3,4,5-trihydroxybenzoate	214-620-6	1166-52-5	Skin Sens. 1	H317	GHS07 Wng	H317			
607-201-00-8	thiocarbonyl chloride	207-341-6	463-71-8	Acute Tox. 3 * Acute Tox. 4 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H331 H302 H319 H335 H315	GHS06 Dgr	H331 H302 H319 H335 H315			
607-203-00-9	2-ethylhexyl[[[3,5-bis(1,1-dimethylethyl)-4-hydroxyphenyl]methyl]thio]acetate	279-452-8	80387-97-9	Repr. 1B Skin Sens. 1 Aquatic Chronic 3	H360D *** H317 H412	GHS08 GHS07 Dgr	H360D *** H317 H412			
607-204-00-4	(chlorophenyl)(chlorotolyl)methane, mixed isomers	400-140-6	—	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
607-205-00-X	methyl chloroacetate	202-501-1	96-34-4	Flam. Liq. 3 Acute Tox. 3 * Acute Tox. 3 * STOT SE 3 Skin Irrit. 2 Eye Dam. 1	H226 H331 H301 H335 H315 H318	GHS02 GHS06 GHS05 Dgr	H226 H331 H301 H335 H315 H318			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-206-00-5	isopropyl chloroacetate	203-301-7	105-48-6	Flam. Liq. 3 Acute Tox. 3 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H226 H301 H319 H335 H315	GHS02 GHS06 Dgr	H226 H301 H319 H335 H315			
607-207-00-0	haloxyfop-etotyl (ISO); 2-ethoxyethyl 2-(4-(3-chloro-5-trifluoromethyl-2-pyridyloxy)phenoxy)propionate; haloxyfop-(2-ethoxyethyl)	402-560-5	87237-48-7	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
607-208-00-6	4,8,12-trimethyltrideca-3,7,11-trienoic acid, mixed isomers	403-000-2	91853-67-7	Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H315 H400 H410	GHS07 GHS09 Wng	H315 H410			
607-209-00-1	reaction mass of O,O'-diisopropyl (pentathio)dithioformate and O,O'-diisopropyl (trithio)dithioformate and O,O'-diisopropyl (tetrathio)dithioformate	403-030-6	—	Acute Tox. 4 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H317 H400 H410	GHS07 GHS09 Wng	H302 H317 H410			
607-210-00-7	methyl acrylamidoglycolate (containing ≥ 0,1 % acrylamide)	403-230-3	77402-05-2	Carc. 1B Muta. 1B Skin Corr. 1B Skin Sens. 1	H350 H340 H314 H317	GHS08 GHS05 GHS07 Dgr	H350 H340 H314 H317			
607-211-00-2	methyl 3-(3-tert-butyl-4-hydroxy-5-methylphenyl)propionate	403-270-1	6386-39-6	Acute Tox. 4 * Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
607-212-00-8	poly(oxypropylenecarbonyl-co-oxy(ethylene)ethylene)carbonyl), containing 27 % hydroxyvalerate	403-300-3	—	Skin Sens. 1	H317	GHS07 Wng	H317			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-213-00-3	ethyl 3,3-bis( <i>tert</i> -pentylperoxy)butyrate	403-320-2	67567-23-1	Org. Perox. D *** Flam. Liq. 3 Aquatic Chronic 2	H242 H226 H411	GHS02 GHS09 Dgr	H242 H226 H411			
607-214-00-9	N,N-hydrazinodiacetic acid	403-510-5	19247-05-3	Acute Tox. 3 * STOT RE 2 * Skin Sens. 1 Aquatic Chronic 3	H301 H373 ** H317 H412	GHS06 GHS08 Dgr	H301 H373 ** H317 H412			
607-215-00-4	3-(3- <i>tert</i> -butyl-4-hydroxyphenyl)propionic acid	403-920-4	107551-67-7	Acute Tox. 4 * Eye Irrit. 2	H302 H319	GHS07 Wng	H302 H319			
607-216-00-X	glutamic acid, reaction products with N-(C <sub>12-14</sub> alkyl)propylenediamine	403-950-8	—	Acute Tox. 2 * Acute Tox. 4 * Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H330 H302 H314 H400 H410	GHS06 GHS05 GHS09 Dgr	H330 H302 H314 H410			
607-217-00-5	2-ethoxyethyl 2-(4-(2,6-dihydro-2,6-dioxo-7-phenyl-1,5-dioxindacen-3-yl)phenoxy)acetate	403-960-2	—	Skin Sens. 1 Aquatic Chronic 4	H317 H413	GHS07 Wng	H317 H413			
607-218-00-0	dichlorprop-P (ISO); (+)- <i>R</i> -2-(2,4-dichlorophenoxy)propionic acid	403-980-1	15165-67-0	Acute Tox. 4 * Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1	H302 H315 H318 H317	GHS05 GHS07 Dgr	H302 H315 H318 H317			
607-219-00-6	bis(2-ethylhexyl) dithiodiacetate	404-510-8	62268-47-7	Acute Tox. 4 * Skin Sens. 1 Aquatic Chronic 2	H302 H317 H411	GHS07 GHS09 Wng	H302 H317 H411			
607-221-00-7	6-docosyloxy-1-hydroxy-4-(1-(4-hydroxy-3-methylphenanthren-1-yl)-3-oxo-2-oxaphenalen-1-yl)naphthalene-2-carboxylic acid	404-550-6	—	Skin Sens. 1 Aquatic Chronic 4	H317 H413	GHS07 Wng	H317 H413			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-222-00-2	6-(2,3-dimethylmaleimido)hexyl methacrylate	404-870-6	63740-41-0	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
607-223-00-8	transfluthrin (ISO); 2,3,5,6-tetrafluorobenzyl <i>trans</i> -2-(2,2-dichlorovinyl)-3,3-dimethylcyclopropanecarboxylate	405-060-5	118712-89-3	Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H315 H400 H410	GHS07 GHS09 Wng	H315 H410			
607-224-00-3	methyl 2-(3-nitrobenzylidene)acetoacetate	405-270-7	39562-17-9	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
607-225-00-9	3-azidosulfonylbenzoic acid	405-310-3	15980-11-7	Self-React. C **** STOT RE 2 * Eye Dam. 1 Skin Sens. 1	H241 H373 ** H318 H317	GHS02 GHS08 GHS05 GHS07 Dgr	H241 H373 ** H318 H317			
607-226-00-4	reaction mass of 2-acryloyloxyethyl hydrogen cyclohexane-1,2-dicarboxylate and 2-methacryloyloxyethyl hydrogen cyclohexane-1,2-dicarboxylate	405-360-6	—	Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 3	H315 H318 H317 H412	GHS05 GHS07 Dgr	H315 H318 H317 H412			
607-227-00-X	potassium 2-amino-2-methylpropionate octahydrate	405-560-3	120447-91-8	Acute Tox. 4 * Skin Corr. 1A	H302 H314	GHS05 GHS07 Dgr	H302 H314			
607-228-00-5	bis(2-methoxyethyl) phthalate	204-212-6	117-82-8	Repr. 1B	H360Df	GHS08 Dgr	H360Df			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-229-00-0	diethylcarbamoyl chloride	201-798-5	88-10-8	Carc. 2 Acute Tox. 4 * Acute Tox. 4 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H351 H332 H302 H319 H335 H315	GHS08 GHS07 Wng	H351 H332 H302 H319 H335 H315			
607-230-00-6	2-ethylhexanoic acid	205-743-6	149-57-5	Repr. 2	H361d ***	GHS08 Wng	H361d ***			
607-231-00-1	3,6-dichloropyridine-2-carboxylic acid; clopyralid	216-935-4	1702-17-6	Eye Dam. 1 Aquatic Chronic 2	H318 H411	GHS05 GHS09 Dgr	H318 H411			
607-232-00-7	pyridate (ISO); O-(6-chloro-3-phenylpyridazin-4-yl) S-octyl thiocarbonate	259-686-7	55512-33-9	Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H315 H317 H400 H410	GHS07 GHS09 Wng	H315 H317 H410			
607-233-00-2	hexyl acrylate	219-698-5	2499-95-8	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 2	H319 H335 H315 H317 H411	GHS07 GHS09 Wng	H319 H335 H315 H317 H411			
607-234-00-8	flurenol (ISO); 9-hydroxy-9H-fluorene-9-carboxylic acid	207-397-1	467-69-6	Aquatic Chronic 2	H411	GHS09	H411			
607-235-00-3	mecrilate; methyl 2-cyanoacrylate	205-275-2	137-05-3	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H319 H335 H315	GHS07 Wng	H319 H335 H315		STOT SE 3; H335: C ≥ 10 %	
607-236-00-9	ethyl 2-cyanoacrylate	230-391-5	7085-85-0	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H319 H335 H315	GHS07 Wng	H319 H335 H315		STOT SE 3; H335: C ≥ 10 %	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-237-00-4	benzyl 2-chloro-4-(trifluoromethyl)thiazole-5-carboxylate; flurazole	276-942-3	72850-64-7	Aquatic Chronic 2	H411	GHS09	H411			
607-238-00-X	tau-fluvalinate (ISO); cyano-(3-phenoxyphenyl)methyl N-[2-chloro-4-(trifluoromethyl)phenyl]-D-valinate	—	102851-06-9	Acute Tox. 4 * Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H302 H315 H400 H410	GHS07 GHS09 Wng	H302 H315 H410			
607-239-00-5	fenpropathrin (ISO); $\alpha$ -cyano-3-phenoxybenzyl 2,2,3,3-tetramethylcyclopropanecarboxylate	254-485-0	39515-41-8	Acute Tox. 2 * Acute Tox. 3 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H330 H301 H312 H400 H410	GHS06 GHS09 Dgr	H330 H301 H312 H410			
607-240-00-0	cis-1,2,3,6-tetrahydro-4-methylphthalic anhydride; [1] 1,2,3,6-tetrahydro-4-methylphthalic anhydride; [2] 1,2,3,6-tetrahydro-3-methylphthalic anhydride; [3] tetrahydromethylphthalic anhydride; [4] 1,2,3,6-tetrahydromethylphthalic anhydride; [5] tetrahydro-4-methylphthalic anhydride; [6] 2,3,5,6-tetrahydro-2-methylphthalic anhydride [7]	216-906-6 [1] 222-323-8 [2] 226-247-6 [3] 234-290-7 [4] 247-830-1 [5] 251-823-9 [6] 255-853-3 [7]	1694-82-2 [1] 3425-89-6 [2] 5333-84-6 [3] 11070-44-3 [4] 26590-20-5 [5] 34090-76-1 [6] 42498-58-8 [7]	Eye Dam. 1 Resp. Sens. 1 Skin Sens. 1	H318 H334 H317	GHS08 GHS05 Dgr	H318 H334 H317			C
607-241-00-6	hexahydro-4-methylphthalic anhydride; [1] hexahydromethylphthalic anhydride; [2] hexahydro-1-methylphthalic anhydride; [3] hexahydro-3-methylphthalic anhydride [4]	243-072-0 [1] 247-094-1 [2] 256-356-4 [3] 260-566-1 [4]	19438-60-9 [1] 25550-51-0 [2] 48122-14-1 [3] 57110-29-9 [4]	Eye Dam. 1 Resp. Sens. 1 Skin Sens. 1	H318 H334 H317	GHS08 GHS05 Dgr	H318 H334 H317			C



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-242-00-1	tetrachlorophthalic anhydride	204-171-4	117-08-8	Eye Dam. 1 Resp. Sens. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H318 H334 H317 H400 H410	GHS08 GHS05 GHS09 Dgr	H318 H334 H317 H410			
607-243-00-7	sodium 3,6-dichloro- <i>o</i> -anisate; [1] 3,6-dichloro- <i>o</i> -anisic acid, compound with 2,2'-iminodiethanol (1:1); [2] 3,6-dichloro- <i>o</i> -anisic acid, compound with 2-aminoethanol (1:1) [3]	217-846-3 [1] 246-590-5 [2] 258-527-9 [3]	1982-69-0 [1] 25059-78-3 [2] 53404-28-7 [3]	Aquatic Chronic 3	H412	—	H412			
607-244-00-2	isooctyl acrylate	249-707-8	29590-42-9	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H319 H335 H315 H400 H410	GHS07 GHS09 Wng	H319 H335 H315 H410	STOT SE 3; H335: C ≥ 10 %		
607-245-00-8	<i>tert</i> -butyl acrylate	216-768-7	1663-39-4	Flam. Liq. 2 Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * STOT SE 3 Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 3	H225 H332 H312 H302 H335 H315 H317 H412	GHS02 GHS07 Dgr	H225 H332 H312 H302 H335 H315 H317 H412		D	
607-246-00-3	allyl methacrylate; 2-methyl-2-propenoic acid 2-propenyl ester	202-473-0	96-05-9	Flam. Liq. 3 Acute Tox. 3 * Acute Tox. 4 * Acute Tox. 4 * Aquatic Acute 1	H226 H331 H312 H302 H400	GHS02 GHS06 GHS09 Dgr	H226 H331 H312 H302 H400			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-247-00-9	dodecyl methacrylate	205-570-6	142-90-5	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H319 H335 H315 H400 H410	GHS07 GHS09 Wng	H319 H335 H315 H410		STOT SE 3; H335: C ≥ 10 %	
607-248-00-4	naptalam-sodium (ISO); sodium N-naphth-1-ylphthalamate	205-073-4	132-67-2	Acute Tox. 4 *	H302	GHS07 Wng	H302			
607-249-00-X	(1-methyl-1,2-ethanediyl)bis[oxy(methyl-2,1-ethanediyl)] diacrylate	256-032-2	42978-66-5	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 2	H319 H335 H315 H317 H411	GHS07 GHS09 Wng	H319 H335 H315 H317 H411		STOT SE 3; H335: C ≥ 10 %	
607-250-00-5	4H—3,1-benzoxazine-2,4(1H)-dione	204-255-0	118-48-9	Eye Irrit. 2 Skin Sens. 1	H319 H317	GHS07 Wng	H319 H317			
607-251-00-0	2-methoxypropyl acetate	274-724-2	70657-70-4	Flam. Liq. 3 Repr. 1B STOT SE 3	H226 H360D *** H335	GHS02 GHS08 GHS07 Dgr	H226 H360D *** H335			
607-252-00-6	lambda-cyhalothrin (ISO); reaction mass of (S)-α-cyano-3-phenoxybenzyl(Z)-(1R)-cis-3-(2-chloro-3,3,3-trifluoropropenyl)-2,2-dimethylcyclopropanecarboxylate and (R)-α-cyano-3-phenoxybenzyl(Z)-(1S)-cis-3-(2-chloro-3,3,3-trifluoropropenyl)-2,2-dimethylcyclopropanecarboxylate (1:1)	415-130-7	91465-08-6	Acute Tox. 2 * Acute Tox. 3 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H330 H301 H312 H400 H410	GHS06 GHS09 Dgr	H330 H301 H312 H410			
607-253-00-1	α-cyano-4-fluoro-3-phenoxybenzyl-3-(2,2-dichlorovinyl)-2,2-dimethylcyclopropanecarboxylate; cyfluthrin	269-855-7	68359-37-5	Acute Tox. 2 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H300 H331 H400 H410	GHS06 GHS09 Dgr	H300 H331 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-254-00-7	$\alpha$ -cyano-4-fluoro-3-phenoxybenzyl-3-(2,2-dichlorovinyl)-2,2-dimethylcyclopropanecarboxylate; beta-cyfluthrin	269-855-7	68359-37-5	Acute Tox. 2 * Acute Tox. 2 * Aquatic Acute 1 Aquatic Chronic 1	H330 H300 H400 H410	GHS06 GHS09 Dgr	H330 H300 H410			
607-255-00-2	fluroxypry (ISO); 4-amino-3,5-dichloro-6-fluoro-2-pyridyloxyacetic acid	—	69377-81-7	Aquatic Chronic 3	H412	—	H412			
607-256-00-8	azoxystrobin (ISO); methyl (E)-2-{2-[6-(2-cyanophenoxy)pyrimidin-4-yloxy]phenyl}-3-methoxyacrylate	—	131860-33-8	Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H331 H400 H410	GHS06 GHS09 Dgr	H331 H410			
607-257-00-3	isopropyl propionate	211-300-8	637-78-5	Flam. Liq. 2	H225	GHS02 Dgr	H225			
607-258-00-9	dodecyl 3-(2-(3-benzyl-4-ethoxy-2,5-dioximidazolidin-1-yl)-3-(4-methoxybenzoyl)acetamido)-4-chlorobenzoate	403-990-6	70950-45-7	Aquatic Chronic 4	H413	—	H413			
607-259-00-4	methyl 2R,3S-(-)-3-(4-methoxyphenyl)oxiranecarboxylate	404-130-2	105560-93-8	Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 3	H318 H317 H412	GHS05 GHS07 Dgr	H318 H317 H412			
607-260-00-X	ethyl 2-(3-nitrobenzylidene)acetoacetate	404-490-0	39562-16-8	Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 3	H318 H317 H412	GHS05 GHS07 Dgr	H318 H317 H412			
607-261-00-5	iso(C <sub>10</sub> -C <sub>14</sub> )alkyl (3,5-di-tert-butyl-4-hydroxyphenyl)methylthioacetate	404-800-4	118832-72-7	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
607-262-00-0	7-chloro-1-cyclopropyl-6-fluoro-1,4-dihydro-4-oxoquinoline-3-carboxylic acid	405-050-0	86393-33-1	Acute Tox. 4 * Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-263-00-6	potassium iron(III) 1,3-propanediamine- <i>N,N,N,N'</i> -tetraacetate hemihydrate	405-680-6	—	Self-heat. 2 **** Aquatic Chronic 2	H252 H411	GHS02 GHS09 Wng	H252 H411			
607-264-00-1	2-chloro-4-(methylsulfonyl)benzoic acid	406-520-8	53250-83-2	Eye Dam. 1	H318	GHS05 Dgr	H318			
607-265-00-7	ethyl-2-chloro-2,2-diphenylacetate	406-580-5	52460-86-3	Skin Irrit. 2 Aquatic Chronic 3	H315 H412	GHS07 Wng	H315 H412			
607-266-00-2	reaction mass of: hydroxyaluminium bis[2-hydroxy-3,5-di- <i>tert</i> -butylbenzoate]; 3,5-di- <i>tert</i> -butyl-salicylic acid	406-890-0	130296-87-6	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
607-267-00-8	<i>tert</i> -butyl (5 <i>S</i> ,6 <i>R</i> ,7 <i>R</i> )-3-bromomethyl-5,8-dioxo-7-(2-(2-phenylacetamido)-5-thia-1-azabicyclo[4.2.0] oct-2-ene-2-carboxylate	407-620-4	33610-13-8	Resp. Sens. 1 Skin Sens. 1 Aquatic Chronic 3	H334 H317 H412	GHS08 Dgr	H334 H317 H412			
607-268-00-3	2-methylpropyl ( <i>R</i> )-2-hydroxypropanoate	407-770-0	61597-96-4	Eye Irrit. 2	H319	GHS07 Wng	H319			
607-269-00-9	( <i>R</i> )-2-(4-hydroxyphenoxy)propanoic acid	407-960-3	94050-90-5	Eye Dam. 1	H318	GHS05 Dgr	H318			
607-270-00-4	3,9-bis(2-(3-(3- <i>tert</i> -butyl-4-hydroxy-5-methylphenyl)propionyloxy-1,1-dimethyl-ethyl)-2,4,8,10-tetraoxaspiro[5.5]undecane	410-730-5	90498-90-1	Acute Tox. 4 *	H312	GHS07 Wng	H312			
607-271-00-X	2-isopropyl-5-methylcyclohexyloxycarbonyloxy-2-hydroxypropane	417-420-9	156324-82-2	Eye Irrit. 2 Aquatic Chronic 2	H319 H411	GHS07 GHS09 Wng	H319 H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-272-00-5	fluroxypyr-meptyl (ISO); methylheptyl, O-(4-amino-3,5-dichloro-6-fluoro-2-pyridyloxy) acetate; [1] fluroxypyr-butometyl (ISO); 2-butoxy-1-methylethyl, O-(4-amino-3,5-dichloro-6-fluoro-2-pyridyloxy) acetate [2]	279-752-9 [1] [2]	81406-37-3 [1] 154486-27-8 [2]	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
607-273-00-0	ammonium 7-(2,6-dimethyl-8-(2,2-dimethylbutyryloxy)-1,2,6,7,8,8a-hexahydro-1-naphthyl)-3,5-dihydroxyheptanoate	404-520-2	—	Aquatic Chronic 3	H412	—	H412			
607-274-00-6	2-(N-benzyl-N-methylamino)ethyl 3-amino-2-butenooate	405-350-1	54527-73-0	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
607-275-00-1	sodium benzoxyloxybenzene-4-sulfonate	405-450-5	66531-87-1	Skin Sens. 1	H317	GHS07 Wng	H317			
607-276-00-7	bis[(1-methylimidazol)-(2-ethyl-hexanoate)], zinc complex	405-635-0	—	Skin Irrit. 2 Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H315 H318 H400 H410	GHS05 GHS09 Dgr	H315 H318 H410			
607-277-00-2	reaction mass of: 2-(hexylthio)ethylamine hydrochloride; sodium propionate	405-720-2	—	Acute Tox. 4 * Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H302 H318 H317 H411	GHS05 GHS07 GHS09 Dgr	H302 H318 H317 H411			
607-278-00-8	reaction mass of isomers of: sodium phenethylnaphthalenesulfonate; sodium naphthylethylbenzenesulfonate	405-760-0	—	Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 3	H318 H317 H412	GHS05 GHS07 Dgr	H318 H317 H412			
607-279-00-3	reaction mass of n-octadecylaminodiethyl bis(hydrogen maleate); n-octadecylaminodiethyl hydrogen maleate hydrogenphthalate	405-960-8	—	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-280-00-9	sodium 4-chloro-1-hydroxybutane-1-sulfonate	406-190-5	54322-20-2	Acute Tox. 4 * Eye Irrit. 2 Skin Sens. 1	H302 H319 H317	GHS07 Wng	H302 H319 H317			
607-281-00-4	reaction mass of branched and linear C <sub>7</sub> -C <sub>9</sub> alkyl 3-[3-(2H-benzotriazol-2-yl)-5-(1,1-dimethylethyl)-4-hydroxyphenyl]propionates	407-000-3	127519-17-9	Aquatic Chronic 2	H411	GHS09	H411			
607-282-00-X	2-acetoxymethyl-4-benzyloxybut-1-yl acetate	407-140-5	131266-10-9	Aquatic Chronic 3	H412	—	H412			
607-283-00-5	E-ethyl-4-oxo-4-phenylcrotonate	408-040-4	15121-89-8	Acute Tox. 4 * Acute Tox. 4 * Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H315 H318 H317 H400 H410	GHS05 GHS07 GHS09 Dgr	H312 H302 H315 H318 H317 H410			
607-284-00-0	reaction mass of: sodium 3,3'-(1,4-phenylenebis(carbonylimino-3,1-propanediylimino))bis(10-amino-6,13-dichloro-4,11-triphenodioxazinedisulfonate); lithium 3,3'-(1,4-phenylenebis-(carbonylimino-3,1-propanediylimino))bis(10-amino-6,13-dichloro-4,11-triphenodioxazinedisulfonate (9:1)	410-040-4	136213-76-8	Aquatic Chronic 2	H411	GHS09	H411			
607-285-00-6	reaction mass of: 7-(((3-aminophenyl)sulfonyl)amino)-naphthalene-1,3-disulfonic acid; sodium 7-(((3-aminophenyl)sulfonyl)amino)-naphthalene-1,3-disulfonate; potassium 7-(((3-aminophenyl)sulfonyl)amino)-naphthalene-1,3-disulfonate	410-065-0	—	Skin Sens. 1	H317	GHS07 Wng				
607-286-00-1	reaction mass of: sodium/potassium 7-[[[3-[[4-((2-hydroxy-naphthyl)azo)phenyl]azo]phenyl]sulfonyl]amino]-naphthalene-1,3-disulfonate	410-070-8	141880-36-6	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-287-00-7	O'-methyl O-(1-methyl-2-methacryloyloxyethyl)-1,2,3,6-tetrahydrophthalate	410-140-8	—	Aquatic Chronic 3	H412	—	H412			
607-288-00-2	tetrasodium (c-(3-(1-(3-(e-6-dichloro-5-cyanopyrimidin-f-yl(methyl)amino)propyl)-1,6-dihydro-2-hydroxy-4-methyl-6-oxo-3-pyridylazo)-4-sulfonatophenylsulfamoyl)phthalocyanine-a,b,d-trisulfonato(6-))nickelato II, where a is 1 or 2 or 3 or 4, b is 8 or 9 or 10 or 11, c is 15 or 16 or 17 or 18, d is 22 or 23 or 24 or 25 and where e and f together are 2 and 4 or 4 and 2 respectively	410-160-7	148732-74-5	Eye Irrit. 2 Skin Sens. 1 Aquatic Chronic 3	H319 H317 H412	GHS07 Wng	H319 H317 H412			
607-289-00-8	3-(3-(4-(2,4-bis(1,1-dimethylpropyl)phenoxy)butylaminocarbonyl-4-hydroxy-1-naphthalenyl)thio)propanoic acid	410-370-9	105488-33-3	Aquatic Chronic 4	H413	—	H413			
607-290-00-3	reaction mass (ratio not known) of: ammonium 1-C <sub>14</sub> -C <sub>18</sub> -alkyloxycarbonyl-2-(3-allyloxy-2-hydroxypropoxycarbonyl)ethane-1-sulfonate; ammonium 2-C <sub>14</sub> -C <sub>18</sub> -alkyloxycarbonyl-1-(3-allyloxy-2-hydroxypropoxycarbonyl)ethane-1-sulfonate	410-540-2	—	Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H315 H317 H400 H410	GHS07 GHS09 Wng	H315 H317 H410			
607-291-00-9	dodecyl-ω-(C <sub>5</sub> /C <sub>6</sub> -cycloalkyl)alkyl carboxylate	410-630-1	104051-92-5	Aquatic Chronic 4	H413	—	H413			
607-292-00-4	reaction mass of: [1-(methoxymethyl)-2-(C <sub>12</sub> -alkoxy)-ethoxy]acetic acid; [1-(methoxymethyl)-2-(C <sub>14</sub> -alkoxy)-ethoxy]acetic acid	410-640-6	—	Skin Irrit. 2 Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H315 H318 H400 H410	GHS05 GHS09 Dgr	H315 H318 H410			
607-293-00-X	reaction mass of: N-aminoethylpiperazonium mono-2,4,6-trimethylnonyldiphenyl ether di-sulfonate; N-aminoethylpiperazonium di-2,4,6-trimethylnonyldiphenyl ether di-sulfonate	410-650-0	—	Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H318 H317 H411	GHS05 GHS07 GHS09 Dgr	H318 H317 H411			
607-294-00-5	sodium 2-benzoyloxy-1-hydroxyethane-sulfonate	410-680-4	—	Skin Sens. 1	H317	GHS07 Wng	H317			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevaar­klasse en categorie	Gevaar­aan­duiding	Pictogram, sig­naal­woord	Gevaar­aan­duiding	Aanvullende gevaar­aan­duiding		
607-295-00-0	reaction mass of: tetrasodium phosphonothane-1,2-dicarboxylate; hexasodium phosphonobutane-1,2,3,4-tetracarboxylate	410-800-5	—	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
607-296-00-6	reaction mass of: pentaerythriol tetraesters with heptanoic acid and 2-ethylhexanoic acid	410-830-9	—	Aquatic Chronic 4	H413	—	H413			
607-297-00-1	(E—E)-3,3'-(1,4-phenylenedimethylidene)bis(2-oxobornane-10-sulfonic acid)	410-960-6	92761-26-7	Eye Dam. 1	H318	GHS05 Dgr	H318			
607-298-00-7	2-(trimethylammonium)ethoxycarboxybenzene-4-sulfonate	411-010-3	—	Skin Sens. 1	H317	GHS07 Wng	H317			
607-299-00-2	methyl 3-(acetylthio)-2-methyl-propanoate	411-040-7	97101-46-7	Acute Tox. 4 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H317 H400 H410	GHS07 GHS09 Wng	H302 H317 H410			
607-300-00-6	trisodium [2-(5-chloro-2,6-difluoropyrimidin-4-ylamino)-5-(b-sulfamoyl-c, d-sulfonatotphthalocyanin-a-yl-K4,N29,N30,N31, N32-sulfonylamino)benzoato(5-)]cuprate(II) where a=1,2,3,4 b=8,9,10,11 c=15,16,17,18 d=22,23,24,25	411-430-7	—	Eye Dam. 1 Skin Sens. 1	H318 H317	GHS05 GHS07 Dgr	H318 H317			
607-301-00-1	reaction mass of: dodecanoic acid; poly(1-7)lactate esters of dodecanoic acid	411-860-5	—	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
607-302-00-7	reaction mass of: tetradecanoic acid; poly(1-7)lactate esters of tetradecanoic acid	411-910-6	—	Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H315 H318 H317 H411	GHS05 GHS07 GHS09 Dgr	H315 H318 H317 H411			



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-303-00-2	1-cyclopropyl-6,7-difluoro-1,4-dihydro-4-oxoquinoline-3-carboxylic acid	413-760-7	93107-30-3	Repr. 2 Aquatic Chronic 3	H361f *** H412	GHS08 Wng	H361f *** H412			
607-304-00-8	fluazifop-butyl (ISO); butyl (RS)-2-[4-(5-trifluoromethyl-2-pyridyloxy)phenoxy]propionate	274-125-6	69806-50-4	Repr. 1B Aquatic Acute 1 Aquatic Chronic 1	H360D *** H400 H410	GHS08 GHS09 Dgr	H360D *** H410			
607-305-00-3	fluazifop-P-butyl (ISO); butyl (R)-2-[4-(5-trifluoromethyl-2-pyridyloxy)phenoxy]propionate	—	79241-46-6	Repr. 2 Aquatic Acute 1 Aquatic Chronic 1	H361d *** H400 H410	GHS08 GHS09 Wng	H361d *** H410			
607-306-00-9	chlozolate (ISO); ethyl (RS)-3-(3,5-dichlorophenyl)-5-methyl-2,4-dioxo-oxazolidine-5-carboxylate	282-714-4	84332-86-5	Carc. 2 Aquatic Chronic 2	H351 H411	GHS08 GHS09 Wng	H351 H411			
607-307-00-4	vinclozolin (ISO); N—3,5-dichlorophenyl-5-methyl-5-vinyl-1,3-oxazolidine-2,4-dione	256-599-6	50471-44-8	Carc. 2 Repr. 1B Skin Sens. 1 Aquatic Chronic 2	H351 H360FD H317 H411	GHS08 GHS07 GHS09 Dgr	H351 H360FD H317 H411			
607-308-00-X	esters of 2,4-D	—	—	Acute Tox. 4 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H317 H400 H410	GHS07 GHS09 Wng	H302 H317 H410			A
607-309-00-5	carfentrazone-ethyl (ISO); ethyl (RS)-2-chloro-3-[2-chloro-4-fluoro-5-[4-difluoromethyl-4,5-dihydro-3-methyl-5-oxo-1H—1,2,4-triazol-1-yl]phenyl]propionate	—	128639-02-1	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-310-00-0	kresoxim-methyl (ISO); methyl (E)-2-methoxyimino-[2-(o-tolyloxy-methyl)phenyl]acetate	—	143390-89-0	Carc. 2 Aquatic Acute 1 Aquatic Chronic 1	H351 H400 H410	GHS08 GHS09 Wng	H351 H410			
607-311-00-6	benazolin-ethyl; ethyl 4-chloro-2-oxo-2H-benzothiazole-3-acetate	246-591-0	25059-80-7	Aquatic Chronic 2	H411	GHS09	H411			
607-312-00-1	methoxyacetic acid	210-894-6	625-45-6	Repr. 1B Acute Tox. 4 * Skin Corr. 1B	H360-FD H302 H314	GHS08 GHS05 GHS07 Dgr	H360FD H302 H314		STOT SE 3; H335: C ≥ 5 %	
607-313-00-7	neodecanoyl chloride	254-875-0	40292-82-8	Acute Tox. 2 * Acute Tox. 4 * Skin Corr. 1B	H330 H302 H314	GHS06 GHS06 Dgr	H330 H302 H314		STOT SE 3; H335: C ≥ 5 %	
607-314-00-2	ethofumesate (ISO); (±)-2-ethoxy-2,3-dihydro-3,3-dimethylbenzofuran-5-yl methanesulfonate	247-525-3	26225-79-6	Aquatic Chronic 2	H411	GHS09	H411			
607-315-00-8	glyphosate (ISO); N-(phosphonomethyl)glycine	213-997-4	1071-83-6	Eye Dam. 1 Aquatic Chronic 2	H318 H411	GHS05 GHS09 Dgr	H318 H411			
607-316-00-3	glyphosate-trimesium; glyphosate-trimethylsulfonium	—	81591-81-3	Acute Tox. 4 * Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
607-317-00-9	bis(2-ethylhexyl) phthalate; di-(2-ethylhexyl) phthalate; DEHP	204-211-0	117-81-7	Repr. 1B	H360-FD	GHS08 Dgr	H360FD			
607-318-00-4	dibutyl phthalate; DBP	201-557-4	84-74-2	Repr. 1B Aquatic Acute 1	H360-Df H400	GHS08 GHS09 Dgr	H360Df H400			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-319-00-X	deltamethrin (ISO); (S)- $\alpha$ -cyano-3-phenoxybenzyl (1R, 3R)-3-(2,2-dibromovinyl)-2,2-dimethylcyclopropa-necarboxylate	258-256-6	52918-63-5	Acute Tox. 3 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H331 H301 H400 H410	GHS06 GHS09 Dgr	H331 H301 H410			
607-320-00-5	bis[4-(ethenyl-oxo)butyl] 1,3-benzenedicarboxylate	413-930-0	130066-57-8	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
607-321-00-0	(S)-methyl-2-chloropropionate	412-470-8	73246-45-4	Flam. Liq. 3 STOT RE 2 * Eye Irrit. 2	H226 H373 ** H319	GHS02 GHS08 Wng	H226 H373 ** H319			
607-322-00-6	4-(4,4-dimethyl-3-oxo-pyrazolidin-1-yl)-benzoic acid	413-120-7	107144-30-9	Acute Tox. 4 * Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
607-323-00-1	2-(1-(2-hydroxy-3,5-di- <i>tert</i> -pentyl-phenyl)ethyl)-4,6-di- <i>tert</i> -pentylphenyl acrylate	413-850-6	123968-25-2	Aquatic Chronic 4	H413	—	H413			
607-324-00-7	reaction mass of: N,N-di(hydrogenated alkyl C <sub>14</sub> -C <sub>18</sub> )phtalamic acid; dihydrogenated alkyl (C <sub>14</sub> -C <sub>18</sub> )amine	413-800-3	—	Aquatic Chronic 4	H413	—	H413			
607-325-00-2	(S)-2-chloropropionic acid	411-150-5	29617-66-1	Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1A	H312 H302 H314	GHS05 GHS07 Dgr	H312 H302 H314			
607-326-00-8	reaction mass of: isobutyl hydrogen 2-( $\alpha$ -2,4,6-trimethylnon-2-enyl)succinate; isobutyl hydrogen 2-( $\beta$ -2,4,6-trimethylnon-2-enyl)succinate	410-720-0	141847-13-4	Eye Dam. 1 Aquatic Chronic 2	H318 H411	GHS05 GHS09 Dgr	H318 H411			
607-327-00-3	2-(2-iodoethyl)-1,3-propanediol diacetate	411-780-0	127047-77-2	Acute Tox. 4 * Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-328-00-9	methyl 4-bromomethyl-3-methoxybenzoate	410-310-1	70264-94-7	Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H315 H318 H317 H400 H410	GHS05 GHS07 GHS09 Dgr	H315 H318 H317 H410			
607-329-00-4	reaction mass of: sodium 2-(C <sub>12-18</sub> - <i>n</i> -alkyl) amino-1,4-butandioate; sodium 2-octadecenyl-amino-1,4-butandioate	411-250-9	—	Skin Sens. 1	H317	GHS07 Wng	H317			
607-330-00-X	(S)-2,3-dihydro-1 <i>H</i> -indole-2-carboxylic acid	410-860-2	79815-20-6	Repr. 2 STOT RE 2 * Skin Sens. 1	H361f *** H373 ** H317	GHS08 GHS07 Wng	H361f *** H373 ** H317			
607-331-00-5	reaction mass of: bis(2,2,6,6-tetramethyl-1-octyloxypiperidin-4-yl)-1,10-decanedioate; 1,8-bis[(2,2,6,6-tetramethyl-4-((2,2,6,6-tetramethyl-1-octyloxypiperidin-4-yl)-decan-1,10-diyl)piperidin-1-yl)oxy]octane	406-750-9	—	Aquatic Chronic 4	H413	—	H413			
607-332-00-0	cyclopentyl chloroformate	411-460-0	50715-28-1	Flam. Liq. 3 Acute Tox. 3 * Acute Tox. 4 * STOT RE 2 * Eye Dam. 1 Skin Sens. 1	H226 H331 H302 H373 ** H318 H317	GHS02 GHS06 GHS08 GHS05 Dgr	H226 H331 H302 H373 ** H318 H317			
607-333-00-6	reaction mass of: dodecyl <i>N</i> -(2,2,6,6-tetramethylpiperidin-4-yl)- $\beta$ -alaninate; tetradecyl <i>N</i> -(2,2,6,6-tetramethylpiperidin-4-yl)- $\beta$ -alaninate	405-670-1	—	Acute Tox. 4 * STOT RE 2 * Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H302 H373 ** H314 H400 H410	GHS08 GHS05 GHS07 GHS09 Dgr	H302 H373 ** H314 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-334-00-1	ethyl 1-ethyl-6,7,8-trifluoro-1,4-dihydro-4-oxoquinoline-3-carboxylate	405-880-3	100501-62-0	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
607-335-00-7	methyl (R)-2-(4-(3-chloro-5-trifluoromethyl-2-pyridyloxy)phenoxy)propionate	406-250-0	72619-32-0	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
607-336-00-2	4-methyl-8-methylenetricyclo[3.3.1.1 <sup>3,7</sup> ]dec-2-yl acetate	406-560-6	122760-85-4	Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 2	H315 H317 H411	GHS07 GHS09 Wng	H315 H317 H411			
607-337-00-8	di-tert-(C <sub>12-14</sub> )-alkylammonium 2-benzothiazolylthiosuccinate	406-052-4	125078-60-6	Flam. Liq. 3 Acute Tox. 4 * Skin Irrit. 2 Eye Dam. 1 Aquatic Chronic 2	H226 H302 H315 H318 H411	GHS02 GHS05 GHS07 GHS09 Dgr	H226 H302 H315 H318 H411			
607-338-00-3	2-methylpropyl 2-hydroxy-2-methylbut-3-enoate	406-235-9	72531-53-4	Eye Irrit. 2 Skin Irrit. 2	H319 H315	GHS07 Wng	H319 H315			
607-339-00-9	2,3,4,5-tetrachlorobenzoylchloride	406-760-3	42221-52-3	Acute Tox. 4 * Skin Corr. 1B Skin Sens. 1	H302 H314 H317	GHS05 GHS07 Dgr	H302 H314 H317			
607-340-00-4	1,3-bis(4-benzoyl-3-hydroxyphenoxy)prop-2-yl acetate	406-990-4	—	Aquatic Chronic 2	H411	GHS09	H411			
607-341-00-X	(9S)-9-amino-9-deoxyerythromycin	406-790-7	26116-56-3	Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H318 H400 H410	GHS05 GHS09 Dgr	H318 H410			
607-342-00-5	4-chlorobutyl veratrate	410-950-1	69788-75-6	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-343-00-0	4,7-methanooctahydro-1 <i>H</i> -indene-diyldimethyl bis(2-carboxybenzoate)	407-410-2	—	Aquatic Chronic 4	H413	—	H413			
607-344-00-6	reaction mass of: 3-( <i>N</i> -(3-dimethylaminopropyl)-(C <sub>4-8</sub> )perfluoroalkylsulfonamido)propionic acid; N-[dimethyl-3-(C <sub>4-8</sub> -perfluoroalkylsulfonamido)propylammonium propionate; 3-( <i>N</i> -(3-dimethyl-propylammonium)-(C <sub>4-8</sub> )perfluoroalkylsulfonamido)propionic acid propionate	407-810-7	—	STOT RE 2 *	H373 **	GHS08 Wng	H373 **			
607-345-00-1	potassium 2-(2,4-dichlorophenoxy)-(R)-propionate	413-580-9	113963-87-4	Acute Tox. 4 * Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1	H302 H315 H318 H317	GHS05 GHS07 Dgr	H302 H315 H318 H317			
607-346-00-7	3-icosyl-4-henicosylidene-2-oxetanone	401-210-9	83708-14-9	Aquatic Chronic 4	H413	—	H413			
607-347-00-2	sodium (R)-2-(2,4-dichlorophenoxy)propionate	413-340-3	119299-10-4	Acute Tox. 4 * Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1	H302 H315 H318 H317	GHS05 GHS07 Dgr	H302 H315 H318 H317			
607-348-00-8	magnesium bis((R)-2-(2,4-dichlorophenoxy)propionate)	413-360-2	—	Acute Tox. 4 * Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1	H302 H315 H318 H317	GHS05 GHS07 Dgr	H302 H315 H318 H317			
607-349-00-3	mono-(tetrapropylammonium) hydrogen 2,2'-dithiobisbenzoate	411-270-8	—	Aquatic Chronic 3	H412		H412			
607-350-00-9	bis(4-(1,2-bis(ethoxycarbonyl)ethylamino)-3-methylcyclohexyl)methane	412-060-9	136210-32-7	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
607-351-00-4	methyl O-(4-amino-3,5-dichloro-6-fluoropyridin-2-yloxy)acetate	407-550-4	69184-17-4	Aquatic Chronic 2	H411	GHS09	H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etiketgeving			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-352-00-X	4,4'-oxydiphthalic anhydride	412-830-4	1823-59-2	Aquatic Chronic 3	H412	—	H412			
607-353-00-5	reaction mass of: ethyl <i>exo</i> -tricyclo[5.2.1.0 <sup>2,6</sup> ]decane- <i>endo</i> -2-carboxylate; ethyl <i>endo</i> -tricyclo[5.2.1.0 <sup>2,6</sup> ]decane- <i>exo</i> -2-carboxylate	407-520-0	80657-64-3	Skin Irrit. 2 Aquatic Chronic 2	H315 H411	GHS07 GHS09 Wng	H315 H411			
607-354-00-0	ethyl 2-cyclohexylpropionate	412-280-5	2511-00-4	Aquatic Chronic 2	H411	GHS09	H411			
607-355-00-6	<i>p</i> -tolyl 4-chlorobenzoate	411-530-0	15024-10-9	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
607-356-00-1	ethyl <i>trans</i> -2,2,6-trimethylcyclohexanecarboxylate	412-540-8	—	Skin Irrit. 2 Aquatic Chronic 2	H315 H411	GHS07 GHS09 Wng	H315 H411			
607-357-00-7	reaction mass of: <i>trans</i> -4-acetoxy-4-methyl-2-propyl-tetrahydro-2 <i>H</i> -pyran; <i>cis</i> -4-acetoxy-4-methyl-2-propyl-tetrahydro-2 <i>H</i> -pyran	412-450-9	131766-73-9	Skin Sens. 1	H317	GHS07 Wng	H317			
607-358-00-2	(1 <i>S</i> ,3 <i>S</i> ,5 <i>R</i> ,6 <i>R</i> )-(4-nitrophenylmethyl)-1-dioxo-6-phenylacetamido-penam-3-carboxylate	412-670-5	54275-93-3	Resp. Sens. 1	H334	GHS08 Dgr	H334			
607-359-00-8	(1 <i>S</i> ,4 <i>R</i> ,6 <i>R</i> ,7 <i>R</i> )-(4-nitrophenylmethyl)3-methylene-1-oxo-7-phenylacetamido-cepham-4-carboxylateido-penam-3-carboxylate	412-800-0	76109-32-5	Resp. Sens. 1	H334	GHS08 Dgr	H334			
607-360-00-3	sodium 3-acetoacetylamino-4-methoxytolyl-6-sulfonate	411-680-7	133167-77-8	Skin Sens. 1	H317	GHS07 Wng	H317			
607-361-00-9	methyl ( <i>R</i> )-2-(4-hydroxyphenoxy)propionate	411-950-4	96562-58-2	Eye Dam. 1 Aquatic Chronic 3	H318 H412	GHS05 Dgr	H318 H412			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-362-00-4	reaction mass of: (3-methoxy)propylammonium/[tris-(2-hydroxyethyl)]ammonium 2-(2-(bis(2-hydroxyethyl)amino)ethoxycarbonylmethyl)hexadec-4-enoate; (3-methoxy)propylammonium/[tris-(2-hydroxyethyl)]ammonium 2-(2-(bis(2-hydroxyethyl)amino)ethoxycarbonylmethyl)tetradec-4-enoate; (3-methoxy)propylammonium/[tris-(2-hydroxyethyl)]ammonium 2-(3-methoxypropylcarbamoylmethyl)hexadec-4-enoate; (3-methoxy)propylammonium/[tris-(2-hydroxyethyl)]ammonium 2-(3-methoxypropylcarbamoylmethyl)tetradec-4-enoate	413-500-2	—	Skin Irrit. 2 Eye Dam. 1 Aquatic Chronic 2	H315 H318 H411	GHS05 GHS09 Dgr	H315 H318 H411			
607-363-00-X	methyl-3-methoxyacrylate	412-900-4	5788-17-0	Skin Sens. 1	H317	GHS07 Wng	H317			
607-364-00-5	3-phenyl-7-[4-(tetrahydrofurfuryloxy)phenyl]-1,5-dioxas-indacen-2,6-dione	413-330-9	134724-55-3	Aquatic Chronic 4	H413		H413			
607-365-00-0	2-(2-amino-1,3-thiazol-4-yl)-(Z)-2-methoxyiminoacetyl chloride hydrochloride	410-620-7	119154-86-8	Acute Tox. 4 * Skin Corr. 1B Skin Sens. 1	H302 H314 H317	GHS05 GHS07 Dgr	H302 H314 H317			
607-366-00-6	3,5-dimethylbenzoyl chloride	413-010-9	6613-44-1	Skin Corr. 1B Skin Sens. 1	H314 H317	GHS05 GHS07 Dgr	H314 H317			
607-367-00-1	potassium bis(N-carboxymethyl)-N-methylglycinato-(2-)N,O,O,N-ferrate-(1-) monohydrate	411-640-9	153352-59-1	Acute Tox. 4 *	H302	GHS07 Wng	H302			
607-368-00-7	1-(N,N-dimethylcarbamoyl)-3-tert-butyl-5-carbethoxymethylthio-1H-1,2,4-triazole	411-650-3	110895-43-7	Acute Tox. 3 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H331 H301 H400 H410	GHS06 GHS09 Dgr	H331 H301 H410			



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-369-00-2	reaction mass of: <i>trans</i> -(2 <i>R</i> )-5-acetoxy-1,3-oxathiolane-2-carboxylic acid; <i>cis</i> -(2 <i>R</i> )-5-acetoxy-1,3-oxathiolane-2-carboxylic acid	411-660-8	147027-04-1	Acute Tox. 4 * Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1	H302 H315 H318 H317	GHS05 GHS07 Dgr	H302 H315 H318 H317			
607-370-00-8	2-[[2-(acetyloxy)-3-(1,1-dimethyl-ethyl)-5-methylphenyl]methyl]-6-(1,1-dimethylethyl)-4-methylphenol	412-210-3	41620-33-1	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
607-371-00-3	3-ethyl 5-methyl 4-(2-chlorophenyl)-1,4-dihydro-2-[2-(1,3-dihydro-1,3-dioxo-(2 <i>H</i> )isindol-2-yl)-ethoxymethyl]-6-methyl-3,5-pyridinedicarboxylate	413-410-3	88150-62-3	Aquatic Chronic 4	H413	—	H413			
607-372-00-9	ethoxylated bis phenol A di-(norbornene carboxylate)	412-410-0	—	Aquatic Chronic 3	H412	—	H412			
607-373-00-4	(±) tetrahydrofurfuryl ( <i>R</i> )-2-[4-(6-chloroquinoxalin-2-yloxy)phenoxy]propionate	414-200-4	119738-06-6	Muta. 2 Repr. 1B Acute Tox. 4 * STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H341 H360Df H302 H373 ** H400 H410	GHS08 GHS07 GHS09 Dgr	H341 H360Df H302 H373 ** H410			
607-374-00-X	5-amino-2,4,6-triiodo-1,3-benzenedicarbonyldichloride	417-220-1	37441-29-5	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
607-375-00-5	reaction mass of: <i>cis</i> -4-hydroxy-3-(1,2,3,4-tetrahydro-3-(4-(4-trifluoromethylbenzyloxy)phenyl)-1-naphthyl)coumarin; <i>trans</i> -4-hydroxy-3-(1,2,3,4-tetrahydro-3-(4-(4-trifluoromethylbenzyloxy)phenyl)-1-naphthyl)coumarin	421-960-0	90035-08-8	Acute Tox. 2 * Acute Tox. 1 Acute Tox. 2 * STOT RE 1 Aquatic Acute 1 Aquatic Chronic 1	H330 H310 H300 H372 ** H400 H410	GHS06 GHS08 GHS09 Dgr	H330 H310 H300 H372 ** H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-376-00-0	benzyl 2,4-dibromobutanoate	420-710-8	23085-60-1	Repr. 2 Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H361f *** H315 H317 H400 H410	GHS08 GHS07 GHS09 Wng	H361f *** H315 H317 H410			
607-377-00-6	<i>trans</i> -4-cyclohexyl-L-proline monohydrochloride	419-160-1	90657-55-9	Repr. 2 Acute Tox. 4 * Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1	H361f *** H302 H315 H318 H317	GHS08 GHS05 GHS07 Dgr	H361f *** H302 H315 H318 H317			
607-378-00-1	ammonium (Z)- $\alpha$ -methoxyimino-2-furylacetate	405-990-1	97148-39-5	Flam. Sol. 2	H228	GHS02 Dgr	H228			T
607-379-00-7	reaction mass of: 2-[N-(2-hydroxyethyl)stearamido]ethyl stearate; sodium [bis[2-(stearoyloxy)ethyl]amino]methylsulfonate; sodium [bis(2-hydroxyethyl)amino]methylsulfonate; N,N-bis(2-hydroxyethyl)stearamide	401-230-8		Aquatic Chronic 3	H412	—	H412			
607-380-00-2	reaction mass of: ammonium-1,2-bis(hexyloxycarbonyl)ethanesulfonate; ammonium-1-hexyloxycarbonyl-2-octyloxycarbonylethanesulfonate; ammonium-2-hexyloxycarbonyl-1-octyloxycarbonylethanesulfonate	407-320-3	—	Skin Irrit. 2 Eye Dam. 1 Aquatic Chronic 3	H315 H318 H412	GHS05 Dgr	H315 H318 H412			
607-381-00-8	reaction mass of triesters of 2,2-bis(hydroxymethyl)butanol with C <sub>7</sub> -alkanoic acids and 2-ethylhexanoic acid	413-710-4	—	Aquatic Chronic 4	H413	—	H413			
607-382-00-3	2-((4-amino-2-nitrophenyl)amino)benzoic acid	411-260-3	117907-43-4	Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 3	H318 H317 H412	GHS05 GHS07 Dgr	H318 H317 H412			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-383-00-9	reaction mass of: 2,2,6,6-tetramethylpiperidin-4-yl-hexadecanoate; 2,2,6,6-tetramethylpiperidin-4-yl-octadecanoate	415-430-8	86403-32-9	Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H318 H317 H400 H410	GHS05 GHS07 GHS09 Dgr	H318 H317 H410			
607-384-00-4	reaction mass of: esters of C <sub>14</sub> -C <sub>15</sub> branched alcohols with 3,5-di-t-butyl-4-hydroxyphenyl propionic acid; C <sub>15</sub> branched and linear alkyl 3,5-bis(1,1-dimethylethyl)-4-hydroxybenzenepropanoate; C <sub>13</sub> branched and linear alkyl 3,5-bis(1,1-dimethylethyl)-4-hydroxybenzenepropanoate	413-750-2	171090-93-0	Aquatic Chronic 4	H413	—	H413			
607-385-00-X	Copolymer of vinyl-alcohol and vinyl acetate partially acetylated with 4-(2-(4-formylphenyl)ethenyl)-1-methylpyridinium methylsulfate	414-590-6	125229-74-5	Aquatic Chronic 2	H411	GHS09	H411			
607-386-00-5	reaction mass of: tetradecanoic acid (42,5-47,5 %); poly(1-7)lactate esters of tetradecanoic acid (52,5-57,5 %)	412-580-6	174591-51-6	Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H315 H318 H317 H400 H410	GHS05 GHS07 GHS09 Dgr	H315 H318 H317 H410			
607-387-00-0	reaction mass of: dodecanoic acid (35-40 %); poly(1-7)lactate esters of dodecanoic acid (60-65 %)	412-590-0	58856-63-6	Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H315 H318 H317 H400 H410	GHS05 GHS07 GHS09 Dgr	H315 H318 H317 H410			
607-388-00-6	4-ethylamino-3-nitrobenzoic acid	412-090-2	2788-74-1	Acute Tox. 4 * Skin Sens. 1 Aquatic Chronic 3	H302 H317 H412	GHS07 Wng	H302 H317 H412			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-389-00-1	trisodium N,N-bis(carboxymethyl)-3-amino-2-hydroxypropionate	414-130-4	119710-96-2	Acute Tox. 4 *	H302	GHS07 Wng	H302			
607-390-00-7	1,2,3,4-tetrahydro-6-nitro-quinoxaline	414-270-6	41959-35-7	Acute Tox. 4 * Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
607-391-00-2	dimethylcyclopropane-1,1-dicarboxylate	414-240-2	6914-71-2	Aquatic Chronic 3	H412	—	H412			
607-392-00-8	2-phenoxyethyl 4-((5-cyano-1,6-dihydro-2-hydroxy-1,4-dimethyl-6-oxo-3-pyridinyl)azo)benzoate	414-260-1	88938-37-8	Aquatic Chronic 4	H413	—	H413			
607-393-00-3	3-(cis-1-propenyl)-7-amino-8-oxo-5-thia-1-azabicyclo[4.2.0]oct-2-ene-2-carboxylic acid	415-750-8	106447-44-3	Skin Sens. 1	H317	GHS07 Wng	H317			
607-394-00-9	5-methylpyrazine-2-carboxylic acid	413-260-9	5521-55-1	Eye Dam. 1	H318	GHS05 Dgr	H318			
607-395-00-4	reaction mass of: sodium 1-tridecyl-4-allyl-(2 or 3)-sulfobutanedioate; sodium 1-dodecyl-4-allyl-(2 or 3)-sulfobutanedioate	410-230-7	—	Skin Corr. 1B Skin Sens. 1 Aquatic Chronic 2	H314 H317 H411	GHS05 GHS07 GHS09 Dgr	H314 H317 H411			
607-396-00-X	bis(1,2,2,6,6-pentamethyl-4-piperidiny) 2-(4-methoxybenzylidene)malonate	414-840-4	147783-69-5	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
607-397-00-5	reaction mass of: Ca salicylates (branched C <sub>10-14</sub> and C <sub>18-30</sub> alkylated); Ca phenates (branched C <sub>10-14</sub> and C <sub>18-30</sub> alkylated); Ca sulfurized phenates (branched C <sub>10-14</sub> and C <sub>18-30</sub> alkylated)	415-930-6	—	Skin Sens. 1	H317	GHS07 Wng	H317			
607-398-00-0	ethyl N-(5-chloro-3-(4-(diethylamino)-2-methylphenylimino)-4-methyl-6-oxo-1,4-cyclohexadienyl)carbamate	414-820-5	125630-94-6	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-399-00-6	2,2-dimethyl 3-methyl-3-butenyl propaanoate	415-610-6	104468-21-5	Skin Irrit. 2 Aquatic Chronic 3	H315 H412	GHS07 Wng	H315 H412			
607-400-00-X	methyl 3-[[[dibutylamino]thioxomethyl]thio]propanoate	414-400-1	32750-89-3	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
607-401-00-5	ethyl 3-hydroxy-5-oxo-3-cyclohexene-1-carboxylate	414-450-4	88805-65-6	Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1	H315 H318 H317	GHS05 GHS07 Dgr	H315 H318 H317			
607-402-00-0	methyl N-(phenoxy-carbonyl)-L-valinate	414-500-5	153441-77-1	Aquatic Chronic 3	H412	—	H412			
607-403-00-6	reaction mass of: bis(1S,2S,4S)-(1-benzyl-4-tert-butoxycarboxamido-2-hydroxy-5-phenyl)pentylammonium succinate; isopropyl alcohol	414-810-0	—	STOT RE 2 * Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H373 ** H318 H400 H410	GHS08 GHS05 GHS09 Dgr	H373 ** H318 H410			
607-404-00-1	reaction mass of: ((Z)-3,7-dimethyl-2,6-octadienyl)oxycarbonylpropanoic acid; di-((E)-3,7-dimethyl-2,6-octadienyl) butandioate; di-((Z)-3,7-dimethyl-2,6-octadienyl) butandioate; (Z)-3,7-dimethyl-2,6-octadienyl butandioate; ((E)-3,7-dimethyl-2,6-octadienyl)oxycarbonylpropanoic acid	415-190-4	—	Skin Sens. 1	H317	GHS07 Wng	H317			
607-405-00-7	2-hexyldecyl-p-hydroxybenzoate	415-380-7	148348-12-3	Aquatic Chronic 2	H411	GHS09	H411			
607-406-00-2	potassium 2,5-dichlorobenzoate	415-700-5	184637-62-5	Acute Tox. 4 * Eye Dam. 1	H302 H318	GHS05 GHS07 Dgr	H302 H318			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-407-00-8	ethyl 2-carboxy-3-(2-thienyl)propionate	415-680-8	143468-96-6	Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1	H315 H318 H317	GHS05 GHS07 Dgr	H315 H318 H317			
607-408-00-3	potassium N-(4-fluorophenyl)glycinate	415-710-1	184637-63-6	STOT RE 2 * Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 3	H373 ** H318 H317 H412	GHS08 GHS05 GHS07 Dgr	H373 ** H318 H317 H412			
607-409-00-9	reaction mass of: (3R)-[1S-(1α, 2α, 6β-((2S)-2-methyl-1-oxo-butoxy)-8α)]hexahydro-2,6-dimethyl-1-naphthalene]-3,5-dihydroxyheptanoic acid; inert biomass from <i>Aspergillus terreus</i>	415-840-7	—	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
607-410-00-4	mono[2-(dimethylamino)ethyl]monohydrogen-2-(hexadec-2-enyl)butanedioate and/or mono[2-(dimethylamino)ethyl]monohydrogen-3-(hexadec-2-enyl)butanedioate	415-880-5	779343-34-9	Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H315 H318 H317 H400 H410	GHS05 GHS07 GHS09 Dgr	H315 H318 H317 H410			
607-411-00-X	oxiranemethanol, 4-methylbenzene-sulfonate, (S)-	417-210-7	70987-78-9	Carc. 1B Muta. 2 Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H350 H341 H318 H317 H411	GHS08 GHS05 GHS07 GHS09 Dgr	H350 H341 H318 H317 H411			
607-412-00-5	ethyl 2-(1-cyanocyclohexyl)acetate	415-970-4	133481-10-4	Acute Tox. 4 * STOT RE 2 * Aquatic Chronic 3	H302 H373 ** H412	GHS08 GHS07 Wng	H302 H373 ** H412			
607-413-00-0	trans-4-phenyl-L-proline	416-020-1	96314-26-0	Repr. 2 Skin Sens. 1	H361f *** H317	GHS08 GHS07 Wng	H361f *** H317			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-414-00-6	tris(2-ethylhexyl)-4,4',4''-(1,3,5-triazine-2,4,6-triyltriimino)tribenzoate	402-070-1	88122-99-0	Aquatic Chronic 4	H413	—	H413			
607-415-00-1	poly-(methyl methacrylate)-co-(butylmethacrylate)-co-(4-acryloxybutyl-isopropenyl- $\alpha$ , $\alpha$ -dimethylbenzyl carbamate)-co-(maleicanhydride)	419-590-1	—	Flam. Sol. 1 Skin Sens. 1	H228 H317	GHS02 GHS07 Dgr	H228 H317			T
607-416-00-7	4-(2-carboxymethylthio)ethoxy-1-hydroxy-5-isobutyloxycarbonylamino- <i>N</i> -(3-dodecylloxypropyl)-2-naphthamide	420-730-7	—	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
607-418-00-8	2-ethylhexyl 4-aminobenzoate	420-170-3	26218-04-2	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
607-419-00-3	(3'-carboxymethyl-5-(2-(3-ethyl-3 <i>H</i> -benzothiazol-2-ylidene)-1-methyl-ethylidene)-4,4'-dioxo-2'-thioxo-(2,5')bithiazolidinyliden-3-yl)-acetic acid	422-240-9	166596-68-5	Eye Dam. 1 Skin Sens. 1	H318 H317	GHS05 GHS07 Dgr	H318 H317			
607-420-00-9	2,2-bis(hydroxymethyl)butanoic acid	424-090-1	10097-02-6	Eye Dam. 1 Aquatic Chronic 3	H318 H412	GHS05 Dgr	H318 H412			
607-421-00-4	cypermethrin <i>cis/trans</i> +/- 40/60; ( <i>RS</i> )- $\alpha$ -cyano-3-phenoxybenzyl (1 <i>RS</i> ,3 <i>RS</i> ;1 <i>RS</i> ,3 <i>SR</i> )-3-(2,2-dichlorovinyl)- 2,2-dimethylcyclopropanecarboxylate	257-842-9	52315-07-8	Acute Tox. 4 * Acute Tox. 4 * STOT SE 3 Aquatic Acute 1 Aquatic Chronic 1	H332 H302 H335 H400 H410	GHS07 GHS09 Wng	H332 H302 H335 H410			
607-422-00-X	$\alpha$ -cypermethrin	257-842-9	67375-30-8	Acute Tox. 3 * STOT RE 2 * STOT SE 3 Aquatic Acute 1 Aquatic Chronic 1	H301 H373 ** H335 H400 H410	GHS06 GHS08 GHS09 Dgr	H301 H373 ** H335 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-423-00-5	esters of mecoprop and of mecoprop-P	—	—	Acute Tox. 4 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H317 H400 H410	GHS07 GHS09 Wng	H302 H317 H410			A
607-424-00-0	trifloxystrobin (ISO); (E,E)- $\alpha$ -methoxyimino-[2-[[[1-[3-(trifluoromethyl)phenyl]ethylidene]amino]oxy]methyl]benzeneacetic acid methyl ester	—	141517-21-7	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
607-425-00-6	metalaxyl (ISO); methyl-N-(2,6-dimethylphenyl)-N-(methoxyacetyl)-DL-alaninate	260-979-7	57837-19-1	Acute Tox. 4 * Skin Sens. 1 Aquatic Chronic 3	H302 H317 H412	GHS07 Wng	H302 H317 H412			
607-426-00-1	1,2-benzenedicarboxylic acid, dipentylester, branched and linear; [1] n-pentyl-isopentylphthalate; [2] di-n-pentyl phthalate; [3] diisopentylphthalate [4]	284-032-2 [1] [2] 205-017-9 [3] 210-088-4 [4]	84777-06-0 [1] [2] 131-18-0 [3] 605-50-5 [4]	Repr. 1B Aquatic Acute 1	H360FD H400	GHS08 GHS09 Dgr	H360FD H400			
607-427-00-7	bromoxynil heptanoate (ISO); 2,6-dibromo-4-cyanophenyl heptanoate	260-300-4	56634-95-8	Repr. 2 Acute Tox. 4 * Acute Tox. 4 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H361d *** H332 H302 H317 H400 H410	GHS08 GHS07 GHS09 Wng	H361d *** H332 H302 H317 H410			
607-430-00-3	BBP; benzyl butyl phthalate e	201-622-7	85-68-7	Repr. 1B Aquatic Acute 1 Aquatic Chronic 1	H360Df H400 H410	GHS08 GHS09 Dgr	H360Df H410			



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-431-00-9	prallethrin (ISO); ETOC; 2-methyl-4-oxo-3-(prop-2-ynyl)cyclopent-2-en-1-yl 2,2-dimethyl-3-(2-methylprop-1-enyl)cyclopropanecarboxylate	245-387-9	23031-36-9	Acute Tox. 3 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H331 H302 H400 H410	GHS06 GHS09 Dgr	H331 H302 H410			
607-432-00-4	S-metolachlor; reaction mass of (S)-2-chloro-N-(2-ethyl-6-methyl-phenyl)-N-(2-methoxy-1-methyl-ethyl)-acetamide (80-100 %); [1] (R)-2-chloro-N-(2-ethyl-6-methyl-phenyl)-N-(2-methoxy-1-methyl-ethyl)-acetamide (0-20 %) [2]	[1] [2]	87392-12-9 [1] 178961-20-1 [2]	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
607-433-00-X	cypermethrin <i>cis/trans</i> +/- 80/20; (RS)- $\alpha$ -cyano-3-phenoxybenzyl (1RS; 3RS; 1RS, 3SR)-3-(2,2-dichlorovinyl)-2,2-dimethylcyclopropanecarboxylate	257-842-9	52315-07-8	Acute Tox. 4 * STOT SE 3 Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H335 H315 H317 H400 H410	GHS07 GHS09 Wng	H302 H335 H315 H317 H410			
607-434-00-5	mecoprop-P [1] and its salts; (R)-2-(4-chloro-2-methylphenoxy)propionic acid	240-539-0	16484-77-8	Acute Tox. 4 * Eye Dam. 1 Aquatic Chronic 2	H302 H318 H411	GHS05 GHS07 GHS09 Dgr	H302 H318 H411			
607-435-00-0	2S-isopropyl-5R-methyl-1R-cyclohexyl 2,2-dihydroxyacetate	416-810-6	111969-64-3	STOT RE 2 * Eye Dam. 1 Aquatic Chronic 2	H373 ** H318 H411	GHS08 GHS05 GHS09 Dgr	H373 ** H318 H411			
607-436-00-6	2-hydroxy-3-(2-ethyl-4-methylimidazolyl)propyl neodecanoate	417-350-9	—	Skin Irrit. 2 Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H315 H318 H400 H410	GHS05 GHS09 Dgr	H315 H318 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-437-00-1	3-(4-aminophenyl)-2-cyano-2-propenoic acid	417-480-6	252977-62-1	Skin Sens. 1	H317	GHS07 Wng	H317			
607-438-00-7	methyl-2-[(aminosulfonyl)methyl]benzoate	419-010-5	112941-26-1	Acute Tox. 4 * Eye Irrit. 2	H302 H319	GHS07 Wng	H302 H319			
607-439-00-2	methyl tetrahydro-2-furancarboxylate	420-670-1	37443-42-8	Eye Dam. 1	H318	GHS05 Dgr	H318			
607-440-00-8	methyl 2-aminosulfonyl-6-(trifluoromethyl)pyridine-3-carboxylate	421-220-7	144740-59-0	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
607-441-00-3	3-[3-(2-dodecyloxy-5-methylphenylcarbamoyl)-4-hydroxy-1-naphthylthio]propionic acid	421-490-6	167684-63-1	Aquatic Chronic 4	H413	—	H413			
607-442-00-9	benzyl [hydroxy-(4-phenylbutyl)phosphinyl]acetate	416-050-5	87460-09-1	Eye Dam. 1	H318	GHS05 Dgr	H318			
607-443-00-4	bis(2,4-di-tert-butyl-6-methylphenyl)ethyl phosphate	416-140-4	145650-60-8	Aquatic Chronic 4	H413	—	H413			
607-444-00-X	reaction mass of: <i>cis</i> -1,4-dimethylcyclohexyl dibenzoate; <i>trans</i> -1,4-dimethylcyclohexyl dibenzoate	416-230-3	35541-81-2	Aquatic Chronic 4	H413	—	H413			
607-445-00-5	Iron (III) tris(4-methylbenzenesulfonate)	420-960-8	77214-82-5	Eye Dam. 1	H318	GHS05 Dgr	H318			
607-446-00-0	methyl 2-[4-(2-chloro-4-nitrophenylazo)-3-(1-oxopropyl)amino]phenylaminopropionate	416-240-8	155522-12-6	Skin Sens. 1 Aquatic Chronic 4	H317 H413	GHS07 Wng	H317 H413			
607-447-00-6	sodium 4-[4-(4-hydroxyphenylazo)phenylamino]-3-nitrobenzenesulfonate	416-370-5	156738-27-1	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-448-00-1	2,3,5,6-tetrafluorobenzoic acid	416-800-1	652-18-6	Skin Irrit. 2 Eye Dam. 1	H315 H318	GHS05 Dgr	H315 H318			
607-449-00-7	reaction mass of: 4,4',4''-[(2,4,6-trioxo-1,3,5-(2H,4H,6H)-triazine-1,3,5-triyl)tris[methylene(3,5,5-trimethyl-3,1-cyclohexanediyl)iminocarbonyloxy-2,1-ethanediyl(ethyl)amino]]trisbenzenediazoniumtri[bis(2-methylpropyl)naphthalenesulfonate]; 4,4',4''-4'''-[[5,5'-[carbonylbis[imino(1,5,5-trimethyl-3,1-cyclohexanediyl)methylene]]-2,4,6-trioxo-1,3,5-(2H,4H,6H)-triazine-1,1',3,3'-tetrayl]tetrakis[methylene(3,5,5-trimethyl-3,1-cyclohexanediyl)iminocarbonyloxy-2,1-ethanediyl(ethyl)amino]]tetrakisbenzenediazoniumtetra[bis(2-methylpropyl)naphthalenesulfonate]	417-080-1	—	Self-react. D **** Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H242 H317 H400 H410	GHS02 GHS07 GHS09 Dgr	H242 H317 H410			
607-450-00-2	2-mercaptobenzothiazolyl-(Z)-(2-aminothiazol-4-yl)-2-(tert-butoxycarbonyl) isopropoxyiminoacetate	419-040-9	89604-92-2	Aquatic Chronic 4	H413	—	H413			
607-451-00-8	4-[4-amino-5-hydroxy-3-(4-(2-sulfoxyethylsulfonyl)phenylazo)-2,7-disulfonapht-6-ylazo]-6-[3-(4-amino-5-hydroxy-3-(4-(2-sulfoxyethylsulfonyl)phenylazo)-2,7-disulfonapht-6-ylazo]phenylcarbonylamino]benzenesulfonic acid, sodium salt	417-640-5	161935-19-9	Eye Dam. 1 Skin Sens. 1	H318 H317	GHS05 GHS07 Dgr	H318 H317			
607-453-00-9	4-benzyl-2,6-dihydroxy-4-aza-heptylene bis(2,2-dimethyloctanoate)	418-100-1	172964-15-7	Skin Sens. 1 Aquatic Chronic 4	H317 H413	GHS07 Wng	H317 H413			
607-454-00-4	reaction mass of: <i>trans</i> -2-(1-methylethyl)-1,3-dioxane-5-carboxylic acid; <i>cis</i> -2-(1-methylethyl)-1,3-dioxane-5-carboxylic acid	418-170-3	116193-72-7	Eye Dam. 1 Aquatic Chronic 3	H318 H412	GHS05 Dgr	H318 H412			
607-455-00-X	1-amino-4-(3-[4-chloro-6-(2,5-di-sulfophenylamino)-1,3,5-triazin-2-ylamino]-2,2-dimethyl-propylamino)-anthraquinone-2-sulfonic acid, sodium/lithium salt	419-520-8	172890-93-6	Skin Sens. 1	H317	GHS07 Wng	H317			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-456-00-5	3-amino-4-chlorobenzoic acid, hexadecyl ester	419-700-6	143269-74-3	Aquatic Chronic 2	H411	GHS09	H411			
607-457-00-0	tetrasodium dihydrogen 1,1"-dihydroxy-8,8"-[p-phenylbis(imino-{6-[4-(2-aminoethyl)piperazin-1-yl]})-1,3,5-triazine-4,2-diylimino]bis(2,2'-azonaphthalene-1',3,6-trisulfonate)	420-350-1	172277-97-3	Eye Dam. 1 Aquatic Chronic 2	H318 H411	GHS05 GHS09 Dgr	H318 H411			
607-458-00-6	reaction mass of: 2-ethyl-[2,6-dibromo-4-[1-[3,5-dibromo-4-(2-hydroxyethoxy)phenyl]-1-methylethyl]phenoxy]propenoate; 2,2'-diethyl-[4,4'-bis(2,6-dibromophenoxy)-1-methylethylidene] dipropenoate; 2,2'-[(1-methylethylidene)bis[[2,6-dibromo-4,1-phenyleneoxy]ethanol]]	420-850-1	—	Aquatic Chronic 2	H411	GHS09	H411			
607-459-00-1	isopentyl 4-{2-[5-cyano-1,2,3,6-tetrahydro-1-(2-isopropoxyethoxy-carbonylmethyl)-4-methyl-2,6-dioxo-3-pyridylidene]hydrazino} benzoate	418-930-4	—	Aquatic Chronic 4	H413	—	H413			
607-460-00-7	3-tridecyloxy-propyl-ammonium 9-octadecenoate	418-990-1	778577-53-0	STOT RE 2 * Eye Irrit. 2 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H373 ** H319 H315 H400 H410	GHS08 GHS07 GHS09 Wng	H373 ** H319 H315 H410			
607-461-00-2	reaction mass of: pentasodium 2-{4-[3-methyl-4-[6-sulfonato-4-(2-sulfonato-phenylazo)-naphthalen-1-ylazo]-phenylamino]-6-[3-(2-sulfato-ethanesulfonyl)-phenylamino]-1,3,5-triazin-2-ylamino]-benzene-1,4-disulfonate; pentasodium 2-{4-[3-methyl-4-[7-sulfonato-4-(2-sulfonato-phenylazo)-naphthalen-1-ylazo]-phenylamino]-6-[3-(2-sulfato-ethanesulfonyl)-phenylamino]-1,3,5-triazin-2-ylamino]-benzene-1,4-disulfonate	421-160-1	—	Aquatic Chronic 3	H412	—	H412			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-462-00-8	reaction mass of: 1-hexyl acetate; 2-methyl-1-pentyl acetate; 3-methyl-1-pentyl acetate; 4-methyl-1-pentyl acetate; other mixed linear and branched C <sub>6</sub> -alkyl acetates	421-230-1	88230-35-7	Aquatic Chronic 2	H411	GHS09	H411			
607-463-00-3	3-(phenothiazin-10-yl)propionic acid	421-260-5	362-03-8	Aquatic Chronic 2	H411	GHS09	H411			
607-464-00-9	reaction mass of: 7-chloro-1-ethyl-6-fluoro-1,4-dihydro-4-oxo-quinoline-3-carboxylic acid; 5-chloro-1-ethyl-6-fluoro-1,4-dihydro-4-oxo-quinoline-3-carboxylic acid	421-280-4		Aquatic Chronic 3	H412	—	H412			
607-465-00-4	tris(2-hydroxyethyl)ammonium 7-{4-[4-(2-cyanoamino-4-hydroxy-6-oxidopyrimidin-5-ylazo)benzamido]-2-ethoxy-phenylazo} naphthalene-1,3-disulfonate	421-440-3	778583-04-3	Aquatic Chronic 3	H412	—	H412			
607-466-00-X	reaction mass of: phenyl 1-(1-[2-chloro-5-(hexadecyloxy carbonyl)phenylcarbamoyl]-3,3-dimethyl-2-oxobutyl)-1H—2,3,3a,7a-tetrahydrobenzotriazole-5-carboxylate; phenyl 2-(1-(2-chloro-5-(hexadecyloxy carbonyl)phenylcarbamoyl)-3,3-dimethyl-2-oxobutyl)-1H—2,3,3a,7a-tetrahydrobenzotriazole-5-carboxylate; phenyl 3-(1-(2-chloro-5-(hexadecyloxy carbonyl)phenylcarbamoyl)-3,3-dimethyl-2-oxobutyl)-1H—2,3,3a,7a-tetrahydrobenzotriazole-5-carboxylate	421-480-1	—	Aquatic Chronic 2	H411	GHS09	H411			
607-467-00-5	1,1,3,3-tetrabutyl-1,3-dinitoxydicaprylate	419-430-9	56533-00-7	Acute Tox. 4 * Acute Tox. 4 * STOT RE 2 * Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H373 ** H314 H400 H410	GHS08 GHS05 GHS07 GHS09 Dgr	H312 H302 H373 ** H314 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-468-00-0	reaction mass of: monosodium 4-((4-(5-sulfonato-2-methoxyphenylamino)-6-chloro-1,3,5-triazine-2-yl)amino)-2-((1,4-dimethyl-6-oxido-2-oxo-5-sulfonatomethyl-1,2-dihydropyridine-3-yl)azo)benzenesulfonate; disodium 4-((4-(5-sulfonato-2-methoxyphenylamino)-6-chloro-1,3,5-triazine-2-yl)amino)-2-((1,4-dimethyl-6-oxido-2-oxo-5-sulfonatomethyl-1,2-dihydropyridine-3-yl)azo)benzenesulfonate; trisodium 4-((4-(5-sulfonato-2-methoxyphenylamino)-6-chloro-1,3,5-triazine-2-yl)amino)-2-((1,4-dimethyl-6-oxido-2-oxo-5-sulfonatomethyl-1,2-dihydropyridine-3-yl)azo)benzenesulfonate; tetrasodium 4-((4-(5-sulfonato-2-methoxyphenylamino)-6-chloro-1,3,5-triazine-2-yl)amino)-2-((1,4-dimethyl-6-oxido-2-oxo-5-sulfonatomethyl-1,2-dihydropyridine-3-yl)azo)benzenesulfonate	419-450-8	—	Skin Sens. 1	H317	GHS07 Wng	H317			
607-469-00-6	disodium 7-((4,6-bis(3-diethylaminopropylamino)-1,3,5-triazine-2-yl)amino)-4-hydroxy-3-(4-(4-sulfonatophenylazo)phenylazo)-2-naphthalene sulfonate	419-460-2	120029-06-3	Aquatic Chronic 3	H412	—	H412			
607-470-00-1	potassium sodium 6,13-dichloro-3,10-bis{2-[4-[3-(2-hydroxysulphonyloxyethanesulfonyl)phenylamino]-6-(2,5-disulfonatophenylamino)-1,3,5-triazin-2-ylamino]ethylamino}benzo[5,6][1,4]oxazino[2,3-b]phoxazine-4,11-disulfonate	414-100-0	154336-20-6	Eye Dam. 1 Aquatic Chronic 3	H318 H412	GHS05 Dgr	H318 H412			
607-472-00-2	ammonium iron(III) trimethylenediaminetracetate hemihydrate	400-660-3	111687-36-6	Aquatic Chronic 2	H411	GHS09	H411			
607-474-00-3	(4-(4-(4-dimethylaminobenzyliden-1-yl)-3-methyl-5-oxo-2-pyrazolin-1-yl)benzoic acid	410-430-4	117573-89-4	Aquatic Chronic 4	H413	—	H413			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-475-00-9	reaction mass of: tetrasodium 7-(4-[4-chloro-6-[methyl-(3-sulfonatophenyl)amino]-1,3,5-triazin-2-ylamino]-2-ureidophenylazo)naphthalene-1,3,6-trisulfonate; tetrasodium 7-(4-[4-chloro-6-[methyl-(4-sulfonatophenyl)amino]-1,3,5-triazin-2-ylamino]-2-ureidophenylazo)naphthalene-1,3,6-trisulfonate (1:1)	412-940-2	148878-18-6	Skin Sens. 1	H317	GHS07 Wng	H317			
607-476-00-4	trisodium N,N-bis(carboxymethyl)-β-alanine	414-070-9	129050-62-0	Skin Corr. 1B Aquatic Chronic 3	H314 H412	GHS05 Dgr	H314 H412			
607-478-00-5	tetramethylammonium hydrogen phthalate	416-900-5	79723-02-7	Acute Tox. 3 * STOT RE 2 * Aquatic Acute 1	H301 H373 ** H400	GHS06 GHS08 GHS09 Dgr	H301 H373 ** H400			
607-479-00-0	hexadecyl 4-chloro-3-[2-(5,5-dimethyl-2,4-dioxo-1,3-oxazolidin-3-yl)-4,4-dimethyl-3-oxopentamido]benzoate	418-550-9	168689-49-4	Aquatic Chronic 4	H413	—	H413			
607-480-00-6	1,2-benzenedicarboxylic acid; di-C <sub>7,11</sub> -branched and linear alkylesters	271-084-6	68515-42-4	Repr. 1B	H360-Df	GHS08 Dgr	H360Df			
607-487-00-4	reaction mass of: disodium 4-(3-ethoxycarbonyl-4-(5-(3-ethoxycarbonyl-5-hydroxy-1-(4-sulfonatophenyl)pyrazol-4-yl)penta-2,4-dienylidene)-4,5-dihydro-5-oxopyrazol-1-yl)benzenesulfonate; trisodium 4-(3-ethoxycarbonyl-4-(5-(3-ethoxycarbonyl-5-oxido-1-(4-sulfonatophenyl)pyrazol-4-yl)penta-2,4-dienylidene)-4,5-dihydro-5-oxopyrazol-1-yl)benzenesulfonate	402-660-9	—	Repr. 1B Aquatic Chronic 3	H360-D *** H412	GHS08 Dgr	H360D *** H412			
607-488-00-X	ethyl (2-acetylamino-5-fluoro-4-isothiocyanatophenoxy)acetate	414-210-9	147379-38-2	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevaarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-489-00-5	reaction mass of: 2-ethylhexyl linolenate, linoleate and oleate; 2-ethylhexyl epoxyoleate; 2-ethylhexyl diepoxylinolenate; 2-ethylhexyl triepoxylinolenate	414-890-7	71302-79-9	Skin Sens. 1	H317	GHS07 Wng	H317			
607-490-00-0	N-[2-hydroxy-3-(C <sub>12-16</sub> -alkyloxy)propyl]-N-methyl glycinate	415-060-7	—	Eye Dam. 1 Skin Sens. 1	H318 H317	GHS05 GHS07 Dgr	H318 H317			
607-492-00-1	2-(1-(3',3'-dimethyl-1'-cyclohexyl)ethoxy)-2-methyl propyl propanoate	415-490-5	141773-73-1	Aquatic Chronic 2	H411	GHS09	H411			
607-493-00-7	methyl (3aR,4R,7aR)-2-methyl-4-(1S,2R,3-triacetoxypropyl)-3a,7a-dihydro-4H-pyrano [3,4-d]oxazole-6-carboxylate	415-670-3	78850-37-0	Eye Dam. 1	H318	GHS05 Dgr	H318			
607-494-00-2	bis(2-ethylhexyl)octylphosphonate	417-170-0	52894-02-7	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
607-495-00-8	sodium 4-sulfophenyl-6-((1-oxononyl)amino)hexanoate	417-550-6	168151-92-6	Skin Sens. 1	H317	GHS07 Wng	H317			
607-496-00-3	2,2'-methylenebis(4,6-di-tert-butyl-phenyl)-2-ethylhexyl phosphite	418-310-3	126050-54-2	Aquatic Chronic 4	H413	—	H413			
607-497-00-9	cerium oxide isostearate	419-760-3	—	Aquatic Chronic 4	H413	—	H413			
607-498-00-4	(E)-3,7-dimethyl-2,6-octadienylhexadecanoate	421-370-3	3681-73-0	Skin Irrit. 2 Aquatic Chronic 4	H315 H413	GHS07 Wng	H315 H413			
607-499-00-X	bis(dimethyl-(2-hydroxyethyl)ammonium) 1,2-ethanediyl-bis(2-hexadecenylsuccinate)	421-660-1	—	Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H318 H317 H411	GHS05 GHS07 GHS09 Dgr	H318 H317 H411			



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etiketgeving			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-500-00-3	calcium 2,2-bis[(5-tetrapropylene-2-hydroxy)phenyl]ethanoate	421-670-4	—	Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H315 H400 H410	GHS07 GHS09 Wng	H315 H410			
607-501-00-9	reaction mass of: triphenylthiophosphate and tertiary butylated phenyl derivatives	421-820-9	192268-65-8	Aquatic Chronic 4	H413	—	H413			
607-502-00-4	(N-benzyl-N,N,N-tributyl)ammonium 4-dodecylbenzenesulfonate	422-200-0	178277-55-9	Skin Corr. 1B Acute Tox. 4 * Aquatic Chronic 2	H314 H302 H411	GHS05 GHS07 GHS09 Dgr	H314 H302 H411			
607-503-00-X	2,4,6-tri-n-propyl-2,4,6-trioxo-1,3,5,2,4,6-trioxatriphosphorinane	422-210-5	68957-94-8	Skin Corr. 1B	H314	GHS05 Dgr	H314			
607-505-00-0	pentasodium 7-(4-(4-(5-amino-4-sulfonato-2-(4-((2-(sulfonato-ethoxy)sulfonyl)phenylazo)phenylamino)-6-chloro-1,3,5-triazin-2-yl)amino-2-ureidophenylazo)naphthalene-1,3,6-trisulfonate	422-930-1		Aquatic Chronic 3	H412	—	H412			
607-506-00-6	reaction mass of: strontium (4-chloro-2-((4,5-dihydro-3-methyl-5-oxo-1-(3-sulfonatophenyl)-1H-pyrazol-4-yl)azo)-5-methyl)benzenesulfonate; disodium (4-chloro-2-((4,5-dihydro-3-methyl-5-oxo-1-(3-sulfonatophenyl)-1H-pyrazol-4-yl)azo)-5-methyl)benzenesulfonate	422-970-8		Aquatic Chronic 2	H411	GHS09	H411			
607-507-00-1	potassium, sodium 2,4-diamino-3-[4-(2-sulfonatoethoxysulfonyl)phenylazo]-5-[4-(2-sulfonatoethoxysulfonyl)-2-sulfonatophenylazo]-benzenesulfonate	422-980-2	187026-95-5	Eye Dam. 1	H318	GHS05 Dgr	H318			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-508-00-7	disodium 3,3'-[iminobis[sulfonyl-4,1-phenylene-(5-hydroxy-3-methylpyrazole-1,4-diyl)azo-4,1-phenylenesulfonylimino-(4-amino-6-hydroxypyrimidine-2,5-diyl)azo-4,1-phenylenesulfonylimino(4-amino-6-hydroxypyrimidine-2,5-diyl)azo]bis(benzenesulfonate)]	423-110-4	—	Eye Dam. 1	H318	GHS05 Dgr	H318			
607-512-00-9	trisodium 2,4-diamino-3,5-bis-[4-(2-sulfonatoethoxy)sulfonyl]phenylazo]benzenesulfonate	423-970-0	182926-43-8	Aquatic Chronic 3	H412	—	H412			
607-513-00-4	reaction mass of: trisodium 4-benzoylamino-6-(6-ethenesulfonyl-1-sulfato-naphthalen-2-ylazo)-5-hydroxynaphthalene-2,7-disulfonate; 5-(benzoylamino)-4-hydroxy-3-((1-sulfo-6-((2-(sulfooxy)ethyl)sulfonyl)-2-naphthyl)azo)naphthalene-2,7-disulfonic acid sodium salt; 5-(benzoylamino)-4-hydroxy-3-((1-sulfo-6-((2-(sulfooxy)ethyl)sulfonyl)-2-naphthyl)azo)naphthalene-2,7-disulfonic acid	423-200-3	—	Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 3	H318 H317 H412	GHS05 GHS07 Dgr	H318 H317 H412			
607-515-00-5	reaction mass of: disodium hexyldiphenyl ether disulphonate; disodium dihexyldiphenyl ether disulphonate	429-650-7	147732-60-3	Eye Irrit. 2 Aquatic Chronic 2	H319 H411	GHS07 GHS09 Wng	H319 H411			
607-516-00-0	N,N'-bis(trifluoroacetyl)-S,S'-bis-L-homocysteine	429-670-6	105996-54-1	Eye Dam. 1 Skin Sens. 1	H318 H317	GHS05 GHS07 Dgr	H318 H317			
607-517-00-6	(S)- $\alpha$ -(acetylthio)benzenepropanoic acid	430-300-0	76932-17-7	Acute Tox. 4 * Eye Dam. 1 Skin Sens. 1	H302 H318 H317	GHS05 GHS07 Dgr	H302 H318 H317			
607-526-00-5	cartap (ISO); 1,3-bis(carbamoylthio)-2-(dimethylamino)propane	—	15263-53-3	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
607-527-00-0	reaction mass of: 1-(1'H,1'H,2'H,2'H-tridecafluorooctyl)-12-(1''H,1''H,2''H,2''H-tridecafluorooctyl)dodecanedioate; 1-(1'H,1'H,2'H,2'H-tridecafluorooctyl)-12-(1''H,1''H,2''H,2''H-heptadecafluorodecyl)dodecanedioate; 1-(1'H,1'H,2'H,2'H-tridecafluorooctyl)-12-(1''H,1''H,2''H,2''H-heneicosafuorododecyl)dodecanedioate; 1-(1'H,1'H,2'H,2'H-tridecafluorooctyl)-12-(1''H,1''H,2''H,2''H-pentacosafuorotetradecyl)dodecanedioate; 1-(1'H,1'H,2'H,2'H-heptadecafluorodecyl)-12-(1''H,1''H,2''H,2''H-heptadecafluorodecyl)dodecanedioate; 1-(1'H,1'H,2'H,2'H-heptadecafluorodecyl)-12-(1''H,1''H,2''H,2''H-heneicosafuorododecyl)dodecanedioate	423-180-6	—	STOT RE 2 *	H373 **	GHS08 Wng	H373 **			
607-696-00-0	pentyl formate	211-340-6	638-49-3	Flam. Liq. 3 Eye Irrit. 2 STOT SE 3	H226 H319 H335	GHS02 GHS07 Dgr	H226 H319 H335			C
607-697-00-6	tert-butyl propionate	—	20487-40-5	Flam. Liq. 2	H225	GHS02 Dgr	H225			C
608-001-00-3	acetonitrile; cyanomethane	200-835-2	75-05-8	Flam. Liq. 2 Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Eye Irrit. 2	H225 H332 H312 H302 H319	GHS02 GHS07 Dgr	H225 H332 H312 H302 H319			
608-002-00-9	trichloroacetonitrile	208-885-7	545-06-2	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Aquatic Chronic 2	H331 H311 H301 H411	GHS06 GHS09 Dgr	H331 H311 H301 H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevaar­klasse en categorie	Gevaar­aan­duiding	Pictogram, sig­naal­woord	Gevaar­aan­duiding	Aanvullende gevaar­aan­duiding		
608-003-00-4	acrylonitrile	203-466-5	107-13-1	Flam. Liq. 2 Carc. 1B Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * STOT SE 3 Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H225 H350 H331 H311 H301 H335 H315 H318 H317 H411	GHS02 GHS06 GHS08 GHS05 GHS09 Dgr	H225 H350 H331 H311 H301 H335 H315 H318 H317 H411		*	D
608-004-00-X	2-hydroxy-2-methylpropionitrile; 2-cyanopropan-2-ol; acetone cyanohydrin	200-909-4	75-86-5	Acute Tox. 2 * Acute Tox. 1 Acute Tox. 2 * Aquatic Acute 1 Aquatic Chronic 1	H330 H310 H300 H400 H410	GHS06 GHS09 Dgr	H330 H310 H300 H410			
608-005-00-5	n-butyronitrile	203-700-6	109-74-0	Flam. Liq. 2 Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 *	H225 H331 H311 H301	GHS02 GHS06 Dgr	H225 H331 H311 H301			
608-006-00-0	bromoxynil (ISO) 3,5-dibromo-4-hydroxybenzonnitrile; bromoxynil phenol	216-882-7	1689-84-5	Repr. 2 Acute Tox. 2 * Acute Tox. 3 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H361d *** H330 H301 H317 H400 H410	GHS06 GHS08 GHS09 Dgr	H361d *** H330 H301 H317 H410		M=10	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevaar­klasse en categorie	Gevaar­aan­duiding	Pictogram, sig­naal­woord	Gevaar­aan­duiding	Aanvullende gevaar­aan­duiding		
608-007-00-6	ioxynil (ISO) 4-hydroxy-3,5-diiodobenzonitrile	216-881-1	1689-83-4	Repr. 2 Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 4 * STOT RE 2 * Eye Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H361d *** H331 H301 H312 H373 ** H319 H400 H410	GHS06 GHS08 GHS09 Dgr	H361d *** H331 H301 H312 H373 ** H319 H410		M=10	
608-008-00-1	chloroacetonitrile	203-467-0	107-14-2	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Aquatic Chronic 2	H331 H311 H301 H411	GHS06 GHS09 Dgr	H331 H311 H301 H411			
608-009-00-7	malononitrile	203-703-2	109-77-3	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H331 H311 H301 H400 H410	GHS06 GHS09 Dgr	H331 H311 H301 H410			
608-010-00-2	methacrylonitrile; 2-methyl-2-propene nitrile	204-817-5	126-98-7	Flam. Liq. 2 Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Skin Sens. 1	H225 H331 H311 H301 H317	GHS02 GHS06 Dgr	H225 H331 H311 H301 H317		* Skin Sens. 1; H317: C ≥ 0,2 %	D
608-011-00-8	oxalonitrile; cyanogen	207-306-5	460-19-5	Flam. Gas 1 Press. Gas Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H220 H331 H400 H410	GHS02 GHS04 GHS06 GHS09 Dgr	H220 H331 H410			U

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
608-012-00-3	benzonitrile	202-855-7	100-47-0	Acute Tox. 4 * Acute Tox. 4 *	H312 H302	GHS07 Wng	H312 H302			
608-013-00-9	2-chlorobenzonitrile	212-836-5	873-32-5	Acute Tox. 4 * Acute Tox. 4 * Eye Irrit. 2	H312 H302 H319	GHS07 Wng	H312 H302 H319			
608-014-00-4	chlorothalonil (ISO); tetrachloroisophthalonitrile	217-588-1	1897-45-6	Carc. 2 Acute Tox. 2 * Eye Dam. 1 STOT SE 3 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H351 H330 H318 H335 H317 H400 H410	GHS06 GHS08 GHS05 GHS09 Dgr	H351 H330 H318 H335 H317 H410		M=10	
608-015-00-X	dichlobenil (ISO); 2,6-dichlorobenzonitrile	214-787-5	1194-65-6	Acute Tox. 4 * Aquatic Chronic 2	H312 H411	GHS07 GHS09 Wng	H312 H411			
608-016-00-5	1,4-Dicyano-2,3,5,6-tetra-chloro-benzene	401-550-8	1897-41-2	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
608-017-00-0	bromoxynil octanoate (ISO); 2,6-dibromo-4-cyanophenyl octanoate	216-885-3	1689-99-2	Repr. 2 Acute Tox. 3 * Acute Tox. 4 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H361d *** H331 H302 H317 H400 H410	GHS06 GHS08 GHS09 Dgr	H361d *** H331 H302 H317 H410		M=10	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevaar­klasse en categorie	Gevaar­aan­duiding	Pictogram, sig­naal­woord	Gevaar­aan­duiding	Aanvullende gevaar­aan­duiding		
608-018-00-6	ioxynil octanoate (ISO); 4-cyano-2,6-diiodophenyl octanoate	223-375-4	3861-47-0	Repr. 2 Acute Tox. 3 * Eye Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H361d *** H301 H319 H317 H400 H410	GHS06 GHS08 GHS09 Dgr	H361d *** H301 H319 H317 H410		M=10	
608-019-00-1	2,2'-dimethyl-2,2'-azodipropionitrile; ADZN	201-132-3	78-67-1	Self-react. C Acute Tox. 4 * Acute Tox. 4 * Aquatic Chronic 3	H242 H332 H302 H412	GHS02 GHS07 Dgr	H242 H332 H302 H412			T
608-021-00-2	3-(2-(diaminomethyleneamino)thiazol-4-ylmethylthio)propionitrile	403-710-2	76823-93-3	Acute Tox. 4 * Skin Sens. 1	H302 H317	GHS07 Wng	H302 H317			
608-022-00-8	3,7-dimethyloctanenitrile	403-620-3	40188-41-8	Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 2	H315 H317 H411	GHS07 GHS09 Wng	H315 H317 H411			
608-023-00-3	fenbuconazole (ISO); 4-(4-chlorophenyl)-2-phenyl-2-[(1H-1,2,4-triazol-1-yl)methyl]butanenitrile	406-140-2	114369-43-6	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
608-024-00-9	2-(4-(N-butyl-N-phenethylamino)phenyl)ethylene-1,1,2-tricarbonitrile	407-650-8	97460-76-9	Aquatic Chronic 4	H413	—	H413			
608-025-00-4	2-nitro-4,5-bis(benzyloxy)phenylacetoneitrile	410-970-0	117568-27-1	Aquatic Chronic 4	H413	—	H413			
608-026-00-X	3-cyano-3,5,5-trimethylcyclohexanone	411-490-4	7027-11-4	Acute Tox. 4 * STOT RE 2 * Skin Sens. 1 Aquatic Chronic 3	H302 H373 ** H317 H412	GHS08 GHS07 Wng	H302 H373 ** H317 H412			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
608-027-00-5	reaction mass of: 3-(4-ethylphenyl)-2,2-dimethylpropanenitrile; 3-(2-ethylphenyl)-2,2-dimethylpropanenitrile; 3-(3-ethylphenyl)-2,2-dimethylpropanenitrile	412-660-0	—	Aquatic Chronic 2	H411	GHS09	H411			
608-028-00-0	4-(2-cyano-3-phenylamino acryloyloxymethyl)-cyclohexyl-methyl 2-cyano-3-phenylamino)-acrylate	413-510-7	147374-67-2	STOT RE 2 * Skin Sens. 1 Aquatic Chronic 2	H373 ** H317 H411	GHS08 GHS09 Wng	H373 ** H317 H411			
608-029-00-6	1,2-dihydro-6-hydroxy-4-methyl-1-[3-(1-methylethoxy)propyl]-2-oxo-3-pyridinecarboxonitrile	411-990-2	68612-94-2	Skin Sens. 1	H317	GHS07 Wng	H317			
608-030-00-1	N-acetyl-N-[5-cyano-3-(2-dibutylamino-4-phenylthiazol-5-yl-methylene)-4-methyl-2,6-dioxo-1,2,3,6-tetrahydropyridin-1-yl]benzamide	412-340-0	147741-93-3	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
608-031-00-7	2-benzyl-2-methyl-3-butenitrile	407-870-4	97384-48-0	Acute Tox. 4 * Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			
608-033-00-8	N-butyl-3-(2-chloro-4-nitrophenylhydrazono)-1-cyano-2-methylprop-1-ene-1,3-dicarboximide	407-970-8	75511-91-0	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
608-034-00-3	chlorfenapyr; 4-bromo-2-(4-chlorophenyl)-1-ethoxymethyl-5-trifluoromethylpyrrole-3-carbonitrile	—	122453-73-0	Acute Tox. 3 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H331 H302 H400 H410	GHS06 GHS09 Dgr	H331 H302 H410			
608-035-00-9	(±)-α-[(2-acetyl-5-methylphenyl)-amino]-2,6-dichlorobenzene-aceto-nitrile	419-290-9	—	Skin Sens. 1 Aquatic Chronic 4	H317 H413	GHS07 Wng	H317 H413			



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
608-036-00-4	3-(2-{4-[2-(4-cyanophenyl)vinyl]phenyl}vinyl)benzonnitrile	419-060-8	79026-02-1	Aquatic Chronic 4	H413	—	H413			
608-037-00-X	reaction mass of: (E)-2,12-trideca-diennitrile; (E)-3,12-trideca-diennitrile; (Z)-3,12-trideca-diennitrile	422-190-8		Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
608-038-00-5	2,2,4-trimethyl-4-phenyl-butane-nitrile	422-580-8	75490-39-0	Acute Tox. 4 * Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
608-039-00-0	2-phenylhexanenitrile	423-460-8	3508-98-3	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
608-040-00-6	4,4'-dithiobis(5-amino-1-(2,6-dichloro-4-(trifluoromethyl)phenyl)-1H-pyrazole-3-carbonitrile)	423-490-1	130755-46-3	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
608-041-00-1	4'-((2-butyl-4-oxo-1,3-diazaspiro[4.4]non-1-ene-3-yl)methyl)(1,1'-biphenyl)-2-carbonitrile	423-500-4	138401-24-8	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
608-043-00-2	3-(cis-3-hexenyloxy)propanenitril	415-220-6	142653-61-0	Acute Tox. 3 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H331 H302 H400 H410	GHS06 GHS09 Dgr	H331 H302 H410			
608-065-00-2	salts of bromoxynil with the exception of those specified elsewhere in this Annex	—	—	Repr. 2 Acute Tox. 2 * Acute Tox. 3 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H361d *** H330 H301 H317 H400 H410	GHS06 GHS08 GHS09 Dgr	H361d *** H330 H301 H317 H410	M=10	A	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
608-066-00-8	salts of ioxynil with the exception of those specified elsewhere in this Annex	—	—	Repr. 2 Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 4 * STOT RE 2 * Eye Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H361d *** H331 H301 H312 H312 H373 ** H319 H400 H410	GHS06 GHS08 GHS09 Dgr	H361d *** H331 H301 H312 H373 ** H319 H410		M=10	A
609-001-00-6	1-nitropropane	203-544-9	108-03-2	Flam. Liq. 3 Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 *	H226 H332 H312 H302	GHS02 GHS07 Wng	H226 H332 H312 H302		*	
609-002-00-1	2-nitropropane	201-209-1	79-46-9	Flam. Liq. 3 Carc. 1B Acute Tox. 4 * Acute Tox. 4 *	H226 H350 H332 H302	GHS02 GHS08 GHS07 Dgr	H226 H350 H332 H302			
609-003-00-7	nitrobenzene	202-716-0	98-95-3	Carc. 2 Repr. 2 Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 1 Aquatic Chronic 2	H351 H361f *** H331 H311 H301 H372 ** H411	GHS06 GHS08 GHS09 Dgr	H351 H361f *** H331 H311 H301 H372 ** H411			
609-004-00-2	dinitrobenzene; [1] 1,4-dinitrobenzene; [2] 1,3-dinitrobenzene; [3] 1,2-dinitrobenzene [4]	246-673-6 [1] 202-833-7 [2] 202-776-8 [3] 208-431-8 [4]	25154-54-5 [1] 100-25-4 [2] 99-65-0 [3] 528-29-0 [4]	Acute Tox. 2 * Acute Tox. 1 Acute Tox. 2 * STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H330 H310 H300 H373 ** H400 H410	GHS06 GHS08 GHS09 Dgr	H330 H310 H300 H373 ** H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
609-005-00-8	1,3,5-trinitrobenzene	202-752-7	99-35-4	Expl. 1.1 Acute Tox. 2 * Acute Tox. 1 Acute Tox. 2 * STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H201 H330 H310 H300 H373 ** H400 H410	GHS01 GHS06 GHS08 GHS09 Dgr	H201 H330 H310 H300 H373 ** H410			
609-006-00-3	4-nitrotoluene	202-808-0	99-99-0	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 2 * Aquatic Chronic 2	H331 H311 H301 H373 ** H411	GHS06 GHS08 GHS09 Dgr	H331 H311 H301 H373 ** H411			
609-007-00-9	2,4-dinitrotoluene; dinitrotoluene, technical grade; [1] dinitrotoluene [2]	204-450-0 [1] 246-836-1 [2]	121-14-2 [1] 25321-14-6 [2]	Carc. 1B Muta. 2 Repr. 2 Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 2 * Aquatic Chronic 2	H350 H341 H361f *** H331 H311 H311 H301 H373 ** H411	GHS06 GHS08 GHS09 Dgr	H350 H341 H361f *** H331 H311 H301 H373 ** H411			
609-008-00-4	2,4,6-trinitrotoluene; TNT	204-289-6	118-96-7	Expl. 1.1 Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 2 * Aquatic Chronic 2	H201 H331 H311 H301 H373 ** H411	GHS01 GHS06 GHS08 GHS09 Dgr	H201 H331 H311 H301 H373 ** H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
609-009-00-X	2,4,6-trinitrophenol; picric acid	201-865-9	88-89-1	Expl. 1.1 Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 *	H201 H331 H311 H301	GHS01 GHS06 Dgr	H201 H331 H311 H301			
609-010-00-5	salts of picric acid	—	—	Unst. Expl Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 *	H201 H331 H311 H301	GHS01 GHS06 Dgr	H201 H331 H311 H301			T
609-011-00-0	2,4,6-trinitroanisole	—	606-35-9	Expl. 1.1 Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Aquatic Chronic 2	H201 H332 H312 H302 H411	GHS01 GHS07 GHS09 Wng	H201 H332 H312 H302 H411			
609-012-00-6	2,4,6-trinitro- <i>m</i> -cresol	210-027-1	602-99-3	Expl. 1.1 Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 *	H201 H332 H312 H302	GHS01 GHS07 Wng	H201 H332 H312 H302			
609-013-00-1	2,4,6-trinitro- <i>m</i> -xylene	211-187-5	632-92-8	Expl. 1.1 Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * STOT RE 2 *	H201 H332 H312 H302 H373 **	GHS01 GHS08 GHS07 Wng	H201 H332 H312 H302 H373 **			
609-015-00-2	4-nitrophenol; <i>p</i> -nitrophenol	202-811-7	100-02-7	Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * STOT RE 2 *	H332 H312 H302 H373 **	GHS08 GHS07 Wng	H332 H312 H302 H373 **			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
609-016-00-8	dinitrophenol (reaction mass of isomers); [1] 2,4(or 2,6)-dinitrophenol [2]	247-096-2 [1] 275-732-9 [2]	25550-58-7 [1] 71629-74-8 [2]	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H331 H311 H301 H373 ** H400 H410	GHS06 GHS08 GHS09 Dgr	H331 H311 H301 H373 ** H410			
609-018-00-9	2,4,6-trinitroresorcinol; stypnic acid	201-436-6	82-71-3	Expl. 1.1 Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 *	H201 H332 H312 H302	GHS01 GHS07 Wng	H201 H332 H312 H302			T
609-019-00-4	lead 2,4,6-trinitro- <i>m</i> -phenylene dioxide; lead 2,4,6-trinitroresorcinoxide; lead styphnate	239-290-0	15245-44-0	Unst. Expl Repr. 1A Acute Tox. 4 * Acute Tox. 4 * STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H200 H360Df H332 H302 H373 ** H400 H410	GHS01 GHS08 GHS07 GHS09 Dgr	H200 H360Df H332 H302 H373 ** H410			1
609-019-01-1	lead 2,4,6-trinitro- <i>m</i> -phenylene dioxide; lead 2,4,6-trinitroresorcinoxide; lead styphnate (≥ 20 % phlegmatiser)	239-290-0	15245-44-0	Expl. 1.1 Repr. 1A Acute Tox. 4 * Acute Tox. 4 * STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H201 H360Df H332 H302 H373 ** H400 H410	GHS01 GHS08 GHS07 GHS09 Dgr	H201 H360Df H332 H302 H373 ** H410			1

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
609-020-00-X	DNOC (ISO); 4,6-dinitro- <i>o</i> -cresol	208-601-1	534-52-1	Muta. 2 Acute Tox. 2 * Acute Tox. 1 Acute Tox. 2 * Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H341 H330 H310 H300 H315 H318 H317 H400 H410	GHS06 GHS08 GHS05 GHS07 GHS09 Dgr	H341 H330 H310 H300 H315 H318 H317 H410	EUH044		
609-021-00-5	sodium salt of DNOC; sodium 4,6-dinitro- <i>o</i> -cresolate; [1] potassium salt of DNOC; potassium 4,6-dinitro- <i>o</i> -cresolate [2]	219-007-7 [1] [2]	2312-76-7 [1] 5787-96-2 [2]	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H331 H311 H301 H373 ** H400 H410	GHS06 GHS08 GHS09 Dgr	H331 H311 H301 H373 ** H410			
609-022-00-0	ammonium salt of DNOC; ammonium 4,6-dinitro- <i>o</i> -tolyl oxide	221-037-0	2980-64-5	Acute Tox. 2 * Acute Tox. 1 Acute Tox. 2 * STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H330 H310 H300 H373 ** H400 H410	GHS06 GHS08 GHS09 Dgr	H330 H310 H300 H373 ** H410			
609-023-00-6	dinocap (ISO)	254-408-0	39300-45-3	Repr. 1B Acute Tox. 4 * STOT RE 2 * Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H360D *** H332 H373 ** ** H315 H317 H400 H410	GHS08 GHS07 GHS09 Dgr	H360D *** H332 H373 ** H315 H317 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
609-024-00-1	binapacryl (ISO); 2-sec-butyl-4,6-dinitrophenyl-3-methylcrotonate	207-612-9	485-31-4	Repr. 1B Acute Tox. 4 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H360-D *** H312 H302 H400 H410	GHS08 GHS07 GHS09 Dgr	H360D *** H312 H302 H410			
609-025-00-7	dinoseb(ISO); 6-sec-butyl-2,4-dinitrophenol	201-861-7	88-85-7	Repr. 1B Acute Tox. 3 * Acute Tox. 3 * Eye Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H360-Df H311 H301 H319 H400 H410	GHS06 GHS08 GHS09 Dgr	H360Df H311 H301 H319 H410	EUH044		
609-026-00-2	salts and esters of dinoseb, with the exception of those specified elsewhere in this Annex	—	—	Repr. 1B Acute Tox. 3 * Acute Tox. 3 * Eye Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H360-Df H311 H301 H319 H400 H410	GHS06 GHS08 GHS09 Dgr	H360Df H311 H301 H319 H410	EUH044		A
609-027-00-8	dinocton; reaction mass of isomers: methyl 2-octyl-4,6-dinitrophenyl carbonate, methyl 4-octyl-2,6-dinitrophenyl carbonate	—	63919-26-6	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
609-028-00-3	dinex (ISO); 2-cyclohexyl-4,6-dinitrophenol	205-042-5	131-89-5	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H331 H311 H301 H400 H410	GHS06 GHS09 Dgr	H331 H311 H301 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevaar­klasse en categorie	Gevaar­aan­duiding	Pictogram, sig­naal­woord	Gevaar­aan­duiding	Aanvullende gevaar­aan­duiding		
609-029-00-9	salts and esters of dinex	—	—	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H331 H311 H301 H400 H410	GHS06 GHS09 Dgr	H331 H311 H301 H410			A
609-030-00-4	dinoterb (ISO); 2-tert-butyl-4,6-dinitrophenol	215-813-8	1420-07-1	Repr. 1B Acute Tox. 2 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H360-D *** H300 H311 H400 H410	GHS06 GHS08 GHS09 Dgr	H360D *** H300 H311 H410	EUH044		
609-031-00-X	salts and esters of dinoterb	—	—	Repr. 1B Acute Tox. 2 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H360-D *** H300 H311 H400 H410	GHS06 GHS08 GHS09 Dgr	H360D *** H300 H311 H410			A
609-032-00-5	bromofenoxim (ISO); 3,5-dibromo-4-hydroxybenzaldehyde-O-(2,4-dinitrophenyl)-oxime	236-129-6	13181-17-4	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
609-033-00-0	dinosam (ISO); 2-(1-methylbutyl)-4,6-dinitrophenol	—	4097-36-3	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H331 H311 H301 H400 H410	GHS06 GHS09 Dgr	H331 H311 H301 H410			



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevaar­klasse en categorie	Gevaar­aan­duiding	Pictogram, sig­naal­woord	Gevaar­aan­duiding	Aanvullende gevaar­aan­duiding		
609-034-00-6	salts and esters of dinosam	—	—	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H331 H311 H301 H400 H410	GHS06 GHS09 Dgr	H331 H311 H301 H410			A
609-035-00-1	nitroethane	201-188-9	79-24-3	Flam. Liq. 3 Acute Tox. 4 * Acute Tox. 4 *	H226 H332 H302	GHS02 GHS07 Wng	H226 H332 H302		*	
609-036-00-7	nitromethane	200-876-6	75-52-5	Flam. Liq. 3 Acute Tox. 4 *	H226 H302	GHS02 GHS07 Wng	H226 H302		*	
609-037-00-2	5-nitroacenaphthene	210-025-0	602-87-9	Carc. 1B	H350	GHS08 Dgr	H350			
609-038-00-8	2-nitronaphthalene	209-474-5	581-89-5	Carc. 1B Aquatic Chronic 2	H350 H411	GHS08 GHS09 Dgr	H350 H411			
609-039-00-3	4-nitrobiphenyl	202-204-7	92-93-3	Carc. 1B Aquatic Chronic 2	H350 H411	GHS08 GHS09 Dgr	H350 H411			
609-040-00-9	nitrofen (ISO); 2,4-dichlorophenyl 4-nitrophenyl ether	217-406-0	1836-75-5	Carc. 1B Repr. 1B Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H350 H360D *** H302 H400 H410	GHS08 GHS07 GHS09 Dgr	H350 H360D *** H302 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
609-041-00-4	2,4-dinitrophenol	200-087-7	51-28-5	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 2 * Aquatic Acute 1	H331 H311 H301 H373 ** H400	GHS06 GHS08 GHS09 Dgr	H331 H311 H301 H373 ** H400			
609-042-00-X	pendimethalin (ISO); N-(1-ethylpropyl)-2,6-dinitro-3,4-xylydine	254-938-2	40487-42-1	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
609-043-00-5	quintozene (ISO); pentachloronitrobenzene	201-435-0	82-68-8	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
609-044-00-0	tecnazene (ISO); 1,2,4,5-tetrachloro-3-nitrobenzene	204-178-2	117-18-0	Acute Tox. 4 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H317 H400 H410	GHS07 GHS09 Wng	H302 H317 H410			
609-045-00-6	reaction mass of: 4,6-dinitro-2-(3-octyl)phenyl methyl carbonate and 4,6-dinitro-2-(4-octyl)phenyl methyl carbonate; dinoocton-6	—	8069-76-9	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
609-046-00-1	trifluralin (ISO) (containing < 0.5 ppm NPDA); $\alpha, \alpha, \alpha$ -trifluoro-2,6-dinitro-N,N-dipropyl-p-toluidine (containing < 0.5 ppm NPDA); 2,6-dinitro-N,N-dipropyl-4-trifluoromethylaniline (containing < 0.5 ppm NPDA); N,N-dipropyl-2,6-dinitro-4-trifluoromethylaniline (containing < 0.5 ppm NPDA)	216-428-8	1582-09-8	Eye Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H319 H317 H400 H410	GHS07 GHS09 Wng	H319 H317 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
609-047-00-7	2-nitroanisole	202-052-1	91-23-6	Carc. 1B Acute Tox. 4 *	H350 H302	GHS08 GHS07 Dgr	H350 H302			
609-048-00-2	sodium 3-nitrobenzenesulphonate	204-857-3	127-68-4	Eye Irrit. 2 Skin Sens. 1	H319 H317	GHS07 Wng	H319 H317			
609-049-00-8	2,6-dinitrotoluene	210-106-0	606-20-2	Carc. 1B Muta. 2 Repr. 2 Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 2 * Aquatic Chronic 3	H350 H341 H361f *** H331 H311 H301 H373 ** H412	GHS06 GHS08 Dgr	H350 H341 H361f *** H331 H311 H301 H373 ** H412			
609-050-00-3	2,3-dinitrotoluene	210-013-5	602-01-7	Carc. 1B Muta. 2 Repr. 2 Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H350 H341 H361f *** H331 H311 H301 H373 ** H400 H410	GHS06 GHS08 GHS09 Dgr	H350 H341 H361f *** H331 H311 H301 H373 ** H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
609-051-00-9	3,4-dinitrotoluene	210-222-1	610-39-9	Carc. 1B Muta. 2 Repr. 2 Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 2 * Aquatic Chronic 2	H350 H341 H361f *** H331 H311 H301 H373 ** H411	GHS06 GHS08 GHS09 Dgr	H350 H341 H361f *** H331 H311 H301 H373 ** H411			
609-052-00-4	3,5-dinitrotoluene	210-566-2	618-85-9	Carc. 1B Muta. 2 Repr. 2 Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 2 * Aquatic Chronic 3	H350 H341 H361f *** H331 H311 H301 H373 ** H412	GHS06 GHS08 Dgr	H350 H341 H361f *** H331 H311 H301 H373 ** H412			
609-053-00-X	hydrazine-trinitromethane	414-850-9	—	Expl. 1.1 **** Self-react. A Carc. 1B Acute Tox. 3 * Acute Tox. 3 * Skin Sens. 1	H201 H240 H350 H331 H301 H317	GHS01 GHS06 GHS08 Dgr	H201 H240 H350 H331 H301 H317			
609-054-00-5	2,3-dinitrophenol; [1] 2,5-dinitrophenol; [2] 2,6-dinitrophenol; [3] 3,4-dinitrophenol; [4] salts of dinitrophenol [5]	200-628-7 [1] 206-348-1 [2] 209-357-9 [3] 209-415-3 [4] [5]	66-56-8 [1] 329-71-5 [2] 573-56-8 [3] 577-71-9 [4] [5]	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 2 * Aquatic Chronic 2	H331 H311 H301 H373 ** H411	GHS06 GHS08 GHS09 Dgr	H331 H311 H301 H373 ** H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevaarlijkheidsklasse en categorie	Gevaarlijkheidsaanwijzing	Pictogram, signaalwoord	Gevaarlijkheidsaanwijzing	Aanvullende gevaarlijkheidsaanwijzing		
609-055-00-0	2,5-dinitrotoluene	210-581-4	619-15-8	Carc. 1B Muta. 2 Repr. 2 Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 2 * Aquatic Chronic 2	H350 H341 H361f *** H331 H311 H301 H373 ** H411	GHS06 GHS08 GHS09 Dgr	H350 H341 H361f *** H331 H311 H301 H373 ** H411			
609-056-00-6	2,2-dibromo-2-nitroethanol	412-380-9	69094-18-4	Expl. 1.1 Carc. 2 Acute Tox. 4 * STOT RE 2 * Skin Corr. 1A Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H201 H351 H302 H373 ** H314 H317 H400 H410	GHS01 GHS08 GHS05 GHS07 GHS09 Dgr	H201 H351 H302 H373 ** H314 H317 H410	* STOT SE 3; H335: C ≥ 1 %	T	
609-057-00-1	3-chloro-2,4-difluoronitrobenzene	411-980-8	3847-58-3	Acute Tox. 4 * Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H314 H317 H400 H410	GHS05 GHS07 GHS09 Dgr	H302 H314 H317 H410			
609-058-00-7	2-nitro-2-phenyl-1,3-propanediol	410-360-4	5428-02-4	STOT RE 1 Acute Tox. 4 * Acute Tox. 4 * Skin Sens. 1 Aquatic Chronic 2	H372 ** H312 H302 H317 H411	GHS08 GHS07 GHS09 Dgr	H372 ** H312 H302 H317 H411	EUH070		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevaar­klasse en categorie	Gevaar­aan­duiding	Pictogram, sig­naal­woord	Gevaar­aan­duiding	Aanvullende gevaar­aan­duiding		
609-059-00-2	2-chloro-6-(ethylamino)-4-nitrophenol	411-440-1	131657-78-8	Acute Tox. 4 * Skin Sens. 1 Aquatic Chronic 2	H302 H317 H411	GHS07 GHS09 Wng	H302 H317 H411			
609-060-00-8	4-[(3-hydroxypropyl)amino]-3-nitrophenol	406-305-9	92952-81-3	Skin Irrit. 2 Aquatic Chronic 2	H315 H411	GHS07 GHS09 Wng	H315 H411			
609-061-00-3	(E,Z)-4-chlorophenyl(cyclopropyl)ketone O-(4-nitrophenylmethyl)oxime	406-100-4	94097-88-8	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
609-062-00-9	2-bromo-2-nitropropanol	407-030-7	24403-04-1	Acute Tox. 3 * Acute Tox. 4 * STOT RE 2 * Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H311 H302 H373 ** H314 H317 H400 H410	GHS06 GHS08 GHS05 GHS09 Dgr	H311 H302 H373 ** H314 H317 H410			
609-063-00-4	2-[(4-chloro-2-nitrophenyl)amino]ethanol	413-280-8	59320-13-7	Acute Tox. 4 * Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
609-064-00-X	mesotrione(ISO); 2-[4-(methylsulfonyl)-2-nitrobenzoyl]-1,3-cyclohexanedione	—	104206-82-8	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
609-065-00-5	2-nitrotoluene	201-853-3	88-72-2	Carc. 1B Muta. 1B Repr. 2 Acute Tox. 4 * Aquatic Chronic 2	H350 H340 H361f *** H302 H411	GHS08 GHS07 GHS09 Dgr	H350 H340 H361f *** H302 H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
609-066-00-0	lithium sodium 3-amino-10-[4-(10-amino-6,13-dichloro-4,11-disulfonatobenzo[5,6][1,4]oxazino[2,3-b]phenoxazine-3-ylamino)-6-[methyl(2-sulfonato-ethyl)amino]-1,3,5-triazin-2-ylamino]-6,13-dichlorobenzo[5,6][1,4]oxazino[2,3-b]phenoxazine-4,11-disulfonate	418-870-9	154212-58-5	Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * STOT SE 2 * *	H332 H312 H302 H371 **	GHS08 GHS07 Dgr	H332 H312 H302 H371 **			
609-067-00-6	sodium and potassium 4-(3-aminopropylamino)-2,6-bis[3-(4-methoxy-2-sulfophenylazo)-4-hydroxy-2-sulfo-7-naphthylamino]-1,3,5-triazine	416-280-6	156769-97-0	Skin Sens. 1	H317	GHS07 Wng	H317			
609-068-00-1	musk xylene; 5-tert-butyl-2,4,6-trinitro- <i>m</i> -xylene	201-329-4	81-15-2	Expl. 1.1 Carc. 2 Aquatic Acute 1 Aquatic Chronic 1	H201 H351 H400 H410	GHS01 GHS08 GHS09 Wng	H201 H351 H410			T
609-070-00-2	1,4-dichloro-2-(1,1,2,3,3,3-hexafluoropropoxy)-5-nitrobenzene	415-580-4	130841-23-5	Acute Tox. 4 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H317 H400 H410	GHS07 GHS09 Wng	H302 H317 H410			
609-071-00-8	reaction mass of: 2-methylsulfanyl-4,6-bis-(2-hydroxy-4-methoxy-phenyl)-1,3,5-triazine; 2-(4,6-bis-methylsulfanyl-1,3,5-triazin-2-yl)-5-methoxy-phenol	423-520-3	156137-33-6	Skin Sens. 1	H317	GHS07 Wng	H317			
610-001-00-3	trichloronitromethane; chloropicrin	200-930-9	76-06-2	Acute Tox. 2 * Acute Tox. 4 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H330 H302 H319 H335 H315	GHS06 Dgr	H330 H302 H319 H335 H315			
610-002-00-9	1,1-dichloro-1-nitroethane	209-854-0	594-72-9	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 *	H331 H311 H301	GHS06 Dgr	H331 H311 H301			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
610-003-00-4	chlorodinitrobenzene	—	—	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H331 H311 H301 H373 ** H400 H410	GHS06 GHS08 GHS09 Dgr	H331 H311 H301 H373 ** H410			C
610-004-00-X	2-chloro-1,3,5-trinitrobenzene	201-864-3	88-88-0	Expl. 1.1 Acute Tox. 2 * Acute Tox. 1 Acute Tox. 2 * Aquatic Acute 1 Aquatic Chronic 1	H201 H330 H310 H300 H400 H410	GHS01 GHS06 GHS09 Dgr	H201 H330 H310 H300 H410			
610-005-00-5	1-chloro-4-nitrobenzene	202-809-6	100-00-5	Carc. 2 Muta. 2 Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 2 * Aquatic Chronic 2	H351 H341 H331 H311 H301 H373 ** H411	GHS06 GHS08 GHS09 Dgr	H351 H341 H331 H311 H301 H373 ** H411			
610-006-00-0	chloronitroanilines with the exception of those specified elsewhere in this Annex	—	—	Acute Tox. 2 * Acute Tox. 1 Acute Tox. 2 * STOT RE 2 * Aquatic Chronic 2	H330 H310 H300 H373 ** H411	GHS06 GHS08 GHS09 Dgr	H330 H310 H300 H373 ** H411			A C
610-007-00-6	1-chloro-1-nitropropane	209-990-0	600-25-9	Acute Tox. 4 * Acute Tox. 4 *	H332 H302	GHS07 Wng	H332 H302		*	
610-008-00-1	2,6-dichloro-4-nitroanisole	403-350-6	17742-69-7	Acute Tox. 3 * Aquatic Chronic 2	H301 H411	GHS06 GHS09 Dgr	H301 H411			



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevaarlijkheidsklasse en categorie	Gevaarlijkheidsaanwijzing	Pictogram, signaalwoord	Gevaarlijkheidsaanwijzing	Aanvullende gevaarlijkheidsaanwijzing		
610-009-00-7	2-chloro-4-nitroaniline	204-502-2	121-87-9	Acute Tox. 4 * Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
610-010-00-2	2-bromo-1-(2-furyl)-2-nitroethylene	406-110-9	35950-52-8	Acute Tox. 4 * STOT RE 2 * Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H373 ** H314 H317 H400 H410	GHS08 GHS05 GHS07 GHS09 Dgr	H302 H373 ** H314 H317 H410			
611-001-00-6	azobenzene	203-102-5	103-33-3	Carc. 1B Muta. 2 Acute Tox. 4 * Acute Tox. 4 * STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H350 H341 H332 H302 H373 ** H400 H410	GHS08 GHS07 GHS09 Dgr	H350 H341 H332 H302 H373 ** H410			
611-002-00-1	azoxybenzene	207-802-1	495-48-7	Acute Tox. 4 * Acute Tox. 4 *	H332 H302	GHS07 Wng	H332 H302			
611-003-00-7	fenaminsulf (ISO); sodium 4-dimethylaminobenzenediazosulphonate	205-419-4	140-56-7	Acute Tox. 3 * Acute Tox. 4 * Aquatic Chronic 3	H301 H312 H412	GHS06 Dgr	H301 H312 H412			
611-004-00-2	methyl-ONN-azoxymethyl acetate; methyl azoxy methyl acetate	209-765-7	592-62-1	Carc. 1B Repr. 1B	H350 H360D ***	GHS08 Dgr	H350 H360D ***			
611-005-00-8	disodium {5-[(4'-((2,6-hydroxy-3-((2-hydroxy-5-sulphophenyl)azo)phenyl)azo)(1,1'-biphenyl)-4-yl)azo]salicylato(4-)} cuprate(2-); CI Direct Brown 95	240-221-1	16071-86-6	Carc. 1B	H350	GHS08 Dgr	H350			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
611-006-00-3	4-o-tolylazo-o-toluidine; 4-amino-2',3-dimethylazobenzene; fast garnet GBC base; AAT; o-aminoazotoluene	202-591-2	97-56-3	Carc. 1B Skin Sens. 1	H350 H317	GHS08 Dgr	H350 H317			
611-007-00-9	tricyclazole (ISO); 5-methyl-1,2,4-triazolo(3,4-b)benzo-1,3-thiazole;	255-559-5	41814-78-2	Acute Tox. 4 *	H302	GHS07 Wng	H302			
611-008-00-4	4-aminoazobenzene; 4-phenylazoaniline	200-453-6	60-09-3	Carc. 1B Aquatic Acute 1 Aquatic Chronic 1	H350 H400 H410	GHS08 GHS09 Dgr	H350 H410			
611-009-00-X	sodium (1-(5-(4-(4-anilino-3-sulphophenylazo)-2-methyl-5-methylsulphonamidophenylazo)-4-hydroxy-2-oxido-3-(phenylazo)phenylazo)-5-nitro-4-sulphonato-2-naphtholato)iron(II)	401-220-3	—	Acute Tox. 4 * Aquatic Chronic 3	H332 H412	GHS07 Wng	H332 H412			
611-010-00-5	2'-(2-cyano-4,6-dinitrophenylazo)-5'-(N,N-dipropylamino)propionanilide	403-010-7	106359-94-8	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
611-011-00-0	N,N,N',N'-tetramethyl-3,3'-(propylenebis(iminocarbonyl-4,1-phenylenazo(1,6-dihydro-2-hydroxy-4-methyl-6-oxopyridine-3,1-diyll))di(propylammonium) dilactate	403-340-1	—	Eye Dam. 1 Aquatic Chronic 2	H318 H411	GHS05 GHS09 Dg	H318 H411			
611-012-00-6	reaction mass of 2,2-iminodiethanol 6-methyl-2-(4-(2,4,6-triaminopyrimidin-5-ylazo)phenyl)benzothiazole-7-sulfonate and 2-methylaminoethanol 6-methyl-2-(4-(2,4,6-triaminopyrimidin-5-ylazo)phenyl)benzothiazole-7-sulfonate and N,N-diethylpropane-1,3-diamine 6-methyl-2-(4-(2,4,6-triaminopyrimidin-5-ylazo)phenyl)benzothiazole-7-sulfonate	403-410-1	114565-65-0	Skin Sens. 1	H317	GHS07 Wng	H317			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
611-013-00-1	trilithium-1-hydroxy-7-(3-sulfonatoanilino)-2-(3-methyl-4-(2-methoxy-4-(3-sulfonato-phenylazo)phenylazo)phenylazo)naphthalene-3-sulfonate	403-650-7	117409-78-6	Expl. 1.3 **** Aquatic Chronic 2	H203 H411	GHS01 GHS09 Dgr	H203 H411			
611-014-00-7	(tetrasodium 1-(4-(3-acetamido-4-(4'-nitro-2,2'-disulfonatosilben-4-ylazo)anilino)-6-(2,5-disulfonatoanilino)-1,3,5-triazin-2-yl)-3-carboxypyridinium) hydroxide	404-250-5	115099-55-3	Skin Sens. 1	H317	GHS07 Wng	H317			
611-015-00-2	tetrasodium 4-amino-5-hydroxy-6-(4-(2-(2-sulfonatooxy)ethylsulfonyl)ethylcarbamoyl)phenylazo)-3-(4-(2-(sulfonatooxy)ethylsulfonyl)phenylazo)naphthalene-2,7-disulfonate	404-320-5	116889-78-2	Skin Sens. 1	H317	GHS07 Wng	H317			
611-016-00-8	reaction mass of 1,1'-((dihydroxyphenylene) bis(azo-3,1-phenylenazo(1-(3-dimethylaminopropyl)-1,2-dihydro-6-hydroxy-4-methyl-2-oxopyridine-5,3-diyl))dipyridinium dichloride dihydrochloride, mixed isomers and 1-(1-(3-dimethylaminopropyl)-5-(3-((4-(1-(3-dimethylaminopropyl)-1,6-dihydro-2-hydroxy-4-methyl-6-oxo-5-pyridinio-3-pyridylazo)phenylazo)-2,4(or2,6 or3,5)-dihydroxyphenylazo)phenylazo)-1,2-dihydro-6-hydroxy-4-methyl-2-oxo-3-pyridyl)pyridinium dichloride	404-540-1	—	Skin Sens. 1	H317	GHS07 Wng	H317			
611-017-00-3	2-(4-(diethylaminopropylcarbamoyl)phenylazo)-3-oxo-N-(2,3-dihydro-2-oxobenzimidazol-5-yl)butyramide	404-910-2	—	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
611-018-00-9	tetraammonium 5-(4-(7-amino-1-hydroxy-3-sulfonato-2-naphthylazo)-6-sulfonato-1-naphthylazo)isophthalate	405-130-5	—	Skin Sens. 1	H317	GHS07 Wng	H317			
611-019-00-4	tetalithium 6-amino-4-hydroxy-3-(7-sulfonato-4-(4-sulfonatophenylazo)-1-naphthylazo)naphthalene-2,7-disulfonate	405-150-4	106028-58-4	Skin Sens. 1	H317	GHS07 Wng	H317			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
611-020-00-X	tetrakis(tetramethylammonium) 6-amino-4-hydroxy-3-(7-sulfonato-4-(4-sulfonatophenylazo)-1-naphthylazo)naphthalene-2,7-disulfonate	405-170-3	116340-05-7	Acute Tox. 3 * Skin Sens. 1 Aquatic Chronic 3	H301 H317 H412	GHS06 Dgr	H301 H317 H412			
611-021-00-5	2-(4-(4-cyano-3-methylisothiazol-5-ylazo)-N-ethyl-3-methylanilino)ethyl acetate	405-480-9	—	Acute Tox. 4 * STOT RE 2 * Skin Irrit. 2 Aquatic Chronic 4	H302 H373 ** H315 H413	GHS08 GHS07 Wng	H302 H373 ** H315 H413			
611-022-00-0	4-dimethylaminobenzenediazonium 3-carboxy-4-hydroxybenzenesulfonate	404-980-4	—	Self-react. C Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 4 * STOT RE 2 * Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H242 H331 H301 H312 H373 ** H318 H317 H400 H410	GHS02 GHS06 GHS08 GHS05 GHS09 Dgr	H242 H331 H301 H312 H373 ** H318 H317 H410			T
611-023-00-6	disodium 7-(4,6-dichloro-1,3,5-triazin-2-ylamino)-4-hydroxy-3-(4-(2-(sulfonatooxy)ethylsulfonyl)phenylazo) naphthalene-2-sulfonate	404-600-7	—	Skin Sens. 1	H317	GHS07 Wng	H317			
611-024-00-1	Benzidine based azo dyes; 4,4'-diarylazobiphenyl dyes, with the exception of those specified elsewhere in this Annex	—	—	Carc. 1B	H350	GHS08 Dgr	H350			A
611-025-00-7	disodium 4-amino-3-[[4'-[(2,4-diaminophenyl)azo][1,1'-biphenyl]-4-yl]azo]-5-hydroxy-6-(phenylazo)naphthalene-2,7-disulphonate; C.I. Direct Black 38	217-710-3	1937-37-7	Carc. 1B Repr. 2	H350 H361d ***	GHS08 Dgr	H350 H361d ***			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
611-026-00-2	tetrasodium 3,3'-[[1,1'-biphenyl]-4,4'-diylbis(azo)]bis[5-amino-4-hydroxynaphthalene-2,7-disulphonate]; C.I. Direct Blue 6	220-012-1	2602-46-2	Carc. 1B Repr. 2	H350 H361d ***	GHS08 Dgr	H350 H361d ***			
611-027-00-8	disodium 3,3'-[[1,1'-biphenyl]-4,4'-diylbis(azo)]bis(4-aminonaphthalene-1-sulphonate); C.I. Direct Red 28	209-358-4	573-58-0	Carc. 1B Repr. 2	H350 H361d ***	GHS08 Dgr	H350 H361d ***			
611-028-00-3	C,C'-azodi(formamide)	204-650-8	123-77-3	Resp. Sens. 1	H334	GHS08 Dgr	H334			G
611-029-00-9	o-dianisidine based azo dyes; 4,4'-diarylo-3,3'-dimethoxybiphenyl dyes with the exception of those mentioned elsewhere in this Annex	—	—	Carc. 1B	H350	GHS08 Dgr	H350			A H
611-030-00-4	o-tolidine based dyes; 4,4'-diarylo-3,3'-dimethylbiphenyl dyes, with the exception of those mentioned elsewhere in this Annex	—	—	Carc. 1B	H350	GHS08 Dgr	H350			A H
611-031-00-X	4,4'-(4-iminocyclohexa-2,5-dienylidene-methylene)dianiline hydrochloride; C.I. Basic Red 9	209-321-2	569-61-9	Carc. 1B	H350	GHS08 Dgr	H350			
611-032-00-5	1,4,5,8-tetraaminoanthraquinone; C.I. Disperse Blue 1	219-603-7	2475-45-8	Carc. 1B Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1	H350 H315 H318 H317	GHS08 GHS05 GHS07 Dgr	H350 H315 H318 H317			
611-033-00-0	hexasodium [4,4''-azoxybis(2,2'-disulfonato-stilbene-4,4'-diylazo)]-bis[5'-sulfonatobenzene-2,2'-diolato-O(2),O(2),N(1)]-copper (II)	400-020-3	82027-60-9	Aquatic Chronic 2	H411	GHS09	H411			
611-034-00-6	N-(5-(bis(2-methoxyethyl)amino)-2-((5-nitro-2,1-benzisothiazol-3-yl)azo)phenylacetamide	402-430-8	105076-77-5	Aquatic Chronic 4	H413	—	H413			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevaar­klasse en categorie	Gevaar­aan­duiding	Pictogram, sig­naal­woord	Gevaar­aan­duiding	Aanvullende gevaar­aan­duiding		
611-035-00-1	tetralithium 6-amino-4-hydroxy-3-[7-sulfonato-4-(5-sulfonato-2-naphthylazo)-1-naphthylazo]naphthalene-2,7-disulfonate	403-660-1	107246-80-0	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
611-036-00-7	2-(4-(5,6(or 6,7)-dichloro-1,3-benzothiazol-2-ylazo)-N-methyl-m-toluidino)ethyl acetate	405-440-0	—	Skin Sens. 1	H317	GHS07 Wng	H317			
611-037-00-2	3(or 5)-(4-(N-benzyl-N-ethylamino)-2-methylphenylazo)-1,4-dimethyl-1,2,4-triazolium methylsulphate	406-055-0	124584-00-5	Acute Tox. 4 * Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H302 H318 H317 H411	GHS05 GHS07 GHS09 Dgr	H302 H318 H317 H411			
611-038-00-8	trisodium 1-hydroxynaphthalene-2-azo-4'(5',5"-dimethylbiphenyl)-4'-azo(4"-phenylsulfonyloxybenzene)- 2',2",4-trisulfonate	406-820-9	—	Eye Irrit. 2	H319	GHS07 Wng	H319			
611-039-00-3	7-(((4,6-dichloro-1,3,5-triazin-2-yl)amino)-4-hydroxy-3-(4-((2-sulfoxyethyl)sulfonyl)phenylazo)naphthalene-2-sulfonic acid	407-050-6	117715-57-8	Skin Sens. 1	H317	GHS07 Wng	H317			
611-040-00-9	3-(5-acetylamino-4-(4-[4,6-bis(3-diethylaminopropylamino)-1,3,5-triazin-2-ylamino]phenylazo)-2-(2-methoxyethoxy)phenylazo)-6-amino-4-hydroxy-2-naphthalenesulfonic acid	407-670-7	115099-58-6	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
611-041-00-4	2-[[[4[[4,6-bis[[3-(diethylamino)propyl]amino]-1,3,5-triazin-2-yl]amino]phenyl]azo]-N-(2,3-dihydro-2-oxo-1H-benzimidazol-5-yl)-3-oxobutanamide	407-680-1	98809-11-1	Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H318 H317 H411	GHS05 GHS07 GHS09 Dgr	H318 H317 H411			
611-042-00-X	trisodium 5-amino-3-[5-(2-bromoacryloylamino)-2-sulfonatophenylazo]-4-hydroxy-6-(4-vinylsulfonylphenylazo)naphthalene-2,7-disulfonate	411-770-6	136213-71-3	Aquatic Chronic 3	H412	—	H412			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
611-043-00-5	reaction mass of: trisodium N(1')-N(2):N(1''')-N(2'')-η-6-[2-amino-4-(or 6)-hydroxy-(or 4-amino-2-hydroxy)phenylazo]-6''-(1-carbaniloyl-2-hydroxyprop-1-enylazo)-5',5'''-disulfamoyl-3,3'''-disulfonatobis(naphthalene-2,1'-azobenzene-1,2'-diolato-O(1),O(2'))-chromate; trisodium N(1')-N(2):N(1''')-N(2'')-η-6,6''-bis(1-carbaniloyl-2-hydroxyprop-1-enylazo)-5',5'''-disulfamoyl-3,3'''-disulfonatobis(naphthalene-2,1'-azobenzene-1,2'-diolato-O(1),O(2'))-chromate; trisodium N(1')-N(2):N(1''')-N(2'')-η-6,6''-bis[2-amino-4-(or 6)-hydroxy-(or 4-amino-2-hydroxy)phenylazo]5',5'''-disulfamoyl-3,3'''-disulfonatobis(naphthalene-2,1'-azobenzene-1,2'-diolato-O(1),O(2'))-chromate (2:1:1)	402-850-1	—	Eye Dam. 1 Aquatic Chronic 3	H318 H412	GHS05 Dgr	H318 H412			
611-044-00-0	reaction mass of: <i>tert</i> -alkyl(C <sub>12</sub> -C <sub>14</sub> )ammonium bis[1-[(2-hydroxy-5-nitrophenyl)azo]-2-naphthalenolato(2-)]-chromate(1-); <i>tert</i> -alkyl(C <sub>12</sub> -C <sub>14</sub> )ammonium bis[1-[(2-hydroxy-4-nitrophenyl)azo]-2-naphthalenolato(2-)]-chromate(1-); <i>tert</i> -alkyl(C <sub>12</sub> -C <sub>14</sub> )ammonium bis[1-[[5-(1,1-dimethylpropyl)-2-hydroxy-3-nitrophenyl]azo]-2-naphthalenolato(2-)]-chromate(1-); <i>tert</i> -alkyl(C <sub>12</sub> -C <sub>14</sub> )ammonium [[1-[(2-hydroxy-5-nitrophenyl)azo]-2-naphthalenolato(2-)]-[1-[(2-hydroxy-5-nitrophenyl)azo]-2-naphthalenolato(2-)]]-chromate(1-); <i>tert</i> -alkyl(C <sub>12</sub> -C <sub>14</sub> )ammonium [[1-[[5-(1,1-dimethylpropyl)-2-hydroxy-3-nitrophenyl]azo]-2-naphthalenolato(2-)]-[1-[(2-hydroxy-5-nitrophenyl)azo]-2-naphthalenolato(2-)]]-chromate(1-); <i>tert</i> -alkyl(C <sub>12</sub> -C <sub>14</sub> )ammonium ((1-(4(or 5)-nitro-2-oxido-5-pentylphenylazo)-2-naphtholato)(1-(3-nitro-2-oxido-5-pentylphenylazo)-2-naphtholato))chromate(1-)	403-720-7	117527-94-3	Aquatic Chronic 2	H411	GHS09	H411			
611-045-00-6	2-[4-[N-(4-acetoxybutyl)-N-ethyl]amino-2-methylphenylazo]-3-acetyl-5-nitrothiophene	404-830-8	—	Aquatic Chronic 4	H413	—	H413			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
611-046-00-1	4,4'-diamino-2-methylazobenzene	407-590-2	431 51-99-1	Acute Tox. 3 * STOT RE 2 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H301 H373 ** H317 H400 H410	GHS06 GHS08 GHS09 Dgr	H301 H373 ** H317 H410			
611-047-00-7	reaction mass of: 2-[[4-[N-ethyl-N-(2-acetoxyethyl)amino]phenyl]azo]-5,6-dichlorobenzothiazole; 2-[[4-[N-ethyl-N-(2-acetoxyethyl)amino]phenyl]azo]-6,7-dichlorobenzothiazole (1:1)	407-890-3	111 381-11-4	Aquatic Chronic 4	H413	—	H413			
611-048-00-2	reaction mass of: 2-[[4-[bis(2-acetoxyethyl)amino]phenyl]azo]-5,6-dichlorobenzothiazole; 2-[[4-[bis(2-acetoxyethyl)amino]phenyl]azo]-6,7-dichlorobenzothiazole (1:1)	407-900-6	111 381-12-5	Aquatic Chronic 4	H413	—	H413			
611-049-00-8	reaction mass of 7-[4-(3-diethylaminopropylamino)-6-(3-diethylammoniopropylamino)-1,3,5-triazin-2-ylamino]-4-hydroxy-3-(4-phenylazophenylazo)-naphthalene-2-sulfonate, acetic acid, lactic acid (2:1:1)	408-000-6	118 658-98-3	STOT RE 2 * Skin Sens. 1 Aquatic Chronic 3	H373 ** H317 H412	GHS08 Wng	H373 ** H317 H412			
611-051-00-9	2-(4-(N-ethyl-N-(2-hydroxyethyl)amino-2-methylphenyl)azo)-6-methoxy-3-methylbenzothiazolium chloride	411-110-7	136 213-74-6	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
611-052-00-4	monosodium aqua-[5-[[2,4-dihydroxy-5-[(2-hydroxy-3,5-dinitrophenyl)azo]phenyl]azo]-2-naphthalensulfonate], iron complex	400-720-9	—	Aquatic Chronic 3	H412	—	H412			
611-053-00-X	2,2'-azobis[2-methylpropionamide] dihydrochloride	221-070-0	2997-92-4	Acute Tox. 4 * Skin Sens. 1	H302 H317	GHS07 Wng	H302 H317			
611-055-00-0	C.I. Disperse Yellow 3; N-[4-[(2-hydroxy-5-methylphenyl)azo]phenyl]acetamide	220-600-8	2832-40-8	Carc. 2 Skin Sens. 1	H351 H317	GHS08 GHS07 Wng	H351 H317			



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
611-056-00-6	C.I. Solvent Yellow 14; 1-phenylazo-2-naphthol	212-668-2	842-07-9	Carc. 2 Muta. 2 Skin Sens. 1 Aquatic Chronic 4	H351 H341 H317 H413	GHS08 GHS07 Wng	H351 H341 H317 H413			
611-057-00-1	6-hydroxy-1-(3-isopropoxypropyl)-4-methyl-2-oxo-5-[4-(phenylazo)phenylazo]-1,2-dihydro-3-pyridinecarbonitrile	400-340-3	85136-74-9	Carc. 1B Aquatic Chronic 4	H350 H413	GHS08 Wng	H350 H413			
611-058-00-7	(6-(4-hydroxy-3-(2-methoxyphenylazo)-2-sulfonato-7-naphthylamino)-1,3,5-triazin-2,4-diyl)bis[(amino-1-methylethyl)ammonium] formate	402-060-7	108225-03-2	Carc. 1B Eye Dam. 1 Aquatic Chronic 2	H350 H318 H411	GHS08 GHS05 GHS09 Dgr	H350 H318 H411			
611-059-00-2	octasodium 2-(6-(4-chloro-6-(3-(N-methyl-N-(4-chloro-6-(3,5-disulfonato-2-naphthylazo)-1-hydroxy-6-naphthylamino)-1,3,5-triazin-2-yl)aminomethyl)phenylamino)-1,3,5-triazin-2-ylamino)-3,5-disulfonato-1-hydroxy-2-naphthylazo)naphthalene-1,5-disulfonate	412-960-1	148878-21-1	Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 3	H318 H317 H412	GHS05 GHS07 Dgr	H318 H317 H412			
611-060-00-8	reaction mass of: sodium 5-[8-[4-[4-[4-[7-(3,5-dicarboxylatophenylazo)-8-hydroxy-3,6-disulfonatophthalen-1-ylamino]-6-hydroxy-1,3,5-triazin-2-yl]-2,5-dimethylpiperazin-1-yl]-6-hydroxy-1,3,5-triazin-2-ylamino]-1-hydroxy-3,6-disulfonatophthalen-2-ylazo]-isophthalate; ammonium 5-[8-[4-[4-[4-[7-(3,5-dicarboxylatophenylazo)-8-hydroxy-3,6-disulfonatophthalen-1-ylamino]-6-hydroxy-1,3,5-triazin-2-yl]-2,5-dimethylpiperazin-1-yl]-6-hydroxy-1,3,5-triazin-2-ylamino]-1-hydroxy-3,6-disulfonatophthalen-2-ylazo]-isophthalate; 5-[8-[4-[4-[4-[7-(3,5-dicarboxylatophenylazo)-8-hydroxy-3,6-disulfonatophthalen-1-ylamino]-6-hydroxy-1,3,5-triazin-2-yl]-2,5-dimethylpiperazin-1-yl]-6-hydroxy-1,3,5-triazin-2-ylamino]-1-hydroxy-3,6-disulfonatophthalen-2-ylazo]-isophthalic acid	413-180-4	187285-15-0	Eye Dam. 1	H318	GHS05 Dgr	H318			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
611-061-00-3	disodium 5-[5-[4-(5-chloro-2,6-difluoropyrimidin-4-ylamino)benzamido]-2-sulfonato-phenylazo]-1-ethyl-6-hydroxy-4-methyl-2-oxo-3-pyridylmethylsulfonate	412-530-3	—	Eye Dam. 1 Skin Sens. 1	H318 H317	GHS05 GHS07 Dgr	H318 H317			
611-062-00-9	octasodium 2-(8-(4-chloro-6-(3-((4-chloro-6-(3,6-disulfonato-2-(1,5-disulfonatonaphthalen-2-ylazo)-1-hydroxynaphthalen-8-ylamino)-1,3,5-triazin-2-yl)aminomethyl)phenylamino)-1,3,5-triazin-2-ylamino)-3,6-disulfonato-1-hydroxynaphthalen-2-ylazo)naphthalene-1,5-disulfonate	413-550-5	—	Skin Irrit. 2 Eye Dam. 1	H315 H318	GHS05 Dgr	H315 H318			
611-063-00-4	trisodium [4'-(8-acetylamino-3,6-disulfonato-2-naphthylazo)-4''-(6-benzoylamino-3-sulfonato-2-naphthylazo)-biphenyl-1,3',3'',1'''-tetraolato-O,O',O'',O''']copper(II)	413-590-3	164058-22-4	Carc. 1B	H350	GHS08 Dgr	H350			
611-064-00-X	4-(3,4-dichlorophenylazo)-2,6-di-sec-butyl-phenol	410-600-8	124719-26-2	STOT RE 2 * Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H373 ** H315 H400 H410	GHS08 GHS07 GHS09 Wng	H373 ** H315 H410			
611-065-00-5	4-(4-nitrophenylazo)-2,6-di-sec-butyl-phenol	410-610-2	111850-24-9	STOT RE 2 * Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H373 ** H319 H315 H317 H400 H410	GHS08 GHS07 GHS09 Wng	H373 ** H319 H315 H317 H410			
611-066-00-0	tetrasodium 5-[4-chloro-6-(N-ethyl-anilino)-1,3,5-triazin-2-ylamino]-4-hydroxy-3-(1,5-disulfonatonaphthalen-2-ylazo)-naphthalene-2,7-disulfonate	411-540-5	130201-57-9	Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H318 H317 H411	GHS05 GHS07 GHS09 Dgr	H318 H317 H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
611-067-00-6	reaction mass of: bis(tris(2-(2-hydroxy(1-methyl)ethoxy)ethyl)ammonium) 7-anilino-4-hydroxy-3-(2-methoxy-5-methyl-4-(4-sulfonatophenylazo)phenylazo)naphthalene-2-sulfonate; bis(tris(2-(2-hydroxy(2-methyl)ethoxy)ethyl)ammonium) 7-anilino-4-hydroxy-3-(2-methoxy-5-methyl-4-(4-sulfonatophenylazo)phenylazo)naphthalene-2-sulfonate	406-910-8	—	Acute Tox. 4 * Eye Dam. 1 Aquatic Chronic 3	H302 H318 H412	GHS05 GHS07 Dgr	H302 H318 H412			
611-068-00-1	tetrasodium 4-amino-3,6-bis(5-[4-chloro-6-(2-hydroxyethylamino)-1,3,5-triazin-2-ylamino]-2-sulfonatophenylazo)-5-hydroxynaphthalene-2,7-disulfonate	400-690-7	85665-98-1	Aquatic Chronic 2	H411	GHS09	H411			
611-069-00-7	N,N-di-[poly(oxyethylene)-co-poly(oxypropylene)]-4-[(3,5-dicyano-4-methyl-2-thienylazo)]-3-methylaniline	413-380-1	—	Aquatic Chronic 2	H411	GHS09	H411			
611-070-00-2	reaction mass of: disodium (6-(4-anisidino)-3-sulfonato-2-(3,5-dinitro-2-oxidophenylazo)-1-naphtholato)(1-(5-chloro-2-oxidophenylazo)-2-naphtholato)chromate(1-); trisodium bis(5-(4-anisidino)-3-sulfonato-2-(3,5-dinitro-2-oxidophenylazo)-1-naphtholato)chromate(1-)	405-665-4	—	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
611-071-00-8	tris(tetramethylammonium) 5-hydroxy-1-(4-sulphonatophenyl)-4-(4-sulphonatophenylazo)pyrazole-3-carboxylate	406-073-9	131013-81-5	Acute Tox. 3 * Aquatic Chronic 3	H301 H412	GHS06 Dgr	H301 H412			
611-072-00-3	2,4-bis[2,2'-[2-(N,N-dimethylamino)ethyloxycarbonyl]phenylazo]-1,3-dihydroxybenzene, dihydrochloride	407-010-8	118208-02-9	Acute Tox. 4 * Eye Dam. 1 Aquatic Chronic 2	H302 H318 H411	GHS05 GHS07 GHS09 Dgr	H302 H318 H411			
611-073-00-9	dimethyl 3,3'-(N-(4-(4-bromo-2,6-dicyanophenylazo)-3-hydroxyphenyl)imino)dipropionate	407-310-9	122630-55-1	Aquatic Chronic 4	H413	—	H413			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevaarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
611-074-00-4	reaction mass of: sodium/potassium (3-(4-(5-(5-chloro-2,6-difluoropyrimidin-4-ylamino)-2-methoxy-3-sulfonatophenylazo)-2-oxidophenylazo)-2,5,7-trisulfonato-4-naphtholato)copper(II); sodium/potassium (3-(4-(5-(5-chloro-4,6-difluoropyrimidin-2-ylamino)-2-methoxy-3-sulfonatophenylazo)-2-oxidophenylazo)-2,5,7-trisulfonato-4-naphtholato)copper(II)	407-100-7	—	Skin Sens. 1	H317	GHS07 Wng	H317			
611-075-00-X	reaction mass of: tris(3,5,5-trimethylhexylammonium) 4-amino-3-(4-(4-(2-amino-4-hydroxyphenylazo)anilino)-3-sulfonatophenylazo)-5,6-dihydro-5-oxo-6-phenylhydrazononaphthalene-2,7-disulfonate; tris(3,5,5-trimethylhexylammonium) 4-amino-3-(4-(4-(4-amino-2-hydroxyphenylazo)anilino)-3-sulfonatophenylazo)-5,6-dihydro-5-oxo-6-phenylhydrazononaphthalene-2,7-disulfonate (2:1)	406-000-0	—	Eye Dam. 1 Aquatic Chronic 2	H318 H411	GHS05 GHS09 Dgr	H318 H411			
611-076-00-5	3-(2,6-dichloro-4-nitrophenylazo)-1-methyl-2-phenylindole	406-280-4	117584-16-4	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
611-077-00-0	dilithium disodium (5,5'-diamino-(μ-4,4'-dihydroxy-1:2-κ-2, O4, O4', -3, 3'-[3,3'-dihydroxy-1:2-κ-2-O3, O3'-biphenyl-4,4'-ylenebisazo-1:2-(N3, N4-η; N3', N4'-η)]-dinaphthalene-2,7-disulfonato(8)))dicuprate(2-)	407-230-4	126637-70-5	Acute Tox. 4 * Skin Sens. 1	H302 H317	GHS07 Wng	H302 H317			
611-078-00-6	(2,2'-(3,3'-dioxidobiphenyl-4,4'-diyldiazo)bis(6-(4-(3-(diethylamino)propylamino)-6-(3-(diethylammonio)propylamino)-1,3,5-triazin-2-ylamino)-3-sulfonato-1-naphtholato)) dicopper(II) acetate lactate	407-240-9	159604-94-1	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
611-079-00-1	disodium 7-[4-chloro-6-(N-ethyl-o-toluidino)-1,3,5-triazin-2-ylamino]-4-hydroxy-3-(4-methoxy-2-sulfonatophenylazo)-2-naphthalenesulfonate	410-390-8	147703-64-8	Eye Dam. 1	H318	GHS05 Dgr	H318			
611-080-00-7	sodium 3-(2-acetamido-4-(4-(2-hydroxybutoxy)phenylazo)phenylazo)benzenesulfonate	410-150-2	147703-65-9	Skin Sens. 1	H317	GHS07 Wng	H317			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
611-081-00-2	tetrasodium [7-(2,5-dihydroxy-KO2-7-sulfonato-6-[4-(2,5,6-trichloro-pyrimidin-4-ylamino)phenylazo]-(N1,N7-N)-1-naphthylazo)-8-hydroxy-KO8-naphthalene-1,3,5-trisulfonato(6-)]cuprate(II)	411-470-5	141048-13-7	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
611-082-00-8	reaction mass of: pentasodium bis(1-(3(or 5)-(4-anilino-3-sulfonatophenylazo)-4-hydroxy-2-oxidophenylazo)-6-nitro-4-sulfonato-2-naphtholato)ferrate(1-); pentasodium [(1-(3-(4-anilino-3-sulfonatophenylazo)-4-hydroxy-2-oxidophenylazo)-6-nitro-4-sulfonato-2-naphtholato)-(5-(4-anilino-3-sulfonatophenylazo)-4-hydroxy-2-oxidophenylazo)-6-nitro-4-sulfonato-2-naphtholato]ferrate(1-)	407-570-3	—	Aquatic Chronic 2	H411	GHS09	H411			
611-083-00-3	reaction mass of: 2-[N-ethyl-4-[(5,6-dichlorobenzothiazol-2-yl)azo]-m-toluidino]ethyl acetate; 2-[N-ethyl-4-[(6,7-dichlorobenzothiazol-2-yl)azo]-m-toluidino]ethyl acetate (1:1)	411-560-4	—	STOT RE 1 Skin Sens. 1 Aquatic Chronic 2	H372 ** H317 H411	GHS08 GHS07 GHS09 Dgr	H372 ** H317 H411			
611-084-00-9	reaction mass of: N-(4-chlorophenyl)-4-(2,5-dichloro-4-(dimethylsulfamoyl)phenylazo)-3-hydroxy-2-naphthalenecarboxamide; N-(4-chlorophenyl)-4-(2,5-dichloro-4-(methylsulfamoyl)phenylazo)-3-hydroxy-2-naphthalenecarboxamide	412-550-2	—	Aquatic Chronic 4	H413	—	H413			
611-085-00-4	reaction mass of: 3-cyano-5-(2-cyano-4-nitro-phenylazo)-2-(2-hydroxy-ethylamino)-4-methyl-6-[3-(2-phenoxyethoxy)propylamino]pyridine; 3-cyano-5-(2-cyano-4-nitro-phenylazo)-6-(2-hydroxy-ethylamino)-4-methyl-2-[3-(2-phenoxyethoxy)propylamino]pyridine; 3-cyano-5-(2-cyano-4-nitro-phenylazo)-2-amino-4-methyl-6-[3-(3-hydroxypropoxy)propylamino]pyridine; 3-cyano-5-(2-cyano-4-nitro-phenylazo)-6-amino-4-methyl-2-[3-(3-methoxypropoxy)propylamino]pyridine	411-880-4	—	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
611-086-00-X	monolithium 5-[[2,4-dihydroxy-5-[(2-hydroxy-3,5-dinitrophenyl)azo]phenyl]azo]-2-naphthalenesulfonate], iron complex, monohydrate	411-360-7	—	Aquatic Chronic 3	H412	—	H412			
611-087-00-5	reaction mass of: 3-((5-cyano-1,6-dihydro-1,4-dimethyl-2-hydroxyl-6-oxo-3-pyridinyl)azo)-benzoyloxy-2-phenoxyethane; 3-((5-cyano-1,6-dihydro-1,4-dimethyl-2-hydroxy-6-oxo-3-pyridinyl)azo)-benzoyloxy-2-ethyloxy-2-(ethylphenol)	411-710-9	—	Aquatic Chronic 4	H413	—	H413			
611-088-00-0	reaction mass of: trilithium 4-amino-3-((4-((4-((2-amino-4-hydroxyphenyl)azo)phenyl)amino)-3-sulfofenyl)azo)-5-hydroxy-6-(phenylazo)naphthalene-2,7-disulfonate; trilithium 4-amino-3-((4-((4-((4-amino-2-hydroxyphenyl)azo)phenyl)amino)-3-sulfofenyl)azo)-5-hydroxy-6-(phenylazo)naphthalene-2,7-disulfonate	411-890-9	—	Acute Tox. 4 * Eye Dam. 1 Aquatic Chronic 3	H302 H318 H412	GHS05 GHS07 Dgr	H302 H318 H412			
611-089-00-6	2-((4-(ethyl-(2-hydroxyethyl)amino)-2-methylphenyl)azo)-6-methoxy-3-methylbenzothiazolium methylsulfate	411-100-2	136213-73-5	STOT RE 2 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H373 ** H317 H400 H410	GHS08 GHS07 GHS09 Wng	H373 ** H317 H410			
611-090-00-1	2,5-dibutoxy-4-(morpholin-4-yl)benzenediazonium 4-methylbenzenesulfonate	413-290-2	93672-52-7	Self-react. C Acute Tox. 4 * Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 3	H242 H302 H318 H317 H412	GHS02 GHS05 GHS07 Dgr	H242 H302 H318 H317 H412			T
611-091-00-7	sodium (1,0-1,95)/lithium (0,05-1) 5-((5-((5-chloro-6-fluoro-pyrimidin-4-yl)amino)-2-sulfonatophenyl)azo)-1,2-dihydro-6-hydroxy-1,4-dimethyl-2-oxo-3-pyridinemethylsulfonate	413-470-0	134595-59-8	Skin Sens. 1	H317	GHS07 Wng	H317			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etiketgeving			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
611-092-00-2	<i>tert</i> -(dodecyl/tetradecyl)-ammonium bis(3-(4-((5-(1,1-dimethyl-propyl)-2-hydroxy-3-nitrophenyl)azo)-3-methyl-5-hydroxy-(1H)pyrazol-1-yl)benzenesulfonamido)chromate	413-210-6	—	Aquatic Chronic 2	H411	GHS09	H411			
611-093-00-8	sodium 2-(4-(4-fluoro-6-(2-sulfo-ethylamino)-[1,3,5]triazin-2-ylamino)-2-ureidophenylazo)-5-(4-sulfophenylazo)benzene-1-sulfonate	410-770-3	146177-84-6	Skin Sens. 1	H317	GHS07 Wng	H317			
611-094-00-3	reaction mass of: 2-[2-acetylamino-4-[N,N-bis[2-ethoxy-carbonyloxy]ethyl]amino]phenylazo]-5,6-dichloro-1,3-benzothiazole; 2-[2-acetylamino-4-[N,N-bis[2-ethoxy-carbonyloxy]ethyl]amino]phenylazo]-6,7-dichloro-1,3-benzotriazole (1:1)	411-600-0	143145-93-1	Aquatic Chronic 4	H413	—	H413			
611-095-00-9	hexasodium 1,1'-[(1-amino-8-hydroxy-3,6-disulfonate-2,7-naphthalenediyl)bis(azo(4-sulfonate-1,3-phenyl)imino[6-[(4-chloro-3-sulfonatophenyl)amino]-1,3,5-triazin-2,4-diyl]]]bis[3-carboxypyridinium] dihydroxide	412-240-7	89797-03-5	Aquatic Chronic 2	H411	GHS09	H411			
611-096-00-4	methyl N-[3-acetylamino)-4-(2-cyano-4-nitrophenylazo)phenyl]-N-[(1-methoxy)acetyl]glycinate	413-040-2	149850-30-6	Skin Sens. 1	H317	GHS07 Wng	H317			
611-097-00-X	reaction mass of iron complexes of: 1,3-dihydroxy-4-[(5-phenylaminosulfonyl)-2-hydroxyphenylazo]-n-(5-amino-sulfonyl-2-hydroxyphenylazo)benzene and: 1,3-dihydroxy-4-[(5-phenylaminosulfonyl)-2-hydroxyphenylazo]-n-[4-(4-nitro-2-sulfophenylamino)phenylazo]benzene (n=2,5,6)	414-150-3	—	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
611-098-00-5	tetrakis(tetramethylammonium)3,3'-(6-(2-hydroxyethylamino)1,3,5-triazine-2,4-diyl-bisimino(2-methyl-4,1-phenyleneazo)) bisnaphthalene-1,5-disulfonate	405-950-3	131013-83-7	Acute Tox. 3 * Aquatic Chronic 3	H301 H412	GHS06 Dgr	H301 H412			
611-099-00-0	(methylenebis(4,1-phenylenazo(1-(3-(dimethylamino)propyl)-1,2-dihydro-6-hydroxy-4-methyl-2-oxopyridine-5,3-diyl)))-1,1'-dipyridinium dichloride dihydrochloride	401-500-5	118658-99-4	Carc. 1B Aquatic Chronic 2	H350 H411	GHS08 GHS09 Dgr	H350 H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
611-100-00-4	potassium sodium 3,3'-(3(or4)-methyl-1,2-phenylenebis(imino(6-chloro)-1,3,5-triazine-4,2-diylimino(2-acetamido-5-methoxy)-4,1-phenylenazo)dinaphthalene-1,5-disulfonate	403-810-6	140876-13-7	Eye Dam. 1	H318	GHS05 Dgr	H318			
611-101-00-X	2'-(4-chloro-3-cyano-5-formyl-2-thienyl)azo-5'-diethylaminoacetanilide	405-200-5	104366-25-8	Skin Sens. 1	H317	GHS07 Wng	H317			
611-103-00-0	trisodium (1-(3-carboxylato-2-oxido-5-sulfonatophenylazo)-5-hydroxy-7-sulfonatophthalen-2-amido)nickel(II)	407-110-1	—	Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H318 H317 H411	GHS05 GHS07 GHS09 Dgr	H318 H317 H411			
611-104-00-6	reaction mass of: trisodium (2,4(or 2,6 or 4,6)-bis(3,5-dinitro-2-oxidophenylazo)-5-hydroxyphenolato)(2(or 4or 6)-(3,5-dinitro-2-oxidophenylazo)-5-hydroxy-4(or 2or 6)-(4-(4-nitro-2-sulfonatoanilino)phenylazo)phenolato)ferrate(1-); trisodium bis(2,4(or 2,6 or 4,6)-bis(3,5-dinitro-2-oxidophenylazo)-5-hydroxyphenolato)ferrate(1-); trisodium (2,4(or 2,6 or 4,6)-bis(3,5-dinitro-2-oxidophenylazo)-5-hydroxyphenolato)(2(or 4 or 6)-(3,5-dinitro-2-oxidophenylazo)-5-hydroxy-4(or 2 or 6)-(4-nitro-2-sulfonatophenylazo)phenolato)ferrate(1-); trisodium (2,4(or 2,6 or 4,6)-bis(3,5-dinitro-2-oxidophenylazo)-5-hydroxyphenolato)(2(or 4 or 6)-(3,5-dinitro-2-oxidophenylazo)-5-hydroxy-4(or 2 or 6)-(3-sulfonatophenylazo)phenolato)ferrate(1-); disodium 3,3'-(2,4-dihydroxy-1,3(or 1,5 or 3,5)-phenylenediazo)dibenzenesulfonate	406-870-1	—	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
611-105-00-1	sodium 4-(4-chloro-6-(N-ethylanilino)-1,3,5-triazin-2-ylamino)-2-(1-(2-chlorophenyl)-5-hydroxy-3-methyl-1H-pyrazol-4-ylazo)benzenesulfonate	407-800-2	136213-75-7	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
611-106-00-7	hexasodium 4,4'-dihydroxy-3,3'-bis[2-sulfonato-4-(4-sulfonatophenylazo)phenylazo]-7,7'[p-phenylenebis(imino(6-chloro-1,3,5-triazine-4,2-diyl)imino)]dinaphthalene-2-sulfonate	410-180-6	157627-99-1	Eye Dam. 1	H318	GHS05 Dgr	H318			
611-107-00-2	potassium sodium 4-(4-chloro-6-(3,6-disulfonato-7-(5,8-disulfonato-naphthalen-2-ylazo)-8-hydroxy-naphthalen-1-ylamino)-1,3,5-triazin-2-ylamino)-5-hydroxy-6-(4-(2-sulfatoethanesulfonyl)-phenylazo)-naphthalene-1,7-disulfonate	412-490-7	—	Skin Sens. 1	H317	GHS07 Wng	H317			
611-108-00-8	disodium 5-(((4-(4-chloro-3-sulfonatophenyl)azo)-1-naphthyl)azo)-8-(phenylamino)-1-naphthalenesulfonate	413-600-6	6527-62-4	Aquatic Chronic 3	H412	—	H412			
611-109-00-3	reaction products of: copper(II) sulfate and tetrasodium 2,4-bis[6-(2-methoxy-5-sulfonatophenylazo)-5-hydroxy-7-sulfonato-2-naphthylamino]-6-(2-hydroxyethylamino)-1,3,5-triazine (2:1)	407-710-3	—	Aquatic Chronic 2	H411	GHS09	H411			
611-110-00-9	tetra-sodium/lithium 4,4'-bis-(8-amino-3,6-disulfonato-1-naphthol-2-ylazo)-3-methylazobenzene	408-210-8	124605-82-9	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
611-111-00-4	disodium 2-[[4-(2-chloroethylsulfonyl)phenyl]-[(2-hydroxy-5-sulfo-3-[3-[2-(2-sulfooxy)ethylsulfonyl]ethylazo]-4-sulfobenzoato(3-)cuprate(1-)]	414-230-8	—	Skin Sens. 1	H317	GHS07 Wng	H317			
611-112-00-X	tetrasodium 4-hydroxy-5-[4-[3-(2-sulfatoethanesulfonyl)phenylamino]-6-morpholin-4-yl-1,3,5-triazin-2-ylamino]-3-(1-sulfonatophthalen-2-ylazo)naphthalene-2,7-disulfonate	413-070-6	—	Skin Sens. 1	H317	GHS07 Wng	H317			
611-113-00-5	lithium sodium (2-(((5-((2,5-dichlorophenyl)azo)-2-hydroxyphenyl)methylene)amino)benzoato(2-)))(2-((4,5-dihydro-3-methyl-5-oxo-1-phenyl-1H-pyrazol-4-yl)azo)-5-sulfobenzoato(3-)) chromate(2-)	414-280-0	149626-00-6	Aquatic Chronic 2	H411	GHS09	H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
611-114-00-0	lithium sodium (4-((5-chloro-2-hydroxyphenyl)azo)-2,4-dihydro-5-methyl-3H-pyrazol-3-onato(2-))(3-((4,5-dihydro-3-methyl-1-(4-methylphenyl)-5-oxo-1H-pyrazol-4-yl)azo)-4-hydroxy-5-nitrobenzenesulfonato(3-)) chromate(2-)	414-250-7	149564-66-9	Acute Tox. 4 * Eye Dam. 1 Aquatic Chronic 3	H302 H318 H412	GHS05 GHS07 Dgr	H302 H318 H412			
611-115-00-6	trilithium bis(4-((4-(diethylamino)-2-hydroxyphenyl)azo)-3-hydroxy-1-naphthalenesulfonato(3-))chromate(3-)	414-290-5	149564-65-8	Acute Tox. 4 * Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			
611-116-00-1	reaction mass of: trisodium 5-{4-chloro-6-[2-(2,6-dichloro-5-cyanopyrimidin-4-ylamino)-propylamino]-1,3,5-triazin-2-ylamino}-4-hydroxy-3-(1-sulfonatophthalene-2-ylazo)-naphthalene-2,7-disulfonate; trisodium 5-{4-chloro-6-[2-(2,6-dichloro-5-cyanopyrimidin-4-ylamino)-1-methyl-ethylamino]-1,3,5-triazin-2-ylamino}-4-hydroxy-3-(1-sulfonatophthalene-2-ylazo)-naphthalene-2,7-disulfonate; trisodium 5-{4-chloro-6-[2-(4,6-dichloro-5-cyanopyrimidin-2-ylamino)-propylamino]-1,3,5-triazin-2-ylamino}-4-hydroxy-3-(1-sulfonatophthalene-2-ylazo)-naphthalene-2,7-disulfonate; trisodium 5-{4-chloro-6-[2-(4,6-dichloro-5-cyanopyrimidin-2-ylamino)-1-methyl-ethylamino]-1,3,5-triazin-2-ylamino}-4-hydroxy-3-(1-sulfonatophthalene-2-ylazo)-naphthalene-2,7-disulfonate	414-620-8	—	Eye Dam. 1 Skin Sens. 1	H318 H317	GHS05 GHS07 Dgr	H318 H317			
611-117-00-7	1,3-bis{6-fluoro-4-[1,5-disulfo-4-(3-aminocarbonyl-1-ethyl-6-hydroxy-4-methyl-pyrid-2-on-5-ylazo)-phenyl-2-ylamino]-1,3,5-triazin-2-ylamino}propane lithium-, sodium salt	415-100-3	149850-29-3	Skin Sens. 1	H317	GHS07 Wng	H317			
611-118-00-2	sodium 1,2-bis[4-[4-(4-(4-sulfophenylazo)-2-sulfophenylazo)-2-ureido-phenyl-amino]-6-fluoro-1,3,5-triazin-2-ylamino]-propane, sodium salt	413-990-8		Skin Sens. 1	H317	GHS07 Wng	H317			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
611-119-00-8	tetrasodium 4-[4-chloro-6-(4-methyl-2-sulfophenylamino)-1,3,5-triazin-2-ylamino]-6-(4,5-dimethyl-2-sulfophenylazo)-5-hydroxynaphthalene-2,7-disulfonate	415-400-4	148878-22-2	Eye Dam. 1 Skin Sens. 1	H318 H317	GHS05 GHS07 Dgr	H318 H317			
611-120-00-3	5-{4-[5-amino-2-[4-(2-sulfoxyethylsulfonyl)phenylazo]-4-sulfo-phenylamino]-6-chloro-1,3,5-triazin-2-ylamino]-4-hydroxy-3-(1-sulfo-naphthalen-2-ylazo)-naphthalene-2,7-disulfonicacid sodium salt	418-340-7	157707-94-3	Eye Dam. 1 Aquatic Chronic 3	H318 H412	GHS05 Dgr	H318 H412			
611-121-00-9	main component 6 (isomer): asym. 1:2 Cr (III)-complex of: A: 3-hydroxy-4-(2-hydroxynaphthalene-1-ylazo)naphthalene-1-sulfonic acid, Na-salt and B: 1-[2-hydroxy-5-(4-methoxy-phenylazo)phenylazo]naphthalene-2-ol; main component 8 (isomer): asym. 1:2 Cr-complex of: A: 3-hydroxy-4-(2-hydroxynaphthalene-1-ylazo)-naphthalene-1-sulfonic acid, Na-salt and B: 1-[2-hydroxy-5-(4-methoxy-phenylazo)-phenylazo]-naphthalene-2-ol	417-280-9	30785-74-1	Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H318 H400 H410	GHS05 GHS09 Dgr	H318 H410			
611-122-00-4	hexasodium (di[N-(3-(4-[5-(5-amino-3-methyl-1-phenylpyrazol-4-yl-azo)-2,4-disulfo-anilino]-6-chloro-1,3,5-triazin-2-ylamino)phenyl)-sulfamoyl](di-sulfo)-phthalocyaninato)nickel	417-250-5	151436-99-6	Eye Dam. 1 Skin Sens. 1	H318 H317	GHS05 GHS07 Dgr	H318 H317			
611-123-00-X	3-(2,4-bis(4-((5-(4,6-bis(2-aminopropylamino)-1,3,5-triazin-2-ylamino)-4-hydroxy-2,7-disulfonaphthalen-3-yl)azo)phenylamino)-1,3,5-triazin-6-ylamino)propyl-diethylammonium lactate	424-310-4	178452-66-9	Eye Dam. 1	H318	GHS05 Dgr	H318			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
611-124-00-5	reaction mass of: pentasodium 5-amino-3-(5-{4-chloro-6-[4-(2-sulfoxyethoxysulfonato)phenylamino]-1,3,5-triazin-2-ylamino]-2-sulfonatophenylazo)-6-[5-(2,3-dibromopropionylamino)-2-sulfonatophenylazo]-4-hydroxynaphthalene-2,7-disulfonate; pentasodium 5-amino-6-[5-(2-bromoacryloylamino)-2-sulfonatophenylazo]-3-(5-{4-chloro-6-[4-(2-sulfoxyethoxysulfonato)phenylamino]-1,3,5-triazin-2-ylamino)-2-sulfonatophenylazo]-4-hydroxynaphthalene-2,7-disulfonate; tetrasodium 5-amino-3-[5-{4-chloro-6-[4-(vinylsulfonyl)phenylamino]-1,3,5-triazin-2-ylamino)-2-sulfonatophenylazo]-6-[5-(2,3-dibromopropionylamino)-2-sulfonatophenylazo]-4-hydroxynaphthalene-2,7-disulfonate	424-320-9		Eye Dam. 1 Aquatic Chronic 2	H318 H411	GHS05 GHS09 Dgr	H318 H411			
611-125-00-0	reaction mass of: Disodium 6-[3-carboxy-4,5-dihydro-5-oxo-4-sulfonatophenyl]pyrazolin-4-yl-azo]-3-[2-oxido-4-(ethensulfonyl)-5-methoxyphenylazo]-4-oxidonaphthalene-2-sulfonate copper (II) complex; Disodium 6-[3-carboxy-4,5-dihydro-5-oxo-4-sulfonatophenyl]pyrazolin-4-yl-azo]-3-[2-oxido-4-(2-hydroxyethylsulfonyl)-5-methoxyphenylazo]-4-oxidonaphthalene-2-sulfonate copper (II) complex	423-940-7	—	Eye Dam. 1 Aquatic Chronic 2	H318 H411	GHS05 GHS09 Dgr	H318 H411			
611-126-00-6	2,6-bis-(2-(4-(4-amino-phenylamino)-phenylazo)-1,3-dimethyl-3H-imidazolium)-4-dimethylamino-1,3,5-triazine, dichloride	424-120-1	174514-06-8	Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H318 H400 H410	GHS05 GHS09 Dgr	H318 H410			
611-127-00-1	pentasodium 4-amino-6-(5-(4-(2-ethyl-phenylamino)-6-(2-sulfatoethanesulfonyl)-1,3,5-triazin-2-ylamino)-2-sulfonatophenylazo)-5-hydroxy-3-(4-(2-sulfatoethanesulfonyl)phenylazo)naphthalene-2,7-disulfonate	423-790-2	—	Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 3	H318 H317 H412	GHS05 GHS07 Dgr	H318 H317 H412			G

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etiketgeving			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
611-128-00-7	N,N'-bis{6-chloro-4-[6-(4-vinylsulfonylphenylazo)-2,7-disulfonacid-5-hydroxynaphth-4-ylamino]-1,3,5-triazin-2-yl}-N-(2-hydroxyethyl)ethane-1,2-diamine, sodium salt	419-500-9	171599-85-2	Eye Dam. 1 Skin Sens. 1	H318 H317	GHS05 GHS07 Dgr	H318 H317			
611-129-00-2	reaction mass of: 5-[(4-[(7-amino-1-hydroxy-3-sulfo-2-naphthyl)azo]-2,5-dihydroxyphenyl)azo]-2-[(3-phosphonophenyl)azo]benzoic acid; 5-[(4-[(7-amino-1-hydroxy-3-sulfo-2-naphthyl)azo]-2,5-dihydroxyphenyl)azo]-3-[(3-phosphonophenyl)azo]benzoic acid	418-230-9	163879-69-4	Expl. 1.3 **** Repr. 2 STOT RE 2 * Skin Sens. 1 Aquatic Chronic 2	H203 H361f *** H373 ** H317 H411	GHS01 GHS08 GHS07 GHS09 Dgr	H203 H361f *** H373 ** H317 H411			
611-130-00-8	tetra-ammonium 2-[6-[7-(2-carboxylatophenylazo)-8-hydroxy-3,6-disulfonato-1-naphthylamino]-4-hydroxy-1,3,5-triazin-2-ylamino]benzoate	418-520-5	183130-96-3	Eye Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H319 H400 H410	GHS07 GHS09 Wng	H319 H410			
611-131-00-3	2-[2-hydroxy-3-(2-chlorophenyl)carbamoyl-1-naphthylazo]-7-[2-hydroxy-3-(3-methylphenyl)carbamoyl-1-naphthylazo]fluoren-9-one	420-580-2	151798-26-4	Repr. 1B Aquatic Chronic 4	H360D *** H413	GHS08 Dgr	H360D *** H413			
611-132-00-9	pentasodium bis{7-[4-(1-butyl-5-cyano-1,2-dihydro-2-hydroxy-4-methyl-6-oxo-3-pyridylazo)phenylsulfonylamino]-5'-nitro-3,3'-disulfonatonaphthalene-2-azobenzene-1,2'-diolato} chromate (III)	419-210-2	178452-71-6	Eye Dam. 1 Aquatic Chronic 3	H318 H412	GHS05 Dgr	H318 H412			
611-133-00-4	Product by process iron complex of azo dyestuffs obtained by coupling a mixture of diazotized 2-amino-1-hydroxybenzene-4-sulfanilide and 2-amino-1-hydroxybenzene-4-sulfonamide with resorcin, the obtained mixture being subsequently submitted to a second coupling reaction with a mixture of diazotized 3-aminobenzene-1-sulfonic acid (metanilic acid) and 4'-amino-4-nitro-1,1'-diphenylamine-2-sulfonic acid and metallization with ferric chloride, sodium salt	419-260-5	—	Eye Dam. 1 Aquatic Chronic 2	H318 H411	GHS05 GHS09 Dgr	H318 H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etiketgeving			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
611-134-00-X	trisodium 2-( $\alpha$ [2-hydroxy-3-[4-chloro-6-[4-(2,3-dibromopropionylamino)-2-sulfonatophenylamino]-1,3,5-triazin-2-ylamino]-5-sulfonatophenylazo]-benzylidenehydrazino)-4-sulfonatobenzoate, copper complex	423-770-3	—	Eye Dam. 1 Aquatic Chronic 2	H318 H411	GHS05 GHS09 Dgr	H318 H411			
611-135-00-5	reaction product of: 2-[[4-amino-2-ureidophenylazo]-5-[(2-(sulfooxy)ethyl)sulfonyl]] benzenesulfonic acid with 2,4,6-trifluoropyrimidine and partial hydrolysis to the corresponding vinylsulfonyl derivative, mixed potassium/sodium salt	424-250-9	—	Eye Dam. 1 Aquatic Chronic 3	H318 H412	GHS05 Dgr	H318 H412			
611-136-00-0	2-{4-(2-ammoniopropylamino)-6-[4-hydroxy-3-(5-methyl-2-methoxy-4-sulfamoylphenylazo)-2-sulfonatophenylamino]-1,3,5-triazin-2-ylamino}-2-aminopropyl formate	424-260-3	—	Repr. 2 Eye Dam. 1 Aquatic Chronic 2	H361f *** H318 H411	GHS05 GHS08 GHS09 Dgr	H361f *** H318 H411			
611-137-00-6	6-tert-butyl-7-chloro-3-tridecyl-7,7a-dihydro-1H-pyrazolo[5,1-c]-1,2,4-triazole	419-870-1	159038-16-1	Aquatic Chronic 4	H413	—	H413			
611-138-00-1	2-(4-aminophenyl)-6-tert-butyl-1H-pyrazolo[1,5-b][1,2,4]triazole	415-910-7	152828-25-6	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
611-140-00-2	azafenidin (ISO); 2-(2,4-dichloro-5-prop-2-ynyloxyphenyl)-5,6,7,8-tetrahydro-1,2,4-triazolo[4,3-a]pyridin-3(2H)-one	—	68049-83-2	Repr. 1B STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H360Df H373 ** H400 H410	GHS08 GHS09 Dgr	H360Df H373 ** H410		M=1000	
612-001-00-9	mono-methylamine; [1] di-methylamine; [2] tri-methylamine [3]	200-820-0 [1] 204-697-4 [2] 200-875-0 [3]	74-89-5 [1] 124-40-3 [2] 75-50-3 [3]	Flam. Gas 1 Press. Gas Acute Tox. 4 * STOT SE 3 Skin Irrit. 2 Eye Dam. 1	H220 H332 H335 H315 H318	GHS02 GHS04 GHS05 GHS07 Dgr	H220 H332 H335 H315 H318		* Skin Irrit. 2; H315: C $\geq$ 5 % Eye Dam. 1; H318: C $\geq$ 5 % Eye Irrit. 2; H319: 0,5 % $\leq$ C < 5 % STOT SE 3; H335: C $\geq$ 5 %	U 5

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
612-001-01-6	mono-methylamine ...%; [1] di-methylamine ...%; [2] tri-methylamine ...% [3]	200-820-0 [1] 204-697-4 [2] 200-875-0 [3]	74-89-5 [1] 124-40-3 [2] 75-50-3 [3]	Flam. Liq. 1 Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1B	H224 H332 H302 H314	GHS02 GHS05 GHS07 Dgr	H224 H332 H302 H314		* STOT SE 3; H335: C ≥ 5 %	B
612-002-00-4	ethylamine	200-834-7	75-04-7	Flam. Gas 1 Press. Gas Eye Irrit. 2 STOT SE 3	H220 H319 H335	GHS02 GHS04 GHS07 Dgr	H220 H319 H335			U
612-003-00-X	diethylamine	203-716-3	109-89-7	Flam. Liq. 2 Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1A	H225 H332 H312 H302 H314	GHS02 GHS05 GHS07 Dgr	H225 H332 H312 H302 H314		STOT SE 3; H335: C ≥ 1 %	
612-004-00-5	triethylamine	204-469-4	121-44-8	Flam. Liq. 2 Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1A	H225 H332 H312 H302 H314	GHS02 GHS05 GHS07 Dgr	H225 H332 H312 H302 H314		STOT SE 3; H335: C ≥ 1 %	
612-005-00-0	butylamine	203-699-2	109-73-9	Flam. Liq. 2 Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1A	H225 H332 H312 H302 H314	GHS02 GHS05 GHS07 Dgr	H225 H332 H312 H302 H314		STOT SE 3; H335: C ≥ 1 %	
612-006-00-6	ethylenediamine; 1,2-diaminoethane	203-468-6	107-15-3	Flam. Liq. 3 Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1B Resp. Sens. 1 Skin Sens. 1	H226 H312 H302 H314 H334 H317	GHS02 GHS08 GHS05 GHS07 Dgr	H226 H312 H302 H314 H334 H317			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
612-007-00-1	2-aminopropane; isopropylamine	200-860-9	75-31-0	Flam. Liq. 1 Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H224 H319 H335 H315	GHS02 GHS07 Dgr	H224 H319 H335 H315			
612-008-00-7	aniline	200-539-3	62-53-3	Carc. 2 Muta. 2 Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 1 Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1	H351 H341 H331 H311 H301 H372 ** H318 H317 H400	GHS06 GHS08 GHS05 GHS09 Dgr	H351 H341 H331 H311 H301 H372 ** H318 H317 H400		* STOT RE 1; H372: C ≥ 1 % STOT RE 2; H373: 0,2 % ≤ C < 1 %	
612-009-00-2	salts of aniline	—	—	Carc. 2 Muta. 2 Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 1 Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1	H351 H341 H331 H311 H301 H372 ** H318 H317 H400	GHS06 GHS08 GHS05 GHS09 Dgr	H351 H341 H331 H311 H301 H372 ** H318 H317 H400		* STOT RE 1; H372: C ≥ 1 % STOT RE 2; H373: 0,2 % ≤ C < 1 %	A
612-010-00-8	chloroanilines (with exception of those specified elsewhere in this Annex)	—	—	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H331 H311 H301 H373 ** H400 H410	GHS06 GHS08 GHS09 Dgr	H331 H311 H301 H373 ** H410			C



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
612-011-00-3	4-nitrosoaniline	211-535-6	659-49-4	Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 *	H332 H312 H302	GHS07 Wng	H332 H312 H302			
612-012-00-9	<i>o</i> -nitroaniline; [1] <i>m</i> -nitroaniline; [2] <i>p</i> -nitroaniline [3]	201-855-4 [1] 202-729-1 [2] 202-810-1 [3]	88-74-4 [1] 99-09-2 [2] 100-01-6 [3]	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 2 * Aquatic Chronic 3	H331 H311 H301 H373 ** H412	GHS06 GHS08 Dgr	H331 H311 H301 H373 ** H412			C
612-013-00-4	3-aminobenzene sulphonic acid; metanilic acid	204-473-6	121-47-1	Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 *	H332 H312 H302	GHS07 Wng	H332 H312 H302			
612-014-00-X	sulphanilic acid; 4-aminobenzenesulphonic acid	204-482-5	121-57-3	Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H319 H315 H317	GHS07 Wng	H319 H315 H317			
612-015-00-5	<i>N</i> -methylaniline	202-870-9	100-61-8	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H331 H311 H301 H373 ** H400 H410	GHS06 GHS08 GHS09 Dgr	H331 H311 H301 H373 ** H410			
612-016-00-0	<i>N,N</i> -dimethylaniline	204-493-5	121-69-7	Carc. 2 Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Aquatic Chronic 2	H351 H331 H311 H301 H411	GHS06 GHS08 GHS09 Dgr	H351 H331 H311 H301 H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
612-017-00-6	N-methyl-N,2,4,6-tetranitroaniline; tetryl	207-531-9	479-45-8	Expl. 1.1 Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 2 *	H201 H331 H311 H301 H373 **	GHS01 GHS06 GHS08 Dgr	H201 H331 H311 H301 H373 **			
612-018-00-1	bis(2,4,6-trinitrophenyl)amine; hexyl	205-037-8	131-73-7	Expl. 1.1 Acute Tox. 2 * Acute Tox. 1 Acute Tox. 2 * STOT RE 2 * Aquatic Chronic 2	H201 H330 H310 H300 H373 ** H411	GHS01 GHS06 GHS08 GHS09 Dgr	H201 H330 H310 H300 H373 ** H411			
612-019-00-7	dipicrylamine, ammonium salt	220-639-0	2844-92-0	Expl. 1.1 Acute Tox. 2 * Acute Tox. 1 Acute Tox. 2 * STOT RE 2 * Aquatic Chronic 2	H201 H330 H310 H300 H373 ** H411	GHS01 GHS06 GHS08 GHS09 Dgr	H201 H330 H310 H300 H373 ** H411	EUH001		
612-020-00-2	1-naphthylamine	205-138-7	134-32-7	Acute Tox. 4 * Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
612-022-00-3	2-naphthylamine	202-080-4	91-59-8	Carc. 1A Acute Tox. 4 * Aquatic Chronic 2	H350 H302 H411	GHS08 GHS07 GHS09 Dgr	H350 H302 H411		Carc. 1A; H350: C ≥ 0,01 %	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
612-023-00-9	phenylhydrazine; [1] phenylhydrazinium chloride; [2] phenylhydrazine hydrochloride; [3] phenylhydrazinium sulphate (2:1) [4]	202-873-5 [1] 200-444-7 [2] 248-259-0 [3] 257-622-2 [4]	100-63-0 [1] 59-88-1 [2] 27140-08-5 [3] 52033-74-6 [4]	Carc. 1B Muta. 2 Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 1 Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1	H350 H341 H331 H311 H301 H372 ** H319 H315 H317 H317 H400	GHS06 GHS08 GHS09 Dgr	H350 H341 H331 H311 H301 H372 ** H319 H315 H317 H400			
612-024-00-4	<i>m</i> -toluidine; 3-aminotoluene	203-583-1	108-44-1	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 2 * Aquatic Acute 1	H331 H311 H301 H373 ** H400	GHS06 GHS08 GHS09 Dgr	H331 H311 H301 H373 ** H400			
612-025-00-X	nitrotoluidines, with the exception of those specified elsewhere in this Annex	—	—	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 2 * Aquatic Chronic 2	H331 H311 H301 H373 ** H411	GHS06 GHS08 GHS09 Dgr	H331 H311 H301 H373 ** H411			C
612-026-00-5	diphenylamine	204-539-4	122-39-4	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H331 H311 H301 H373 ** H400 H410	GHS06 GHS08 GHS09 Dgr	H331 H311 H301 H373 ** H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
612-027-00-0	xylidines with the exception of those specified elsewhere in this Annex; dimethyl anilines with the exception of those specified elsewhere in this Annex	—	—	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 2 * Aquatic Chronic 2	H331 H311 H301 H373 ** H411	GHS06 GHS08 GHS09 Dgr	H331 H311 H301 H373 ** H411			C
612-028-00-6	<i>p</i> -phenylenediamine	203-404-7	106-50-3	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Eye Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H331 H311 H301 H319 H317 H400 H410	GHS06 GHS09 Dgr	H331 H311 H301 H319 H317 H410			
612-029-00-1	benzene-1,4-diamine dihydrochloride; <i>p</i> -phenylenediamine dihydrochloride	210-834-9	624-18-0	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Eye Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H331 H311 H301 H319 H317 H400 H410	GHS06 GHS09 Dgr	H331 H311 H301 H319 H317 H410			
612-030-00-7	2-methyl- <i>p</i> -phenylenediamine sulphate [1]	210-431-8 [1] 228-871-4 [2]	615-50-9 [1] 6369-59-1 [2]	Acute Tox. 3 * Acute Tox. 4 * Acute Tox. 4 * Skin Sens. 1 Aquatic Chronic 2	H301 H332 H312 H317 H411	GHS06 GHS09 Dgr	H301 H332 H312 H317 H411			
612-031-00-2	<i>N,N</i> -dimethylbenzene-1,3-diamine; [1] 4-amino- <i>N,N</i> -dimethylaniline; 3-amino- <i>N,N'</i> -dimethylaniline [2]	220-623-3 [1] 202-807-5 [2]	2836-04-6 [1] 99-98-9 [2]	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 *	H331 H311 H301	GHS06 Dgr	H331 H311 H301			C

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
612-032-00-8	<i>N,N,N',N'</i> -tetramethyl- <i>p</i> -phenylenediamine	202-831-6	100-22-1	Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 *	H332 H312 H302	GHS07 Wng	H332 H312 H302			
612-033-00-3	2-aminophenol	202-431-1	95-55-6	Muta. 2 Acute Tox. 4 * Acute Tox. 4 *	H341 H332 H302	GHS08 GHS07 Wng	H341 H332 H302			
612-034-00-9	2-amino-4,6-dinitrophenol; picramic acid (< 20 % water)	202-544-6	96-91-3	Expl. 1.1 Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Aquatic Chronic 3	H201 H332 H312 H302 H412	GHS01 GHS07 Wng	H201 H332 H312 H302 H412			T
612-034-01-6	2-amino-4,6-dinitrophenol; picramic acid; [≥ 20 % water]	202-544-6	96-91-3	Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Aquatic Chronic 3	H332 H312 H302 H412	GHS07 Wng	H332 H312 H302 H412			G
612-035-00-4	2-methoxyaniline; <i>o</i> -anisidine	201-963-1	90-04-0	Carc. 1B Muta. 2 Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 *	H350 H341 H331 H311 H301	GHS06 GHS08 Dgr	H350 H341 H331 H311 H301			
612-036-00-X	3,3'-dimethoxybenzidine; <i>o</i> -dianisidine	204-355-4	119-90-4	Carc. 1B Acute Tox. 4 *	H350 H302	GHS08 GHS07 Dgr	H350 H302			
612-037-00-5	salts of 3,3'-dimethoxybenzidine; salts of <i>o</i> -dianisidine	—	—	Carc. 1B Acute Tox. 4 *	H350 H302	GHS08 GHS07 Dgr	H350 H302			A

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
612-038-00-0	2-nitro- <i>p</i> -anisidine; 4-methoxy-2-nitroaniline	202-547-2	96-96-8	Acute Tox. 2 * Acute Tox. 1 Acute Tox. 2 * STOT RE 2 * Aquatic Chronic 3	H330 H310 H300 H373 ** H412	GHS06 GHS08 Dgr	H330 H310 H300 H373 ** H412			
612-039-00-6	2-ethoxyaniline; <i>o</i> -phenetidine	202-356-4	94-70-2	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 2 *	H331 H311 H301 H373 **	GHS06 GHS08 Dgr	H331 H311 H301 H373 **			
612-040-00-1	2,4-dinitroaniline	202-553-5	97-02-9	Acute Tox. 2 * Acute Tox. 1 Acute Tox. 2 * STOT RE 2 * Aquatic Chronic 2	H330 H310 H300 H373 ** H411	GHS06 GHS08 GHS09 Dgr	H330 H310 H300 H373 ** H411			
612-041-00-7	4,4'- <i>bi-o</i> -toluidine	204-358-0	119-93-7	Carc. 1B Acute Tox. 4 * Aquatic Chronic 2	H350 H302 H411	GHS08 GHS07 GHS09 Dgr	H350 H302 H411			
612-042-00-2	benzidine; 1,1'-biphenyl-4,4'-diamine; 4,4'-diaminobiphenyl; biphenyl-4,4'-ylenediamine	202-199-1	92-87-5	Carc. 1A Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H350 H302 H400 H410	GHS08 GHS07 GHS09 Dgr	H350 H302 H410		Carc. 1A; H350: C ≥ 0,01 %	
612-043-00-8	<i>N,N'</i> -dimethylbenzidine	—	2810-74-4	Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 *	H332 H312 H302	GHS07 Wng	H332 H312 H302			
612-044-00-3	<i>N,N'</i> -diacetylbenzidine	210-338-2	613-35-4	Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 *	H332 H312 H302	GHS07 Wng	H332 H312 H302			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevaar­klasse en categorie	Gevaar­aan­duiding	Pictogram, sig­naal­woord	Gevaar­aan­duiding	Aanvullende gevaar­aan­duiding		
612-046-00-4	allylamine	203-463-9	107-11-9	Flam. Liq. 2 Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Aquatic Chronic 2	H225 H331 H311 H301 H411	GHS02 GHS06 GHS09 Dgr	H225 H331 H311 H301 H411			
612-047-00-X	benzylamine	202-854-1	100-46-9	Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1B	H312 H302 H314	GHS05 GHS07 Dgr	H312 H302 H314			
612-048-00-5	dipropylamine	205-565-9	142-84-7	Flam. Liq. 2 Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1A	H225 H332 H312 H302 H314	GHS02 GHS05 GHS07 Dgr	H225 H332 H312 H302 H314		STOT SE 3; H335: C ≥ 1 %	
612-049-00-0	di- <i>n</i> -butylamine; [1] di- <i>sec</i> -butylamine [2]	203-921-8 [1] 210-937-9 [2]	111-92-2 [1] 626-23-3 [2]	Flam. Liq. 3 Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 *	H226 H332 H312 H302	GHS02 GHS07 Wng	H226 H332 H312 H302			
612-050-00-6	cyclohexylamine	203-629-0	108-91-8	Flam. Liq. 3 Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1B	H226 H312 H302 H314	GHS02 GHS05 GHS07 Dgr	H226 H312 H302 H314			
612-051-00-1	4,4'-diaminodiphenylmethane; 4,4'-methylenedianiline	202-974-4	101-77-9	Carc. 1B Muta. 2 STOT SE 1 STOT RE 2 * Skin Sens. 1 Aquatic Chronic 2	H350 H341 H370 ** H373 ** H317 H411	GHS08 GHS07 GHS09 Dgr	H350 H341 H370 ** H373 ** H317 H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
612-052-00-7	(S)- <i>sec</i> -butylamine; (S)-2-aminobutane; [1] (R)- <i>sec</i> -butylamine; (R)-2-aminobutane; [2] <i>sec</i> -butylamine; 2-aminobutane [3]	208-164-7 [1] 236-232-6 [2] 237-732-7 [3]	513-49-5 [1] 13250-12-9 [2] 13952-84-6 [3]	Flam. Liq. 2 Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1A Aquatic Acute 1	H225 H332 H302 H314 H400	GHS02 GHS05 GHS07 GHS09 Dgr	H225 H332 H302 H314 H400			C
612-053-00-2	N-ethylaniline	203-135-5	103-69-5	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 2 *	H331 H311 H301 H373 **	GHS06 GHS08 Dgr	H331 H311 H301 H373 **			
612-054-00-8	N,N-diethylaniline	202-088-8	91-66-7	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 2 * Aquatic Chronic 2	H331 H311 H301 H373 ** H411	GHS06 GHS08 GHS09 Dgr	H331 H311 H301 H373 ** H411	*		
612-055-00-3	N-methyl- <i>o</i> -toluidine; [1] N-methyl- <i>m</i> -toluidine; [2] N-methyl- <i>p</i> -toluidine [3]	210-260-9 [1] 211-795-0 [2] 210-769-6 [3]	611-21-2 [1] 696-44-6 [2] 623-08-5 [3]	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 2 * Aquatic Chronic 3	H331 H311 H301 H373 ** H412	GHS06 GHS08 Dgr	H331 H311 H301 H373 ** H412			C
612-056-00-9	N,N-dimethyl- <i>p</i> -toluidine; [1] N,N-dimethyl- <i>m</i> -toluidine; [2] N,N-dimethyl- <i>o</i> -toluidine [3]	202-805-4 [1] 204-495-6 [2] 210-199-8 [3]	99-97-8 [1] 121-72-2 [2] 609-72-3 [3]	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * STOT RE 2 * Aquatic Chronic 3	H331 H311 H301 H373 ** H412	GHS06 GHS08 Dgr	H331 H311 H301 H373 ** H412	*		C



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
612-057-00-4	piperazine	203-808-3	110-85-0	Skin Corr. 1B Resp. Sens. 1 Skin Sens. 1 Aquatic Chronic 3	H314 H334 H317 H412	GHS08 GHS05 Dgr	H314 H334 H317 H412			
612-058-00-X	2,2'-iminodiethylamine; diethylenetriamine	203-865-4	111-40-0	Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1B Skin Sens. 1	H312 H302 H314 H317	GHS05 GHS07 Dgr	H312 H302 H314 H317			
612-059-00-5	3,6-diazaoctanethylenediamin; triethylenetetramine	203-950-6	112-24-3	Acute Tox. 4 * Skin Corr. 1B Skin Sens. 1 Aquatic Chronic 3	H312 H314 H317 H412	GHS05 GHS07 Dgr	H312 H314 H317 H412			
612-060-00-0	3,6,9-triazaundecamethylenediamine; tetraethylenepentamine	203-986-2	112-57-2	Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1B Skin Sens. 1 Aquatic Chronic 2	H312 H302 H314 H317 H411	GHS05 GHS07 GHS09 Dgr	H312 H302 H314 H317 H411			
612-061-00-6	3-aminopropyldimethylamine; N,N-dimethyl-1,3-diaminopropane	203-680-9	109-55-7	Flam. Liq. 3 Acute Tox. 4 * Skin Corr. 1B Skin Sens. 1	H226 H302 H314 H317	GHS02 GHS05 GHS07 Dgr	H226 H302 H314 H317			
612-062-00-1	3-aminopropyldiethylamine; N,N-diethyl-1,3-diaminopropane	203-236-4	104-78-9	Flam. Liq. 3 Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1B Skin Sens. 1	H226 H312 H302 H314 H317	GHS02 GHS05 GHS07 Dgr	H226 H312 H302 H314 H317			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
612-063-00-7	3,3'-iminodi(propylamine); dipropylenetriamine	200-261-2	56-18-8	Acute Tox. 2 * Acute Tox. 3 * Acute Tox. 4 * Skin Corr. 1A Skin Sens. 1	H330 H311 H302 H314 H317	GHS06 GHS05 Dgr	H330 H311 H302 H314 H317			
612-064-00-2	3,6,9,12-tetra-azatetradecamethylenediamine; pentactylehexamine	223-775-9	4067-16-7	Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H314 H317 H400 H410	GHS05 GHS07 GHS09 Dgr	H314 H317 H410			
612-065-00-8	polyethylenepolyamines with the exception of those specified elsewhere in this Annex	—	—	Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H314 H317 H400 H410	GHS05 GHS07 GHS09 Dgr	H312 H302 H314 H317 H410			
612-066-00-3	dicyclohexylamine	202-980-7	101-83-7	Acute Tox. 4 * Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H302 H314 H400 H410	GHS05 GHS07 GHS09 Dgr	H302 H314 H410			
612-067-00-9	3-aminomethyl-3,5,5-trimethylcyclohexylamine	220-666-8	2855-13-2	Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1B Skin Sens. 1 Aquatic Chronic 3	H312 H302 H314 H317 H412	GHS05 GHS07 Dgr	H312 H302 H314 H317 H412			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
612-068-00-4	3,3'-dichlorobenzidine; 3,3'-dichlorobiphenyl-4,4'-ylenediamine	202-109-0	91-94-1	Carc. 1B Acute Tox. 4 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H350 H312 H317 H400 H410	GHS08 GHS07 GHS09 Dgr	H350 H312 H317 H410			
612-069-00-X	salts of 3,3'-dichlorobenzidine; salts of 3,3'-dichlorobiphenyl-4,4'-ylenediamine	—	—	Carc. 1B Acute Tox. 4 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H350 H312 H317 H400 H410	GHS08 GHS07 GHS09 Dgr	H350 H312 H317 H410			A
612-070-00-5	salts of benzidine	208-519-6 208-520-1 244-236-4 252-984-8	531-85-1 531-86-2 21136-70-9 36341-27-2	Carc. 1A Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H350 H302 H400 H410	GHS08 GHS07 GHS09 Dgr	H350 H302 H410			A
612-071-00-0	salts of 2-naphthylamine	209-030-0 210-313-6	553-00-4 612-52-2	Carc. 1A Acute Tox. 4 * Aquatic Chronic 2	H350 H302 H411	GHS08 GHS07 GHS09 Dgr	H350 H302 H411			A
612-072-00-6	biphenyl-4-ylamine; xenylamine; 4-aminobiphenyl	202-177-1	92-67-1	Carc. 1A Acute Tox. 4 *	H350 H302	GHS08 GHS07 Dgr	H350 H302			
612-073-00-1	salts of biphenyl-4-ylamine; salts of xenylamine; salts of 4-aminobiphenyl	—	—	Carc. 1A Acute Tox. 4 *	H350 H302	GHS08 GHS07 Dgr	H350 H302			A

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
612-074-00-7	benzyldimethylamine	203-149-1	103-83-3	Flam. Liq. 3 Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1B Aquatic Chronic 3	H226 H332 H312 H302 H314 H412	GHS02 GHS05 GHS07 Dgr	H226 H332 H312 H302 H314 H412			
612-075-00-2	2-aminoethyl dimethylamine; 2-dimethylaminoethylamine	203-541-2	108-00-9	Flam. Liq. 2 Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1A	H225 H312 H302 H314	GHS02 GHS05 GHS07 Dgr	H225 H312 H302 H314			
612-076-00-8	ethyl dimethylamine	209-940-8	598-56-1	Flam. Liq. 2 Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1B	H225 H332 H302 H314	GHS02 GHS05 GHS07 Dgr	H225 H332 H302 H314			
612-077-00-3	dimethylnitrosoamine; N-nitrosodimethylamine	200-549-8	62-75-9	Carc. 1B Acute Tox. 2 * Acute Tox. 3 * STOT RE 1 Aquatic Chronic 2	H350 H330 H301 H372 ** H411	GHS06 GHS08 GHS09 Dgr	H350 H330 H301 H372 ** H411		Carc. 1B; H350: C ≥ 0,001 %	
612-078-00-9	2,2'-dichloro-4,4'-methylenedianiline; 4,4'-methylene bis(2-chloroaniline)	202-918-9	101-14-4	Carc. 1B Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H350 H302 H400 H410	GHS08 GHS07 GHS09 Dgr	H350 H302 H410			
612-079-00-4	salts of 2,2'-dichloro-4,4'-methylenedianiline; salts of 4,4'-methylenebis(2-chloroaniline)	—	—	Carc. 1B Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H350 H302 H400 H410	GHS08 GHS07 GHS09 Dgr	H350 H302 H410			A

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etiketgeving			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
612-080-00-X	4-amino- <i>N,N</i> -diethylaniline; <i>N,N</i> -diethyl- <i>p</i> -phenylendiamine	202-214-1	93-05-0	Acute Tox. 3 * Skin Corr. 1B	H301 H314	GHS06 GHS05 Dgr	H301 H314			
612-081-00-5	salts of 4,4'- <i>bi-o</i> -toluidine; salts of 3,3'-dimethylbenzidine; salts of <i>o</i> -toluidine	210-322-5 265-294-7 277-985-0	612-82-8 64969-36-4 74753-18-7	Carc. 1B Acute Tox. 4 * Aquatic Chronic 2	H350 H302 H411	GHS08 GHS07 GHS09 Dgr	H350 H302 H411			A
612-082-00-0	thiourea; thiocarbamide	200-543-5	62-56-6	Carc. 2 Repr. 2 Acute Tox. 4 * Aquatic Chronic 2	H351 H361d *** H302 H411	GHS08 GHS07 GHS09 Wng	H351 H361d *** H302 H411			
612-083-00-6	1-methyl-3-nitro-1-nitrosoguanidine	200-730-1	70-25-7	Carc. 1B Acute Tox. 4 * Eye Irrit. 2 Skin Irrit. 2 Aquatic Chronic 2	H350 H332 H319 H315 H411	GHS08 GHS07 GHS09 Dgr	H350 H332 H319 H315 H411		Carc. 1B; H350: C ≥ 0,01 %	
612-084-00-1	dapsone; 4,4'-diamino diphenyl sulfone	201-248-4	80-08-0	Acute Tox. 4 *	H302	GHS07 Wng	H302			
612-085-00-7	4,4'-methylenedi- <i>o</i> -toluidine	212-658-8	838-88-0	Carc. 1B Acute Tox. 4 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H350 H302 H317 H400 H410	GHS08 GHS07 GHS09 Dgr	H350 H302 H317 H410			
612-086-00-2	amitraz (ISO); <i>N,N</i> -bis(2,4-xylyliminomethyl) methylamine	251-375-4	33089-61-1	Acute Tox. 4 * STOT RE 2 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H373 ** H317 H400 H410	GHS08 GHS07 GHS09 Wng	H302 H373 ** H317 H410		M=10	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevaar­klasse en categorie	Gevaar­aan­duiding	Pictogram, sig­naal­woord	Gevaar­aan­duiding	Aanvullende gevaar­aan­duiding		
612-087-00-8	guazatine (ISO)		108173-90-6	Acute Tox. 2 * Acute Tox. 4 * Acute Tox. 4 * STOT SE 3 Skin Irrit. 2 Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H330 H312 H302 H335 H315 H318 H400 H410	GHS06 GHS05 GHS09 Dgr	H330 H312 H302 H335 H315 H318 H410			
612-088-00-3	simazine (ISO); 6-chloro-N,N'-diethyl-1,3,5-triazine-2,4-diamine	204-535-2	122-34-9	Carc. 2 Aquatic Acute 1 Aquatic Chronic 1	H351 H400 H410	GHS08 GHS09 Wng	H351 H410			
612-089-00-9	1,5-naphthylenediamine	218-817-8	2243-62-1	Carc. 2 Aquatic Acute 1 Aquatic Chronic 1	H351 H400 H410	GHS08 GHS09 Wng	H351 H410			
612-090-00-4	2,2'-(nitrosoimino)bisethanol	214-237-4	1116-54-7	Carc. 1B	H350	GHS08 Dgr	H350			
612-091-00-X	o-toluidine; 2-aminotoluene	202-429-0	95-53-4	Carc. 1B Acute Tox. 3 * Acute Tox. 3 * Eye Irrit. 2 Aquatic Acute 1	H350 H331 H301 H319 H400	GHS06 GHS08 GHS09 Dgr	H350 H331 H301 H319 H400			
612-092-00-5	N,N'-(2,2-dimethylpropylidene)hexamethylenediamine	401-660-6	1000-78-8	Skin Irrit. 2 Skin Sens. 1	H315 H317	GHS07 Wng	H315 H317			
612-093-00-0	3,5-dichloro-4-(1,1,2,2-tetrafluoroethoxy)aniline	401-790-3	104147-32-2	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
612-094-00-6	4-(2-chloro-4-trifluoromethyl)phenoxy-2-fluoroaniline hydrochloride	402-190-4	—	STOT RE 1 Acute Tox. 4 * Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H372 ** H302 H318 H317 H400 H410	GHS08 GHS05 GHS07 GHS09 Dgr	H372 ** H302 H318 H317 H410			
612-095-00-1	benzyl-2-hydroxydodecyldimethylammonium benzoate	402-610-6	113694-52-3	Skin Corr. 1B Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H314 H302 H400 H410	GHS05 GHS07 GHS09 Dgr	H314 H302 H410			
612-096-00-7	4,4'-carbonimidoylbis[N,N-dimethylaniline]	207-762-5	492-80-8	Carc. 2 Acute Tox. 4 * Eye Irrit. 2 Aquatic Chronic 2	H351 H302 H319 H411	GHS08 GHS07 GHS09 Wng	H351 H302 H319 H411			
612-097-00-2	salts of 4,4'-carbonimidoylbis[N,N-dimethylaniline]	—	—	Carc. 2 Acute Tox. 4 * Eye Irrit. 2 Aquatic Chronic 2	H351 H302 H319 H411	GHS08 GHS07 GHS09 Wng	H351 H302 H319 H411			A
612-098-00-8	nitrosodipropylamine	210-698-0	621-64-7	Carc. 1B Acute Tox. 4 * Aquatic Chronic 2	H350 H302 H411	GHS08 GHS07 GHS09 Dgr	H350 H302 H411		Carc. 1B; H350: C ≥ 0,001 %	
612-099-00-3	4-methyl- <i>m</i> -phenylenediamine; 2,4-toluenediamine	202-453-1	95-80-7	Carc. 1B Acute Tox. 3 * Acute Tox. 4 * Eye Irrit. 2 Skin Sens. 1 Aquatic Chronic 2	H350 H301 H312 H319 H317 H411	GHS06 GHS08 GHS09 Dgr	H350 H301 H312 H319 H317 H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
612-100-00-7	propylenediamine	201-155-9	78-90-0	Flam. Liq. 3 Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1A	H226 H312 H302 H314	GHS02 GHS05 GHS07 Dgr	H226 H312 H302 H314			
612-101-00-2	methenamine; hexamethylenetetramine	202-905-8	100-97-0	Flam. Sol. 2 Resp. Sens. 1 Skin Sens. 1	H228 H334 H317	GHS02 GHS08 Dgr	H228 H334 H317			
612-102-00-8	N,N-bis(3-aminopropyl)methylamine	203-336-8	105-83-9	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 4 * Skin Corr. 1B	H331 H311 H302 H314	GHS06 GHS05 Dgr	H331 H311 H302 H314			
612-103-00-3	N,N,N',N'-tetramethylethylenediamine	203-744-6	110-18-9	Flam. Liq. 2 Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1B	H225 H332 H302 H314	GHS02 GHS05 GHS07 Dgr	H225 H332 H302 H314			
612-104-00-9	hexamethylenediamine	204-679-6	124-09-4	Acute Tox. 4 * Acute Tox. 4 * STOT SE 3 Skin Corr. 1B	H312 H302 H335 H314	GHS05 GHS07 Dgr	H312 H302 H335 H314			
612-105-00-4	2-piperazin-1-ylethylamine	205-411-0	140-31-8	Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1B Skin Sens. 1 Aquatic Chronic 3	H312 H302 H314 H317 H412	GHS05 GHS07 Dgr	H312 H302 H314 H317 H412			
612-106-00-X	2,6-diethylaniline	209-445-7	579-66-8	Acute Tox. 4 *	H302	—	H302			
612-107-00-5	1-phenylethylamine; [1] DL- $\alpha$ -methylbenzylamine [2]	202-706-6 [1] 210-545-8 [2]	98-84-0 [1] 618-36-0 [2]	Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1B	H312 H302 H314	GHS05 GHS07 Dgr	H312 H302 H314			



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevaarlijkheidsklasse en categorie	Gevaarlijkheidsaanduiding	Pictogram, signaalwoord	Gevaarlijkheidsaanduiding	Aanvullende gevaarlijkheidsaanduiding		
612-108-00-0	3-aminopropyltriethoxysilane	213-048-4	919-30-2	Acute Tox. 4 * Skin Corr. 1B	H302 H314	GHS05 GHS07 Dgr	H302 H314			
612-109-00-6	bis(2-dimethylaminoethyl)(methyl)amine	221-201-1	3030-47-5	Acute Tox. 3 * Acute Tox. 4 * Skin Corr. 1B	H311 H302 H314	GHS06 GHS05 Dgr	H311 H302 H314			
612-110-00-1	2,2'-dimethyl-4,4'-methylenebis(cyclohexylamine)	229-962-1	6864-37-5	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 4 * Skin Corr. 1A Aquatic Chronic 2	H331 H311 H302 H314 H411	GHS06 GHS05 GHS09 Dgr	H331 H311 H302 H314 H411			
612-111-00-7	2-methyl- <i>m</i> -phenylenediamine; 2,6-toluenediamine	212-513-9	823-40-5	Muta. 2 Acute Tox. 4 * Acute Tox. 4 * Skin Sens. 1 Aquatic Chronic 2	H341 H312 H302 H317 H411	GHS08 GHS07 GHS09 Wng	H341 H312 H302 H317 H411			
612-112-00-2	<i>p</i> -anisidine; 4-methoxyaniline	203-254-2	104-94-9	Acute Tox. 2 * Acute Tox. 1 Acute Tox. 2 * STOT RE 2 * Aquatic Acute 1	H330 H310 H300 H373 ** H400	GHS06 GHS08 GHS09 Dgr	H330 H310 H300 H373 ** H400			
612-113-00-8	6-methyl-2,4-bis(methylthio)phenylene-1,3-diamine	403-240-8	106264-79-3	Acute Tox. 4 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H317 H400 H410	GHS07 GHS09 Wng	H302 H317 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
612-114-00-3	R,R-2-hydroxy-5-(1-hydroxy-2-(4-phenylbut-2-ylamino)ethyl)benzamide hydrogen 2,3-bis(benzoyloxy)succinate	404-390-7	—	Flam. Sol. 1 Skin Sens. 1 Aquatic Chronic 3	H228 H317 H412	GHS02 GHS07 Wng	H228 H317 H412			
612-115-00-9	dimethyldioctadecylammonium hydrogen sulfate	404-050-8	123312-54-9	Eye Irrit. 2 Aquatic Chronic 4	H319 H413	GHS07 Wng	H319 H413			
612-116-00-4	C <sub>8-18</sub> alkylbis(2-hydroxyethyl)ammonium bis(2-ethylhexyl)phosphate	404-690-8	68132-19-4	Acute Tox. 3 * Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H331 H314 H317 H400 H410	GHS06 GHS05 GHS09 Dgr	H331 H314 H317 H410			
612-117-00-X	C <sub>12-14</sub> -tert-alkylamine, methylphosphonic acid salt	404-750-3	119415-07-5	Acute Tox. 4 * Skin Corr. 1B Aquatic Chronic 2	H302 H314 H411	GHS05 GHS07 GHS09 Dgr	H302 H314 H411			
612-118-00-5	A reaction mass of: (1,3-dioxo-2H-benz(de)isoquinolin-2-ylpropyl)hexadecyldimethylammonium 4-toluenesulfonate; (1,3-dioxo-2H-benz(de)isoquinolin-2-ylpropyl)hexadecyldimethylammonium bromide	405-080-4	—	Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H318 H400 H410	GHS05 GHS09 Dgr	H318 H410			
612-119-00-0	benzyl dimethyloctadecylammonium 3-nitrobenzenesulfonate	405-330-2	—	Skin Irrit. 2 Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H315 H318 H400 H410	GHS05 GHS09 Dgr	H315 H318 H410			
612-120-00-6	acлонifen (ISO); 2-chloro-6-nitro-3-phenoxyaniline	277-704-1	74070-46-5	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevaarlijkheidsklasse en categorie	Gevaarlijkheidsaanwijzing	Pictogram, signaalwoord	Gevaarlijkheidsaanwijzing	Aanvullende gevaarlijkheidsaanwijzing		
612-121-00-1	amines, polyethylenepoly-; HEPA	268-626-9	68131-73-7	Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H314 H317 H400 H410	GHS05 GHS07 GHS09 Dgr	H312 H302 H314 H317 H410			
612-122-00-7	hydroxylamine	232-259-2	7803-49-8	Unst. Expl. Met. Corr. 1 Acute Tox. 4 * STOT RE 2 * STOT SE 3 Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1	H200 H290 H302 H373 ** H335 H315 H318 H317 H400	GHS01 GHS08 GHS05 GHS07 GHS09 Dgr	H200 H290 H302 H373 ** H335 H315 H318 H317 H400			T
612-123-00-2	hydroxylammonium chloride; hydroxylamine hydrochloride; [1] bis(hydroxylammonium) sulphate; hydroxylamine sulphate (2:1); [2] hydroxylammonium hydrogensulphate; hydroxylamine sulphate (1:1) [3]	226-798-2 [1] 233-118-8 [2] 233-154-4 [3]	5470-11-1 [1] 10039-54-0 [2] 10046-00-1 [3]	Met. Corr. 1 Acute Tox. 4 * STOT RE 2 * Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1	H290 H302 H373 ** H319 H315 H317 H400	GHS08 GHS05 GHS07 GHS09 Wng	H290 H302 H373 ** H319 H315 H317 H400			G T
612-124-00-8	N,N,N-trimethylanilinium chloride	205-319-0	138-24-9	Acute Tox. 3 * Acute Tox. 3 *	H311 H301	GHS06 Dgr	H311 H301			
612-125-00-3	2-methyl-p-phenylenediamine; 2,5-toluenediamine	202-442-1	95-70-5	Acute Tox. 3 * Acute Tox. 4 * Acute Tox. 4 * Skin Sens. 1 Aquatic Chronic 2	H301 H332 H312 H317 H411	GHS06 GHS09 Dgr	H301 H332 H312 H317 H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
612-126-00-9	toluene-2,4-diammonium sulphate; 4-methyl-m-phenylenediamine sulfate	265-697-8	65321-67-7	Carc. 1B Acute Tox. 3 * Acute Tox. 4 * Eye Irrit. 2 Skin Sens. 1 Aquatic Chronic 2	H350 H301 H312 H319 H317 H411	GHS06 GHS08 GHS09 Dgr	H350 H301 H312 H319 H317 H411			
612-127-00-4	3-aminophenol	209-711-2	591-27-5	Acute Tox. 4 * Acute Tox. 4 * Aquatic Chronic 2	H332 H302 H411	GHS07 GHS09 Wng	H332 H302 H411			
612-128-00-X	4-aminophenol	204-616-2	123-30-8	Muta. 2 Acute Tox. 4 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H341 H332 H302 H400 H410	GHS08 GHS07 GHS09 Wng	H341 H332 H302 H410			
612-129-00-5	diisopropylamine	203-558-5	108-18-9	Flam. Liq. 2 Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1B	H225 H332 H302 H314	GHS02 GHS05 GHS07 Dgr	H225 H332 H302 H314		STOT SE 3; H335: C ≥ 5 %	
612-130-00-0	2,6-diamino-3,5-diethyltoluene; 4,6-diethyl-2-methyl-1,3-benzenediamine; [1] 2,4-diamino-3,5-diethyltoluene; 2,4-diethyl-6-methyl-1,3-benzenediamine; [2] diethylmethylbenzenediamine [3]	218-255-3 [1] 218-256-9 [2] 270-877-4 [3]	2095-01-4 [1] 2095-02-5 [2] 68479-98-1 [3]	Acute Tox. 4 * Acute Tox. 4 * STOT RE 2 * Eye Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H373 ** H319 H400 H410	GHS08 GHS07 GHS09 Wng	H312 H302 H373 ** H319 H410			C
612-131-00-6	didecyldimethylammonium chloride	230-525-2	7173-51-5	Acute Tox. 4 * Skin Corr. 1B	H302 H314	GHS05 GHS07 Dgr	H302 H314			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
612-132-00-1	N,N'-diphenyl-p-phenylenediamine; N,N'-diphenyl-1,4-benzenediamine	200-806-4	74-31-7	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
612-133-00-7	(4-ammonio-m-tolyl)ethyl(2-hydroxyethyl) ammonium sulphate; 4-(N-ethyl-N-2-hydroxyethyl)-2-methylphenylenediamine sulphate	247-162-0	25646-77-9	Acute Tox. 3 * STOT RE 2 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H301 H373 ** H317 H400 H410	GHS06 GHS08 GHS09 Dgr	H301 H373 ** H317 H410			
612-134-00-2	N-(2-(4-amino-N-ethyl-m-toluidino)ethyl) methanesulphonamide sesquisulphate; 4-(N-ethyl-N-2-methanesulphonylaminoethyl)-2-methylphenylenediamine sesquisulphate monohydrate	247-161-5	25646-71-3	Acute Tox. 4 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H317 H400 H410	GHS07 GHS09 Wng	H302 H317 H410			
612-135-00-8	N-2-naphthylaniline; N-phenyl-2-naphthylamine	205-223-9	135-88-6	Carc. 2 Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 2	H351 H319 H315 H317 H411	GHS08 GHS07 GHS09 Wng	H351 H319 H315 H317 H411			
612-136-00-3	N-isopropyl-N'-phenyl-p-phenylenediamine	202-969-7	101-72-4	Acute Tox. 4 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H317 H400 H410	GHS07 GHS09 Wng	H302 H317 H410		Skin Sens. 1; H317: C ≥ 0,1 %	
612-137-00-9	4-chloroaniline	203-401-0	106-47-8	Carc. 1B Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H350 H331 H311 H301 H317 H400 H410	GHS06 GHS08 GHS09 Dgr	H350 H331 H311 H301 H317 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
612-138-00-4	furalaxyl (ISO); methyl N-(2,6-dimethylphenyl)-N-(2-furyl-carbonyl)-DL-alaninate	260-875-1	57646-30-7	Acute Tox. 4 * Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			
612-139-00-X	mefenacet (ISO); 2-(benzothiazol-2-yloxy)-N-methyl-N-phenylacetamide	277-328-8	73250-68-7	Aquatic Chronic 2	H411	GHS09	H411			
612-140-00-5	quaternary ammonium compounds, benzyl-C <sub>8-18</sub> -alkyldimethyl, chlorides	264-151-6	63449-41-2	Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1B Aquatic Acute 1	H312 H302 H314 H400	GHS05 GHS07 GHS09 Dgr	H312 H302 H314 H400			
612-141-00-0	4,4'-methylenebis(2-ethylaniline); 4,4'-methylenebis(2-ethylbenzeneamine)	243-420-1	19900-65-3	Carc. 2 Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H351 H302 H400 H410	GHS08 GHS07 GHS09 Wng	H351 H302 H410			
612-142-00-6	biphenyl-2-ylamine	201-990-9	90-41-5	Carc. 2 Acute Tox. 4 * Aquatic Chronic 3	H351 H302 H412	GHS08 GHS07 Wng	H351 H302 H412			
612-143-00-1	N <sup>5</sup> ,N <sup>5</sup> -diethyltoluene-2,5-diamine monohydrochloride; 4-diethylamino-2-methylaniline monohydrochloride	218-130-3	2051-79-8	Acute Tox. 3 * Eye Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H301 H319 H317 H400 H410	GHS06 GHS09 Dgr	H301 H319 H317 H410			
612-144-00-7	flumetralin (ISO); N-(2-chloro-6-fluorobenzyl)-N-ethyl- $\alpha$ , $\alpha$ -trifluoro-2,6-dinitro- <i>p</i> -toluidine	—	62924-70-3	Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H319 H315 H317 H400 H410	GHS07 GHS09 Wng	H319 H315 H317 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
612-145-00-2	<i>o</i> -phenylenediamine	202-430-6	95-54-5	Carc. 2 Muta. 2 Acute Tox. 3 * Acute Tox. 4 * Acute Tox. 4 * Eye Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H351 H341 H301 H332 H312 H319 H317 H400 H410	GHS06 GHS08 GHS09 Dgr	H351 H341 H301 H332 H312 H319 H317 H410			
612-146-00-8	<i>o</i> -phenylenediamine dihydrochloride	210-418-7	615-28-1	Carc. 2 Muta. 2 Acute Tox. 3 * Acute Tox. 4 * Acute Tox. 4 * Eye Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H351 H341 H301 H332 H312 H319 H317 H400 H410	GHS06 GHS08 GHS09 Dgr	H351 H341 H301 H332 H312 H319 H317 H410			
612-147-00-3	<i>m</i> -phenylenediamine	203-584-7	108-45-2	Muta. 2 Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Eye Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H341 H331 H311 H301 H319 H317 H400 H410	GHS06 GHS08 GHS09 Dgr	H341 H331 H311 H301 H319 H317 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
612-148-00-9	<i>m</i> -phenylenediamine dihydrochloride	208-790-0	541-69-5	Muta. 2 Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Eye Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H341 H331 H311 H301 H319 H317 H400 H410	GHS06 GHS08 GHS09 Dgr	H341 H331 H311 H301 H319 H317 H410			
612-149-00-4	1,3-diphenylguanidine	203-002-1	102-06-7	Repr. 2 Acute Tox. 4 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Chronic 2	H361f *** H302 H319 H335 H315 H411	GHS08 GHS07 GHS09 Wng	H361f *** H302 H319 H335 H315 H411			
612-150-00-X	spiroxamine (ISO); 8- <i>tert</i> -butyl-1,4-dioxaspiro[4.5]decan-2-ylmethyl(ethyl)(propyl)amine	—	118134-30-8	Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H332 H312 H302 H315 H317 H400 H410	GHS07 GHS09 Wng	H332 H312 H302 H315 H317 H410			
612-151-00-5	diaminotoluene, technical product — reaction mass of [2] and [3]; methyl-phenylenediamine; [1] 4-methyl- <i>m</i> -phenylene diamine; [2] 2-methyl- <i>m</i> -phenylene diamine [3]	246-910-3 [1] 202-453-1 [2] 212-513-9 [3]	25376-45-8 [1] 95-80-7 [2] 823-40-5 [3]	Carc. 1B Acute Tox. 3 * Acute Tox. 4 * Acute Tox. 4 * Eye Irrit. 2 Skin Sens. 1 Aquatic Chronic 2	H350 H301 H332 H312 H319 H317 H411	GHS06 GHS08 GHS09 Dgr	H350 H301 H332 H312 H319 H317 H411			



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
612-152-00-0	N,N-diethyl-N',N'-dimethylpropan-1,3-diyl-diamine	406-610-7	62478-82-4	Flam. Liq. 3 Acute Tox. 4 * Acute Tox. 4 * STOT RE 2 * Skin Corr. 1A Aquatic Chronic 3	H226 H332 H302 H373 ** H314 H412	GHS02 GHS08 GHS05 GHS07 Dgr	H226 H332 H302 H373 ** H314 H412			
612-153-00-6	4-[N-ethyl-N-(2-hydroxyethyl)amino]-1-(2-hydroxyethyl)amino-2-nitrobenzene, monohydrochloride	407-020-2	132885-85-9	Acute Tox. 4 * Skin Sens. 1 Aquatic Chronic 3	H302 H317 H412	GHS07 Wng	H302 H317 H412			
612-154-00-1	6'-(isobutylethylamino)-3'-methyl-2'-phenylamino-spiro[isobenzoo-2-oxofuran-7,9'-[9H]-xantheen]	410-890-6	95235-29-3	Aquatic Chronic 4	H413	—	H413			
612-155-00-7	2'-anilino-6'-((3-ethoxypropyl)ethylamino)-3'-methylspiro(isobenzoo-3-oxofuran)-1-(1H)-9'-xantheen	411-730-8	93071-94-4	Aquatic Chronic 4	H413	—	H413			
612-156-00-2	reaction mass of: trihexadecylmethylammonium chloride; dihexadecyldimethylammonium chloride	405-620-9	—	Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H318 H400 H410	GHS05 GHS09 Dgr	H318 H410			
612-157-00-8	(Z)-1-benzo[b]thien-2-ylethanone oxime hydrochloride	410-780-8	—	Acute Tox. 4 * STOT RE 2 * Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H302 H373 ** H318 H317 H411	GHS08 GHS05 GHS07 GHS09 Dgr	H302 H373 ** H318 H317 H411			
612-158-00-3	reaction mass of: bis(5-dodecyl-2-hydroxybenzald-oximate) copper (II) C <sub>12</sub> -alkyl group is branched; 4-dodecylsalicylaldoxime	410-820-4	—	Aquatic Chronic 4	H413	—	H413			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
612-159-00-9	Reaction products of: trimethylhexamethylene diamine (a mixture of 2,2,4-trimethyl-1,6-hexanediamine and 2,4,4-trimethyl-1,6-hexanediamine, EINECS listed), Epoxide 8 (mono[(C <sub>10</sub> -C <sub>16</sub> -alkyloxy)methyl]oxirane derivatives) and <i>p</i> -toluene-sulfonic acid	410-880-1	—	Acute Tox. 4 * Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H302 H314 H400 H410	GHS05 GHS07 GHS09 Dgr	H302 H314 H410			
612-160-00-4	<i>p</i> -toluidine; 4-aminotoluene; [1] toluidinium chloride; [2] toluidine sulphate (1:1) [3]	203-403-1 [1] 208-740-8 [2] 208-741-3 [3]	106-49-0 [1] 540-23-8 [2] 540-25-0 [3]	Carc. 2 Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Eye Irrit. 2 Skin Sens. 1 Aquatic Acute 1	H351 H331 H311 H301 H319 H317 H400	GHS06 GHS08 GHS09 Dgr	H351 H331 H311 H301 H319 H317 H400			
612-161-00-X	2,6-xylylidine; 2,6-dimethylaniline	201-758-7	87-62-7	Carc. 2 Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * STOT SE 3 Skin Irrit. 2 Aquatic Chronic 2	H351 H332 H312 H302 H335 H315 H411	GHS08 GHS07 GHS09 Wng	H351 H332 H312 H302 H335 H315 H411			
612-162-00-5	dimethyldioctadecylammonium chloride; DODMAC	203-508-2	107-64-2	Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H318 H400 H410	GHS05 GHS09 Dgr	H318 H410			
612-163-00-0	metalaxyl-M (ISO); mefenoxam; ( <i>R</i> )-2-[(2,6-dimethylphenyl)-methoxyacetyl-amino]propionic acid methyl ester	—	70630-17-0	Acute Tox. 4 * Eye Dam. 1	H302 H318	GHS05 GHS07 Dgr	H302 H318			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
612-164-00-6	2-butyl-2-ethyl-1,5-diaminopentane	412-700-7	137605-95-9	Acute Tox. 4 * Acute Tox. 4 * STOT RE 2 * Skin Corr. 1B Skin Sens. 1 Aquatic Chronic 3	H312 H302 H373 ** H314 H317 H412	GHS08 GHS05 GHS07 Dgr	H312 H302 H373 ** H314 H317 H412			
612-165-00-1	N,N'-diphenyl-N,N'-bis(3-methylphenyl)-(1,1'-diphenyl)-4,4'-diamine	413-810-8	65181-78-4	Aquatic Chronic 2	H411	GHS09	H411			
612-166-00-7	reaction mass of: <i>cis</i> -(5-ammonium-1,3,3-trimethyl)-cyclohexanemethylammonium phosphate (1:1); <i>trans</i> -(5-ammonium-1,3,3-trimethyl)-cyclohexanemethylammonium phosphate (1:1)	411-830-1	114765-88-7	Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 3	H318 H317 H412	GHS05 GHS07 Dgr	H318 H317 H412			
612-167-00-2	5-acetyl-3-amino-10,11-dihydro-5 <i>H</i> -dibenz[ <i>b,f</i> ]azepine-hydrochloride	410-490-1	—	Acute Tox. 4 * STOT RE 2 * Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H302 H373 ** H318 H317 H411	GHS08 GHS05 GHS07 GHS09 Dgr	H302 H373 ** H318 H317 H411			
612-168-00-8	3,5-dichloro-2,6-difluoropyridine-4-amine	220-630-1	2840-00-8	Acute Tox. 4 * Acute Tox. 4 * Aquatic Chronic 2	H312 H302 H411	GHS07 GHS09 Wng	H312 H302 H411			
612-170-00-9	4-chlorophenyl cyclopropyl ketone <i>O</i> -(4-aminobenzyl)oxime	405-260-2	—	Acute Tox. 4 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H317 H400 H410	GHS07 GHS09 Wng	H302 H317 H410			
612-171-00-4	N,N,N',N'-tetraglycidyl-4,4'-diamino-3,3'-diethyldiphenylmethane	410-060-3	130728-76-6	Muta. 2 Skin Sens. 1 Aquatic Chronic 2	H341 H317 H411	GHS08 GHS09 Wng	H341 H317 H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
612-172-00-X	4,4'-methylenebis(N,N'-dimethylcyclohexanamine	412-840-9	13474-64-1	Acute Tox. 4 * STOT RE 2 * Skin Corr. 1A Aquatic Chronic 3	H302 H373 ** H314 H412	GHS08 GHS05 GHS07 Dgr	H302 H373 ** H314 H412			
612-173-00-5	lithium 1-amino-4-(4-tert-butylanilino)anthraquinone-2-sulfonate	411-140-0	125328-86-1	Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H318 H317 H411	GHS05 GHS07 GHS09 Dgr	H318 H317 H411			
612-174-00-0	4,4-dimethoxybutylamine	407-690-6	19060-15-2	Acute Tox. 4 * Skin Corr. 1B Skin Sens. 1 Aquatic Chronic 3	H302 H314 H317 H412	GHS05 GHS07 Dgr	H302 H314 H317 H412			
612-175-00-6	2-(O-aminoxy)ethylamine dihydrochloride	412-310-7	37866-45-8	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
612-176-00-1	polymer of 1,3-dibromopropane and N,N-diethyl-N',N'-dimethyl-1,3-propanediamine	410-570-6	143747-73-3	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
612-177-00-7	2-naphthylamino-6-sulfomethylamide	412-120-4	104295-55-8	STOT RE 2 * Skin Sens. 1 Aquatic Chronic 2	H373 ** H317 H411	GHS08 GHS09 Wng	H373 ** H317 H411			
612-178-00-2	1,4,7,10-tetraazacyclododecane disulfate	412-080-8	112193-77-8	Acute Tox. 4 * STOT SE 3 Eye Dam. 1 Aquatic Chronic 3	H302 H335 H318 H412	GHS05 GHS07 Dgr	H302 H335 H318 H412			
612-179-00-8	1-(2-propenyl)pyridinium chloride	412-740-5	25965-81-5	Acute Tox. 4 * Skin Sens. 1	H302 H317	GHS07 Wng	H302 H317			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
612-180-00-3	3-aminobenzylamine	412-230-2	4403-70-7	Acute Tox. 4 * Skin Corr. 1B Aquatic Chronic 2	H302 H314 H411	GHS05 GHS07 GHS09 Dgr	H302 H314 H411			
612-181-00-9	2-phenylthioaniline	413-030-8	1134-94-7	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
612-182-00-4	1-ethyl-1-methylmorpholinium bromide	418-210-1	65756-41-4	Muta. 2	H341	GHS08 Wng	H341			
612-183-00-X	1-ethyl-1-methylpyrrolidinium bromide	418-200-5	69227-51-6	Muta. 2	H341	GHS08 Wng	H341			
612-184-00-5	6'-(dibutylamino)-3'-methyl-2'-(phenylamino)spiro[isobenzofuran-1(3H),9-(9H)-xanthen]-3-one	403-830-5	89331-94-2	Aquatic Chronic 3	H412	—	H412			
612-185-00-0	1-[3-[4-((heptadecafluorononyl)oxy)-benzamido]propyl]-N,N,N-trimethylammonium iodide	407-400-8	59493-72-0	Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H318 H400 H410	GHS05 GHS09 Dgr	H318 H410			
612-186-00-6	bis(N-(7-hydroxy-8-methyl-5-phenylphenazin-3-ylidene)dimethylammonium) sulfate	406-770-8	149057-64-7	STOT RE 2 * Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H373 ** H318 H317 H400 H410	GHS08 GHS05 GHS07 GHS09 Dgr	H373 ** H318 H317 H410			
612-187-00-1	2,3,4-trifluoroaniline	407-170-9	3862-73-5	Acute Tox. 4 * Acute Tox. 4 * STOT RE 2 * Skin Irrit. 2 Eye Dam. 1 Aquatic Chronic 2	H312 H302 H373 ** H315 H318 H411	GHS08 GHS05 GHS07 GHS09 Dgr	H312 H302 H373 ** H315 H318 H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
612-188-00-7	4,4'-(9H-fluoren-9-ylidene)bis(2-chloroaniline)	407-560-9	107934-68-9	Aquatic Chronic 2	H411	GHS09	H411			
612-189-00-2	4-amino-2-(aminomethyl)phenol dihydrochloride	412-510-4	135043-64-0	Acute Tox. 4 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H317 H400 H410	GHS07 GHS09 Wng	H302 H317 H410			
612-190-00-8	4,4'-methylenebis(2-isopropyl-6-methylaniline)	415-150-6	16298-38-7	STOT RE 2 * Aquatic Chronic 2	H373 ** H411	GHS08 GHS09 Wng	H373 ** H411			
612-191-00-3	polymer of allylamine hydrochloride	415-050-2	71550-12-4	Acute Tox. 4 * Skin Sens. 1	H302 H317	GHS07 Wng	H302 H317			
612-192-00-9	2-isopropyl-4-(N-methyl)aminomethylthiazole	414-800-6	154212-60-9	Acute Tox. 4 * Acute Tox. 4 * Skin Irrit. 2 Eye Dam. 1 Aquatic Chronic 2	H312 H302 H315 H318 H411	GHS05 GHS07 GHS09 Dgr	H312 H302 H315 H318 H411			
612-193-00-4	3-methylaminomethylphenylamine	414-570-7	18759-96-1	Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H314 H317 H400 H410	GHS05 GHS07 GHS09 Dgr	H312 H302 H314 H317 H410			
612-194-00-X	2-hydroxy-3-[(2-hydroxyethyl)-[2-(1-oxotetradecyl)amino]ethyl]amino]-N,N,N-trimethyl-1-propanammonium chloride	414-670-0	141890-30-4	Acute Tox. 4 * Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H318 H400 H410	GHS05 GHS07 GHS09 Dgr	H302 H318 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
612-195-00-5	bis[tributyl 4-(methylbenzyl)ammonium] 1,5-naphthalenedisulfonate	415-210-1	160236-81-7	Acute Tox. 4 * Acute Tox. 4 * Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H332 H302 H318 H400 H410	GHS05 GHS07 GHS09 Dgr	H332 H302 H318 H410			
612-196-00-0	4-chloro- <i>o</i> -toluidine; [1] 4-chloro- <i>o</i> -toluidine hydrochloride [2]	202-441-6 [1] 221-627-8 [2]	95-69-2 [1] 3165-93-3 [2]	Carc. 1B Muta. 2 Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Aquatic Acute 1 Aquatic Chronic 1	H350 H341 H331 H311 H301 H400 H410	GHS06 GHS08 GHS09 Dgr	H350 H341 H331 H311 H301 H410			
612-197-00-6	2,4,5-trimethylaniline; [1] 2,4,5-trimethylaniline hydrochloride [2]	205-282-0 [1] [2]	137-17-7 [1] 21436-97-5 [2]	Carc. 1B Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Aquatic Chronic 2	H350 H331 H311 H301 H411	GHS06 GHS08 GHS09 Dgr	H350 H331 H311 H301 H411			
612-198-00-1	4,4'-thiodianiline and its salts	205-370-9	139-65-1	Carc. 1B Acute Tox. 4 * Aquatic Chronic 2	H350 H302 H411	GHS08 GHS07 GHS09 Dgr	H350 H302 H411			
612-199-00-7	4,4'-oxydianiline and its salts; <i>p</i> -aminophenyl ether	202-977-0	101-80-4	Carc. 1B Muta. 1B Repr. 2 Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Aquatic Chronic 2	H350 H340 H361f *** H331 H311 H301 H411	GHS06 GHS08 GHS09 Dgr	H350 H340 H361f *** H331 H311 H301 H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
612-200-00-0	2,4-diaminoanisoole; 4-methoxy- <i>m</i> -phenylenediamine; [1] 2,4-diaminoanisoole sulphate [2]	210-406-1 [1] 254-323-9 [2]	615-05-4 [1] 39156-41-7 [2]	Carc. 1B Muta. 2 Acute Tox. 4 * Aquatic Chronic 2	H350 H341 H302 H411	GHS08 GHS07 GHS09 Dgr	H350 H341 H302 H411			
612-201-00-6	<i>N,N,N',N'</i> -tetramethyl-4,4'-methylenedianiline	202-959-2	101-61-1	Carc. 1B Aquatic Acute 1 Aquatic Chronic 1	H350 H400 H410	GHS08 GHS09 Dgr	H350 H410			
612-202-00-1	3,4-dichloroaniline	202-448-4	95-76-1	Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H331 H311 H301 H318 H317 H400 H410	GHS06 GHS05 GHS09 Dgr	H331 H311 H301 H318 H317 H410			
612-204-00-2	C.I. Basic Violet 3; 4-[4,4'-bis(dimethylamino) benzhydrylidene]cyclohexa-2,5-dien-1-ylidene]dimethylammonium chloride	208-953-6	548-62-9	Carc. 2 Acute Tox. 4 * Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H351 H302 H318 H400 H410	GHS08 GHS05 GHS07 GHS09 Dgr	H351 H302 H318 H410			
612-205-00-8	C.I. Basic Violet 3 with $\geq 0,1$ % of Michler's ketone (EC no. 202-027-5)	208-953-6	548-62-9	Carc. 1B Acute Tox. 4 * Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H350 H302 H318 H400 H410	GHS08 GHS05 GHS07 GHS09 Dgr	H350 H302 H318 H410			
612-206-00-3	famoxadone (ISO); 3-anilino-5-methyl-5-(4-phenoxyphenyl)-1,3-oxazolidine-2,4-dione	—	131807-57-3	STOT RE 2 * Aquatic Acute 1 Aquatic Chronic 1	H373 ** H400 H410	GHS08 GHS09 Wng	H373 ** H410			



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
612-207-00-9	4-ethoxyaniline; <i>p</i> -phenetidine	205-855-5	156-43-4	Muta. 2 Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Eye Irrit. 2 Skin Sens. 1	H341 H332 H312 H302 H319 H317	GHS08 GHS07 Wng	H341 H332 H312 H302 H319 H317			
612-209-00-X	6-methoxy- <i>m</i> -toluidine; <i>p</i> -cresidine	204-419-1	120-71-8	Carc. 1B Acute Tox. 4 *	H350 H302	GHS08 GHS07 Dgr	H350 H302			
612-210-00-5	5-nitro- <i>o</i> -toluidine; [1] 5-nitro- <i>o</i> -toluidine hydrochloride [2]	202-765-8 [1] 256-960-8 [2]	99-55-8 [1] 51085-52-0 [2]	Carc. 2 Acute Tox. 3 * Acute Tox. 3 * Acute Tox. 3 * Aquatic Chronic 3	H351 H331 H311 H301 H412	GHS06 GHS08 Dgr	H351 H331 H311 H301 H412			
612-211-00-0	<i>N</i> -[(benzotriazole-1-yl)methyl]-4-carboxybenzenesulfonamide	416-470-9	170292-97-4	Eye Irrit. 2 Aquatic Chronic 2	H319 H411	GHS07 GHS09 Wng	H319 H411			
612-212-00-6	2,6-dichloro-4-trifluoromethylaniline	416-430-0	24279-39-8	Acute Tox. 4 * Acute Tox. 4 * Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H332 H302 H315 H317 H400 H410	GHS07 GHS09 Wng	H332 H302 H315 H317 H410			
612-213-00-1	isobutylidene-(2-(2-isopropyl-4,4-dimethylloxazolidine-3-yl)-1,1-dimethylethyl)amine	419-850-2	148348-13-4	Skin Corr. 1B Aquatic Chronic 3	H314 H412	GHS05 Dgr	H314 H412			
612-214-00-7	4-(2,2-diphenylethenyl)- <i>N,N</i> -di-phenylbenzenamine	421-390-2	89114-90-9	Aquatic Chronic 4	H413	—	H413			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
612-215-00-2	3-chloro-2-(isopropylthio)aniline	421-700-6	179104-32-6	Skin Irrit. 2 Aquatic Chronic 2	H315 H411	GHS07 GHS09 Wng	H315 H411			
612-217-00-3	1-methoxy-2-propylamine	422-550-4	37143-54-7	Flam. Liq. 2 Skin Corr. 1B Acute Tox. 4 * Aquatic Chronic 3	H225 H314 H302 H412	GHS02 GHS05 GHS07 Dgr	H225 H314 H302 H412			
613-001-00-1	ethyleneimine; aziridine	205-793-9	151-56-4	Flam. Liq. 2 Carc. 1B Muta. 1B Acute Tox. 2 * Acute Tox. 1 Acute Tox. 2 * Skin Corr. 1B Aquatic Chronic 2	H225 H350 H340 H330 H310 H300 H314 H411	GHS02 GHS06 GHS08 GHS05 GHS09 Dgr	H225 H350 H340 H330 H310 H300 H314 H411			D
613-002-00-7	pyridine	203-809-9	110-86-1	Flam. Liq. 2 Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 *	H225 H332 H312 H302	GHS02 GHS07 Dgr	H225 H332 H312 H302		*	
613-003-00-2	1,2,3,4-tetranitrocarbazole	—	6202-15-9	Expl. 1.1 Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 *	H201 H332 H312 H302	GHS01 GHS07 Wng	H201 H332 H312 H302			
613-004-00-8	crimidine (ISO); 2-chloro-6-methylpyrimidin-4-yl dimethylamine	208-622-6	535-89-7	Acute Tox. 2 *	H300	GHS06 Dgr	H300			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
613-007-00-4	desmetryne (ISO); 6-isopropylamino-2-methylamino-4-methylthio-1,3,5-triazine	213-800-1	1014-69-3	Acute Tox. 4 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H400 H410	GHS07 GHS09 Wng	H312 H302 H410			
613-008-00-X	dazomet (ISO); tetrahydro-3,5-dimethyl-1,3,5-thiadiazine-2-thione	208-576-7	533-74-4	Acute Tox. 4 * Eye Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H302 H319 H400 H410	GHS07 GHS09 Wng	H302 H319 H410			
613-009-00-5	2,4,6-trichloro-1,3,5-triazine; cyanuric chloride	203-614-9	108-77-0	Acute Tox. 2 * Acute Tox. 4 * Skin Corr. 1B Skin Sens. 1	H330 H302 H314 H317	GHS06 GHS05 Dgr	H330 H302 H314 H317	EUH014	STOT SE 3; H335: C ≥ 5 %	
613-010-00-0	ametryn (ISO); 2-ethylamino-4-isopropylamino-6-methylthio-1,3,5-triazine	212-634-7	834-12-8	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
613-011-00-6	amitrole (ISO); 1,2,4-triazol-3-ylamine	200-521-5	61-82-5	Repr. 2 STOT RE 2 * Aquatic Chronic 2	H361d *** H373 ** H411	GHS08 GHS09 Wng	H361d *** H373 ** H411			
613-012-00-1	bentazone (ISO); 3-isopropyl-2,1,3-benzothiadiazine-4-one-2,2-dioxide	246-585-8	25057-89-0	Acute Tox. 4 * Eye Irrit. 2 Skin Sens. 1 Aquatic Chronic 3	H302 H319 H317 H412	GHS07 Wng	H302 H319 H317 H412			
613-013-00-7	cyanazine (ISO); 2-(4-chloro-6-ethylamino-1,3,5-triazine-2-ylamino)-2-methylpropionitrile	244-544-9	21725-46-2	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
613-014-00-2	ethoxyquin(ISO); 6-ethoxy-1,2-dihydro-2,2,4-trimethylquino- line	202-075-7	91-53-2	Acute Tox. 4 *	H302	GHS07 Wng	H302			
613-015-00-8	fenazaflor (ISO); phenyl 5,6-dichloro-2-trifluoromethylben- zimidazole-1-carboxylate	238-134-9	14255-88-0	Acute Tox. 4 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chro- nic 1	H312 H302 H400 H410	GHS07 GHS09 Wng	H312 H302 H410			
613-016-00-3	fuberidazole(ISO); 2-(2-furyl)benzimidazole	223-404-0	3878-19-1	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chro- nic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
613-017-00-9	bis (8-hydroxyquinolinium) sulphate	205-137-1	134-31-6	Acute Tox. 4 *	H302	GHS07 Wng	H302			
613-018-00-4	morfamquat (ISO); 1,1'-bis(3,5-dimethylmorpholinocarbonyl- methyl)-4,4'-bipyridilium ion	—	7411-47-4	Acute Tox. 4 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Chro- nic 3	H302 H319 H335 H315 H412	GHS07 Wng	H302 H319 H335 H315 H412			
613-019-00-X	thioquinox(ISO); 2-thio-1,3-dithiolo(4,5,b)quinoxaline	202-272-8	93-75-4	Acute Tox. 4 *	H302	GHS07 Wng	H302			
613-020-00-5	tridemorph (ISO); 2,6-dimethyl-4-tridecylmorpholine	246-347-3	24602-86-6	Repr. 1B Acute Tox. 4 * Acute Tox. 4 * Skin Irrit. 2 Aquatic Acute 1 Aquatic Chro- nic 1	H360- D *** H332 H302 H315 H400 H410	GHS08 GHS07 GHS09 Dgr	H360D *** H332 H302 H315 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
613-021-00-0	dithianon (ISO); 5,10-dihydro-5,10-dioxonaphtho(2,3-b) (1,4)dithiazine-2,3-dicarbonitrile	222-098-6	3347-22-6	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
613-022-00-6	pyrethrins including cinerins, with the exception of those specified elsewhere in this Annex	—	—	Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H332 H312 H302 H400 H410	GHS07 GHS09 Wng	H332 H312 H302 H410			A
613-023-00-1	2-methyl-4-oxo-3-(penta-2,4-dienyl)cyclopent-2-enyl [1R-[1 $\alpha$ [S*(Z)],3 $\beta$ ]]-chrysanthemate; pyrethrin I	204-455-8	121-21-1	Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H332 H312 H302 H400 H410	GHS07 GHS09 Wng	H332 H312 H302 H410			
613-024-00-7	2-methyl-4-oxo-3-(penta-2,4-dienyl)cyclopent-2-enyl[1R-[1 $\alpha$ [S*(Z)](3 $\beta$ )]-3-(3-methoxy-2-methyl-3-oxoprop-1-enyl)-2,2-dimethylcyclopropanecarboxylate; pyrethrin II	204-462-6	121-29-9	Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H332 H312 H302 H400 H410	GHS07 GHS09 Wng	H332 H312 H302 H410			
613-025-00-2	cinerin I; 3-(but-2-enyl)-2-methyl-4-oxocyclopent-2-enyl 2,2-dimethyl-3-(2-methylprop-1-enyl)cyclopropanecarboxylate	246-948-0	25402-06-6	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
613-026-00-8	cinerin II; 3-(but-2-enyl)-2-methyl-4-oxocyclopent-2-enyl 2,2-dimethyl-3-(3-methoxy-2-methyl-3-oxoprop-1-enyl)cyclopropanecarboxylate	204-454-2	121-20-0	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
613-027-00-3	piperidine	203-813-0	110-89-4	Flam. Liq. 2 Acute Tox. 3 * Acute Tox. 3 * Skin Corr. 1B	H225 H331 H311 H314	GHS02 GHS06 GHS05 Dgr	H225 H331 H311 H314		*	
613-028-00-9	morpholine	203-815-1	110-91-8	Flam. Liq. 3 Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1B	H226 H332 H312 H302 H314	GHS02 GHS05 GHS07 Dg	H226 H332 H312 H302 H314			
613-029-00-4	dichloro-1,3,5-triazinetrione; dichloroisocyanuric acid	220-487-5	2782-57-2	Ox. Sol. 2 Acute Tox. 4 * Eye Irrit. 2 STOT SE 3 Aquatic Acute 1 Aquatic Chronic 1	H272 H302 H319 H335 H400 H410	GHS03 GHS07 GHS09 Dgr	H272 H302 H319 H335 H410	EUH031		T
613-030-00-X	troclosene potassium; [1] troclosene sodium [2]	218-828-8 [1] 220-767-7 [2]	2244-21-5 [1] 2893-78-9 [2]	Ox. Sol. 2 Acute Tox. 4 * Eye Irrit. 2 STOT SE 3 Aquatic Acute 1 Aquatic Chronic 1	H272 H302 H319 H335 H400 H410	GHS03 GHS07 GHS09 Dgr	H272 H302 H319 H335 H410	EUH031	* STOT SE 3; H335: C ≥ 10 % EUH031: C ≥ 10 %	
613-030-01-7	troclosene sodium, dihydrate	220-767-7	51580-86-0	Acute Tox. 4 * Eye Irrit. 2 STOT SE 3 Aquatic Acute 1 Aquatic Chronic 1	H302 H319 H335 H400 H410	GHS07 GHS09 Wng	H302 H319 H335 H410	EUH031		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevaar­klasse en categorie	Gevaar­aan­duiding	Pictogram, sig­naal­woord	Gevaar­aan­duiding	Aanvullende gevaar­aan­duiding		
613-031-00-5	symclosene; trichloroisocyanuric acid; trichloro-1,3,5-triazinetri­on	201-782-8	87-90-1	Ox. Sol. 2 Acute Tox. 4 * Eye Irrit. 2 STOT SE 3 Aquatic Acute 1 Aquatic Chronic 1	H272 H302 H319 H335 H400 H410	GHS03 GHS07 GHS09 Dgr	H272 H302 H319 H335 H410	EUH031		
613-032-00-0	methyl-2,3,5,6-tetrachloro-4-pyridylsulphone; 2,3,5,6-tetrachloro-4-(methylsulphonyl)pyridine	236-035-5	13108-52-6	Acute Tox. 4 * Acute Tox. 4 * Eye Irrit. 2 Skin Sens. 1	H312 H302 H319 H317	GHS07 Wng	H312 H302 H319 H317			
613-033-00-6	2-methylaziridine; propyleneimine	200-878-7	75-55-8	Flam. Liq. 2 Carc. 1B Acute Tox. 2 * Acute Tox. 1 Acute Tox. 2 * Eye Dam. 1 Aquatic Chronic 2	H225 H350 H330 H310 H300 H318 H411	GHS02 GHS06 GHS08 GHS05 GHS09 Dgr	H225 H350 H330 H310 H300 H318 H411		Carc. 1B; H350: C ≥ 0,01 %	
613-034-00-1	1,2-dimethylimidazole	217-101-2	1739-84-0	Acute Tox. 4 * Skin Irrit. 2 Eye Dam. 1	H302 H315 H318	GHS05 GHS07 Dgr	H302 H315 H318			
613-035-00-7	1-methylimidazole	210-484-7	616-47-7	Acute Tox. 4 * Acute Tox. 4 * Skin Corr. 1B	H312 H302 H314	GHS05 GHS07 Dgr	H312 H302 H314			
613-036-00-2	2-methylpyridine; 2-picoline	203-643-7	109-06-8	Flam. Liq. 3 Acute Tox. 4 * Acute Tox. 4 * Acute Tox. 4 * Eye Irrit. 2 STOT SE 3	H226 H332 H312 H302 H319 H335	GHS02 GHS07 Wng	H226 H332 H312 H302 H319 H335			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
613-037-00-8	4-methylpyridine; 4-picoline	203-626-4	108-89-4	Flam. Liq. 3 Acute Tox. 3 * Acute Tox. 4 * Acute Tox. 4 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H226 H311 H332 H302 H319 H335 H315	GHS02 GHS06 Dgr	H226 H311 H332 H302 H319 H335 H315			
613-038-00-3	6-phenyl-1,3,5-triazine-2,4-diylidiamine; 6-phenyl-1,3,5-triazine-2,4-diamine; benzoguanamine	202-095-6	91-76-9	Acute Tox. 4 * Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			
613-039-00-9	ethylene thiourea; imidazolidine-2-thione; 2-imidazoline-2-thiol	202-506-9	96-45-7	Repr. 1B Acute Tox. 4 *	H360D *** H302	GHS08 GHS07 Dgr	H360D *** H302			
613-040-00-4	azaconazole (ISO); 1-([2-(2,4-dichlorophenyl)-1,3-dioxolan-2-yl]methyl)-1H-1,2,4-triazole	262-102-3	60207-31-0	Acute Tox. 4 *	H302	GHS07 Wng	H302			
613-041-00-X	morpholine-4-carbonyl chloride	239-213-0	15159-40-7	Carc. 2 Eye Irrit. 2 Skin Irrit. 2	H351 H319 H315	GHS08 Wng	H351 H319 H315	EUH014		
613-042-00-5	imazalil (ISO); 1-[2-(allyloxy)-2-(2,4-dichlorophenyl)ethyl]-1H-imidazole	252-615-0	35554-44-0	Acute Tox. 4 * Acute Tox. 4 * Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H332 H302 H318 H400 H410	GHS05 GHS07 GHS09 Dgr	H332 H302 H318 H410			
613-043-00-0	imazalil sulphate (ISO) powder; 1- [2-(allyloxy)ethyl-2-(2,4-dichlorophenyl)]-1H-imidazolium hydrogen sulphate; [1] 281-291-3 [1] (±)-1- [2-(allyloxy)ethyl-2-(2,4-dichlorophenyl)]-1H-imidazolium hydrogen sulphate [2]	261-351-5 [1] 281-291-3 [2]	58594-72-2 [1] 83918-57-4 [2]	Acute Tox. 4 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H317 H400 H410	GHS07 GHS09 Wng	H302 H317 H410			



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
613-043-01-8	imazalil sulphate (ISO), aqueous solution; 1- [2-(allyloxy)ethyl-2-(2,4-dichlorophenyl)]-1H-imidazolium hydrogen sulphate; [1] (±)-1- [2-(allyloxy)ethyl-2-(2,4-dichlorophenyl)]-1H-imidazolium hydrogen sulphate [2]	261-351-5 [1] 281-291-3 [2]	58594-72-2 [1] 83918-57-4 [2]	Acute Tox. 4 * Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H314 H317 H400 H410	GHS05 GHS07 GHS09 Wng	H302 H314 H317 H410		Skin Corr. 1B; H314: C ≥ 50 % Skin Irrit. 2; H315: 30 % ≤ C < 50 % Eye Dam. 1; H318: 15 % ≤ C < 50 % Eye Irrit. 2; H319: 5 % ≤ C < 15 %	
613-044-00-6	captan (ISO); 1,2,3,6-tetrahydro-N-(trichloromethylthio)phthalimide	205-087-0	133-06-2	Carc. 2 Acute Tox. 3 * Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1	H351 H331 H318 H317 H400	GHS06 GHS08 GHS05 GHS09 Dgr	H351 H331 H318 H317 H400			
613-045-00-1	folpet (ISO); N-(trichloromethylthio)phthalimide	205-088-6	133-07-3	Carc. 2 Acute Tox. 4 * Eye Irrit. 2 Skin Sens. 1 Aquatic Acute 1	H351 H332 H319 H317 H400	GHS08 GHS07 GHS09 Wng	H351 H332 H319 H317 H400			
613-046-00-7	captafol (ISO); 1,2,3,6-tetrahydro-N-(1,1,2,2-tetrachloroethylthio)phthalimide	219-363-3	2425-06-1	Carc. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H350 H317 H400 H410	GHS08 GHS09 Dgr	H350 H317 H410			
613-047-00-2	1-dimethylcarbamoyl-5-methylpyrazol-3-yl dimethylcarbamate; dimetilan (ISO)	211-420-0	644-64-4	Acute Tox. 3 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H301 H312 H400 H410	GHS06 GHS09 Dgr	H301 H312 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
613-048-00-8	carbendazim (ISO); methyl benzimidazol-2-ylcarbamate	234-232-0	10605-21-7	Muta. 1B Repr. 1B Aquatic Acute 1 Aquatic Chronic 1	H340 H360-FD H400 H410	GHS08 GHS09 Dgr	H340 H360FD H410			
613-049-00-3	benomyl (ISO); methyl 1-(butylcarbamoyl)benzimidazol-2-ylcarbamate	241-775-7	17804-35-2	Muta. 1B Repr. 1B STOT SE 3 Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H340 H360-FD H335 H315 H317 H400 H410	GHS08 GHS07 GHS09 Dgr	H340 H360FD H335 H315 H317 H410		M=10	
613-050-00-9	carbadox (INN); methyl 3-(quinoxalin-2-ylmethylene)carbamate 1,4-dioxide; 2-(methoxycarbonylhydrazonomethyl)quinoxaline 1,4-dioxide	229-879-0	6804-07-5	Flam. Sol. 1 Carc. 1B Acute Tox. 4 *	H228 H350 H302	GHS02 GHS08 GHS07 Dgr	H228 H350 H302			T
613-051-00-4	molinate (ISO); S-ethyl 1-perhydroazepinecarbothioate; S-ethyl perhydroazepine-1-carbothioate	218-661-0	2212-67-1	Carc. 2 Repr. 2 Acute Tox. 4 * Acute Tox. 4 * STOT RE 2 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H351 H361f *** H332 H302 H373 ** H317 H400 H410	GHS08 GHS07 GHS09 Wng	H351 H361f *** H332 H302 H373 ** H317 H410		M=100	
613-052-00-X	trifenmorph (ISO); 4-tritylmorpholine	215-812-2	1420-06-0	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
613-053-00-5	anilazine (ISO); 2-chloro-N-(4,6-dichloro-1,3,5-triazin-2-yl)aniline	202-910-5	101-05-3	Eye Irrit. 2 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H319 H315 H400 H410	GHS07 GHS09 Wng	H319 H315 H410			
613-054-00-0	thiabendazol (ISO); 2-(thiazole-4-yl)benzimidazole	205-725-8	148-79-8	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
613-056-00-1	1,2-dimethyl-3,5-diphenylpyrazolium methylsulphate; difenzoquat methyl sulfate	256-152-5	43222-48-6	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS09 Wng	H302 H410			
613-057-00-7	dodemorph (ISO); 4-cyclododecyl-2,6-dimethylmorpholine	216-474-9	1593-77-7	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Chronic 2	H319 H335 H315 H411	GHS07 GHS09 Wng	H319 H335 H315 H411			
613-058-00-2	permethrin (ISO); <i>m</i> -phenoxybenzyl 3-(2,2-dichlorovinyl)-2,2-dimethylcyclopropanecarboxylate	258-067-9	52645-53-1	Acute Tox. 4 * Acute Tox. 4 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H332 H302 H317 H400 H410	GHS07 GHS09 Wng	H332 H302 H317 H410		M=1000	
613-059-00-8	profluralin (ISO); N-(cyclopropylmethyl)- $\alpha$ , $\alpha$ , $\alpha$ -trifluoro-2,6-dinitro-N-propyl-p-toluidine	247-656-6	26399-36-0	Eye Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H319 H400 H410	GHS07 GHS09 Wng	H319 H410			
613-060-00-3	resmethrin (ISO); 5-benzyl-3-furylmethyl ( $\pm$ )- <i>cis</i> — <i>trans</i> -chrysanthemate	233-940-7	10453-86-8	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
613-061-00-9	6-(1 $\alpha$ , 5 $\alpha$ , 8 $\alpha$ , 9-pentahydroxy-7 $\beta$ -isopropyl-2 $\beta$ , 5 $\beta$ , 8 $\beta$ -trimethylperhydro-8ba, 9-epoxy-5, 8-ethanocyclopenta[1, 2-b]indenyl) pyrrole-2-carboxylate; ryania	239-732-2	15662-33-6	Acute Tox. 4 * Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H400 H410	GHS07 GHS09 Wng	H312 H302 H410			
613-062-00-4	sabadilla (ISO); veratrine	—	8051-02-3	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H319 H335 H315	GHS07 Wng	H319 H335 H315			
613-063-00-X	secbumeton (ISO); 2-sec-butylamino-4-ethylamino-6-methoxy-1, 3, 5-triazine	247-554-1	26259-45-0	Acute Tox. 4 * Eye Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H302 H319 H400 H410	GHS07 GHS09 Wng	H302 H319 H410			
613-064-00-5	5-(3, 6, 9-trioxa-2-undecyloxy)benzo(d)-1, 3-dioxolane; sesamex	—	51-14-9	Acute Tox. 4 *	H302	GHS07 Wng	H302			
613-065-00-0	simetryn (ISO); 2, 4-bis(ethylamino)-6-methylthio-1, 3, 5-triazine	213-801-7	1014-70-6	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
613-066-00-6	terbumeton (ISO); 2-tert-butylamino-4-ethylamino-6-methoxy-1, 3, 5-triazine	251-637-8	33693-04-8	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
613-067-00-1	propazine(ISO); 2-chloro-4, 6-bis(isopropylamino)-1, 3, 5-triazine	205-359-9	139-40-2	Carc. 2 Aquatic Acute 1 Aquatic Chronic 1	H351 H400 H410	GHS08 GHS09 Wng	H351 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
613-068-00-7	atrazine (ISO); 2-chloro-4-ethylamine-6-isopropylamine-1,3,5-triazine	217-617-8	1912-24-9	STOT RE 2 * Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H373 ** H317 H400 H410	GHS08 GHS09 Wng	H373 ** H317 H410			
613-069-00-2	ε-caprolactam	203-313-2	105-60-2	Acute Tox. 4 * Acute Tox. 4 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2	H332 H302 H319 H335 H315	GHS07 Wng	H332 H302 H319 H335 H315			
613-070-00-8	propylenethiourea	—	2122-19-2	Repr. 2 Acute Tox. 4 * Aquatic Chronic 3	H361d *** H302 H412	GHS08 GHS07 Wng	H361d *** H302 H412			
613-071-00-3	2-fluoro-5-trifluoromethylpyridine	400-290-2	69045-82-5	Flam. Liq. 3 Skin Sens. 1 Aquatic Chronic 3	H226 H317 H412	GHS02 GHS07 Wng	H226 H317 H412			
613-072-00-9	N,N-bis(2-ethylhexyl)-((1,2,4-triazol-1-yl)methyl)amine	401-280-0	91273-04-0	Skin Corr. 1B Skin Sens. 1 Aquatic Chronic 2	H314 H317 H411	GHS05 GHS07 GHS09 Dgr	H314 H317 H411			
613-073-00-4	N,N-dimethyl-2-(3-(4-chlorophenyl)-4,5-dihydropyrazol-1-ylphenylsulphonyl)ethylamine	401-410-6	10357-99-0	STOT RE 2 * Skin Sens. 1 Aquatic Chronic 2	H373 ** H317 H411	GHS08 GHS09 Wng	H373 ** H317 H411			
613-074-00-X	3-(3-methylpent-3-yl)isoxazol-5-ylamine	401-460-9	82560-06-3	Acute Tox. 3 * Acute Tox. 3 * Eye Dam. 1 Aquatic Chronic 3	H331 H301 H318 H412	GHS06 GHS05 Dgr	H331 H301 H318 H412			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
613-075-00-5	1,3-dichloro-5-ethyl-5-methylimidazolidine-2,4-dione	401-570-7	89415-87-2	Ox. Sol. 1 **** Acute Tox. 3 * Skin Corr. 1B Acute Tox. 4 * Skin Sens. 1 Aquatic Acute 1	H271 H331 H314 H302 H317 H400	GHS03 GHS06 GHS05 GHS09 Dgr	H271 H331 H314 H302 H317 H400			
613-076-00-0	3-chloro-5-trifluoromethyl-2-pyridylamine	401-670-0	79456-26-1	Acute Tox. 4 * Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			
613-077-00-6	reaction mass of 5-heptyl-1,2,4-triazol-3-ylamine and 5-nonyl-1,2,4-triazol-3-ylamine	401-940-8	—	Acute Tox. 4 * Eye Irrit. 2 Aquatic Chronic 2	H302 H319 H411	GHS07 GHS09 Wng	H302 H319 H411			
613-078-00-1	N,N,N,N-tetrakis(4,6-bis(butyl-(N-methyl-2,2,6,6-tetramethylpiperidin-4-yl)amino)triazin-2-yl)-4,7-diazadecane-1,10-diamine	401-990-0	106990-43-6	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
613-079-00-7	4-(1(or 4 or 5 or 6)-methyl-8,9,10-trinorborn-5-en-2-yl)pyridine, reaction mass of isomers	402-520-7	—	Acute Tox. 4 * Acute Tox. 4 * Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H315 H317 H400 H410	GHS07 GHS09 Wng	H312 H302 H315 H317 H410			
613-080-00-2	3-(bis(2-ethylhexyl)aminomethyl)benzothiazole-2(3H)-thione	402-540-6	105254-85-1	Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H314 H317 H400 H410	GHS05 GHS07 GHS09 Dgr	H314 H317 H410			
613-081-00-8	1-butyl-2-methylpyridinium bromide	402-680-8	26576-84-1	Acute Tox. 4 * Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
613-082-00-3	2-methyl-1-pentylpyridinium bromide	402-690-2	—	Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Chronic 3	H312 H302 H412	GHS07 Wng	H312 H302 H412			
613-083-00-9	2-(4-(3-(4-chlorophenyl)-2-pyrazolin-1-yl)phenylsulfonyl)ethyltrimethylammonium formate	402-120-2	—	Skin Corr. 1B STOT RE 2 (*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H314 H373 (**) H317 H400 H410	GHS08 GHS05 GHS07 GHS09 Dgr	H314 H373 (**) H317 H410			
613-084-00-4	2-(4-(3-(4-chlorophenyl)-4,5-dihydropyrazolyl)phenylsulphonyl)ethyltrimethylammonium hydrogen phosphonate	402-490-5	106359-93-7	Eye Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H319 H400 H410	GHS07 GHS09 Wng	H319 H410			
613-085-00-X	reaction mass of 1,1'-(methylenebis(4,1-phenylene)dipyrrole-2,5-dione and N-(4-(4-(2,5-dioxopyrrol-1-yl)benzyl)phenyl)acetamide and 1-(4-(4-(5-oxo-2H-2-furylidena-mino)benzyl)phenyl)pyrrole-2,5-dione	401-970-1	—	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
613-086-00-5	caffeine	200-362-1	58-08-2	Acute Tox. 4 (*)	H302	GHS07 Wng	H302			
613-087-00-0	tetrahydrothiophene	203-728-9	110-01-0	Flam. Liq. 2 Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*) Eye Irrit. 2 Skin Irrit. 2 Aquatic Chronic 3	H225 H332 H312 H302 H319 H315 H412	GHS02 GHS07 Dgr	H225 H332 H312 H302 H319 H315 H412			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
613-088-00-6	1,2-benzisothiazol-3(2H)-one; 1,2-benzisothiazolin-3-one	220-120-9	2634-33-5	Acute Tox. 4 (*) Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1	H302 H315 H318 H317 H400	GHS05 GHS07 GHS09 Dgr	H302 H315 H318 H317 H400		Skin Sens. 1; H317: C ≥ 0,05 %	
613-089-00-1	diquat dibromide; [1] diquat dichloride; [2] 6,7-dihydrodipyrido[1,2-α:2',1'-c]pyrazinediylidium dihydroxide [3]	201-579-4 [1] 223-714-6 [2] 301-467-6 [3]	85-00-7 [1] 4032-26-2 [2] 94021-76-8 [3]	Acute Tox. 2 (*) STOT RE 1 Acute Tox. 4 (*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H330 H372 (*) H302 H319 H335 H315 H317 H400 H410	GHS06 GHS08 GHS09 Dgr	H330 H372 (**) H302 H319 H335 H315 H317 H410			
613-090-00-7	paraquat dichloride; 1,1-dimethyl-4,4'-bipyridinium dichloride; [1] paraquat dimethylsulfate; 1,1-dimethyl-4,4'-bipyridinium dimethyl sulphate [2]	217-615-7 [1] 218-196-3 [2]	1910-42-5 [1] 2074-50-2 [2]	Acute Tox. 2 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) STOT RE 1 Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H330 H311 H301 H372 (*) H319 H335 H315 H400 H410	GHS06 GHS08 GHS09 Dgr	H330 H311 H301 H372 (**) H319 H335 H315 H410			
613-091-00-2	morfamquat dichloride; [1] morfamquat sulfate [2]	225-062-8 [1] -[2]	4636-83-3 [1] 29873-36-7 [2]	Acute Tox. 4 (*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Chronic 3	H302 H319 H335 H315 H412	GHS07 Wng	H302 H319 H335 H315 H412			



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
613-092-00-8	1,10-phenanthroline	200-629-2	66-71-7	Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H301 H400 H410	GHS06 GHS09 Dgr	H301 H410			
613-093-00-3	hexasodium 6,13-dichloro-3,10-bis((4-(2,5-disulfonatoanilino)-6-fluoro-1,3,5-triazin-2-ylamino)prop-3-ylamino)-5,12-dioxa-7,14-diazapentacene-4,11-disulfonate	400-050-7	85153-92-0	Resp. Sens. 1 Skin Sens. 1	H334 H317	GHS08 Dgr	H334 H317			
613-094-00-9	4-methoxy-N,6-dimethyl-1,3,5-triazin-2-ylamine	401-360-5	5248-39-5	Acute Tox. 4 (*) STOT RE 2 (*)	H302 H373 (**)	GHS08 GHS07 Wng	H302 H373 (**)			
613-095-00-4	sodium 3-(2H-benzotriazol-2-yl)-5-sec-butyl-4-hydroxybenzenesulfonate	403-080-9	92484-48-5	Eye Dam. 1	H318	GHS05 Dgr	H318			
613-096-00-X	2-amino-6-ethoxy-4-methylamino-1,3,5-triazine	403-580-7	62096-63-3	Acute Tox. 4 (*)	H302	GHS07 Wng	H302			
613-097-00-5	7-amino-3-((5-carboxymethyl-4-methyl-1,3-thiazol-2-ylthio)methyl)-8-oxo-5-thia-1-azabicyclo(4.2.0)oct-2-ene-2-carboxylic acid	403-690-5	111298-82-9	Resp. Sens. 1 Skin Sens. 1 Aquatic Chronic 3	H334 H317 H412	GHS08 Dgr	H334 H317 H412			
613-098-00-0	N-(n-octyl)-2-pyrrolidone	403-700-8	2687-94-7	Skin Corr. 1B Aquatic Chronic 2	H314 H411	GHS05 GHS09 Dgr	H314 H411			
613-099-00-6	1-dodecyl-2-pyrrolidone	403-730-1	2687-96-9	Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H314 H317 H400 H410	GHS05 GHS07 GHS09 Dgr	H314 H317 H410			
613-100-00-X	2,9-bis(3-(diethylamino)propylsulfamoyl)quino(2,3-b)acridine-7,14-dione	404-230-6	—	Skin Sens. 1 Aquatic Chronic 4	H317 H413	GHS07 Wng	H317 H413			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevaar­klasse en categorie	Gevaar­aan­duiding	Pictogram, sig­naal­woord	Gevaar­aan­duiding	Aanvullende gevaar­aan­duiding		
613-101-00-5	N— <i>tert</i> -pentyl-2-benzothiazolesulfenamide	404-380-2	110799-28-5	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
613-102-00-0	dimethomorph (ISO); 4-(3-(4-chlorophenyl)-3-(3,4-dimethoxyphenyl)acryloyl)morpholine	404-200-2	110488-70-5	Aquatic Chronic 2	H411	GHS09	H411			
613-103-00-6	sodium 5- <i>n</i> -butylbenzotriazole	404-450-2	118685-34-0	Acute Tox. 4 (*) Skin Corr. 1B Skin Sens. 1 Aquatic Chronic 2	H302 H314 H317 H411	GHS05 GHS07 GHS09 Dgr	H302 H314 H317 H411			
613-104-00-1	5- <i>tert</i> -butyl-3-isoxazolylamine hydrochloride	404-840-2	—	Acute Tox. 4 (*) STOT RE 2 (*) Eye Dam. 1 Aquatic Chronic 3	H302 H373 (**) H318 H412	GHS08 GHS05 GHS07 Dgr	H302 H373 (**) H318 H412			
613-105-00-7	hexakis(tetramethylammonium) 4,4'-vinylenebis((3-sulfonato-4,1-phenylene)imino(6-morpholino-1,3,5-triazine-4,2-diyl)imino)bis(5-hydroxy-6-phenylazonaphthalene-2,7-disulfonate)	405-160-9	124537-30-0	Acute Tox. 3 (*) Skin Sens. 1 Aquatic Chronic 3	H301 H317 H412	GHS06 Dgr	H301 H317 H412			
613-106-00-2	tetrapotassium 2-(4-(5-(1-(2,5-disulfonato-phenyl)-3-ethoxycarbonyl-5-hydroxypyrazol-4-yl)penta-2,4-dienylidene)-3-ethoxycarbonyl-5-oxo-2-pyrazolin-1-yl)benzene-1,4-disulfonate	405-240-3	—	Skin Sens. 1	H317	GHS07 Wng	H317			
613-107-00-8	hexasodium 2,2'-vinylenebis((3-sulfonato-4,1-phenylene)imino(6-( <i>N</i> -cyanoethyl- <i>N</i> -(2-hydroxypropyl)amino)-1,3,5-triazine-4,2-diyl)imino)dibenzene-1,4-disulfonate	405-280-1	76508-02-6	Eye Irrit. 2	H319	GHS07 Wng	H319			
613-108-00-3	benzothiazole-2-thiol	205-736-8	149-30-4	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
613-109-00-9	bis(piperidinothiocarbonyl) disulphide	202-328-1	94-37-1	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Skin Sens. 1	H319 H335 H315 H317	GHS07 Wng	H319 H335 H315 H317			
613-110-00-4	dimepiperate (ISO); S-(1-methyl-1-phenylethyl) piperidine-1-carbothioate	262-784-2	61432-55-1	Acute Tox. 4 (*) Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
613-111-00-X	1,2,4-triazole	206-022-9	288-88-0	Repr. 2 Acute Tox. 4 (*) Eye Irrit. 2	H361d (***) H302 H319	GHS08 GHS07 Wng	H361d (***) H302 H319			
613-112-00-5	octhilonone (ISO); 2-octyl-2H-isothiazol-3-one	247-761-7	26530-20-1	Acute Tox. 3 (*) Acute Tox. 3 (*) Acute Tox. 4 (*) Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H331 H311 H302 H314 H317 H400 H410	GHS06 GHS05 GHS09 Dgr	H331 H311 H302 H314 H317 H410		Skin Sens. 1; H317: C ≥ 0,05 %	
613-113-00-0	2-(morpholinothio)benzothiazole	203-052-4	102-77-2	Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 2	H319 H315 H317 H411	GHS07 GHS09 Wng	H319 H315 H317 H411			
613-114-00-6	2,2',2''-(hexahydro-1,3,5-triazine-1,3,5-triyl)triethanol; 1,3,5-tris(2-hydroxyethyl)hexahydro-1,3,5-triazine	225-208-0	4719-04-4	Acute Tox. 4 (*) Skin Sens. 1	H302 H317	GHS07 Wng	H302 H317		Skin Sens. 1; H317: C ≥ 0,1 %	
613-115-00-1	hymexazol (ISO); 3-hydroxy-5-methylisoxazole	233-000-6	10004-44-1	Acute Tox. 4 (*) Eye Dam. 1 Aquatic Chronic 3	H302 H318 H412	GHS05 GHS07 Dgr	H302 H318 H412			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
613-116-00-7	tolyfluanid (ISO); dichloro-N-[(dimethylamino)sulphonyl]fluoro-N-(p-tolyl)methanesulphenamide	211-986-9	731-27-1	Acute Tox. 3 (*) STOT RE 2 (*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H331 H373 (*) H319 H335 H315 H317 H400 H410	GHS06 GHS08 GHS09 Dgr	H331 H373 (*) H319 H335 H315 H317 H410			
613-117-00-2	diniconazole (ISO); (E)-β-[(2,4-dichlorophenyl)methylene]-α-(1,1-dimethylethyl)-1H-1,2,4-triazol-1-ethanol; (E)-(RS)-1-(2,4-dichlorophenyl)-4,4-dimethyl-2-(1H-1,2,4-triazol-1-yl)pent-1-en-3-ol	—	76714-88-0	Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
613-118-00-8	flubenzimine (ISO); N-[3-phenyl-4,5-bis[(trifluoromethyl)imino]thiazolidin-2-ylidene]aniline	253-703-1	37893-02-0	Eye Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H319 H400 H410	GHS07 GHS09 Wng	H319 H410			
613-119-00-3	(benzothiazol-2-ylthio)methyl thiocyanate; TCMTB	244-445-0	21564-17-0	Acute Tox. 2 (*) Acute Tox. 4 (*) Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H330 H302 H319 H315 H317 H400 H410	GHS06 GHS09 Dgr	H330 H302 H319 H315 H317 H410			
613-120-00-9	bioresmethrin; (5-bezylfur-3-yl)methyl(1R)-trans-2,2-dimethyl-3-(2-methylpropenyl)cyclopropanecarboxylate	249-014-0	28434-01-7	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
613-121-00-4	chlorsulfuron (ISO); 2-chloro-N-[[[4-methoxy-6-methyl-1,3,5-triazin-2-yl]amino]carbonyl]benzenesulfonamide	265-268-5	64902-72-3	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
613-122-00-X	diclobutrazole (ISO); (R <sup>*</sup> ), R <sup>*</sup> )-(-)-β-[(2,4-dichlorophenyl)methyl]-α-(1,1-dimethylethyl)-1H-1,2,4-triazole-1-ethanol; (2RS, 3RS)-1-(2,4-dichlorophenyl)-4,4-dimethyl-2-(1H-1,2,4-triazol-1-yl)pentan-3-ol	—	75736-33-3	Eye Irrit. 2 Aquatic Chronic 2	H319 H411	GHS07 GHS09 Wng	H319 H411			
613-123-00-5	5,6-dihydro-3H-imidazo[2,1-c]-1,2,4-dithiazole-3-thione; etem	251-684-4	33813-20-6	Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
613-124-00-0	fenpropimorph (ISO); cis-4-[3-(p-tert-butylphenyl)-2-methylpropyl]-2,6-dimethylmorpholine	266-719-9	67564-91-4	Repr. 2 Acute Tox. 4 (*) Skin Irrit. 2 Aquatic Chronic 2	H361d (***) H302 H315 H411	GHS08 GHS07 GHS09 Wng	H361d (***) H302 H315 H411			
613-125-00-6	hexythiazox(ISO); trans-5-(4-chlorophenyl)-N-cyclohexyl-4-methyl-2-oxo-3-thiazolidine-carboxamide	—	78587-05-0	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
613-126-00-1	imazapyr (ISO); 2-[4,5-dihydro-4-methyl-4-(1-methylethyl)-5-oxo-1H-imidazol-2-yl]-3-pyridine carboxylate	—	81334-34-1	Eye Irrit. 2 Aquatic Chronic 3	H319 H412	GHS07 Wng	H319 H412			
613-127-00-7	1,1-dimethylpiperidinium chloride; mepiquat chloride	246-147-6	24307-26-4	Acute Tox. 4 (*) Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
613-128-00-2	prochloraz (ISO); N-propyl-N-[2-(2,4,6-trichlorophenoxy)ethyl]-1H-imidazole-1-carboxamide	266-994-5	67747-09-5	Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
613-129-00-8	metamitron (ISO); 4-amino-3-methyl-6-phenyl-1,2,4-triazin-5-one	255-349-3	41394-05-2	Acute Tox. 4 (*) Aquatic Acute 1	H302 H400	GHS07 GHS09 Wng	H302 H400			
613-131-00-9	pyroquilon (ISO); 1,2,5,6-tetrahydropyrrolo[3,2,1-ij]quinolin-4-one	—	57369-32-1	Acute Tox. 4 (*) Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			
613-132-00-4	hexazinone (ISO); 3-cyclohexyl-6-dimethylamino-1-methyl-1,2,3,4-tetrahydro-1,3,5-triazine-2,4-dione	257-074-4	51235-04-2	Acute Tox. 4 (*) Eye Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H302 H319 H400 H410	GHS07 GHS09 Wng	H302 H319 H410			
613-133-00-X	etridiazole (ISO); 5-ethoxy-3-trichloromethyl-1,2,4-thiadiazole	219-991-8	2593-15-9	Carc. 2 Acute Tox. 3 (*) Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H351 H331 H312 H302 H400 H410	GHS06 GHS08 GHS09 Dgr	H351 H331 H312 H302 H410			
613-134-00-5	myclobutanil(ISO); 2-(4-chlorophenyl)-2-(1H-1,2,4-triazol-1-ylmethyl)hexanenitrile	—	88671-89-0	Repr. 2 Acute Tox. 4 (*) Eye Irrit. 2 Aquatic Chronic 2	H361d (***) H302 H319 H411	GHS08 GHS07 GHS09 Wng	H361d (***) H302 H319 H411			
613-135-00-0	di(benzothiazol-2-yl) disulphide	204-424-9	120-78-5	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410	EUH031		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
613-136-00-6	N-cyclohexylbenzothiazole-2-sulphenamide	202-411-2	95-33-0	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
613-137-00-1	methabenzthiazuron (ISO); 1-(1,3-benzothiazol-2-yl)1,3-dimethylurea	242-505-0	18691-97-9	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
613-138-00-7	quinoxyfen (ISO); 5,7-dichloro-4-(4-fluorophenoxy)quinoline	—	124495-18-7	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
613-139-00-2	metsulfuron-methyl; 2-(4-methoxy-6-methyl-1,3,5-triazin-2-ylcarbamoylsulfamoyl) benzoic acid	—	74223-64-6	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
613-140-00-8	cycloheximide (ISO); 4-((2R)-2-((1S,3S,5S)-3,5-dimethyl-2-oxocyclohexyl)-2-hydroxyethyl)piperidine-2,6-dione	200-636-0	66-81-9	Muta. 2 Repr. 1B Acute Tox. 2 (*) Aquatic Chronic 2	H341 H360D (***) H300 H411	GHS06 GHS08 GHS09 Dgr	H341 H360D (***) H300 H411			
613-141-00-3	1,4-diamino-2-(2-butyltetrazol-5-yl)-3-cyanoanthraquinone	401-470-3	93686-63-6	Aquatic Chronic 4	H413	—	H413			
613-142-00-9	<i>trans</i> -N-methyl-2-styryl-[4'-aminomethine-(1-acetyl-1-(2-methoxyphenyl)acetamido)]pyridinium acetate	405-860-4	—	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
613-143-00-4	1-(3-phenylpropyl)-2-methylpyridinium bromide	405-930-4	10551-42-5	Acute Tox. 4 (*) Eye Irrit. 2 Aquatic Chronic 3	H302 H319 H412	GHS07 Wng	H302 H319 H412			
613-144-00-X	reaction products of: poly(vinyl acetate), partially hydrolyzed, with (E)-2-(4-formylstyryl)-3,4-dimethylthiazoliummethyl sulfate	406-460-2	125139-08-4	Aquatic Chronic 3	H412	—	H412			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
613-145-00-5	(S)-3-benzyloxycarbonyl-1,2,3,4-tetrahydroisoquinolinium 4-methylbenzenesulfonate	406-960-0	77497-97-3	Aquatic Chronic 2	H411	GHS09	H411			
613-146-00-0	N-ethyl-N-methylpiperidinium iodide	407-780-5	4186-71-4	Acute Tox. 4 (*) Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
613-147-00-6	4-[2-(1-methyl-2-(4-morpholinyl)ethoxy)ethyl]morpholine	407-940-4	111681-72-2	Eye Dam. 1	H318	GHS05 Dgr	H318			
613-148-00-1	tetrasodium 1,2-bis(4-fluoro-6-[5-(1-amino-2-sulfonatoanthrachinon-4-ylamino)-2,4,6-trimethyl-3-sulfonatophenylamino]-1,3,5-triazin-2-ylamino)ethane	411-240-4	143683-23-2	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
613-149-00-7	pyridaben (ISO); 2-tert-butyl-5-(4-tert-butylbenzylthio)-4-chloropyridazin-3(2H)-one	405-700-3	96489-71-3	Acute Tox. 3 (*) Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H331 H301 H400 H410	GHS06 GHS09 Dgr	H331 H301 H410			
613-150-00-2	2,2'-[3,3'-(piperazine-1,4-diyl)dipropyl]bis(1H-benzimidazo[2,1-b]benzo[ <i>l,m,n</i> ][3,8]phenanthroline-1,3,6-trione	406-295-6	—	Aquatic Chronic 4	H413	—	H413			
613-151-00-8	1-(3-mesyloxy-5-trityloxymethyl-2-D-threofuryl)thymine	406-360-9	104218-44-2	Aquatic Chronic 4	H413	—	H413			
613-152-00-3	phenyl N-(4,6-dimethoxypyrimidin-2-yl)carbamate	406-600-2	89392-03-0	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
613-153-00-9	2,3,5-trichloropyridine	407-270-2	16063-70-0	Aquatic Chronic 3	H412	—	H412			
613-154-00-4	2-amino-4-chloro-6-methoxypyrimidine	410-050-9	5734-64-5	Acute Tox. 4 (*)	H302	GHS07 Wng	H302			



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
613-155-00-X	5-chloro-2,3-difluoropyridine	410-090-7	89402-43-7	Flam. Liq. 3 Acute Tox. 4 (*) Aquatic Chronic 3	H226 H302 H412	GHS02 GHS07 Wng	H226 H302 H412			
613-156-00-5	2-butyl-4-chloro-5-formylimidazole	410-260-0	83857-96-9	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
613-157-00-0	2,4-diamino-5-methoxymethylpyrimidine	410-330-0	54236-98-5	Acute Tox. 4 (*) STOT RE 2 (*) Eye Irrit. 2	H302 H373 (*) H319	GHS08 GHS07 Wng	H302 H373 (**) H319			
613-158-00-6	2,3-dichloro-5-trifluoromethyl-pyridine	410-340-5	69045-84-7	Acute Tox. 4 (*) Acute Tox. 4 (*) Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H332 H302 H318 H317 H411	GHS05 GHS07 GHS09 Dgr	H332 H302 H318 H317 H411			
613-159-00-1	fenazaquin (ISO); 4-[2-[4-(1,1-dimethylethyl)phenyl]-ethoxy] quinazoline	410-580-0	120928-09-8	Acute Tox. 3 (*) Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H301 H332 H400 H410	GHS06 GHS09 Dgr	H301 H332 H410			
613-160-00-7	(1S)-2-methyl-2,5-diazobicyclo[2.2.1]heptane dihydrobromide	411-000-9	125224-62-6	Skin Sens. 1	H317	GHS07 Wng	H317			
613-163-00-3	azimsulfuron (ISO); 1-(4,6-dimethoxyypyrimidin-2-yl)-3-[1-methyl-4-(2-methyl-2H-tetrazol-5-yl)pyrazol-5-ylsulfonyl]urea	—	120162-55-2	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
613-164-00-9	flufenacet (ISO); N-(4-fluorophenyl)-N-isopropyl-2-(5-trifluoromethyl-[1,3,4]thiadiazol-2-yloxy)acetamide	—	142459-58-3	Acute Tox. 4 (*) STOT RE 2 (*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H373 (**) H317 H400 H410	GHS08 GHS07 GHS09 Wng	H302 H373 (**) H317 H410			
613-165-00-4	flupyrsulfuron-methyl-sodium (ISO); methyl 2-[[[4,6-dimethoxyimidin-2-ylcarbamoyle)sulfamoyl]-6-trifluoromethyl]nicotinate, monosodium salt	—	144740-54-5	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
613-166-00-X	flumioxazin (ISO); N-(7-fluoro-3,4-dihydro-3-oxo-4-prop-2-ynyl-2H-1,4-benzoxazin-6-yl)cyclohex-1-ene-1,2-dicarboxamide	—	103361-09-7	Repr. 1B Aquatic Acute 1 Aquatic Chronic 1	H360D (***) H400 H410	GHS08 GHS09 Dgr	H360D (***) H410			
613-167-00-5	reaction mass of: 5-chloro-2-methyl-4-isothiazolin-3-one [EC no. 247-500-7] and 2-methyl-2H-isothiazol-3-one [EC no. 220-239-6] (3:1); reaction mass of: 5-chloro-2-methyl-4-isothiazolin-3-one [EC no. 247-500-7] and 2-methyl-4-isothiazolin-3-one [EC no. 220-239-6] (3:1)	—	55965-84-9	Acute Tox. 3 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H331 H311 H301 H314 H317 H400 H410	GHS06 GHS05 GHS09 Dgr	H331 H311 H301 H314 H317 H410		Skin Corr. 1B; H314: C ≥ 0,6 % Skin Irrit. 2; H315: 0,06 % ≤ C < 0,6 % Eye Irrit. 2; H319: 0,06 % ≤ C < 0,6 % Skin Sens. 1; H317: C ≥ 0,0015 %	
613-168-00-0	1-vinyl-2-pyrrolidone	201-800-4	88-12-0	Carc. 2 Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*) STOT RE 2 (*) STOT SE 3 Eye Dam. 1	H351 H332 H312 H302 H373 (**) H335 H318	GHS06 GHS05 GHS09 Dgr	H351 H332 H312 H302 H373 (**) H335 H318			D

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
613-169-00-6	9-vinylcarbazole	216-055-0	1484-13-5	Muta. 2 Acute Tox. 4 (*) Acute Tox. 4 (*) Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H341 H312 H302 H315 H317 H400 H410	GHS08 GHS07 GHS09 Wng	H341 H312 H302 H315 H317 H410			
613-170-00-1	2,2-ethylmethylthiazolidine	404-500-3	694-64-4	Acute Tox. 4 (*) Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H302 H318 H317 H411	GHS05 GHS07 GHS09 Dgr	H302 H318 H317 H411			
613-171-00-7	hexaconazole (ISO); (RS)-2-(2,4-dichlorophenyl)-1-(1H-1,2,4-triazol-1-yl)hexan-2-ol	413-050-7	79983-71-4	Acute Tox. 4 * Skin Sens. 1 Aquatic Chronic 2	H302 H317 H411	GHS07 GHS09 Wng	H302 H317 H411			
613-172-00-2	5-chloro-1,3-dihydro-2H-indol-2-one	412-200-9	17630-75-0	Repr. 2 Acute Tox. 4 (*) Skin Sens. 1 Aquatic Chronic 3	H361f (***) H302 H317 H412	GHS08 GHS07 Wng	H361f (***) H302 H317 H412			
613-173-00-8	fluquinconazole (ISO); 3-(2,4-dichlorophenyl)-6-fluoro-2-(1H-1,2,4-triazol-1-yl)quinazolin-4-(3H)-one	411-960-9	136426-54-5	Acute Tox. 3 (*) Acute Tox. 3 (*) STOT RE 1 Acute Tox. 4 (*) Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H331 H301 H372 (*) H312 H315 H400 H410	GHS06 GHS08 GHS09 Dgr	H331 H301 H372 (*) H312 H315 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
613-174-00-3	(±) 2-(2,4-dichlorophenyl)-3-(1 <i>H</i> -1,2,4-triazol-1-yl)propyl-1,1,2,2-tetrafluoroethylether	407-760-6	112281-77-3	Carc. 2 Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Chronic 2	H351 H332 H302 H411	GHS08 GHS07 GHS09 Wng	H351 H332 H302 H411			
613-175-00-9	epoxiconazole(ISO); (2 <i>RS</i> ,3 <i>SR</i> )-3-(2-chlorophenyl)-2-(4-fluorophenyl)-[(1 <i>H</i> -1,2,4-triazol-1-yl)methyl]oxirane	406-850-2	133855-98-8	Carc. 2 Repr. 2 Aquatic Chronic 2	H351 H361fd H411	GHS08 GHS09 Wng	H351 H361fd H411			
613-176-00-4	2-methyl-2-azabicyclo[2.2.1]heptane	404-810-9	4524-95-2	Flam. Liq. 3 Acute Tox. 4 (*) Acute Tox. 4 (*) STOT RE 2 (*) Skin Corr. 1B	H226 H312 H302 H373 (**) H314	GHS02 GHS08 GHS05 GHS07 Dgr	H226 H312 H302 H373 (**) H314			
613-177-00-X	8-amino-7-methylquinoline	412-760-4	5470-82-6	Acute Tox. 4 (*) Acute Tox. 4 (*) Skin Sens. 1 Aquatic Chronic 2	H312 H302 H317 H411	GHS07 GHS09 Wng	H312 H302 H317 H411			
613-178-00-5	4-ethyl-2-methyl-2-isopentyl-1,3-oxazolidine	410-470-2	137796-06-6	Skin Corr. 1B Skin Sens. 1	H314 H317	GHS05 GHS07 Dgr	H314 H317		STOT SE 3; H335: C ≥ 5 %	
613-179-00-0	lithium 3-oxo-1,2(2 <i>H</i> )-benzisothiazol-2-ide	411-690-1	111337-53-2	Acute Tox. 4 * Skin Corr. 1B Skin Sens. 1 Aquatic Chronic 2	H302 H314 H317 H411	GHS05 GHS07 Dgr	H302 H314 H317 H411			
613-180-00-6	N-(1,1-dimethylethyl)bis(2-benzothiazole-sulfen)amide	407-430-1	3741-80-8	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
613-181-00-1	5,5-dimethyl-perhydro-pyrimidin-2-one $\alpha$ -(4-trifluoromethylstyryl)- $\alpha$ -(4-trifluoromethyl)cinnamylidenehydrazone	405-090-9	67485-29-4	STOT RE 1 Acute Tox. 4 (*) Eye Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H372 (*) H302 H319 H400 H410	GHS08 GHS07 GHS09 Dgr	H372 (**) H302 H319 H410			
613-182-00-7	1-(1-naphthylmethyl)quinolinium chloride	406-220-7	65322-65-8	Carc. 2 Muta. 2 Acute Tox. 4 * Skin Irrit. 2 Eye Dam. 1 Aquatic Chronic 3	H351 H341 H302 H315 H318 H412	GHS08 GHS05 GHS07 Dgr	H351 H341 H302 H315 H318 H412			
613-183-00-2	reaction mass of: 5-(N-methylperfluorooctylsulfonamido)methyl-3-octadecyl-1,3-oxazolidin-2-one; 5-(N-methylperfluoroheptylsulfonamido)methyl-3-octadecyl-1,3-oxazolidin-2-one	413-640-4	—	STOT RE 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H373 (*) H400 H410	GHS08 GHS09 Wng	H373 (**) H410			
613-184-00-8	nitrilotriethyleneammoniopropane-2-ol 2-ethylhexanoate	413-670-8	—	Eye Irrit. 2 Skin Sens. 1	H319 H317	GHS07 Wng	H319 H317			
613-185-00-3	2,3,5,6-tetrahydro-2-methyl-2H-cyclopenta[d]-1,2-thiazol-3-one	407-630-9	82633-79-2	Acute Tox. 3 (*) Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H301 H318 H317 H400 H410	GHS06 GHS05 GHS09 Dgr	H301 H318 H317 H410			
613-186-00-9	(2R,3R)-3-((R)-1-(tert-butyl)dimethylsiloxy)ethyl-4-oxoazetidin-2-yl acetate	408-050-9	76855-69-1	Eye Irrit. 2 Skin Sens. 1 Aquatic Chronic 2	H319 H317 H411	GHS07 GHS09 Wng	H319 H317 H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
613-188-00-X	1-(3-(4-fluorophenoxy)propyl)-3-methoxy-4-piperidinone	411-500-7	116256-11-2	Acute Tox. 4 (*) Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H302 H318 H317 H411	GHS05 GHS07 GHS09 Dgr	H302 H318 H317 H411			
613-189-00-5	1,4,7,10-tetrakis(p-toluensulfonyl)-1,4,7,10-tetraazacyclododecane	414-030-0	52667-88-6	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
613-190-00-0	disodium 1-amino-4-(2-(5-chloro-6-fluoropyrimidin-4-ylamino-methyl)-4-methyl-6-sulfo-phenylamino)-9,10-dioxo-9,10-dihydro-anthracene-2-sulfonate	414-040-5	149530-93-8	Acute Tox. 4 (*) Skin Sens. 1	H302 H317	GHS07 Wng	H302 H317			
613-191-00-6	3-ethyl-2-methyl-2-(3-methylbutyl)-1,3-oxazolidine	421-150-7	143860-04-2	Repr. 1B Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H360F (**) H314 H400 H410	GHS08 GHS05 GHS09 Dgr	H360F (***) H314 H410			
613-193-00-7	pentakis[3-(dimethylammonio)propylsulfamoyl]-[(6-hydroxy-4,4,8,8-tetramethyl-4,8-diazoniaundecane-1,11-diyl)disulfamoyl]di[phthalocyaninecopper(II)] heptalactate	414-930-3	—	Aquatic Chronic 2	H411	GHS09	H411			
613-194-00-2	6,13-dichloro-3,10-bis(2-[4-fluoro-6-(2-sulfophenylamino)-1,3,5-triazin-2-ylamino]propylamino)benzo[5,6][1,4]oxazino[2,3-b.]phenoxazine-4,11-disulphonic acid, lithium-, sodium salt	418-000-8	163062-28-0	Eye Dam. 1	H318	GHS05 Dgr	H318			
613-195-00-8	2,2-(1,4-phenylene)bis((4H—3,1-benzoxazine-4-one)	418-280-1	18600-59-4	Skin Sens. 1 Aquatic Chronic 4	H317 H413	GHS07 Wng	H317 H413			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
613-196-00-3	5-[[4-chloro-6-[[2-[[4-fluoro-6-[[5-hydroxy-6-[[4-methoxy-2-sulfophenyl]azo]-7-sulfo-2-naphthalenyl]amino]-1,3,5-triazin-2-yl]amino]-1-methylethyl]amino]-1,3,5-triazin-2-yl]amino]-3-[[4-(ethenylsulfonyl)phenyl]azo]-4-hydroxy-naphtalene-2,7-disulfonic acid, sodium salt	418-380-5	168113-78-8	Eye Dam. 1	H318	GHS05 Dgr	H318			
613-197-00-9	reaction mass of: 2,4,6-tri(butylcarbamoyl)-1,3,5-triazine; 2,4,6-tri(methylcarbamoyl)-1,3,5-triazine; [(2-butyl-4,6-dimethyl)tricarbamoyl]-1,3,5-triazine; [(2,4-dibutyl-6-methyl)tricarbamoyl]-1,3,5-triazine	420-390-1	187547-46-2	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
613-199-00-X	reaction mass of: 1,3,5-tris(3-aminomethylphenyl)-1,3,5-(1 <i>H</i> ,3 <i>H</i> ,5 <i>H</i> )-triazine-2,4,6-trione; reaction mass of oligomers of 3,5-bis(3-aminomethylphenyl)-1-poly[3,5-bis(3-aminomethylphenyl)-2,4,6-trioxo-1,3,5-(1 <i>H</i> ,3 <i>H</i> ,5 <i>H</i> )-triazin-1-yl]-1,3,5-(1 <i>H</i> ,3 <i>H</i> ,5 <i>H</i> )-triazine-2,4,6-trione	421-550-1	—	Carc. 1B Repr. 1B Skin Sens. 1 Aquatic Chronic 3	H350 H360D (**) H317 H412	GHS08 Dgr	H350 H360D (**) H317 H412			
613-200-00-3	Reaction product of: copper, (29 <i>H</i> ,31 <i>H</i> -phthalocyaninato(2-)-N29,N30,N31,N32)-, chlorosulfuric acid and 3-(2-sulfoxyethylsulfonyl)aniline, sodium salts	420-980-7	—	Eye Dam. 1	H318	GHS05 Dgr	H318			
613-201-00-9	( <i>R</i> )-5-bromo-3-(1-methyl-2-pyrrolidinyl methyl)-1 <i>H</i> -indole	422-390-5	143322-57-0	Repr. 2 STOT RE 1 Acute Tox. 4 (*) Acute Tox. 4 (*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H361f (**) H372 (**) H332 (**) H302 H317 H400 H410	GHS08 GHS07 GHS09 Dgr	H361f (***) H372 (**) H332 H302 H317 H410	EUH070		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
613-202-00-4	pymetrozine (ISO); (E)-4,5-dihydro-6-methyl-4-(3-pyridylmethyleneamino)-1,2,4-triazin-3(2H)-one	—	123312-89-0	Carc. 2 Aquatic Chronic 3	H351 H412	GHS08 Wng	H351 H412			
613-203-00-X	pyraflufen-ethyl; [1] pyraflufen [2]	-[1] -[2]	129630-19-9 [1] 129630-17-7 [2]	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
613-204-00-5	oxadiargyl (ISO); 3-[2,4-dichloro-5-(2-propynyloxy)phenyl]-5-(1,1-dimethylethyl)-1,3,4-oxadiazol-2(3H)-one; 5-tert-butyl-3-[2,4-dichloro-5-(prop-2-ynyloxy)phenyl]-1,3,4-oxadiazol-2(3H)-one	254-637-6	39807-15-3	Repr. 2 STOT RE 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H361d (**) H373 (**) H400 H410	GHS08 GHS09 Wng	H361d (***) H373 (**) H410			
613-205-00-0	propiconazole(ISO); (±) 1-[2-(2,4-dichlorophenyl)-4-propyl-1,3-dioxolan-2-ylmethyl]-1H-1,2,4-triazole	262-104-4	60207-90-1	Acute Tox. 4 (*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H317 H400 H410	GHS07 GHS09 Wng	H302 H317 H410			
613-206-00-6	fenamidone (ISO); (S)-5-methyl-2-methylthio-5-phenyl-3-phenylamino-3,5-dihydroimidazol-4-one	—	161326-34-7	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
613-208-00-7	imazamox (ISO); (RS)-2-(4-isopropyl-4-methyl-5-oxo-2-imidazol-2-yl)-5-methoxymethylnicotinic acid	—	114311-32-9	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
613-209-00-2	cis-1-(3-chloropropyl)-2,6-dimethyl-piperidin hydrochloride	417-430-3	63645-17-0	Acute Tox. 3 (*) STOT RE 2 (*) Skin Sens. 1 Aquatic Chronic 2	H301 H373 (**) H317 H411	GHS06 GHS08 GHS09 Dgr	H301 H373 (**) H317 H411			
613-210-00-8	2-(3-chloropropyl)-2,5,5-trimethyl-1,3-dioxane	417-650-1	88128-57-8	STOT RE 2 (*) Aquatic Chronic 3	H373 (**) H412	GHS08 Wng	H373 (**) H412			



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
613-211-00-3	N-methyl-4-(p-formylstyryl)pyridinium methylsulfate	418-240-3	74401-04-0	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
613-212-00-9	4-[4-(2-ethylhexyloxy)phenyl](1,4-thiazinane-1,1-dioxide)	418-320-8	133467-41-1	Acute Tox. 4 * Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
613-213-00-4	cis-1-benzoyl-4-[(4-methylsulfonyl)oxy]-L-proline	416-040-0	120807-02-5	Aquatic Chronic 3	H412	—	H412			
613-214-00-X	N,N-di-n-butyl-2-(1,2-dihydro-3-hydroxy-6-isopropyl-2-quinolydene)-1,3-dioxindan-5-carboxamide	416-260-7	147613-95-4	Aquatic Chronic 4	H413	—	H413			
613-215-00-5	2-chloromethyl-3,4-dimethoxypyridinium chloride	416-440-5	72830-09-2	Acute Tox. 4 (*) Acute Tox. 4 (*) STOT RE 2 (*) Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H312 H302 H373 (**) H315 H318 H317 H411	GHS08 GHS05 GHS07 GHS09 Dgr	H312 H302 H373 (**) H315 H318 H317 H411			
613-216-00-0	6-tert-butyl-7-(6-diethylamino-2-methyl-3-pyridylimino)-3-(3-methylphenyl)pyrazolo [3,2-c][1,2,4]triazole	416-490-8	162208-01-7	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
613-217-00-6	4-[3-(3,5-di-tert-butyl-4-hydroxyphenyl)propionyloxy]-1-[2-[3-(3,5-di-tert-butyl-4-hydroxyphenyl)propionyloxy]ethyl]-2,2,6,6-tetramethylpiperidine	416-770-1	73754-27-5	Aquatic Chronic 4	H413	—	H413			
613-218-00-1	6-hydroxyindole	417-020-4	2380-86-1	Acute Tox. 4 (*) Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H302 H318 H317 H411	GHS05 GHS07 GHS09 Dgr	H302 H318 H317 H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
613-219-00-7	7a-ethyl-3,5-bis(1-methylethyl)-2,3,4,5-tetrahydrooxazolo[3,4-c]-2,3,4,5-tetrahydrooxazole	417-140-7	79185-77-6	Skin Irrit. 2 Aquatic Chronic 2	H315 H411	GHS07 GHS09 Wng	H315 H411			
613-220-00-2	trans-(4S,6S)-5,6-dihydro-6-methyl-4H-thieno[2,3-b]thiopyran-4-ol, 7,7-dioxide	417-290-3	147086-81-5	Acute Tox. 4 (*)	H302	GHS07 Wng	H302			
613-221-00-8	2-chloro-5-methyl-pyridine	418-050-0	18368-64-4	Acute Tox. 4 (*) Acute Tox. 4 (*) Skin Irrit. 2 Aquatic Chronic 3	H312 H302 H315 H412	GHS07 Wng	H312 H302 H315 H412			
613-222-00-3	4-(1-oxo-2-propenyl)-morpholine	418-140-1	5117-12-4	Acute Tox. 4 (*) STOT RE 2 (*) Eye Dam. 1 Skin Sens. 1	H302 H373 (*) H318 H317	GHS08 GHS05 GHS07 Dgr	H302 H373 (**) H318 H317			
613-223-00-9	N-isopropyl-3-(4-fluorophenyl)-1H-indole	418-790-4	93957-49-4	Aquatic Chronic 4	H413	—	H413			
613-224-00-4	2,5-dimercaptomethyl-1,4-dithiane	419-770-8	136122-15-1	Acute Tox. 4 (*) Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H314 H317 H400 H410	GHS05 GHS07 GHS09 Dgr	H302 H314 H317 H410			
613-225-00-X	reaction mass of:[2-(anthraquinon-1-ylamino)-6-[(5-benzoylamino)-anthraquinone-1-ylamino]-4-phenyl]-1,3,5-triazine; 2,6-bis-[(5-benzoylamino)-anthraquinon-1-ylamino]-4-phenyl-1,3,5-triazine.	421-290-9	—	STOT RE 2 (*) Aquatic Chronic 4	H373 (*) H413	GHS08 Wng	H373 (**) H413			
613-226-00-5	1-(2-(ethyl(4-(4-(4-(4-(ethyl(2-pyridinoethyl)amino)-2-methylphenylazo)benzoylamino)phenylazo)-3-methylphenyl)amino)ethyl)-pyridinium dichloride	420-950-3	163831-67-2	Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H318 H400 H410	GHS05 GHS09 Dgr	H318 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
613-227-00-0	(±)-[(R*,R*) and (R*,S*)]-6-fluoro-3,4-dihydro-2-oxiranyl-2H-1-benzopyran	419-600-2	99199-90-3	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
613-228-00-6	(±)-(R*,S*)-6-fluoro-3,4-dihydro-2-oxiranyl-2H-1-benzopyran	419-630-6	793669-26-8	Aquatic Chronic 2	H411	GHS09	H411			
613-230-00-7	florasulam (ISO); 2',6',8-trifluoro-5-methoxy-5-triazolo[1,5-c]; pyrimidine-2-sulfonamide	—	145701-23-1	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
613-233-00-3	4,4'-(oxy-(bismethylene))-bis-1,3-dioxolane	423-230-7	56552-15-9	Eye Dam. 1	H318	GHS05 Dgr	H318			
614-001-00-4	nicotine (ISO); 3-(N-methyl-2-pyrrolidinyl)pyridine	200-193-3	54-11-5	Acute Tox. 1 Acute Tox. 3 (*) Aquatic Chronic 2	H310 H301 H411	GHS06 GHS09 Dgr	H310 H301 H411			
614-002-00-X	salts of nicotine	—	—	Acute Tox. 2 (*) Acute Tox. 1 Acute Tox. 2 (*) Aquatic Chronic 2	H330 H310 H300 H411	GHS06 GHS09 Dgr	H330 H310 H300 H411			A
614-003-00-5	strychnine	200-319-7	57-24-9	Acute Tox. 1 Acute Tox. 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H310 H300 H400 H410	GHS06 GHS09 Dgr	H310 H300 H410			
614-004-00-0	salts of strychnine	—	—	Acute Tox. 2 (*) Acute Tox. 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H330 H300 H400 H410	GHS06 GHS09 Dgr	H330 H300 H410			A

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevaarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
614-005-00-6	colchicine	200-598-5	64-86-8	Acute Tox. 2 (*) Acute Tox. 2 (*)	H330 H300	GHS06 Dgr	H330 H300			
614-006-00-1	brucine; 2,3-dimethoxystrychnine	206-614-7	357-57-3	Acute Tox. 2 (*) Acute Tox. 2 (*) Aquatic Chronic 3	H330 H300 H412	GHS06 Dgr	H330 H300 H412			
614-007-00-7	brucine sulphate; [1] brucine nitrate; [2] strychnidin-10-one, 2,3-dimethoxy-, mono [(R)-1-methylheptyl 1,2-benzenedicarboxylate]; [3] strychnidin-10-one, 2,3-dimethoxy-, compd. with (S)mono(1-methylheptyl)-1,2-benzenedicarboxylate (1:1) [4]	225-432-9 [1] 227-317-9 [2] 269-439-5 [3] 269-710-8 [4]	4845-99-2 [1] 5786-97-0 [2] 68239-26-9 [3] 68310-42-9 [4]	Acute Tox. 2 (*) Acute Tox. 2 (*) Aquatic Chronic 3	H330 H300 H412	GHS06 Dgr	H330 H300 H412			A
614-008-00-2	aconitine	206-121-7	302-27-2	Acute Tox. 2 (*) Acute Tox. 2 (*)	H330 H300	GHS06 Dgr	H330 H300			
614-009-00-8	salts of aconitine	—	—	Acute Tox. 2 (*) Acute Tox. 2 (*)	H330 H300	GHS06 Dgr	H330 H300			A
614-010-00-3	atropine	200-104-8	51-55-8	Acute Tox. 2 (*) Acute Tox. 2 (*)	H330 H300	GHS06 Dgr	H330 H300			
614-011-00-9	salts of atropine	—	—	Acute Tox. 2 (*) Acute Tox. 2 (*)	H330 H300	GHS06 Dgr	H330 H300			A
614-012-00-4	hyoscyamine	202-933-0	101-31-5	Acute Tox. 2 (*) Acute Tox. 2 (*)	H330 H300	GHS06 Dgr	H330 H300			
614-013-00-X	salts of hyoscyamine	—	—	Acute Tox. 2 (*) Acute Tox. 2 (*)	H330 H300	GHS06 Dgr	H330 H300			A
614-014-00-5	hyoscine	200-090-3	51-34-3	Acute Tox. 2 (*) Acute Tox. 1 Acute Tox. 2 (*)	H330 H310 H300	GHS06 Dgr	H330 H310 H300			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
614-015-00-0	salts of hyoscine	—	—	Acute Tox. 2 (*) Acute Tox. 1 Acute Tox. 2 (*)	H330 H310 H300	GHS06 Dgr	H330 H310 H300			A
614-016-00-6	pilocarpine	202-128-4	92-13-7	Acute Tox. 2 (*) Acute Tox. 2 (*)	H330 H300	GHS06 Dgr	H330 H300			
614-017-00-1	salts of pilocarpine	—	—	Acute Tox. 2 (*) Acute Tox. 2 (*)	H330 H300	GHS06 Dgr	H330 H300			A
614-018-00-7	papaverine	200-397-2	58-74-2	Acute Tox. 4 (*)	H302	GHS07 Wng	H302			
614-019-00-2	salts of papaverine	—	—	Acute Tox. 4 (*)	H302	GHS07 Wng	H302			A
614-020-00-8	physostigmine	200-332-8	57-47-6	Acute Tox. 2 (*) Acute Tox. 2 (*)	H330 H300	GHS06 Dgr	H330 H300			
614-021-00-3	salts of physostigmine	—	—	Acute Tox. 2 (*) Acute Tox. 2 (*)	H330 H300	GHS06 Dgr	H330 H300			A
614-022-00-9	digitoxin	200-760-5	71-63-6	Acute Tox. 3 (*) Acute Tox. 3 (*) STOT RE 2 (*)	H331 H301 H373 (**)	GHS06 GHS08 Dgr	H331 H301 H373 (**)			
614-023-00-4	ephedrine	206-080-5	299-42-3	Acute Tox. 4 (*)	H302	GHS07 Wng	H302			
614-024-00-X	salts of ephedrine	—	—	Acute Tox. 4 (*)	H302	GHS07 Wng	H302			A
614-025-00-5	ouabain	211-139-3	630-60-4	Acute Tox. 3 (*) Acute Tox. 3 (*) STOT RE 2 (*)	H331 H301 H373 (**)	GHS06 GHS08 Dgr	H331 H301 H373 (**)			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
614-026-00-0	strophantin-K	234-239-9	11005-63-3	Acute Tox. 3 (*) Acute Tox. 3 (*) STOT RE 2 (*)	H331 H301 H373 (**)	GHS06 GHS08 Dgr	H331 H301 H373 (**)			
614-027-00-6	bufa-4,20,22-trienolide, 6-(acetyloxy)-3-(β-D-glucopyranosyloxy)-8,14-dihydroxy-, (3β, 6β)-; red squill; scilliroside	208-077-4	507-60-8	Acute Tox. 2 (*)	H300	GHS06 Dgr	H300			
614-028-00-1	reaction mass of: 2-ethylhexyl mono-D-glucopyranoside; 2-ethylhexyl di-D-glucopyranoside	414-420-0	—	Eye Dam. 1	H318	GHS05 Dgr	H318			
614-029-00-7	constitutional isomers of penta-O-allyl-β-D-fructofuranosyl-α-D-glucopyranoside; constitutional isomers of hexa-O-allyl-β-D-fructofuranosyl-α-D-glucopyranoside; constitutional isomers of hepta-O-allyl-β-D-fructofuranosyl-α-D-glucopyranoside	419-640-0	68784-14-5	Acute Tox. 4 (*)	H302	GHS07 Wng	H302			
615-001-00-7	methyl isocyanate	210-866-3	624-83-9	Flam. Liq. 2 Repr. 2 Acute Tox. 2 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) STOT SE 3 Skin Irrit. 2 Eye Dam. 1 Resp. Sens. 1 Skin Sens. 1	H225 H361d (***) H330 H311 H301 H301 H335 H315 H318 H318 H334 H317	GHS02 GHS06 GHS06 GHS08 GHS05 Dgr	H225 H361d (***) H330 H311 H301 H335 H315 H318 H334 H317			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etiketgeving			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
615-002-00-2	methyl isothiocyanate	209-132-5	556-61-6	Acute Tox. 3 (*) Acute Tox. 3 (*) Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H331 H301 H314 H317 H400 H410	GHS06 GHS05 GHS09 Dgr	H331 H301 H314 H317 H410			
615-003-00-8	thiocyanic acid	207-337-4	463-56-9	Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Chronic 3	H332 H312 H302 H412	GHS07 Wng	H332 H312 H302 H412	EUH032		
615-004-00-3	salts of thiocyanic acid	—	—	Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Chronic 3	H332 H312 H302 H412	GHS07 Wng	H332 H312 H302 H412	EUH032		A
615-005-00-9	4,4'-methylenediphenyl diisocyanate; diphenylmethane-4,4'-diisocyanate; [1] 2,2'-methylenediphenyl diisocyanate; diphenylmethane-2,2'-diisocyanate; [2] o-(p-isocyanatobenzyl)phenyl isocyanate; diphenylmethane-2,4'-diisocyanate; [3] methylenediphenyl diisocyanate [4]	202-966-0 [1] 219-799-4 [2] 227-534-9 [3] 247-714-0 [4]	101-68-8 [1] 2536-05-2 [2] 5873-54-1 [3] 26447-40-5 [4]	Acute Tox. 4 (*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Resp. Sens. 1 Skin Sens. 1	H332 H319 H335 H315 H334 H317	GHS08 GHS07 Dgr	H332 H319 H335 H315 H334 H317		Eye Irrit.; H319: C ≥ 5 % STOT SE 3; H335: C ≥ 5 % Skin Irrit. 2; H315: C ≥ 5 % Resp. Sens. 1; H334: C ≥ 0,1 %	C 2
615-006-00-4	2-methyl- <i>m</i> -phenylene diisocyanate; toluene-2,4-di-isocyanate; [1] 4-methyl- <i>m</i> -phenylene diisocyanate; toluene-2,6-di-isocyanate; [2] <i>m</i> -tolylidene diisocyanate; toluene-diisocyanate [3]	202-039-0 [1] 209-544-5 [2] 247-722-4 [3]	91-08-7 [1] 584-84-9 [2] 26471-62-5 [3]	Carc. 2 Acute Tox. 2 (*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Resp. Sens. 1 Skin Sens. 1 Aquatic Chronic 3	H351 H330 H319 H335 H315 H334 H317 H412	GHS06 GHS08 Dgr	H351 H330 H319 H335 H315 H334 H317 H412		Resp. Sens. 1; H334: C ≥ 0,1 %	C

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
615-007-00-X	1,5-naphthylene diisocyanate	221-641-4	3173-72-6	Acute Tox. 4 (*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Resp. Sens. 1 Aquatic Chronic 3	H332 H319 H335 H315 H334 H412	GHS08 GHS07 Dgr	H332 H319 H335 H315 H334 H412			
615-008-00-5	3-isocyanatomethyl-3,5,5-trimethylcyclohexyl isocyanate; isophorone di-isocyanate	223-861-6	4098-71-9	Acute Tox. 3 * Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Resp. Sens. 1 Skin Sens. 1 Aquatic Chronic 2	H331 H319 H335 H315 H334 H317 H411	GHS06 GHS08 GHS09 Dgr	H331 H319 H335 H315 H334 H317 H411		(*) Resp. Sens. 1; H334: C ≥ 0,5 % Skin Sens.1; H317: C ≥ 0,5 %	2
615-009-00-0	4,4'-methylenedi(cyclohexyl isocyanate); dicyclohexylmethane-4,4'-di-isocyanate	225-863-2	5124-30-1	Acute Tox. 3 (*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Resp. Sens. 1 Skin Sens. 1	H331 H319 H335 H315 H334 H317	GHS06 GHS08 Dgr	H331 H319 H335 H315 H334 H317		(*) Resp. Sens. 1; H334: C ≥ 0,5 % Skin Sens. 1; H317: C ≥ 0,5 %	2
615-010-00-6	2,2,4-trimethylhexamethylene-1,6-di-isocyanate; [1] 2,4,4-trimethylhexamethylene-1,6-di-isocyanate [2]	241-001-8 [1] 239-714-4 [2]	16938-22-0 [1] 15646-96-5 [2]	Acute Tox. 3 (*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Resp. Sens. 1	H331 H319 H335 H315 H334	GHS06 GHS08 Dgr	H331 H319 H335 H315 H334		(*) Resp. Sens. 1; H334: C ≥ 0,5 % Skin Sens. 1; H317: C ≥ 0,5 %	C 2
615-011-00-1	hexamethylene-di-isocyanate	212-485-8	822-06-0	Acute Tox. 3 (*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Resp. Sens. 1 Skin Sens. 1	H331 H319 H335 H315 H334 H317	GHS06 GHS08 Dgr	H331 H319 H335 H315 H334 H317		(*) Resp. Sens. 1; H334: C ≥ 0,5 % Skin Sens. 1; H317: C ≥ 0,5 %	2



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
615-012-00-7	4-isocyanatosulphonyltoluene; tosyl isocyanate	223-810-8	4083-64-1	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Resp. Sens. 1	H319 H335 H315 H334	GHS08 GHS07 Dgr	H319 H335 H315 H334	EUH014	Eye Irrit.; H319: C ≥ 5 % STOT SE 3; H335: C ≥ 5 % Skin Irrit. 2; H315: C ≥ 5 %	
615-013-00-2	cyanamide; carbanonitril	206-992-3	420-04-2	Acute Tox. 3 (*) Acute Tox. 4 (*) Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H301 H312 H319 H315 H317	GHS06 Dgr	H301 H312 H319 H315 H317			
615-014-00-8	tris(1-dodecyl-3-methyl-2-phenylbenzimidazolium)hexacyanoferrate	—	7276-58-6	Acute Tox. 4 (*)	H302	GHS07 Wng	H302			
615-015-00-3	1,7,7-trimethylbicyclo(2,2,1)hept-2-yl thiocyanatoacetate; isobornyl thiocyanacetate	204-081-5	115-31-1	Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
615-016-00-9	potassium cyanate	209-676-3	590-28-3	Acute Tox. 4 (*)	H302	GHS07 Wng	H302			
615-017-00-4	calcium cyanamide	205-861-8	156-62-7	Acute Tox. 4 (*) STOT SE 3 Eye Dam. 1	H302 H335 H318	GHS05 GHS07 Dgr	H302 H335 H318			
615-018-00-X	2-(2-butoxyethoxy)ethyl thiocyanate	203-985-7	112-56-1	Flam. Liq. 3 Acute Tox. 3 (*) Acute Tox. 3 (*)	H226 H311 H301	GHS02 GHS06 Dgr	H226 H311 H301			
615-019-00-5	dicyclohexylcarbodiimide	208-704-1	538-75-0	Acute Tox. 3 (*) Acute Tox. 4 (*) Eye Dam. 1 Skin Sens. 1	H311 H302 H318 H317	GHS06 GHS05 Dgr	H311 H302 H318 H317			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
615-020-00-0	methylene dithiocyanate	228-652-3	6317-18-6	Acute Tox. 2 (*) Acute Tox. 3 (*) Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1	H330 H301 H314 H317 H400	GHS06 GHS05 GHS09 Dgr	H330 H301 H314 H317 H400			
615-021-00-6	1,3,5-tris(oxiranylmethyl)-1,3,5-triazine-2,4,6(1H,3H,5H)-trione; TGIC	219-514-3	2451-62-9	Muta. 1B Acute Tox. 3 (*) Acute Tox. 3 (*) STOT RE 2 (*) Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 3	H340 H331 H301 H373 (**) H318 H317 H412	GHS06 GHS08 GHS05 Dgr	H340 H331 H301 H373 (**) H318 H317 H412			
615-022-00-1	methyl 3-isocyanatosulfonyl-2-thiophene-carboxylate	410-550-7	79277-18-2	STOT RE 2 (*) Resp. Sens. 1 Skin Sens. 1	H373 (**) H334 H317	GHS08 Dgr	<del>E; R2</del> H373 (**) H334 H317	EUH014		
615-023-00-7	2-(isocyanatosulfonylmethyl)benzoic acid methyl ester; (alt.):methyl 2-(isocyanatosulfonylmethyl) benzoate	410-900-9	83056-32-0	Flam. Liq. 3 Muta. 2 Acute Tox. 4 (*) STOT RE 2 (*) Eye Dam. 1 Resp. Sens. 1	H226 H341 H332 H373 (**) H318 H334	GHS02 GHS08 GHS05 GHS07 Dgr	H226 H341 H332 H373 (**) H318 H334	EUH014		
615-024-00-2	2-phenylethylisocyanate	413-080-0	1943-82-4	Acute Tox. 3 (*) Acute Tox. 4 (*) Skin Corr. 1A Resp. Sens. 1 Skin Sens. 1 Aquatic Chronic 2	H331 H302 H314 H334 H317 H411	GHS06 GHS08 GHS05 GHS09 Dgr	H331 H302 H314 H334 H317 H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevaarlijkheidsklasse en categorie	Gevaarlijkheidsaanwijzing	Pictogram, signaalwoord	Gevaarlijkheidsaanwijzing	Aanvullende gevaarlijkheidsaanwijzing		
615-025-00-8	4,4'-ethylidenediphenyl dicyanate	405-740-1	47073-92-7	Acute Tox. 4 (*) Acute Tox. 4 (*) STOT RE 2 (*) Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H332 H302 H373 (*) H318 H400 H410	GHS08 GHS05 GHS07 GHS09 Dgr	H332 H302 H373 (**) H318 H410			
615-026-00-3	4,4'-methylenebis(2,6-dimethylphenyl cyanate)	405-790-4	101657-77-6	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
615-028-00-4	ethyl 2-(isocyanatosulfonyl)benzoate	410-220-2	77375-79-2	(****) Acute Tox. 4 (*) STOT RE 2 (*) Eye Dam. 1 Resp. Sens. 1 Skin Sens. 1	H302 H373 (*) H318 H334 H317	GHS08 GHS05 GHS07 Dgr	<del>E; R2</del> H302 H373 (**) H318 H334 H317	EUH014		
615-029-00-X	2,5-bis-isocyanatomethyl-bicyclo[2.2.1]heptane	411-280-2	—	Acute Tox. 2 (*) Acute Tox. 4 (*) Skin Corr. 1B Resp. Sens. 1 Skin Sens. 1 Aquatic Chronic 3	H330 H302 H314 H334 H317 H412	GHS06 GHS08 GHS05 Dgr	H330 H302 H314 H334 H317 H412			
615-030-00-5	alkali salts, alkali earth salts and other salts of thiocyanic acid not mentioned elsewhere in this Annex	—	—	Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Chronic 3	H332 H312 H302 H412	GHS07 Wng	H332 H312 H302 H412	EUH032		A
615-031-00-0	thallium salt of thiocyanic acid	222-571-7	3535-84-0	Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Chronic 2	H332 H312 H302 H411	GHS07 GHS09 Wng	H332 H312 H302 H411	EUH032		A

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevaar­klasse en categorie	Gevaar­aan­duiding	Pictogram, sig­naal­woord	Gevaar­aan­duiding	Aanvullende gevaar­aan­duiding		
615-032-00-6	metal salts of thiocyanic acid not mentioned elsewhere in this Annex	—	—	Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H332 H312 H302 H400 H410	GHS07 GHS09 Wng	H332 H312 H302 H410	EUH032		A
616-001-00-X	N,N-dimethylformamide; dimethyl formamide	200-679-5	68-12-2	Repr. 1B Acute Tox. 4 (*) Acute Tox. 4 (*) Eye Irrit. 2	H360-D (**) H332 H312 H319	GHS08 GHS07 Dgr	H360D (**) H332 H312 H319			
616-002-00-5	2-fluoroacetamide	211-363-1	640-19-7	Acute Tox. 2 (*) Acute Tox. 3 (*)	H300 H311	GHS06 Dgr	H300 H311			
616-003-00-0	acrylamide; prop-2-enamide	201-173-7	79-06-1	Carc. 1B Muta. 1B Repr. 2 Acute Tox. 3 (*) STOT RE 1 Acute Tox. 4 (*) Acute Tox. 4 (*) Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1	H350 H340 H361f (**) H301 H372 (**) H332 H312 H319 H315 H317	GHS06 GHS08 Dgr	H350 H340 H361f (**) H301 H372 (**) H332 H312 H319 H315 H317			D
616-004-00-6	allidochlor (ISO); N,N-diallylchloroacetamide	202-270-7	93-71-0	Acute Tox. 4 (*) Acute Tox. 4 (*) Eye Irrit. 2 Skin Irrit. 2 Aquatic Chronic 2	H312 H302 H319 H315 H411	GHS07 GHS09 Wng	H312 H302 H319 H315 H411			
616-005-00-1	chlorthiamid (ISO); 2,6-dichloro (thiobenzamide)	217-637-7	1918-13-4	Acute Tox. 4 (*)	H302	GHS07 Wng	H302			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
616-006-00-7	dichlofluaniid (ISO); N-dichlorofluoromethylthio-N',N'-dimethyl-N-phenylsulphamide	214-118-7	1085-98-9	Acute Tox. 4 (*) Eye Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H332 H319 H317 H400 H410	GHS07 GHS09 Wng	H332 H319 H317 H410			
616-007-00-2	diphenamid (ISO); N,N-dimethyl-2,2-diphenylacetamide	213-482-4	957-51-7	Acute Tox. 4 (*) Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			
616-008-00-8	propachlor (ISO); 2-chloro-N-isopropylacetanilide; α-chloro-N-isopropylacetanilide	217-638-2	1918-16-7	Acute Tox. 4 (*) Eye Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H319 H317 H400 H410	GHS07 GHS09 Wng	H302 H319 H317 H410			
616-009-00-3	propanil (ISO); 3',4'-dichloropropionanilide	211-914-6	709-98-8	Acute Tox. 4 (*) Aquatic Acute 1	H302 H400	GHS07 GHS09 Wng	H302 H400			
616-010-00-9	tosylchloramide sodium	204-854-7	127-65-1	Acute Tox. 4 (*) Skin Corr. 1B Resp. Sens. 1	H302 H314 H334	GHS08 GHS05 GHS07 Dg	H302 H314 H334	EUH031		
616-011-00-4	N,N-dimethylacetamide	204-826-4	127-19-5	Repr. 1B Acute Tox. 4 (*) Acute Tox. 4 (*)	H360D (***) H332 H312	GHS08 GHS07 Dgr	H360D (***) H332 H312		Repr. 1B; H360D: C ≥ 5 %	
616-012-00-X	N-(dichlorofluoromethylthio)phthalimide; N-(fluorodichloromethylthio)phthalimide	211-952-3	719-96-0	Skin Irrit. 2	H315	GHS07 Wng	H315			
616-013-00-5	butyraldehyde oxime	203-792-8	110-69-0	Acute Tox. 3 (*) Acute Tox. 4 (*) Eye Irrit. 2	H311 H302 H319	GHS06 Dgr	H311 H302 H319			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
616-014-00-0	2-butanone oxime; ethyl methyl ketoxime; ethyl methyl ketone oxime	202-496-6	96-29-7	Carc. 2 Acute Tox. 4 (*) Eye Dam. 1 Skin Sens. 1	H351 H312 H318 H317	GHS08 GHS05 GHS07 Dgr	H351 H312 H318 H317			
616-015-00-6	alachlor (ISO); 2-chloro-2',6'-diethyl-N-(methoxymethyl) acetanilide	240-110-8	15972-60-8	Carc. 2 Acute Tox. 4 (*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H351 H302 H317 H400 H410	GHS08 GHS07 GHS09 Wng	H351 H302 H317 H410		M=10	
616-016-00-1	1-(3,4-dichlorophenylimino) thiosemicarbazide	—	5836-73-7	Acute Tox. 2 (*)	H300	GHS06 Dgr	H300			
616-017-00-7	cartap hydrochloride	239-309-2	15263-52-2	Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H312 H302 H400 H410	GHS07 GHS09 Wng	H312 H302 H410			
616-018-00-2	N,N-diethyl-m-toluamide; deet	205-149-7	134-62-3	Acute Tox. 4 (*) Eye Irrit. 2 Skin Irrit. 2 Aquatic Chronic 3	H302 H319 H315 H412	GHS07 Wng	H302 H319 H315 H412			
616-019-00-8	perfluidone (ISO); 1,1,1-trifluoro-N-(4-phenylsulphonyl- <i>o</i> -tolyl)methanesulphonamide;	253-718-3	37924-13-3	Acute Tox. 4 (*) Eye Irrit. 2	H302 H319	GHS07 Wng	H302 H319			
616-020-00-3	tebuthiuron (ISO); 1-(5- <i>tert</i> -butyl-1,3,4-thiadiazol-2-yl)-1,3-dimethylurea	251-793-7	34014-18-1	Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
616-021-00-9	thiazafuron (ISO); 1,3-dimethyl-1-(5-trifluoromethyl-1,3,4-thiadiazol-2-yl)urea	246-901-4	25366-23-8	Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
616-022-00-4	acetamide	200-473-5	60-35-5	Carc. 2	H351	GHS08 Wng	H351			
616-023-00-X	N-hexadecyl(or octadecyl)-N-hexadecyl(or octadecyl)benzamide	401-980-6	—	Skin Irrit. 2 Skin Sens. 1	H315 H317	GHS07 Wng	H315 H317			
616-024-00-5	2-(4,4-dimethyl-2,5-dioxooxazolidin-1-yl)-2-chloro-5-(2-(2,4-di-tert-pentylphenoxy)butyramido)-4,4-dimethyl-3-oxovaleraniide	402-260-4	54942-74-4	Aquatic Chronic 4	H413	—	H413			
616-025-00-0	valinamide	402-840-7	20108-78-5	Repr. 2 Eye Irrit. 2 Skin Sens. 1	H361f (**) H319 H317	GHS08 Wng	H361f (***) H319 H317			
616-026-00-6	thioacetamide	200-541-4	62-55-5	Carc. 1B Acute Tox. 4 (*) Eye Irrit. 2 Skin Irrit. 2 Aquatic Chronic 3	H350 H302 H319 H315 H412	GHS08 GHS07 Dgr	H350 H302 H319 H315 H412			
616-027-00-1	tris(2-(2-hydroxyethoxy)ethyl)ammonium 3-acetoacetamido-4-methoxybenzenesulfonate	403-760-5	—	Skin Sens. 1	H317	GHS07 Wng	H317			
616-028-00-7	N-(4-(3-(4-cyanophenyl)ureido)-3-hydroxyphenyl)-2-(2,4-di-tert-pentylphenoxy)octanamide	403-790-9	108673-51-4	Skin Sens. 1 Aquatic Chronic 4	H317 H413	GHS07 Wng	H317 H413			
616-029-00-2	N,N'-ethylenebis(vinylsulfonylacetamide)	404-790-1	66710-66-5	Eye Dam. 1 Skin Sens. 1	H318 H317	GHS05 GHS07 Dgr	H318 H317			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
616-030-00-8	ethidimuron (ISO); 1-(5-ethylsulphonyl-1,3,4-thiadiazol-2-yl)-1,3-dimethylurea	250-010-6	30043-49-3	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
616-031-00-3	dimethachlor (ISO); 2-chloro-N-(2,6-dimethylphenyl)-N-(2-methoxyethyl)acetamide;	256-625-6	50563-36-5	Acute Tox. 4 (*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H317 H400 H410	GHS07 GHS09 Wng	H302 H317 H410			
616-032-00-9	diflufenican (ISO); N-(2,4-difluorophenyl)-2-[3-(trifluoromethyl)phenoxy]-3-pyridinecarboxamide	—	83164-33-4	Aquatic Chronic 3	H412	—	H412			
616-033-00-4	cyprofuram (ISO); N-(3-chlorophenyl)-N-(tetrahydro-2-oxo-3-furyl)cyclopropanecarboxamide	274-050-9	69581-33-5	Acute Tox. 3 (*) Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H301 H312 H400 H410	GHS06 GHS09 Dgr	H301 H312 H410			
616-034-00-X	pyracarbolid; (ISO); 3,4-dihydro-6-methyl-2H-pyran-5-carboxanilide	246-419-4	24691-76-7	Aquatic Chronic 3	H412	—	H412			
616-035-00-5	cymoxanil (ISO); 2-cyano-N-[(ethylamino)carbonyl]-2-(methoxyimino)acetamide	261-043-0	57966-95-7	Acute Tox. 4 (*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H317 H400 H410	GHS07 GHS09 Wng	H302 H317 H410			
616-036-00-0	2-chloroacetamide	201-174-2	79-07-2	Repr. 2 Acute Tox. 3 (*) Skin Sens. 1	H361f (**) H301 H317	GHS06 GHS08 Dgr	H361f (***) H301 H317		Skin Sens. 1; H317: C ≥ 0,1 %	



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
616-037-00-6	acetochlor (ISO); 2-chloro-N-(ethoxymethyl)-N-(2-ethyl-6-methylphenyl)acetamide	251-899-3	34256-82-1	Acute Tox. 4 (*) STOT SE 3 Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H332 H335 H315 H317 H400 H410	GHS07 GHS09 Wng	H332 H335 H315 H317 H410			
616-038-00-1	(4-aminophenyl)-N-methylmethylensulfonamide hydrochloride	406-010-5	88918-84-7	Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H318 H317 H411	GHS05 GHS07 GHS09 Dgr	H318 H317 H411			
616-039-00-7	3',5'-dichloro-4'-ethyl-2'-hydroxypalmitanilide	406-200-8	117827-06-2	Skin Sens. 1	H317	GHS07 Wng	H317			
616-040-00-2	potassium N-(4-toluenesulfonyl)-4-toluenesulfonamide	406-650-5	97888-41-0	Eye Dam. 1	H318	GHS05 Dgr	H318			
616-041-00-8	3',5'-dichloro-2-(2,4-di-tert-pentylphenoxy)-4'-ethyl-2'-hydroxyhexananilide	406-840-8	101664-25-9	Aquatic Chronic 4	H413	—	H413			
616-042-00-3	N-(2-(6-ethyl-7-(4-methylphenoxy)-1H-pyrazolo[1,5-b][1,2,4]triazol-2-yl)propyl)-2-octadecyloxybenzamide	407-070-5	142859-67-4	Skin Sens. 1 Aquatic Chronic 4	H317 H413	GHS07 Wng	H317 H413			
616-043-00-9	isoxaben (ISO); N-[3-(1-ethyl-1-methylpropyl)-1,2-oxazol-5-yl]-2,6-dimethoxybenzamide	407-190-8	82558-50-7	Aquatic Chronic 4	H413	—	H413			
616-044-00-4	N-(3,5-dichloro-4-ethyl-2-hydroxyphenyl)-2-(3-pentadecylphenoxy)-butanamide	402-510-2	—	Aquatic Chronic 2	H411	GHS09	H411			
616-045-00-X	2'-(4-chloro-3-cyano-5-formyl-2-thienylazo)-5'-diethylamino-2-methoxyacetanilide	405-190-2	122371-93-1	Skin Sens. 1 Aquatic Chronic 4	H317 H413	GHS07 Wng	H317 H413			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
616-046-00-5	N-(2-(6-chloro-7-methylpyrazolo(1,5-b)-1,2,4-triazol-4-yl)propyl)-2-(2,4-di-tert-pentylphenoxy)octanamide	406-390-2	—	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
616-047-00-0	reaction mass of: 2,2',2'',2''''-(ethylenedinitrilotetrakis-N,N-di(C <sub>16</sub> )alkylacetamide; 2,2',2'',2''''-(ethylenedinitrilotetrakis-N,N-di(C <sub>18</sub> )alkylacetamide	406-640-0	—	Skin Sens. 1	H317	GHS07 Wng	H317			
616-048-00-6	3'-trifluoromethylisobutyranilide	406-740-4	1939-27-1	STOT RE 2 * Aquatic Chronic 2	H373 (**) H411	GHS08 GHS09 Wng	H373 (**) H411			
616-049-00-1	2-(2,4-bis(1,1-dimethylethyl)phenoxy)-N-(3,5-dichloro-4-ethyl-2-hydroxyphenyl)-hexanamide	408-150-2	99141-89-6	Aquatic Chronic 4	H413	—	H413			
616-050-00-7	lufenuron (ISO); N-[2,5-dichloro-4-(1,1,2,3,3,3-hexafluoropropoxy)-phenyl-aminocarbonyl]-2,6-difluorobenzamide	410-690-9	103055-07-8	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
616-051-00-2	reaction mass of: 2,4 -bis(N'-(4-methylphenyl)-ureido)-toluene; 2,6 -bis(N'-(4-methylphenyl)-ureido)-toluene	411-070-0	—	Aquatic Chronic 4	H413	—	H413			
616-052-00-8	formamide	200-842-0	75-12-7	Repr. 1B	H360D (***)	GHS08 Dgr	H360D (***)			
616-053-00-3	N-methylacetamide	201-182-6	79-16-3	Repr. 1B	H360D (***)	GHS08 Dgr	H360D (***)			
616-054-00-9	iprodione (ISO); 3-(3,5-dichlorophenyl)-2,4-dioxo-N-isopropylimidazolidine-1-carboxamide	253-178-9	36734-19-7	Carc. 2 Aquatic Acute 1 Aquatic Chronic 1	H351 H400 H410	GHS08 GHS09 Wng	H351 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
616-055-00-4	propyzamide (ISO); 3,5-dichloro-N-(1,1-dimethylprop-2-ynyl)benzamide	245-951-4	23950-58-5	Carc. 2 Aquatic Acute 1 Aquatic Chronic 1	H351 H400 H410	GHS08 GHS09 Wng	H351 H410			
616-056-00-X	N-methylformamide	204-624-6	123-39-7	Repr. 1B Acute Tox. 4 (*)	H360D (***) H312	GHS08 GHS07 Dg	H360D (***) H312			
616-057-00-5	reaction mass of: N-[3-hydroxy-2-(2-methylacryloylaminoethoxy)propoxymethyl]-2-methylacrylamide; N-[2,3-bis-(2-methylacryloylaminoethoxy)propoxymethyl]-2-methylacrylamide; methacrylamide; 2-methyl-N-(2-methylacryloylaminoethoxymethyl)-acrylamide; N-(2,3-dihydroxypropoxymethyl)-2-methylacrylamide	412-790-8	—	Carc. 1B Muta. 2 STOT RE 2 (*)	H350 H341 H373 (**)	GHS08 Dgr	H350 H341 H373 (**)			
616-058-00-0	1,3-bis(3-methyl-2,5-dioxo-1H-pyrrolinylmethyl)benzene	412-570-1	119462-56-5	STOT RE 2 (*) Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H373 (**) H318 H317 H400 H410	GHS08 GHS05 GHS07 GHS09 Dgr	H373 (**) H318 H317 H410			
616-059-00-6	4-((4-(diethylamino)-2-ethoxyphenyl)imino)-1,4-dihydro-1-oxo-N-propyl-2-naphthalenecarboxamide	412-650-6	121487-83-0	Aquatic Chronic 4	H413	—	H413			
616-060-00-1	Condensation product of: 3-(7-carboxyhept-1-yl)-6-hexyl-4-cyclohexene-1,2-dicarboxylic acid with polyamines (primarily aminoethyl-piperazine and triethylenetetramine)	413-770-1	—	Acute Tox. 4 (*) Skin Corr. 1B Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H314 H317 H400 H410	GHS05 GHS07 GHS09 Dgr	H302 H314 H317 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
616-061-00-7	<i>N,N'</i> -1,6-hexanediylbis( <i>N</i> -(2,2,6,6-tetramethyl-piperidin-4-yl)-formamide	413-610-0	124172-53-8	Eye Irrit. 2 Aquatic Chronic 3	H319 H412	GHS07 Wng	H319 H412			
616-062-00-2	<i>N</i> -[3-[(2-acetyloxy)ethyl](phenyl-methyl amino)]-4-methoxyphenylacetamide	411-590-8	70693-57-1	Skin Corr. 1B Aquatic Chronic 3	H314 H412	GHS05 Dgr	H314 H412			
616-063-00-8	3-dodecyl-(1-(1,2,2,6,6-pentamethyl-4-piperidin-yl)-2,5-pyrrolidindione	411-920-0	106917-30-0	Acute Tox. 3 (*) Acute Tox. 4 (*) STOT RE 2 (*) Skin Corr. 1A Aquatic Acute 1 Aquatic Chronic 1	H331 H302 H373 (**) H314 H400 H410	GHS06 GHS08 GHS05 GHS09 Dgr	H331 H302 H373 (**) H314 H410			
616-064-00-3	<i>N</i> - <i>tert</i> -butyl-3-methylpicolinamide	406-720-5	32998-95-1	Aquatic Chronic 3	H412	—	H412			
616-065-00-9	3'-(3-acetyl-4-hydroxyphenyl)-1,1-diethylurea	411-970-3	79881-89-3	Acute Tox. 4 (*) STOT RE 2 (*)	H302 H373 (**)	GHS08 GHS07 Wng	H302 H373 (**)			
616-066-00-4	5,6,12,13-tetrachloroantra(2,1,9- <i>def</i> :6,5,10- <i>d'e'f'</i> )diisoquinoline-1,3,8,10 (2 <i>H</i> ,9 <i>H</i> )-tetrone	405-100-1	115662-06-1	Repr. 2	H361f (***)	GHS08 Wng	H361f (***)			
616-067-00-X	dodecyl 3-(2-(3-benzyl-4-ethoxy-2,5-dioximidazolidin-1-yl)-4,4-dimethyl-3-oxovaleramido)-4-chlorobenzoate	407-300-4	92683-20-0	Aquatic Chronic 4	H413	—	H413			
616-068-00-5	potassium 4-(11-methacrylamidoundecanamido)benzenesulfonate	406-500-9	174393-75-0	Skin Sens. 1	H317	GHS07 Wng	H317			
616-069-00-0	1-hydroxy-5-(2-methylpropyloxycarbonylamino)- <i>N</i> -(3-dodecyloxypropyl)-2-naphthoamide	406-210-2	110560-22-0	Aquatic Chronic 4	H413	—	H413			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
616-070-00-6	reaction mass of: 3,3'-dicyclohexyl-1,1'-methylenebis(4,1-phenylene)diurea; 3-cyclohexyl-1-(4-(4-(3-octadecylureido)benzyl)phenyl)urea; 3,3'-dioctadecyl-1,1'-methylenebis(4,1-phenylene)diurea	406-530-2	—	Aquatic Chronic 4	H413	—	H413			
616-071-00-1	reaction mass of: bis(N-cyclohexyl-N'-phenyleneureido)methylene; bis(N-octadecyl-N'-phenyleneureido)methylene; bis(N-dicyclohexyl-N'-phenyleneureido)methylene (1:2:1)	406-550-1	—	Skin Sens. 1 Aquatic Chronic 4	H317 H413	GHS07 Wng	H317 H413			
616-072-00-7	1-(2-deoxy-5-O-trityl-β-D-threopentofuranosyl)thymine	407-120-6	55612-11-8	Aquatic Chronic 4	H413	—	H413			
616-073-00-2	4'-ethoxy-2-benzimidazoleanilide	407-600-5	120187-29-3	Muta. 2 Aquatic Chronic 4	H341 H413	GHS08 Wng	H341 H413			
616-074-00-8	N-butyl-2-(4-morpholinylcarbonyl)benzamide	407-730-2	104958-67-0	Eye Irrit. 2 Skin Sens. 1 Aquatic Chronic 3	H319 H317 H412	GHS07 Wng	H319 H317 H412			
616-075-00-3	D, L-(N,N-diethyl-2-hydroxy-2-phenylacetamide)	408-120-9	65197-96-8	Acute Tox. 4 (*) Eye Dam. 1	H302 H318	GHS05 GHS07 Dgr	H302 H318			
616-076-00-9	tebufenozide (ISO); N—tert-butyl-N'-(4-ethylbenzoyl)-3,5-dimethylbenzohydrazide	412-850-3	112410-23-8	Aquatic Chronic 2	H411	GHS09	H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
616-077-00-4	reaction mass of: 2-(9-methyl-1,3,8,10-tetraoxo-2,3,9,10-tetrahydro-(1 <i>H</i> ,8 <i>H</i> )-anthra[2,1,9- <i>def</i> : 6,5,10- <i>d'ef'</i> ]diisoquinolin-2-ylethansulfonic acid; potassium 2-(9-methyl-1,3,8,10-tetraoxo-2,3,9,10-tetrahydro-(1 <i>H</i> ,8 <i>H</i> )-anthra[2,1,9- <i>def</i> : 6,5,10- <i>d'ef'</i> ]diisoquinolin-2-ylethansulfate	411-310-4	—	Eye Dam. 1	H318	GHS05 Dgr	H318			
616-078-00-X	2-[2,4-bis(1,1-dimethyl-ethyl)phenoxy]- <i>N</i> -(2-hydroxy-5-methyl-phenyl)hexanamide	411-330-3	104541-33-5	Aquatic Chronic 4	H413	—	H413			
616-079-00-5	1,6-hexanediyil-bis(2-(2-(1-ethylpentyl)-3-oxazolidinyl)ethyl)carbamate	411-700-4	140921-24-0	Skin Sens. 1	H317	GHS07 Wng	H317			
616-080-00-0	4-(2-((3-ethyl-4-methyl-2-oxo-pyrrolin-1-yl)carboxamido)ethyl)benzenesulfonamide	411-850-0	119018-29-0	Aquatic Chronic 3	H412	—	H412			
616-081-00-6	5-bromo-8-naphtholactam	413-480-5	24856-00-6	Acute Tox. 4 (*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H317 H400 H410	GHS07 GHS09 Wng	H302 H317 H410			
616-082-00-1	<i>N</i> -(5-chloro-3-((4-(diethylamino)-2-methylphenyl)imino-4-methyl-6-oxo-1,4-cyclohexadien-1-yl)benzamide	413-200-1	129604-78-0	Skin Sens. 1	H317	GHS07 Wng	H317			
616-083-00-7	[2-((4-nitrophenyl)amino)ethyl]urea	410-700-1	27080-42-8	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
616-084-00-2	2,4-bis[ <i>N'</i> -(4-methylphenyl)ureido]toluene	411-790-5	—	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
616-085-00-8	3-(2,4-dichlorophenyl)-6-fluoro-quinazoline-2,4(1 <i>H</i> ,3 <i>H</i> )-dione	412-190-6	168900-02-5	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevaarlijkheidsklasse en categorie	Gevaarlijkheidsaanduiding	Pictogram, signaalwoord	Gevaarlijkheidsaanduiding	Aanvullende gevaarlijkheidsaanduiding		
616-086-00-3	2-acetylamino-6-chloro-4-[(4-diethylamino)2-methylphenyl-imino]-5-methyl-1-oxo-2,5-cyclohexadiene	412-250-1	102387-48-4	Aquatic Chronic 4	H413	—	H413			
616-087-00-9	reaction mass of: 7,9,9-trimethyl-3,14-dioxa-4,13-dioxo-5,12-diazahexadecan-1,16-diyl-prop-2-enoate; 7,7,9-trimethyl-3,14-dioxa-4,13-dioxo-5,12-diazahexadecan-1,16-diyl-prop-2-enoate	412-260-6	52658-19-2	Eye Irrit. 2 Skin Sens. 1 Aquatic Chronic 2	H319 H317 H411	GHS07 GHS09 Wng	H319 H317 H411			
616-088-00-4	2-aminosulfonyl-N,N-dimethylnicotinamide	413-440-7	112006-75-4	Skin Sens. 1 Aquatic Chronic 3	H317 H412	GHS07 Wng	H317 H412			
616-089-00-X	5-(2,4-dioxo-1,2,3,4-tetrahydropyrimidine)-3-fluoro-2-hydroxymethyltetrahydrofuran	415-360-8	41107-56-6	Muta. 2	H341	GHS08 Wng	H341			
616-090-00-5	1-(1,4-benzodioxan-2-ylcarbonyl)piperazine hydrochloride	415-660-9	70918-74-0	Acute Tox. 3 (*) Acute Tox. 3 (*) Acute Tox. 3 (*) STOT RE 2 (*) Aquatic Chronic 2	H331 H311 H301 H373 (**) H411	GHS06 GHS08 GHS09 Dgr	H331 H311 H301 H373 (**) H411			
616-091-00-0	1,3,5-tris-[(2S and 2R)-2,3-epoxypropyl]-1,3,5-triazine-2,4,6-(1H,3H,5H)-trione	423-400-0	59653-74-6	Muta. 1B Acute Tox. 3 (*) Acute Tox. 4 (*) STOT RE 2 (*) Eye Dam. 1 Skin Sens. 1	H340 H331 H302 H373 (**) H318 H317	GHS06 GHS08 GHS05 Dgr	H340 H331 H302 H373 (**) H318 H317			
616-092-00-6	Polymeric reaction product of bicyclo[2.2.1]hepta-2,5-diene, ethene, 1,4-hexadiene, 1-propene with N,N-di-2-propenylformamide	404-035-6	—	Skin Sens. 1 Aquatic Chronic 4	H317 H413	GHS07 Wng	H317 H413			
616-093-00-1	Reaction products of: aniline-terephthalaldehyde-o-toluidine condensate with maleic anhydride	406-620-1	129217-90-9	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
616-094-00-7	3,3'-dicyclohexyl-1,1'-methylebis(4,1-phenylene)diurea	406-370-3	58890-25-8	Skin Sens. 1 Aquatic Chronic 4	H317 H413	GHS07 Wng	H317 H413			
616-095-00-2	3,3'-dioctadecyl-1,1'-methylebis(4,1-phenylene)diurea	406-690-3	43136-14-7	Aquatic Chronic 4	H413	—	H413			
616-096-00-8	N-(3-hexadecyloxy-2-hydroxyprop-1-yl)-N-(2-hydroxyethyl)palmitamide	408-110-4	110483-07-3	Aquatic Chronic 4	H413	—	H413			
616-097-00-3	N,N'-1,4-phenylenebis(2-((2-methoxy-4-nitrophenyl)azo)-3-oxobutanamide	411-840-6	83372-55-8	Aquatic Chronic 4	H413	—	H413			
616-098-00-9	1-[4-chloro-3-((2,2,3,3,3-pentafluoropropoxy)methyl)phenyl]-5-phenyl-1H-1,2,4-triazole-3-carboxamide	411-750-7	119126-15-7	Aquatic Chronic 2	H411	GHS09	H411			
616-099-00-4	2-[4-[(4-hydroxyphenyl)sulfonyl]phenoxy]-4,4-dimethyl-N-[5-[(methylsulfonyl)amino]-2-[4-(1,1,3,3-tetramethylbutyl)phenoxy]phenyl]-3-oxopentanamide	414-170-2	135937-20-1	Aquatic Chronic 4	H413	—	H413			
616-100-00-8	1,3-dimethyl-1,3-bis(trimethylsilyl)urea	414-180-7	10218-17-4	Acute Tox. 4 (*) Skin Irrit. 2	H302 H315	GHS07 Wng	H302 H315			
616-101-00-3	(S)-N-tert-butyl-1,2,3,4-tetrahydro-3-isoquinolinecarboxamide	414-600-9	149182-72-9	Acute Tox. 4 (*) Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			
616-102-00-9	reaction mass of: α-[3-(3-mercaptopropanoxycarbonylamino)methylphenylaminocarbonyl]-ω-[3-(3-mercaptopropanoxycarbonylamino)methylphenylaminocarbonyloxy]-poly-(oxyethylene-co-oxypropylene); 1,2-(or 1,3-)bis[α-(3-mercaptopropanoxycarbonylamino)methylphenylaminocarbonyl]-ω-oxy-poly(oxyethylene-co-oxypropylene)]-3-(or 2-)propanol; 1,2,3-tris[α-(3-mercaptopropanoxycarbonylamino)methylphenylaminocarbonyl]-ω-oxy-poly-(oxyethylene-co-oxypropylene)]propane]	415-870-0	—	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etiketgeving			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
616-103-00-4	(S,S)-trans-4-(acetylamino)-5,6-dihydro-6-methyl-7,7-dioxo-4H-thieno[2,3-b]thiopyran-2-sulfonamide	415-030-3	120298-38-6	Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H317 H400 H410	GHS07 GHS09 Wng	H317 H410			
616-104-00-X	benalaxyl (ISO); methyl N-(2,6-dimethylphenyl)-N-(phenylacetyl)-DL-alaninate	275-728-7	71626-11-4	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
616-105-00-5	chlorotoluron (ISO); 3-(3-chloro-p-tolyl)-1,1-dimethylurea	239-592-2	15545-48-9	Carc. 2 Repr. 2 Aquatic Acute 1 Aquatic Chronic 1	H351 H361d (***) H400 H410	GHS08 GHS09 Wng	H351 H361d (***) H410			
616-106-00-0	phenmedipham (ISO); methyl 3-(3-methylcarbaniloxy)carbanilate	237-199-0	13684-63-4	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
616-108-00-1	iodosulfuron-methyl-sodium; sodium ([5-iodo-2-(methoxycarbonyl)phenyl]sulfonyl)carbamoyl(4-methoxy-6-methyl-1,3,5-triazin-2-yl)azanide	—	144550-36-7	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
616-109-00-7	sulfosulfuron (ISO); 1-(4,6-dimethoxypyrimidin-2-yl)-3-(2-ethylsulfonylimidazo[1,2-a]pyridin-3-yl)sulfonylurea	—	141776-32-1	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
616-110-00-2	cyclanilide (ISO); 1-(2,4-dichloroanilinocarbonyl)cyclopropanecarboxylic acid	419-150-7	113136-77-9	Acute Tox. 4 (*) Aquatic Chronic 2	H302 H411	GHS07 GHS09 Wng	H302 H411			
616-111-00-8	fenhexamid (ISO); N-(2,3-dichlor-4-hydroxyphenyl)-1-methylcyclohexancarboxamid	422-530-5	126833-17-8	Aquatic Chronic 2	H411	GHS09	H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
616-112-00-3	oxasulfuron (ISO); oxetan-3-yl 2-[(4,6-dimethylpyrimidin-2-yl)- carbamoylsulfamoyl]benzoate	—	144651-06-9	STOT RE 2 (*) Aquatic Acute 1 Aquatic Chronic 1	H373 (*) H400 H410	GHS08 GHS09 Wng	H373 (**) H410			
616-113-00-9	desmedipham (ISO); ethyl 3-phenylcarbamoyloxyphenylcarbamate	237-198-5	13684-56-5	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410		M=10	
616-114-00-4	dodecanamide, N,N'-(9,9',10,10'-tetrahydro- 9,9',10,10'-tetraoxo(1,1'-bianthracene)-4,4'- diyl)bis-	418-010-2	136897-58-0	Aquatic Chronic 4	H413	—	H413			
616-115-00-X	N-(3-acetyl-2-hydroxyphenyl)-4-(4-phenyl- butoxy)benzamide	416-150-9	136450-06-1	Aquatic Chronic 4	H413	—	H413			
616-116-00-5	N-(4-dimethylaminopyridinium)-3- methoxy-4-(1-methyl-5-nitroindol-3-ylme- thyl)-N-(o-tolylsulfonyl)benzamidate	416-790-9	143052-96-4	Aquatic Chronic 4	H413	—	H413			
616-117-00-0	N-[2-(3-acetyl-5-nitrothiophen-2-ylazo)-5- diethylaminophenyl]acetamide	416-860-9	777891-21-1	Repr. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H361f (**) H317 H400 H410	GHS08 GHS09 Wng	H361f (***) H317 H410			
616-118-00-6	N-(2',6'-dimethylphenyl)-2-piperidinecarbo- xamide hydrochloride	417-950-0	65797-42-4	Acute Tox. 4 (*) Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			
616-119-00-1	2-(1-butyl-3,5-dioxo-2-phenyl-(1,2,4)-triaz- olidin-4-yl)-4,4-dimethyl-3-oxo-N-(2- methoxy-5-(2-(dodecyl-1-sulfonyl))propio- nylamino)-phenyl)-pentanamide	418-060-5	118020-93-2	Aquatic Chronic 4	H413	—	H413			
616-120-00-7	reaction mass of: N-(3-dimethylamino-4- methyl-phenyl)-benzamide; N-(3-dimethylamino-2-methyl-phenyl)-ben- zamide; N-(3-dimethylamino-3-methyl-phenyl)-ben- zamide	420-600-1	—	STOT RE 2 (*) Aquatic Chronic 2	H373 (*) H411	GHS08 GHS09 Wng	H373 (**) H411			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
616-121-00-2	2,4-dihydroxy-N-(2-methoxyphenyl)benzamide	419-090-1	129205-19-2	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
616-123-00-3	N-[3-[[4-(diethylamino)-2-methylphenyl]imino]-6-oxo-1,4-cyclohexadienyl]acetamide	414-740-0	96141-86-5	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
616-124-00-9	lithium bis(trifluoromethylsulfonyl)imide	415-300-0	90076-65-6	Acute Tox. 3 (*) Acute Tox. 3 (*) Skin Corr. 1B Aquatic Chronic 3	H311 H301 H314 H412	GHS06 GHS05 Dgr	H311 H301 H314 H412			
616-125-00-4	3-cyano-N-(1,1-dimethylethyl)androsta-3,5-diene-17- $\beta$ -carboxamide	415-730-9	151338-11-3	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	410			
616-127-00-5	reaction mass of: N,N'-Ethane-1,2-diylbis(decanamide); 12-Hydroxy-N-[2-[1-oxydecyl]amino]ethyl octadecanamide; N,N'-Ethane-1,2-diylbis(12-hydroxyoctadecanamide)	430-050-2	—	Skin Sens. 1 Aquatic Chronic 2	H317 H411	GHS07 GHS09 Wng	H317 H411			
616-128-00-0	N-(2-(1-allyl-4,5-dicyanoimidazol-2-ylazo)-5-(dipropylamino)phenyl)-acetamide	417-530-7	123590-00-1	Aquatic Chronic 4	H413	—	H413			
616-129-00-6	N,N'-bis(2,2,6,6-tetramethyl-4-piperidyl)isophthalamide	419-710-0	42774-15-2	Acute Tox. 4 (*) Eye Irrit. 2	H302 H319	GHS07 Wng	H302 H319			
616-130-00-1	N-(3-(2-(4,4-dimethyl-2,5-dioxoimidazolin-1-yl)-4,4-dimethyl-3-oxo-pentanoylamino)-4-methoxy-phenyl)-octadecanamide	421-780-2	150919-56-5	Aquatic Chronic 4	H413	—	H413			
616-132-00-2	N-[4-(4-cyano-2-furfurylidene-2,5-dihydro-5-oxo-3-furyl)phenyl]butane-1-sulfonamide	423-250-6	130016-98-7	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevaar­klasse en categorie	Gevaar­aan­duiding	Pictogram, sig­naal­woord	Gevaar­aan­duiding	Aanvullende gevaar­aan­duiding		
616-133-00-8	N-cyclohexyl-S,S-dioxobenzo[b]tiophene-2-carboxamide	423-990-1	149118-66-1	Acute Tox. 4 (*) Eye Dam. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H318 H400 H410	GHS05 GHS07 GHS09 Dgr	H302 H318 H410			
616-134-00-3	3,3'-bis(dioctyloxyphosphinothioylthio)-N,N'-oxybis(methylene)dipropionamide	401-820-5	793710-14-2	Aquatic Chronic 3	H412	—	H412			
616-135-00-9	(3S,4aS,8aS)-2-[(2R,3S)-3-amino-2-hydroxy-4-phenylbutyl]-N-tert-butyldecahydroisoquinoline-3-carboxamide	430-230-0	136522-17-3	Acute Tox. 4 (*) Aquatic Chronic 3	H302 H412	GHS07 Wng	H302 H412			
616-142-00-7	1,3-Bis(vinylsulfonylacetamido)propane	428-350-3	93629-90-4	Muta. 2 Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 3	H341 H318 H317 H412	GHS08 GHS05 GHS07 Dgr	H341 H318 H317 H412			
616-143-00-2	N,N'-dihexadecyl-N,N'-bis(2-hydroxyethyl)propanediamide	422-560-9	149591-38-8	Repr. 2 Eye Irrit. 2 Aquatic Chronic 4	H361f (**) H319 H413	GHS08 Wng	H361f (***) H319 H413			
617-001-00-2	di-tert-butyl peroxide	203-733-6	110-05-4	Org. Perox. E Flam. Liq. 2	H242 H225	GHS02 Dgr	H242 H225			
617-002-00-8	α, α-dimethylbenzyl hydroperoxide; cumene hydroperoxide	201-254-7	80-15-9	Org. Perox. E Acute Tox. 3 (*) Acute Tox. 4 (*) Acute Tox. 4 (*) STOT RE 2 (*) Skin Corr. 1B Aquatic Chronic 2	H242 H331 H312 H302 H373 (**) H314 H411	GHS02 GHS06 GHS08 GHS05 GHS09 Dgr	H242 H331 H312 H302 H373 (**) H314 H411	Skin Corr. 1B; H314: C ≥ 10 % Skin Irrit. 2; H315: 3 % ≤ C < 10 % Eye Dam. 1; H318: 3 % ≤ C < 10 % Eye Irrit. 2; H319: 1 % ≤ C < 3 % STOT SE 3; H335: C < 10 %		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
617-003-00-3	dilauroyl peroxide	203-326-3	105-74-8	Org. Perox. D	H242	GHS02 Dgr	H242			
617-004-00-9	1,2,3,4-tetrahydro-1-naphthyl hydroperoxide	212-230-0	771-29-9	Org. Perox. D Acute Tox. 4 (*) Skin Corr. 1B Aquatic Acute 1 Aquatic Chronic 1	H242 H302 H314 H400 H410	GHS02 GHS05 GHS07 GHS09 Dgr	H242 H302 H314 H410		STOT SE 3; H335: C ≥ 5 %	
617-006-00-X	bis(α, α-dimethylbenzyl) peroxide	201-279-3	80-43-3	Org. Perox. F Eye Irrit. 2 Skin Irrit. 2 Aquatic Chronic 2	H242 H319 H315 H411	GHS02 GHS07 GHS09 Wng	H242 H319 H315 H411			
617-007-00-5	tert-butyl α, α-dimethylbenzyl peroxide	222-389-8	3457-61-2	Org. Perox. E Skin Irrit. 2 Aquatic Chronic 2	H242 H315 H411	GHS02 GHS07 GHS09 Wng	H242 H315 H411			
617-008-00-0	dibenzoyl peroxide; benzoyl peroxide	202-327-6	94-36-0	Org. Perox. B Eye Irrit. 2 Skin Sens. 1	H241 H319 H317	GHS01 GHS02 GHS07 Wng	H241 H319 H317			T
617-010-00-1	1-hydroperoxycyclohexyl 1-hydroxycyclohexyl peroxide; [1] 1,1'-dioxybiscyclohexan-1-ol; [2] cyclohexylidene hydroperoxide; [3] cyclohexanone, peroxide [4] [> 91 % solution]	201-091-1 [1] 219-306-2 [2] 220-279-4 [3] 235-527-7 [4]	78-18-2 [1] 2407-94-5 [2] 2699-11-8 [3] 12262-58-7 [4]	Org. Perox. A Acute Tox. 4 (*) Skin Corr. 1B	H240 H302 H314	GHS01 GHS05 GHS07 Dgr	H240 H302 H314		STOT SE 3; H335: C ≥ 5 %	C T

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
617-010-01-9	1-hydroperoxycyclohexyl 1-hydroxycyclohexyl peroxide; [1] 1,1'-dioxybiscyclohexan-1-ol; [2] cyclohexylidene hydroperoxide; [3] cyclohexanone, peroxide [4] [≤ 91 % solution]	201-091-1 [1] 219-306-2 [2] 220-279-4 [3] 235-527-7 [4]	78-18-2 [1] 2407-94-5 [2] 2699-11-8 [3] 12262-58-7 [4]	Org. Perox. C Acute Tox. 4 (*) Skin Corr. 1B	H242 H302 H314	GHS02 GHS05 GHS07 Dgr	H242 H302 H314		STOT SE 3; H335: C ≥ 5 %	C T
617-012-00-2	8- <i>p</i> -menthyl hydroperoxide; <i>p</i> -menthane hydroperoxide	201-281-4	80-47-7	Org. Perox. D Skin Corr. 1B Acute Tox. 4 *	H242 H314 H332	GHS02 GHS05 GHS07 Dgr	H242 H314 H332		STOT SE 3; H335: C ≥ 5 %	
617-013-00-8	O,O— <i>tert</i> -butyl O-docosyl monoperoxyoxalate	404-300-6	116753-76-5	Org. Perox. C (****) Aquatic Acute 1 Aquatic Chronic 1	H242 H400 H410	GHS02 GHS09 Dgr	H242 H410			
617-014-00-3	6-(nonylamino)-6-oxo-peroxyhexanoic acid	406-680-9	104788-63-8	Org. Perox. C (****) Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1	H242 H318 H317 H400	GHS02 GHS05 GHS07 GHS09 Dgr	H242 H318 H317 H400			
617-015-00-9	bis(4-methylbenzoyl)peroxide	407-950-9	895-85-2	Org. Perox. B (****) Aquatic Acute 1 Aquatic Chronic 1	H241 H400 H410	GHS01 GHS02 GHS09 Dgr	H241 H410			
617-016-00-4	3-hydroxy-1,1-dimethylbutyl 2-ethyl-2-methylheptaneperoxoate	413-910-1	—	Org. Perox. C (****) Flam. Liq. 3 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H242 H226 H315 H400 H410	GHS02 GHS07 GHS09 Dgr	H242 H226 H315 H410			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
617-017-00-X	reaction mass of: 2,2'-bis( <i>tert</i> -pentylperoxy)- <i>p</i> -diisopropylbenzene; 2,2'-bis( <i>tert</i> -pentylperoxy)- <i>m</i> -diisopropylbenzene	412-140-3	32144-25-5	Org. Perox. D ( <sup>***</sup> ) Aquatic Chronic 4	H242 H413	GHS02 Dgr	H242 H413			T
617-018-00-5	reaction mass of: 1-methyl-1-(3-(1-methylethyl)phenyl)ethyl-1-methyl-1-phenylethylperoxide, 63 % by weight; 1-methyl-1-(4-(1-methylethyl)phenyl)ethyl-1-methyl-1-phenylethylperoxide, 31 % by weight	410-840-3	71566-50-2	Org. Perox. C ( <sup>***</sup> ) Aquatic Chronic 2	H242 H411	GHS02 GHS09 Dgr	H242 H411			T
617-019-00-0	6-(phthalimido)peroxyhexanoic acid	410-850-8	128275-31-0	Org. Perox. D Eye Dam. 1 Aquatic Acute 1	H242 H318 H400	GHS02 GHS05 GHS09 DgDgr	H242 H318 H400			T
617-020-00-6	1,3-di(prop-2,2-diy)benzene bis(neodecanoylperoxide)	420-060-5	117663-11-3	Flam. Liq. 3 Org. Perox. D ( <sup>***</sup> ) Aquatic Chronic 2	H226 H242 H411	GHS02 GHS09 Dgr	H226 H242 H411			
647-001-00-8	glucosidase, $\beta$ -	232-589-7	9001-22-3	Resp. Sens. 1	H334	GHS08 Dgr	H334			
647-002-00-3	cellulase	232-734-4	9012-54-8	Resp. Sens. 1	H334	GHS08 Dgr	H334			
647-003-00-9	cellobiohydrolase, exo-	253-465-9	37329-65-0	Resp. Sens. 1	H334	GHS08 Dgr	H334			
647-004-00-4	cellulases with the exception of those specified elsewhere in this Annex	—	—	Resp. Sens. 1	H334	GHS08 Dgr	H334			A
647-005-00-X	bromelain, juice	232-572-4	9001-00-7	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Resp. Sens. 1	H319 H335 H315 H334	GHS08 GHS07 Dgr	H319 H335 H315 H334			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etiketgeving			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
647-006-00-5	ficin	232-599-1	9001-33-6	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Resp. Sens. 1	H319 H335 H315 H334	GHS08 GHS07 Dgr	H319 H335 H315 H334			
647-007-00-0	papain	232-627-2	9001-73-4	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Resp. Sens. 1	H319 H335 H315 H334	GHS08 GHS07 Dgr	H319 H335 H315 H334			
647-008-00-6	pepsin A	232-629-3	9001-75-6	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Resp. Sens. 1	H319 H335 H315 H334	GHS08 GHS07 Dgr	H319 H335 H315 H334			
647-009-00-1	rennin	232-645-0	9001-98-3	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Resp. Sens. 1	H319 H335 H315 H334	GHS08 GHS07 Dgr	H319 H335 H315 H334			
647-010-00-7	trypsin	232-650-8	9002-07-7	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Resp. Sens. 1	H319 H335 H315 H334	GHS08 GHS07 Dgr	H319 H335 H315 H334			
647-011-00-2	chymotrypsin	232-671-2	9004-07-3	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Resp. Sens. 1	H319 H335 H315 H334	GHS08 GHS07 Dgr	H319 H335 H315 H334			
647-012-00-8	subtilisin	232-752-2	9014-01-1	STOT SE 3 Skin Irrit. 2 Eye Dam. 1 Resp. Sens. 1	H335 H315 H318 H334	GHS08 GHS05 GHS07 Dgr	H335 H315 H318 H334			



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
647-013-00-3	proteïnase, microbial neutral	232-966-6	9068-59-1	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Resp. Sens. 1	H319 H335 H315 H334	GHS08 GHS07 Dgr	H319 H335 H315 H334			
647-014-00-9	proteases with the exception of those specified elsewhere in this Annex	—	—	Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Resp. Sens. 1	H319 H335 H315 H334	GHS08 GHS07 Dgr	H319 H335 H315 H334			
647-015-00-4	amylase, α-	232-565-6	9000-90-2	Resp. Sens. 1	H334	GHS08 Dgr	H334			
647-016-00-X	amylases with the exception of those specified elsewhere in this Annex	—	—	Resp. Sens. 1	H334	GHS08 Dgr	H334			
648-001-00-0	Distillates (coal tar), benzole fraction; Light Oil; [A complex combination of hydrocarbons obtained by the distillation of coal tar. It consists of hydrocarbons having carbon numbers primarily in the range of C <sub>4</sub> to C <sub>10</sub> and distilling in the approximate range of 80 °C to 160 °C (175°F to 320°F).]	283-482-7	84650-02-2	Carc. 1B	H350	GHS08 Dgr	H350			H
648-002-00-6	Tar oils, brown-coal; Light Oil; [The distillate from lignite tar boiling in the range of approximately 80 °C to 250 °C (176°F to 482°F). Composed primarily of aliphatic and aromatic hydrocarbons and monobasic phenols.]	302-674-4	94114-40-6	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-003-00-1	Benzol forerunnings (coal); Light Oil Redistillate, low boiling; [The distillate from coke oven light oil having an approximate distillation range below 100 °C (212°F). Composed primarily of C <sub>4</sub> to C <sub>6</sub> aliphatic hydrocarbons.]	266-023-5	65996-88-5	Carc. 1B	H350	GHS08 Dgr	H350			H J

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
648-004-00-7	Distillates (coal tar), benzole fraction, BTX-rich; Light Oil Redistillate, low boiling; [A residue from the distillation of crude benzole to remove benzole fronts. Composed primarily of benzene, toluene and xylenes boiling in the range of approximately 75 °C to 200 °C (167°F to 392°F).]	309-984-9	101896-26-8	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-005-00-2	Aromatic hydrocarbons, C <sub>6-10</sub> , C <sub>8</sub> -rich; Light Oil Redistillate, low boiling	292-697-5	90989-41-6	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-006-00-8	Solvent naphtha (coal), light; Light Oil Redistillate, low boiling	287-498-5	85536-17-0	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-007-00-3	Solvent naphtha (coal), xylene-styrene cut; Light Oil Redistillate, intermediate boiling	287-502-5	85536-20-5	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-008-00-9	Solvent naphtha (coal), coumarone-styrene contg.; Light Oil Redistillate, intermediate boiling	287-500-4	85536-19-2	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-009-00-4	Naphtha (coal), distn. residues; Light Oil Redistillate, high boiling; [The residue remaining from the distillation of recovered naphtha. Composed primarily of naphthalene and condensation products of indene and styrene.]	292-636-2	90641-12-6	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-010-00-X	Aromatic hydrocarbons, C <sub>8</sub> ; Light Oil Redistillate, high boiling	292-694-9	90989-38-1	Carc. 1B	H350	GHS08 Dgr	H350			H J

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
648-012-00-0	Aromatic hydrocarbons, C <sub>8-9</sub> , hydrocarbon resin polymn. by-product; Light Oil Redistillate, high boiling; [A complex combination of hydrocarbons obtained from the evaporation of solvent under vacuum from polymerized hydrocarbon resin. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>8</sub> through C <sub>9</sub> and boiling in the range of approximately 120 °C to 215 °C (248°F to 419°F).]	295-281-1	91995-20-9	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-013-00-6	Aromatic hydrocarbons, C <sub>9-12</sub> , benzene distn.; Light Oil Redistillate, high boiling	295-551-9	92062-36-7	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-014-00-1	Extract residues (coal), benzole fraction alk., acid ext.; Light Oil Extract Residues, low boiling; [The redistillate from the distillate, freed of tar acids and tar bases, from bituminous coal high temperature tar boiling in the approximate range of 90 °C to 160 °C (194°F to 320°F). It consists predominantly of benzene, toluene and xylenes.]	295-323-9	91995-61-8	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-015-00-7	Extract residues (coal tar), benzole fraction alk., acid ext.; Light Oil Extract Residues, low boiling; [A complex combination of hydrocarbons obtained by the redistillation of the distillate of high temperature coal tar (tar acid and tar base free). It consists predominantly of unsubstituted and substituted mononuclear aromatic hydrocarbons boiling in the range of 85 °C-195 °C (185°F-383°F).]	309-868-8	101316-63-6	Carc. 1B	H350	GHS08 Dgr	H350			H J

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
648-016-00-2	Extract residues (coal), benzole fraction acid; Light Oil Extract Residues, low boiling; [An acid sludge by-product of the sulphuric acid refining of crude high temperature coal. Composed primarily of sulfuric acid and organic compounds.]	298-725-2	93821-38-6	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-017-00-8	Extract residues (coal), light oil alk., distrn. overheads; Light Oil Extract Residues, low boiling; [The first fraction from the distillation of aromatic hydrocarbons, coumarone, naphthalene and indene rich prefractionator bottoms or washed carbolic oil boiling substantially below 145 °C (293°F). Composed primarily of C <sub>7</sub> and C <sub>8</sub> aliphatic and aromatic hydrocarbons.]	292-625-2	90641-02-4	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-018-00-3	Extract residues (coal), light oil alk., acid ext., indene fraction; Light Oil Extract Residues, intermediate boiling	309-867-2	101316-62-5	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-019-00-9	Extract residues (coal), light oil alk., indene naphtha fraction; Light Oil Extract Residues, high boiling; [The distillate from aromatic hydrocarbons, coumarone, naphthalene and indene rich prefractionator bottoms or washed carbolic oils, having an approximate boiling range of 155 °C to 180 °C (311°F to 356°F). Composed primarily of indene, indan and trimethylbenzenes.]	292-626-8	90641-03-5	Carc. 1B	H350	GHS08 Dgr	H350			H J

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
648-020-00-4	Solvent naphtha (coal); Light Oil Extract Residues, high boiling; [The distillate from either high temperature coal tar, coke oven light oil, or coal tar oil alkaline extract residue having an approximate distillation range of 130 °C to 210 °C (266°F to 410°F) Composed primarily of indene and other polycyclic ring systems containing a single aromatic ring. May contain phenolic compounds and aromatic nitrogen bases.]	266-013-0	65996-79-4	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-021-00-X	Distillates (coal tar), light oils, neutral fraction; Light Oil Extract Residues, high boiling; [A distillate from the fractional distillation of high temperature coal tar. Composed primarily of alkyl-substituted one ring aromatic hydrocarbons boiling in the range of approximately 135 °C to 210 °C (275°F to 410°F). May also include unsaturated hydrocarbons such as indene and coumarone.]	309-971-8	101794-90-5	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-022-00-5	Distillates (coal tar), light oils, acid exts.; Light Oil Extract Residues, high boiling; [This oil is a complex mixture of aromatic hydrocarbons, primarily indene, naphthalene, coumarone, phenol, and <i>o</i> -, <i>m</i> - and <i>p</i> -cresol and boiling in the range of 140 °C to 215 °C (284°F to 419°F).]	292-609-5	90640-87-2	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-023-00-0	Distillates (coal tar), light oils; Carbolic Oil; [A complex combination of hydrocarbons obtained by distillation of coal tar. It consists of aromatic and other hydrocarbons, phenolic compounds and aromatic nitrogen compounds and distills at the approximate range of 150 °C to 210 °C (302°F to 410°F).]	283-483-2	84650-03-3	Carc. 1B	H350	GHS08 Dgr	H350			H J

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
648-024-00-6	Tar oils, coal; Carbolic Oil; [The distillate from high temperature coal tar having an approximate distillation range of 130 °C to 250 °C (266°F to 410°F). Composed primarily of naphthalene, alkyl-naphthalenes, phenolic compounds, and aromatic nitrogen bases.]	266-016-7	65996-82-9	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-026-00-7	Extract residues (coal), light oil alk., acid ext.; Carbolic Oil Extract Residue; [The oil resulting from the acid washing of alkali-washed carbolic oil to remove the minor amounts of basic compounds (tar bases). Composed primarily of indene, indan and alkylbenzenes.]	292-624-7	90641-01-3	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-027-00-2	Extract residues (coal), tar oil alk.; Carbolic Oil Extract Residue; [The residue obtained from coal tar oil by an alkaline wash such as aqueous sodium hydroxide after the removal of crude coal tar acids. Composed primarily of naphthalenes and aromatic nitrogen bases.]	266-021-4	65996-87-4	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-028-00-8	Extract oils (coal), light oil; Acid Extract; [The aqueous extract produced by an acidic wash of alkali-washed carbolic oil. Composed primarily of acid salts of various aromatic nitrogen bases including pyridine, quinoline and their alkyl derivatives.]	292-622-6	90640-99-6	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-029-00-3	Pyridine, alkyl derivs.; Crude Tar Bases; [The complex combination of polyalkylated pyridines derived from coal tar distillation or as high-boiling distillates approximately above 150 °C (302°F) from the reaction of ammonia with acetaldehyde, formaldehyde or paraformaldehyde.]	269-929-9	68391-11-7	Carc. 1B	H350	GHS08 Dgr	H350			H J

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
648-030-00-9	Tar bases, coal, picoline fraction; Distillate Bases; [Pyridine bases boiling in the range of approximately 125 °C to 160 °C (257°F to 320°F) obtained by distillation of neutralized acid extract of the base-containing tar fraction obtained by the distillation of bituminous coal tars. Composed chiefly of lutidines and picolines.]	295-548-2	92062-33-4	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-031-00-4	Tar bases, coal, lutidine fraction; Distillate Bases	293-766-2	91082-52-9	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-032-00-X	Extract oils (coal), tar base, collidine fraction; Distillate Bases; [The extract produced by the acidic extraction of bases from crude coal tar aromatic oils, neutralization, and distillation of the bases. Composed primarily of collidines, aniline, toluidines, lutidines, xylidines.]	273-077-3	68937-63-3	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-033-00-5	Tar bases, coal, collidine fraction; Distillate Bases; [The distillation fraction boiling in the range of approximately 181 °C to 186 °C (356°F to 367°F) from the crude bases obtained from the neutralized, acid-extracted base-containing tar fractions obtained by the distillation of bituminous coal tar. It contains chiefly aniline and collidines.]	295-543-5	92062-28-7	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-034-00-0	Tar bases, coal, aniline fraction; Distillate Bases; [The distillation fraction boiling in the range of approximately 180 °C to 200 °C (356°F to 392°F) from the crude bases obtained by dephenolating and debasing the carbolated oil from the distillation of coal tar. It contains chiefly aniline, collidines, lutidines and toluidines.]	295-541-4	92062-27-6	Carc. 1B	H350	GHS08 Dgr	H350			H J

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
648-035-00-6	Tar bases, coal, toluidine fraction; Distillate Bases	293-767-8	91082-53-0	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-036-00-1	Distillates (petroleum), alkene-alkyne manuf. pyrolysis oil, mixed with high-temp. coal tar, indene fraction; Redistillates; [A complex combination of hydrocarbons obtained as a redistillate from the fractional distillation of bituminous coal high temperature tar and residual oils that are obtained by the pyrolytic production of alkenes and alkynes from petroleum products or natural gas. It consists predominantly of indene and boils in a range of approximately 160 °C to 190 °C (320°F to 374°F).]	295-292-1	91995-31-2	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-037-00-7	Distillates (coal), coal tar-residual pyrolysis oils, naphthalene oils; Redistillates; [The redistillate obtained from the fractional distillation of bituminous coal high temperature tar and pyrolysis residual oils and boiling in the range of approximately 190 °C to 270 °C (374°F to 518°F). Composed primarily of substituted dinuclear aromatics.]	295-295-8	91995-35-6	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-038-00-2	Extract oils (coal), coal tar-residual pyrolysis oils, naphthalene oil, redistillate; Redistillates; [The redistillate from the fractional distillation of dephenolated and debased methyl-naphthalene oil obtained from bituminous coal high temperature tar and pyrolysis residual oils boiling in the approximate range of 220 °C to 230 °C (428°F to 446°F). It consists predominantly of unsubstituted and substituted dinuclear aromatic hydrocarbons.]	295-329-1	91995-66-3	Carc. 1B	H350	GHS08 Dgr	H350			H J



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
648-039-00-8	Extract oils (coal), coal tar-residual pyrolysis oils, naphthalene oils; Redistillates; [A neutral oil obtained by debasing and dephenolating the oil obtained from the distillation of high temperature tar and pyrolysis residual oils which has a boiling range of 225 °C to 255 °C (437°F to 491°F). Composed primarily of substituted dinuclear aromatic hydrocarbons.]	310-170-0	122070-79-5	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-040-00-3	Extract oils (coal), coal tar residual pyrolysis oils, naphthalene oil, distn. residues; Redistillates; [Residue from the distillation of dephenolated and debased methylnaphthalene oil (from bituminous coal tar and pyrolysis residual oils) with a boiling range of 240 °C to 260 °C (464°F to 500°F). Composed primarily of substituted dinuclear aromatic and heterocyclic hydrocarbons.]	310-171-6	122070-80-8	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-041-00-9	Absorption oils, bicyclo arom. and heterocyclic hydrocarbon fraction; Wash Oil Redistillate; [A complex combination of hydrocarbons obtained as a redistillate from the distillation of wash oil. It consists predominantly of 2-ringed aromatic and heterocyclic hydrocarbons boiling in the range of approximately 260 °C to 290 °C (500°F to 554°F).]	309-851-5	101316-45-4	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-042-00-4	Distillates (coal tar), upper, fluorene-rich; Wash Oil Redistillate; [A complex combination of hydrocarbons obtained by the crystallization of tar oil. It consists of aromatic and polycyclic hydrocarbons primarily fluorene and some acenaphthene.]	284-900-0	84989-11-7	Carc. 1B	H350	GHS08 Dgr	H350			H M

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
648-043-00-X	Creosote oil, acenaphthene fraction, acenaphthene-free; Wash Oil Redistillate; [The oil remaining after removal by a crystallization process of acenaphthene from acenaphthene oil from coal tar. Composed primarily of naphthalene and alkylnaphthalenes.]	292-606-9	90640-85-0	Carc. 1B	H350	GHS08 Dgr	H350			H
648-044-00-5	Distillates (coal tar), heavy oils; Heavy Anthracene Oil; [Distillate from the fractional distillation of coal tar of bituminous coal, with boiling range of 240 °C to 400 °C (464°F to 752°F). Composed primarily of tri- and polynuclear hydrocarbons and heterocyclic compounds.]	292-607-4	90640-86-1	Carc. 1B	H350	GHS08 Dgr	H350			H
648-045-00-0	Distillates (coal tar), upper; Heavy Anthracene Oil; [The distillate from coal tar having an approximate distillation range of 220 °C to 450 °C (428°F to 842°F). Composed primarily of three to four membered condensed ring aromatic hydrocarbons and other hydrocarbons.]	266-026-1	65996-91-0	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-046-00-6	Anthracene oil, acid ext.; Anthracene Oil Extract Residue; [A complex combination of hydrocarbons from the base-free fraction obtained from the distillation of coal tar and boiling in the range of approximately 325 °C to 365 °C (617°F to 689°F). It contains predominantly anthracene and phenanthrene and their alkyl derivatives.]	295-274-3	91995-14-1	Carc. 1B	H350	GHS08 Dgr	H350			H M

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
648-047-00-1	Distillates (coal tar); Heavy Anthracene Oil; [The distillate from coal tar having an approximate distillation range of 100 °C to 450 °C (212°F to 842°F). Composed primarily of two to four membered condensed ring aromatic hydrocarbons, phenolic compounds, and aromatic nitrogen bases.]	266-027-7	65996-92-1	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-048-00-7	Distillates (coal tar), pitch, heavy oils; Heavy Anthracene Oil; [The distillate from the distillation of the pitch obtained from bituminous high temperature tar. Composed primarily of tri- and polynuclear aromatic hydrocarbons and boiling in the range of approximately 300 °C to 470 °C (572°F to 878°F). The product may also contain heteroatoms.]	295-312-9	91995-51-6	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-049-00-2	Distillates (coal tar), pitch; Heavy Anthracene Oil; [The oil obtained from condensation of the vapors from the heat treatment of pitch. Composed primarily of two- to four-ring aromatic compounds boiling in the range of 200 °C to greater than 400 °C (392°F to greater than 752°F).]	309-855-7	101316-49-8	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-050-00-8	Distillates (coal tar), heavy oils, pyrene fraction; Heavy Anthracene Oil Redistillate; [The redistillate obtained from the fractional distillation of pitch distillate boiling in the range of approximately 350 °C to 400 °C (662°F to 752°F). Consists predominantly of tri- and polynuclear aromatics and heterocyclic hydrocarbons.]	295-304-5	91995-42-5	Carc. 1B	H350	GHS08 Dgr	H350			H M

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
648-051-00-3	Distillates (coal tar), pitch, pyrene fraction; Heavy Anthracene Oil Redistillate; [The redistillate obtained from the fractional distillation of pitch distillate and boiling in the range of approximately 380 °C to 410 °C (7160 to 770°F). Composed primarily of tri- and polynuclear aromatic hydrocarbons and heterocyclic compounds.]	295-313-4	91995-52-7	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-052-00-9	Paraffin waxes (coal), brown-coal high-temp. tar, carbon-treated; Coal Tar Extract; [A complet combination of hydrocarbons obtained by the treatment of lignite carbonization tar with activated carbon for removal of trace constituents and impurities. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C <sub>12</sub> .]	308-296-6	97926-76-6	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-053-00-4	Paraffin waxes (coal), brown-coal high-temp tar, clay-treated; Coal Tar Extract; [A complex combination of hydrocarbons obtained by the treatment of lignite carbonization tar with bentonite for removal of trace constituents and impurities. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C <sub>12</sub> .]	308-297-1	97926-77-7	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-054-00-X	Pitch; Pitch	263-072-4	61789-60-4	Carc. 1B	H350	GHS08 Dgr	H350			H M

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
648-055-00-5	Pitch, coal tar, high-temp.; Pitch; [The residue from the distillation of high temperature coal tar. A black solid with an approximate softening point from 30 °C to 180 °C (86°F to 356°F). Composed primarily of a complex mixture of three or more membered condensed ring aromatic hydrocarbons.]	266-028-2	65996-93-2	Carc. 1B	H350	GHS08 Dgr	H350			H
648-056-00-0	Pitch, coal tar, high-temp., heat-treated; Pitch; [The heat treated residue from the distillation of high temperature coal tar. A black solid with an approximate softening point from 80 °C to 180 °C (176°F to 356°F). Composed primarily of a complex mixture of three or more membered condensed ring aromatic hydrocarbons.]	310-162-7	121575-60-8	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-057-00-6	Pitch, coal tar, high-temp., secondary; Pitch Redistillate; [The residue obtained during the distillation of high boiling fractions from bituminous coal high temperature tar and/or pitch coke oil, with a softening point of 140 °C to 170 °C (284°F to 392°F) according to DIN 52025. Composed primarily of tri- and polynuclear aromatic compounds which also contain heteroatoms.]	302-650-3	94114-13-3	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-058-00-1	Residues (coal tar), pitch distn.; Pitch Redistillate; [Residue from the fractional distillation of pitch distillate boiling in the range of approximately 400 °C to 470 °C (752°F to 846°F). Composed primarily of polynuclear aromatic hydrocarbons, and heterocyclic compounds.]	295-507-9	92061-94-4	Carc. 1B	H350	GHS08 Dgr	H350			H M

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
648-059-00-7	Tar, coal, high-temp., distn. and storage residues; Coal Tar Solids Residue; [Coke- and ash-containing solid residues that separate on distillation and thermal treatment of bituminous coal high temperature tar in distillation installations and storage vessels. Consists predominantly of carbon and contains a small quantity of hetero compounds as well as ash components.]	295-535-1	92062-20-9	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-060-00-2	Tar, coal, storage residues; Coal Tar Solids Residue; [The deposit removed from crude coal tar storages. Composed primarily of coal tar and carbonaceous particulate matter.]	293-764-1	91082-50-7	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-061-00-8	Tar, coal, high-temp., residues; Coal Tar Solids Residue; [Solids formed during the coking of bituminous coal to produce crude bituminous coal high temperature tar. Composed primarily of coke and coal particles, highly aromatized compounds and mineral substances.]	309-726-5	100684-51-3	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-062-00-3	Tar, coal, high-temp., high-solids; Coal Tar Solids Residue; [The condensation product obtained by cooling, to approximately ambient temperature, the gas evolved in the high temperature (greater than 700 °C (1292°F)) destructive distillation of coal. Composed primarily of a complex mixture of condensed ring aromatic hydrocarbons with a high solid content of coal-type materials.]	273-615-7	68990-61-4	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-063-00-9	Waste solids, coal-tar pitch coking; Coal Tar Solids Residue; [The combination of wastes formed by the coking of bituminous coal tar pitch. It consists predominantly of carbon.]	295-549-8	92062-34-5	Carc. 1B	H350	GHS08 Dgr	H350			H M

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
648-064-00-4	Extract residues (coal), brown; Coal Tar Extract; [The residue from extraction of dried coal.]	294-285-0	91697-23-3	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-065-00-X	Paraffin waxes (coal), brown-coal-high-temp. tar; Coal Tar Extract; [A complex combination of hydrocarbons obtained from lignite carbonization tar by solvent crystallisation (solvent deoiling), by sweating or an adducting process. It consists predominantly of straight and branched chain saturated hydrocarbons having carbon numbers predominantly greater than C <sub>12</sub> .]	295-454-1	92045-71-1	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-066-00-5	Paraffin waxes (coal), brown-coal-high-temp. tar, hydrotreated; Coal Tar Extract; [A complex combination of hydrocarbons obtained from lignite carbonization tar by solvent crystallisation (solvent deoiling), by sweating or an adducting process treated with hydrogen in the presence of a catalyst. It consists predominantly of straight and branched chain saturated hydrocarbons having carbon numbers predominantly greater than C <sub>12</sub> .]	295-455-7	92045-72-2	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-067-00-0	Paraffin waxes (coal), brown-coal high-temp tar, silicic acid-treated; Coal Tar Extract; [A complex combination of hydrocarbons obtained by the treatment of lignite carbonization tar with silicic acid for removal of trace constituents and impurities. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C <sub>12</sub> .]	308-298-7	97926-78-8	Carc. 1B	H350	GHS08 Dgr	H350			H M

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
648-068-00-6	Tar, coal, low-temp., distn. residues; Tar Oil, intermediate boiling; [Residues from fractional distillation of low temperature coal tar to remove oils that boil in a range up to approximately 300 °C (572°F). Composed primarily of aromatic compounds.]	309-887-1	101316-85-2	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-069-00-1	Pitch, coal tar, low-temp; Pitch Residue; [A complex black solid or semi-solid obtained from the distillation of a low temperature coal tar. It has a softening point within the approximate range of 40 °C to 180 °C (104°F to 356°F). Composed primarily of a complex mixture of hydrocarbons.]	292-651-4	90669-57-1	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-070-00-7	Pitch, coal tar, low-temp., oxidized; Pitch Residue, oxidised; [The product obtained by air-blowing, at elevated temperature, low-temperature coal tar pitch. It has a softening-point within the approximate range of 70 °C to 180 °C (158°F to 356°F). Composed primarily of a complex mixture of hydrocarbons.]	292-654-0	90669-59-3	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-071-00-2	Pitch, coal tar, low-temp., heat-treated; Pitch Residue, oxidised; Pitch Residue, heat-treated; [A complex black solid obtained by the heat treatment of low temperature coal tar pitch. It has a softening point within the approximate range of 50 °C to 140 °C (122°F to 284°F). Composed primarily of a complex mixture of aromatic compounds.]	292-653-5	90669-58-2	Carc. 1B	H350	GHS08 Dgr	H350			H M



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
648-072-00-8	Distillates (coal-petroleum), condensed-ring arom; Distillates; [The distillate from a mixture of coal and tar and aromatic petroleum streams having an approximate distillation range of 220 °C to 450 °C (428°F to 842°F). Composed primarily of 3- to 4-membered condensed ring aromatic hydrocarbons.]	269-159-3	68188-48-7	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-073-00-3	Aromatic hydrocarbons, C <sub>20-28</sub> , polycyclic, mixed coal-tar pitch-polyethylene-polypropylene pyrolysis-derived; Pyrolysis Products; [A complex combination hydrocarbons obtained from mixed coal tar pitch-polyethylene-polypropylene pyrolysis. Composed primarily of polycyclic aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>28</sub> and having a softening point of 100 °C to 220 °C (212°F to 428°F) according to DIN 52025.]	309-956-6	101794-74-5	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-074-00-9	Aromatic hydrocarbons, C <sub>20-28</sub> , polycyclic, mixed coal-tar pitch-polyethylene pyrolysis-derived; Pyrolysis Products; [A complex combination of hydrocarbons obtained from mixed coal tar pitch-polyethylene pyrolysis. Composed primarily of polycyclic aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>28</sub> and having a softening point of 100 °C to 220 °C (212°F to 428°F) according to DIN 52025.]	309-957-1	101794-75-6	Carc. 1B	H350	GHS08 Dgr	H350			H M

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
648-075-00-4	Aromatic hydrocarbons, C <sub>20-28</sub> , polycyclic, mixed coal-tar pitch-polystyrene pyrolysis-derived; Pyrolysis Products; [A complex combination of hydrocarbons obtained from mixed coal tar pitch-polystyrene pyrolysis. Composed primarily of polycyclic aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>28</sub> and having a softening point of 100 °C to 220 °C (212°F to 428°F) according to DIN 52025.]	309-958-7	101794-76-7	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-076-00-X	Pitch, coal tar-petroleum; Pitch Residues; [The residue from the distillation of a mixture of coal tar and aromatic petroleum streams. A solid with a softening point from 40 °C to 180 °C (140°F to 356°F). Composed primarily of a complex combination of three or more membered condensed ring aromatic hydrocarbons.]	269-109-0	68187-57-5	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-077-00-5	Phenanthrene, distn. residues; Heavy Anthracene Oil Redistillate; [Residue from the distillation of crude phenanthrene boiling in the approximate range of 340 °C to 420 °C (644°F to 788°F). It consists predominantly of phenanthrene, anthracene and carbazole.]	310-169-5	122070-78-4	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-078-00-0	Distillates (coal tar), upper, fluorene-free; Wash Oil Redistillate; [A complex combination of hydrocarbons obtained by the crystallization of tar oil. It consists of aromatic polycyclic hydrocarbons, primarily diphenyl, dibenzofuran and acenaphthene.]	284-899-7	84989-10-6	Carc. 1B	H350	GHS08 Dgr	H350			H M

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
648-079-00-6	Anthracene oil; Anthracene oil; [A complex combination of polycyclic aromatic hydrocarbons obtained from coal tar having an approximate distillation range of 300 °C to 400 °C (572°F to 752°F). Composed primarily of phenanthrene, anthracene and carbazole.]	292-602-7	90640-80-5	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-080-00-1	Residues (coal tar), creosote oil distn.; Wash Oil Redistillate; [The residue from the fractional distillation of wash oil boiling in the approximate range of 270 °C to 330 °C (518°F to 626°F). It consists predominantly of dinuclear aromatic and heterocyclic hydrocarbons.]	295-506-3	92061-93-3	Carc. 1B	H350	GHS08 Dgr	H350			H
648-081-00-7	Tar, coal; Coal tar; [The by-product from the destructive distillation of coal. Almost black semisolid. A complex combination of aromatic hydrocarbons, phenolic compounds, nitrogen bases and thiophene.]	232-361-7	8007-45-2	Carc. 1A	H350	GHS08 Dgr	H350			H
648-082-00-2	Tar, coal, high-temp.; Coal tar; [The condensation product obtained by cooling, to approximately ambient temperature, the gas evolved in the high temperature (greater than 700 °C (1292°F)) destructive distillation of coal. A black viscous liquid denser than water. Composed primarily of a complex mixture of condensed ring aromatic hydrocarbons. May contain minor amounts of phenolic compounds and aromatic nitrogen bases.]	266-024-0	65996-89-6	Carc. 1A	H350	GHS08 Dgr	H350			H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
648-083-00-8	Tar, coal, low-temp.; Coal oil; [The condensation product obtained by cooling, to approximately ambient temperature, the gas evolved in low temperature (less than 700 °C (1292°F)) destructive distillation of coal. A black viscous liquid denser than water. Composed primarily of condensed ring aromatic hydrocarbons, phenolic compounds, aromatic nitrogen bases, and their alkyl derivatives.]	266-025-6	65996-90-9	Carc. 1A	H350	GHS08 Dgr	H350			H
648-084-00-3	Distillates (coal), coke-oven light oil, naphthalene cut; Naphthalene Oil; [The complex combination of hydrocarbons obtained from prefractionation (continuous distillation) of coke oven light oil. It consists predominantly of naphthalene, coumarone and indene and boils above 148 °C (298°F).]	285-076-5	85029-51-2	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-085-00-9	Distillates (coal tar), naphthalene oils; Naphthalene Oil; [A complex combination of hydrocarbons obtained by the distillation of coal tar. It consists primarily of aromatic and other hydrocarbons, phenolic compounds and aromatic nitrogen compounds and distills in the approximate range of 200 °C to 250 °C (392°F to 482°F).]	283-484-8	84650-04-4	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-086-00-4	Distillates (coal tar), naphthalene oils, naphthalene-low; Naphthalene Oil Redistillate; [A complex combination of hydrocarbons obtained by crystallization of naphthalene oil. Composed primarily of naphthalene, alkyl naphthalenes and phenolic compounds.]	284-898-1	84989-09-3	Carc. 1B	H350	GHS08 Dgr	H350			HJM

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
648-087-00-X	Distillates (coal tar), naphthalene oil crystn. mother liquor; Naphthalene Oil Redistillate; [A complex combination of organic compounds obtained as a filtrate from the crystallization of the naphthalene fraction from coal tar and boiling in the range of approximately 200 °C to 230 °C (392°F to 446°F). Contains chiefly naphthalene, thionaphthene and alkyl naphthalenes.]	295-310-8	91995-49-2	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-088-00-5	Extract residues (coal), naphthalene oil, alk.; Naphthalene Oil Extract Residue; [A complex combination of hydrocarbons obtained from the alkali washing of naphthalene oil to remove phenolic compounds (tar acids). It is composed of naphthalene and alkyl naphthalenes.]	310-166-9	121620-47-1	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-089-00-0	Extract residues (coal), naphthalene oil, alk., naphthalene-low; Naphthalene Oil Extract Residue; [A complex combination of hydrocarbons remaining after the removal of naphthalene from alkali-washed naphthalene oil by a crystallization process. It is composed primarily of naphthalene and alkyl naphthalenes.]	310-167-4	121620-48-2	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-090-00-6	Distillates (coal tar), naphthalene oils, naphthalene-free, alk. exts.; Naphthalene Oil Extract Residue; [The oil remaining after the removal of phenolic compounds (tar acids) from drained naphthalene oil by an alkali wash. Composed primarily of naphthalene and alkyl naphthalenes.]	292-612-1	90640-90-7	Carc. 1B	H350	GHS08 Dgr	H350			HJM

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
648-091-00-1	Extract residues (coal), naphthalene oil alk., distn. overheads; Naphthalene Oil Extract Residue; [The distillation from alkali-washed naphthalene oil having an approximate distillation range of 180 °C to 220 °C (356°F to 428°F). Composed primarily of naphthalene, alkylbenzenes, indene and indan.]	292-627-3	90641-04-6	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-092-00-7	Distillates (coal tar), naphthalene oils, methylnaphthalene fraction; Methylnaphthalene Oil; [A distillate from the fractional distillation of high temperature coal tar. Composed primarily of substituted two ring aromatic hydrocarbons and aromatic nitrogen bases boiling in the range of approximately 225 °C to 255 °C (437°F to 491°F).]	309-985-4	101896-27-9	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-093-00-2	Distillates (coal tar), naphthalene oils, indole-methylnaphthalene fraction; Methylnaphthalene Oil; [A distillate from the fractional distillation of high temperature coal tar. Composed primarily of indole and methylnaphthalene boiling in the range of approximately 235 °C to 255 °C (455°F to 491°F).]	309-972-3	101794-91-6	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-094-00-8	Distillates (coal tar), naphthalene oils, acid exts.; Methylnaphthalene Oil Extract Residue; [A complex combination of hydrocarbons obtained by debasing the methylnaphthalene fraction obtained by the distillation of coal tar and boiling in the range of approximately 230 °C to 255 °C (446°F to 491°F). Contains chiefly 1(2)-methylnaphthalene, naphthalene, dimethylnaphthalene and biphenyl.]	295-309-2	91995-48-1	Carc. 1B	H350	GHS08 Dgr	H350			HJM

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
648-095-00-3	Extract residues (coal), naphthalene oil alk., distn. residues; Methylnaphthalene Oil Extract Residue; [The residue from the distillation of alkali-washed naphthalene oil having an approximate distillation range of 220 °C to 300 °C (428°F to 572°F). Composed primarily of naphthalene, alkylnaphthalenes and aromatic nitrogen bases.]	292-628-9	90641-05-7	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-096-00-9	Extract oils (coal), acidic, tar-base free; Methylnaphthalene Oil Extract Residue; [The extract oil boiling in the range of approximately 220 °C to 265 °C (428°F to 509°F) from coal tar alkaline extract residue produced by an acidic wash such as aqueous sulfuric acid after distillation to remove tar bases. Composed primarily of alkylnaphthalenes.]	284-901-6	84989-12-8	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-097-00-4	Distillates (coal tar), benzole fraction, distn. residues; Wash Oil; [A complex combination of hydrocarbons obtained from the distillation of crude benzole (high temperature coal tar). It may be a liquid with the approximate distillation range of 150 °C to 300 °C (302°F to 572°F) or a semi-solid or solid with a melting point up to 70 °C (158°F). It is composed primarily of naphthalene and alkyl naphthalenes.]	310-165-3	121620-46-0	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-098-00-X	Creosote oil, acenaphthene fraction; Wash Oil; [A complex combination of hydrocarbons produced by the distillation of coal tar and boiling in the range of approximately 240 °C to 280 °C (464°F to 536°F). Composed primarily of acenaphthene, naphthalene and alkyl naphthalene.]	292-605-3	90640-84-9	Carc. 1B	H350	GHS08 Dgr	H350			H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
648-099-00-5	Creosote oil; [A complex combination of hydrocarbons obtained by the distillation of coal tar. It consists primarily of aromatic hydrocarbons and may contain appreciable quantities of tar acids and tar bases. It distills at the approximate range of 200 °C to 325 °C (392°F to 617°F).]	263-047-8	61789-28-4	Carc. 1B	H350	GHS08 Dgr	H350			H
648-100-00-9	Creosote oil, high-boiling distillate; Wash Oil; [The high-boiling distillation fraction obtained from the high temperature carbonization of bituminous coal which is further refined to remove excess crystalline salts. It consists primarily of creosote oil with some of the normal polynuclear aromatic salts, which are components of coal tar distillates, removed. It is crystal free at approximately 5 °C (41°F).]	274-565-9	70321-79-8	Carc. 1B	H350	GHS08 Dgr	H350			H
648-101-00-4	Creosote; [The distillate of coal tar produced by the high temperature carbonization of bituminous coal. It consists primarily of aromatic hydrocarbons, tar acids and tar bases.]	232-287-5	8001-58-9	Carc. 1B	H350	GHS08 Dgr	H350			H
648-102-00-X	Extract residues (coal), creosote oil acid; Wash Oil Extract Residue; [A complex combination of hydrocarbons from the base-freed fraction from the distillation of coal tar, boiling in the range of approximately 250 °C to 280 °C (482°F to 536°F). It consists predominantly of biphenyl and isomeric diphenyl naphthalenes.]	310-189-4	122384-77-4	Carc. 1B	H350	GHS08 Dgr	H350			H
648-103-00-5	Anthracene oil, anthracene paste; Anthracene Oil Fraction; [The anthracene-rich solid obtained by the crystallization and centrifuging of anthracene oil. It is composed primarily of anthracene, carbazole and phenanthrene.]	292-603-2	90640-81-6	Carc. 1B	H350	GHS08 Dgr	H350			HJM



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
648-104-00-0	Anthracene oil, anthracene-low; Anthracene Oil Fraction; [The oil remaining after the removal, by a crystallization process, of an anthracene-rich solid (anthracene paste) from anthracene oil. It is composed primarily of two, three and four membered aromatic compounds.]	292-604-8	90640-82-7	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-105-00-6	Residues (coal tar), anthracene oil distn.; Anthracene Oil Fraction; [The residue from the fraction distillation of crude anthracene boiling in the approximate range of 340 °C to 400 °C (644°F to 752°F). It consists predominantly of tri- and polynuclear aromatic and heterocyclic hydrocarbons.]	295-505-8	92061-92-2	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-106-00-1	Anthracene oil, anthracene paste, anthracene fraction; Anthracene Oil Fraction; [A complex combination of hydrocarbons from the distillation of anthracene obtained by the crystallization of anthracene oil from bituminous high temperature tar and boiling in the range of 330 °C to 350 °C (626°F to 662°F). It contains chiefly anthracene, carbazole and phenanthrene.]	295-275-9	91995-15-2	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-107-00-7	Anthracene oil, anthracene paste, carbazole fraction; Anthracene Oil Fraction; [A complex combination of hydrocarbons from the distillation of anthracene obtained by crystallization of anthracene oil from bituminous coal high temperature tar and boiling in the approximate range of 350 °C to 360 °C (662°F to 680°F). It contains chiefly anthracene, carbazole and phenanthrene.]	295-276-4	91995-16-3	Carc. 1B	H350	GHS08 Dgr	H350			HJM

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
648-108-00-2	Anthracene oil, anthracene paste, distn. lights; Anthracene Oil Fraction; [A complex combination of hydrocarbons from the distillation of anthracene obtained by crystallization of anthracene oil from bituminous light temperature tar and boiling in the range of approximately 290 °C to 340 °C (554°F to 644°F). It contains chiefly trinuclear aromatics and their dihydro derivatives.]	295-278-5	91995-17-4	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-109-00-8	Tar oils, coal, low-temp.; Tar Oil, high boiling; [A distillate from low-temperature coal tar. Composed primarily of hydrocarbons, phenolic compounds and aromatic nitrogen bases boiling in the range of approximately 160 °C to 340 °C (320°F to 644°F).]	309-889-2	101316-87-4	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-110-00-3	Extract residues (coal), low temp. coal atar alk; [The residue from low temperature coal tar oils after an alkaline wash, such as aqueous sodium hydroxide, to remove crude coal tar acids. Composed primarily of hydrocarbons and aromatic nitrogen bases.]	310-191-5	122384-78-5	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-111-00-9	Phenols, ammonia liquor ext.; Alkaline Extract; [The combination of phenols extracted, using isobutyl acetate, from the ammonia liquor condensed from the gas evolved in low-temperature (less than 700 °C (1292°F)) destructive distillation of coal. It consists predominantly of a mixture of monohydric and dihydric phenols.]	284-881-9	84988-93-2	Carc. 1B	H350	GHS08 Dgr	H350			HJM

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
648-112-00-4	Distillates (coal tar), light oils, alk. exts.; Alkaline Extract; [The aqueous extract from carbolic oil produced by an alkaline wash such as aqueous sodium hydroxide. Composed primarily of the alkali salts of various phenolic compounds.]	292-610-0	90640-88-3	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-113-00-X	Extracts, coal tar oil alk.; Alkaline Extract; [The extract from coal tar oil produced by an alkaline wash such as aqueous sodium hydroxide. Composed primarily of the alkali salts of various phenolic compounds.]	266-017-2	65996-83-0	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-114-00-5	Distillates (coal tar), naphthalene oils, alk. exts.; Alkaline Extract; [The aqueous extract from naphthalene oil produced by an alkaline wash such as aqueous sodium hydroxid. Composed primarily of the alkali salts of various phenolic compounds.]	292-611-6	90640-89-4	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-115-00-0	Extract residues (coal), tar oil alk., carbonated, limed; Crude Phenols; [The product obtained by treatment of coal tar oil alkaline extract with CO <sub>2</sub> and CaO. Composed primarily of CaCO <sub>3</sub> , Ca(OH) <sub>2</sub> , Na <sub>2</sub> CO <sub>3</sub> and other organic and inorganic impurities.]	292-629-4	90641-06-8	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-116-00-6	Tar acids, coal, crude; Crude Phenols; [The reaction product obtained by neutralizing coal tar oil alkaline extract with an acidic solution, such as aqueous sulfuric acid, or gaseous carbon dioxide, to obtain the free acids. Composed primarily of tar acids such as phenol, cresols, and xylenols.]	266-019-3	65996-85-2	Carc. 1B	H350	GHS08 Dgr	H350			HJM

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
648-117-00-1	Tar acids, brown-coal, crude; Crude Phenols; [An acidified alkaline extract of brown coal tar distillate. Composed primarily of phenol and phenol homologs.]	309-888-7	101316-86-3	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-118-00-7	Tar acids, brown-coal gasification; Crude Phenols; [A complex combination of organic compounds obtained from brown coal gasification. Composed primarily of C <sub>6-10</sub> hydroxy aromatic phenols and their homologs.]	295-536-7	92062-22-1	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-119-00-2	Tar acids, distn. residues; Distillate Phenols; [A residue from the distillation of crude phenol from coal. It consists predominantly of phenols having carbon numbers in the range of C <sub>8</sub> through C <sub>10</sub> with a softening point of 60 °C to 80 °C (140°F to 176°F).]	306-251-5	96690-55-0	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-120-00-8	Tar acids, methylphenol fraction; Distillate Phenols; [The fraction of tar acid rich in 3- and 4-methylphenol, recovered by distillation of low-temperature coal tar crude tar acids.]	284-892-9	84989-04-8	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-121-00-3	Tar acids, polyalkylphenol fraction; Distillate Phenols; [The fraction of tar acids, recovered by distillation of low-temperature coal tar crude tar acids, having an approximate boiling range of 225 °C to 320 °C (437°F to 608°F). Composed primarily of polyalkylphenols.]	284-893-4	84989-05-9	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-122-00-9	Tar acids, xylenol fraction; Distillate Phenols; [The fraction of tar acids, rich in 2,4- and 2,5-dimethylphenol, recovered by distillation of low-temperature coal tar crude tar acids.]	284-895-5	84989-06-0	Carc. 1B	H350	GHS08 Dgr	H350			HJM

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
648-123-00-4	Tar acids, ethylphenol fraction; Distillate Phenols; [The fraction of tar acids, rich in 3- and 4-ethylphenol, recovered by distillation of low-temperature coal tar crude tar acids.]	284-891-3	84989-03-7	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-124-00-X	Tar acids, 3,5-xylenol fraction; Distillate Phenols; [The fraction of tar acids, rich in 3,5-dimethylphenol, recovered by distillation of low-temperature coal tar acids.]	284-896-0	84989-07-1	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-125-00-5	Tar acids, residues, distillates, first-cut; Distillate Phenols; [The residue from the distillation in the range of 235 °C to 355 °C (481°F to 697°F) of light carbolic oil.]	270-713-1	68477-23-6	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-126-00-0	Tar acids, cresylic, residues; Distillate Phenols; [The residue from crude coal tar acids after removal of phenol, cresols, xylenols and any higher boiling phenols. A black solid with a melting point approximately 80 °C (176°F). Composed primarily of polyalkylphenols, resin gums, and inorganic salts.]	271-418-0	68555-24-8	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-127-00-6	Phenols, C <sub>9-11</sub> ; Distillate Phenols	293-435-2	91079-47-9	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-128-00-1	Tar acids, cresylic; Distillate Phenols; [A complex combination of organic compounds obtained from brown coal and boiling in the range of approximately 200 °C to 230 °C (392°F to 446°F). It contains chiefly phenols and pyridine bases.]	295-540-9	92062-26-5	Carc. 1B	H350	GHS08 Dgr	H350			HJM

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
648-129-00-7	Tar acids, brown-coal, C <sub>2</sub> -alkylphenol fraction; Distillate Phenols; [The distillate from the acidification of alkaline washed lignite tar distillate boiling in the range of approximately 200 °C to 230 °C (392°F to 446°F). Composed primarily of <i>m</i> - and <i>p</i> -ethylphenol as well as cresols and xylenols.]	302-662-9	94114-29-1	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-130-00-2	Extract oils (coal), naphthalene oils; Acid Extract; [The aqueous extract produced by an acidic wash of alkali-washed naphthalene oil. Composed primarily of acid salts of various aromatic nitrogen bases including pyridine, quinoline and their alkyl derivatives.]	292-623-1	90641-00-2	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-131-00-8	Tar bases, quinoline derivs.; Distillate Bases	271-020-7	68513-87-1	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-132-00-3	Tar bases, coal, quinoline derivs. fraction; Distillate Bases	274-560-1	70321-67-4	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-133-00-9	Tar bases, coal, distn. residues; Distillate Bases; [The distillation residue remaining after the distillation of the neutralized, acid-extracted base-containing tar fractions obtained by the distillation of coal tars. It contains chiefly aniline, collidines, quinoline and quinoline derivatives and toluidines.]	295-544-0	92062-29-8	Carc. 1B	H350	GHS08 Dgr	H350			HJM

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
648-134-00-4	Hydrocarbon oils, arom., mixed with polyethylene and polypropylene, pyrolyzed, light oil fraction; Heat Treatment Products; [The oil obtained from the heat treatment of a polyethylene/polypropylene mixture with coal tar pitch or aromatic oils. It consists predominantly of benzene and its homologs boiling in a range of approximately 70 °C to 120 °C (158°F to 248°F).]	309-745-9	100801-63-6	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-135-00-X	Hydrocarbon oils, arom., mixed with polyethylene, pyrolyzed, light oil fraction; Heat Treatment Products; [The oil obtained from the heat treatment of polyethylene with coal tar pitch or aromatic oils. It consists predominantly of benzene and its homologs boiling in a range of 70 °C to 120 °C (158°F to 248°F).]	309-748-5	100801-65-8	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-136-00-5	Hydrocarbon oils, arom., mixed with polystyrene, pyrolyzed, light oil fraction; Heat Treatment Products; [The oil obtained from the heat treatment of polystyrene with coal tar pitch or aromatic oils. It consists predominantly of benzene and its homologs boiling in a range of approximately 70 °C to 210 °C (158°F to 410°F).]	309-749-0	100801-66-9	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-137-00-0	Extract residues (coal), tar oil alk., naphthalene distn. residues; Naphthalene Oil Extract Residue; [The residue obtained from chemical oil extracted after the removal of naphthalene by distillation composed primarily of two to four membered condensed ring aromatic hydrocarbons and aromatic nitrogen bases.]	277-567-8	73665-18-6	Carc. 1B	H350	GHS08 Dgr	H350			HJM

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
648-138-00-6	Creosote oil, low-boiling distillate; Wash Oil; [The low-boiling distillation fraction obtained from the high temperature carbonization of bituminous coal, which is further refined to remove excess crystalline salts. It consists primarily of creosote oil with some of the normal polynuclear aromatic salts, which are components of coal tar distillate, removed. It is crystal free at approximately 38 °C (100°F).]	274-566-4	70321-80-1	Carc. 1B	H350	GHS08 Dgr	H350			H
648-139-00-1	Tar acids, cresylic, sodium salts, caustic solns.; Alkaline Extract	272-361-4	68815-21-4	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-140-00-7	Extract oils (coal), tar base; Acid Extract; [The extract from coal tar oil alkaline extract residue produced by an acidic wash such as aqueous sulfuric acid after distillation to remove naphthalene. Composed primarily of the acid salts of various aromatic nitrogen bases including pyridine, quinoline, and their alkyl derivatives.]	266-020-9	65996-86-3	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-141-00-2	Tar bases, coal, crude; Crude Tar Bases; [The reaction product obtained by neutralizing coal tar base extract oil with an alkaline solution, such as aqueous sodium hydroxide, to obtain the free bases. Composed primarily of such organic bases as acridine, phenanthridine, pyridine, quinoline and their alkyl derivatives.]	266-018-8	65996-84-1	Carc. 1B	H350	GHS08 Dgr	H350			HJM
648-142-00-8	Residues (coal), liq. solvent extn.; [A cohesive powder composed of coal mineral matter and undissolved coal remaining after extraction of coal by a liquid solvent.]	302-681-2	94114-46-2	Carc. 1B	H350	GHS08 Dgr	H350			H M



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
648-143-00-3	Coal liquids, liq. solvent extrn. soln.; [The product obtained by filtration of coal mineral matter and undissolved coal from coal extract solution produced by digesting coal in a liquid solvent. A black, viscous, highly complex liquid combination composed primarily of aromatic and partly hydrogenated aromatic hydrocarbons, aromatic nitrogen compounds, aromatic sulfur compounds, phenolic and other aromatic oxygen compounds and their alkyl derivatives.]	302-682-8	94114-47-3	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-144-00-9	Coal liquids, liq. solvent extrn.; [The substantially solvent-free product obtained by the distillation of the solvent from filtered coal extract solution produced by digesting coal in a liquid solvent. A black semi-solid, composed primarily of a complex combination of condensed-ring aromatic hydrocarbons, aromatic nitrogen compounds, aromatic sulfur compounds, phenolic compounds and other aromatic oxygen compounds, and their alkyl derivatives.]	302-683-3	94114-48-4	Carc. 1B	H350	GHS08 Dgr	H350			H M
648-145-00-4	Tar brown-coal; [An oil distilled from brown-coal tar. Composed primarily of aliphatic, naphthenic and one- to three-ring aromatic hydrocarbons, their alkyl derivatives, heteroaromatics and one- and two-ring phenols boiling in the range of approximately 150 °C to 360 °C (302°F to 680°F).]	309-885-0	101316-83-0	Carc. 1A	H350	GHS08 Dgr	H350			H
648-146-00-X	Tar, brown-coal, low-temp.; [A tar obtained from low temperature carbonization and low temperature gasification of brown coal. Composed primarily of aliphatic, naphthenic and cyclic aromatic hydrocarbons, heteroaromatic hydrocarbons and cyclic phenols.]	309-886-6	101316-84-1	Carc. 1A	H350	GHS08 Dgr	H350			H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
648-147-00-5	Light oil (coal), coke-oven; Crude benzole; [The volatile organic liquid extracted from the gas evolved in the high temperature (greater than 700 °C (1292°F)) destructive distillation of coal. Composed primarily of benzene, toluene, and xylenes. May contain other minor hydrocarbon constituents.]	266-012-5	65996-78-3	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-148-00-0	Distillates (coal), liq. solvent extn., primary; [The liquid product of condensation of vapors emitted during the digestion of coal in a liquid solvent and boiling in the range of approximately 30 °C to 300 °C (86°F to 572°F). Composed primarily of partly hydrogenated condensed-ring aromatic hydrocarbons, aromatic compounds containing nitrogen, oxygen and sulfur, and their alkyl derivatives having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>14</sub> .]	302-688-0	94114-52-0	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-149-00-6	Distillates (coal), solvent extn., hydrocracked; [Distillate obtained by hydrocracking of coal extract or solution produced by the liquid solvent extraction or supercritical gas extraction process and boiling in the range of approximately 30 °C to 300 °C (86°F to 572°F). Composed primarily of aromatic, hydrogenated aromatic and naphthenic compounds, their alkyl derivatives and alkanes with carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>14</sub> . Nitrogen, sulfur and oxygen-containing aromatic and hydrogenated aromatic compounds are also present.]	302-689-6	94114-53-1	Carc. 1B	H350	GHS08 Dgr	H350			H J

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
648-150-00-1	Naphtha (coal), solvent extn., hydrocracked; [Fraction of the distillate obtained by hydrocracking of coal extract or solution produced by the liquid solvent extraction or supercritical gas extraction processes and boiling in the range of approximately 30 °C to 180 °C (86°F to 356°F). Composed primarily of aromatic, hydrogenated aromatic and naphthenic compounds, their alkyl derivatives and alkanes with carbon numbers predominantly in the range of C <sub>4</sub> to C <sub>9</sub> . Nitrogen, sulfur and oxygen-containing aromatic and hydrogenated aromatic compounds are also present.]	302-690-1	94114-54-2	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-151-00-7	Gasoline, coal solvent extn., hydrocracked naphtha; [Motor fuel produced by the reforming of the refined naphtha fraction of the products of hydrocracking of coal extract or solution produced by the liquid solvent extraction or supercritical gas extraction processes and boiling in the range of approximately 30 °C to 180 °C (86°F to 356°F). Composed primarily of aromatic and naphthenic hydrocarbons, their alkyl derivatives and alkyl hydrocarbons having carbon numbers in the range of C <sub>4</sub> through C <sub>9</sub> .]	302-691-7	94114-55-3	Carc. 1B	H350	GHS08 Dgr	H350			H
648-152-00-2	Distillates (coal), solvent extn., hydrocracked middle; [Distillate obtained from the hydrocracking of coal extract or solution produced by the liquid solvent extraction or supercritical gas extraction processes and boiling in the range of approximately 180 °C to 300 °C (356°F to 572°F). Composed primarily of two-ring aromatic, hydrogenated aromatic and naphthenic compounds, their alkyl derivatives and alkanes having carbon numbers predominantly in the range of C <sub>9</sub> through C <sub>14</sub> . Nitrogen, sulfur and oxygen-containing compounds are also present.]	302-692-2	94114-56-4	Carc. 1B	H350	GHS08 Dgr	H350			H J

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
648-153-00-8	Distillates (coal), solvent extn., hydrocracked hydrogenated middle; [Distillate from the hydrogenation of hydrocracked middle distillate from coal extract or solution produced by the liquid solvent extraction or supercritical gas extraction processes and boiling in the range of approximately 180 °C to 280 °C (356°F to 536°F). Composed primarily of hydrogenated two- ring carbon compounds and their alkyl derivatives having carbon numbers predominantly in the range of C <sub>9</sub> through C <sub>14</sub> .]	302-693-8	94114-57-5	Carc. 1B	H350	GHS08 Dgr	H350			H J
648-154-00-3	Fuels, jet aircraft, coal solvent extn., hydrocracked hydrogenated; [Jet engine fuel produced by hydrogenation of the middle distillate fraction of the products of hydrocracking of coal extract or solution produced by the liquid solvent extraction or supercritical gas extraction processes and boiling in the range of approximately 180 °C to 225 °C (356°F to 473°F). Composed primarily of hydrogenated two-ring hydrocarbons and their alkyl derivatives having carbon numbers predominantly in the range of C <sub>10</sub> through C <sub>12</sub> .]	302-694-3	94114-58-6	Carc. 2	H351	GHS08 Wng	H350			H
648-155-00-9	Fuels, diesel, coal solvent extn., hydrocracked hydrogenated; [Diesel engine fuel produced by the hydrogenation of the middle distillate fraction of the products of hydrocracking of coal extract or solution produced by the liquid solvent extraction or supercritical gas extraction processes and boiling in the range of approximately 200 °C to 280 °C (392°F to 536°F). Composed primarily of hydrogenated two-ring hydrocarbons and their alkyl derivatives having carbon numbers predominantly in the range of C <sub>11</sub> through C <sub>14</sub> .]	302-695-9	94114-59-7	Carc. 2	H351	GHS08 Wng	H350			H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
648-156-00-4	Light oil (coal), semi-coking process; Fresh oil; [The volatile organic liquid condensed from the gas evolved in the low temperature (less than 700 °C (1292°F) destructive distillation of coal. Composed primarily of C <sub>6-10</sub> hydrocarbons.]	292-635-7	90641-11-5	Carc. 1B	H350	GHS08 Dgr	H350			H J
649-001-00-3	Extracts (petroleum), light naphthenic distillate solvent	265-102-1	64742-03-6	Carc. 1B	H350	GHS08 Dgr	H350			H
649-002-00-9	Extracts (petroleum), heavy paraffinic distillate solvent	265-103-7	64742-04-7	Carc. 1B	H350	GHS08 Dgr	H350			H
649-003-00-4	Extracts (petroleum), light paraffinic distillate solvent	265-104-2	64742-05-8	Carc. 1B	H350	GHS08 Dgr	H350			H
649-004-00-X	Extracts (petroleum), heavy naphthenic distillate solvent	265-111-0	64742-11-6	Carc. 1B	H350	GHS08 Dgr	H350			H
649-005-00-5	Extracts (petroleum), light vacuum gas oil solvent	295-341-7	91995-78-7	Carc. 1B	H350	GHS08 Dgr	H350			H
649-006-00-0	hydrocarbons C <sub>26-55</sub> , arom-rich	307-753-7	97722-04-8	Carc. 1B	H350	GHS08 Dgr	H350			H
649-007-00-6	fatty acids, tall-oil, reaction products with iminodiethanol and boric acid	400-160-5	—	Skin Irrit. 2 Aquatic Chronic 2	H315 H411	GHS07 GHS09 Wng	H315 H411			
649-008-00-1	Residues (petroleum), atm. tower; Heavy Fuel oil; [A complex residuum from the atmospheric distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly greater than C <sub>20</sub> and boiling above approximately 350 °C (662°F). This stream is likely to contain 5 wt. % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	265-045-2	64741-45-3	Carc. 1B	H350	GHS08 Dgr	H350			H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-009-00-7	Gas oils (petroleum), heavy vacuum; Heavy Fuel oil; [A complex combination of hydrocarbons produced by the vacuum distillation of the residuum from atmospheric distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and boiling in the range of approximately 350 °C to 600 °C (662°F to 1112°F). This stream is likely to contain 5 wt. % or more of 4-to 6-membered condensed ring aromatic hydrocarbons.]	265-058-3	64741-57-7	Carc. 1B	H350	GHS08 Dgr	H350			H
649-010-00-2	Distillates (petroleum), heavy catalytic cracked; Heavy Fuel oil; [A complex combination of hydrocarbons produced by the distillation of products from a catalytic cracking process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>35</sub> and boiling in the range of approximately 260 °C to 500 °C (500°F to 932°F). This stream is likely to contain 5 wt. % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	265-063-0	64741-61-3	Carc. 1B	H350	GHS08 Dgr	H350			H
649-011-00-8	Clarified oils (petroleum), catalytic cracked; Heavy Fuel oil; [A complex combination of hydrocarbons produced as the residual fraction from distillation of the products from a catalytic cracking process. It consists of hydrocarbons having carbon numbers predominantly greater than C <sub>20</sub> and boiling above approximately 350 °C (662°F). This stream is likely to contain 5 wt. % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	265-064-6	64741-62-4	Carc. 1B	H350	GHS08 Dgr	H350			H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-012-00-3	Residues (petroleum), hydrocracked; Heavy Fuel oil; [A complex combination of hydrocarbons produced as the residual fraction from distillation of the products of a hydrocracking process. It consists of hydrocarbons having carbon numbers predominantly greater than C <sub>20</sub> and boiling above approximately 350 °C (662°F).]	265-076-1	64741-75-9	Carc. 1B	H350	GHS08 Dgr	H350			H
649-013-00-9	Residues (petroleum), thermal cracked; Heavy Fuel oil; [A complex combination of hydrocarbons produced as the residual fraction from distillation of the product from a thermal cracking process. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly greater than C <sub>20</sub> and boiling above approximately 350 °C (662°F). This stream is likely to contain 5 wt. % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	265-081-9	64741-80-6	Carc. 1B	H350	GHS08 Dgr	H350			H
649-014-00-4	Distillates (petroleum), heavy thermal cracked; Heavy Fuel oil; [A complex combination of hydrocarbons from the distillation of the products from a thermal cracking process. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>36</sub> and boiling in the range of approximately 260 °C to 480 °C (500°F to 896°F). This stream is likely to contain 5 wt. % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	265-082-4	64741-81-7	Carc. 1B	H350	GHS08 Dgr	H350			H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-015-00-X	Gas oils (petroleum), hydrotreated vacuum; Heavy Fuel oil; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>13</sub> through C <sub>50</sub> and boiling in the range of approximately 230 °C to 600 °C (446°F to 1112°F). This stream is likely to contain 5 wt.% or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	265-162-9	64742-59-2	Carc. 1B	H350	GHS08 Dgr	H350			H
649-016-00-5	Residues (petroleum), hydrodesulfurized atmospheric tower; Heavy Fuel oil; [A complex combination of hydrocarbons obtained by treating an atmospheric tower residuum with hydrogen in the presence of a catalyst under conditions primarily to remove organic sulfur compounds. It consists of hydrocarbons having carbon numbers predominantly greater than C <sub>20</sub> and boiling above approximately 350 °C (662°F). This stream is likely to contain 5 wt. % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	265-181-2	64742-78-5	Carc. 1B	H350	GHS08 Dgr	H350			H
649-017-00-0	Gas oils (petroleum), hydrodesulfurized heavy vacuum; Heavy Fuel oil; [A complex combination of hydrocarbons obtained from a catalytic hydrodesulfurization process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and boiling in the range of approximately 350 °C to 600 °C (662°F to 1112 °C). This stream is likely to contain 5 wt. % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	265-189-6	64742-86-5	Carc. 1B	H350	GHS08 Dgr	H350			H



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-018-00-6	Residues (petroleum), steam-cracked; Heavy Fuel oil; [A complex combination of hydrocarbons obtained as the residual fraction from the distillation of the products of a steam cracking process (including steam cracking to produce ethylene). It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly greater than C <sub>14</sub> and boiling above approximately 260 °C (500°F). This stream is likely to contain 5 wt. % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	265-193-8	64742-90-1	Carc. 1B	H350	GHS08 Dgr	H350			H
649-019-00-1	Residues (petroleum), atmospheric; Heavy Fuel oil; [A complex residuum from atmospheric distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly greater than C <sub>11</sub> and boiling above approximately 200 °C (392°F). This stream is likely to contain 5 wt. % or more of 4-to 6-membered condensed ring aromatic hydrocarbons.]	269-777-3	68333-22-2	Carc. 1B	H350	GHS08 Dgr	H350			H
649-020-00-7	Clarified oils (petroleum), hydrodesulfurized catalytic cracked; Heavy Fuel oil; [A complex combination of hydrocarbons obtained by treating catalytic cracked clarified oil with hydrogen to convert organic sulfur to hydrogen sulfide which is removed. It consists of hydrocarbons having carbon numbers predominantly greater than C <sub>20</sub> and boiling above approximately 350 °C (662°F). This stream is likely to contain 5 wt. % or more of 4-to 6-membered condensed ring aromatic hydrocarbons.]	269-782-0	68333-26-6	Carc. 1B	H350	GHS08 Dgr	H350			H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-021-00-2	Distillates (petroleum), hydrosulfurized intermediate catalytic cracked; Heavy Fuel oil; [A complex combination of hydrocarbons obtained by treating intermediate catalytic cracked distillates with hydrogen to convert organic sulfur to hydrogen sulfide which is removed. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>11</sub> through C <sub>30</sub> and boiling in the range of approximately 205 °C to 450 °C (401°F to 842°F). It contains a relatively large proportion of tricyclic aromatic hydrocarbons.]	269-783-6	68333-27-7	Carc. 1B	H350	GHS08 Dgr	H350			H
649-022-00-8	Distillates (petroleum), hydrosulfurized heavy catalytic cracked; Heavy Fuel oil; [A complex combination of hydrocarbons obtained by treatment of heavy catalytic cracked distillates with hydrogen to convert organic sulfur to hydrogen sulfide which is removed. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>35</sub> and boiling in the range of approximately 260 °C to 500 °C (500°F to 932°F). This stream is likely to contain 5 wt. % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	269-784-1	68333-28-8	Carc. 1B	H350	GHS08 Dgr	H350			H
649-023-00-3	Fuel oil, residues-straight-run gas oils, high-sulfur; Heavy Fuel oil	270-674-0	68476-32-4	Carc. 1B	H350	GHS08 Dgr	H350			H
649-024-00-9	Fuel oil, residual; Heavy Fuel oil; [The liquid product from various refinery streams, usually residues. The composition is complex and varies with the source of the crude oil.]	270-675-6	68476-33-5	Carc. 1B	H350	GHS08 Dgr	H350			H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-025-00-4	Residues (petroleum), catalytic reformer fractionator residue distn.; Heavy Fuel oil; [A complex residuum from the distillation of catalytic reformer fractionator residue. It boils approximately above 399 °C (750°F).]	270-792-2	68478-13-7	Carc. 1B	H350	GHS08 Dgr	H350			H
649-026-00-X	Residues (petroleum), heavy coker gas oil and vacuum gas oil; Heavy Fuel oil; [A complex combination of hydrocarbons produced as the residual fraction from the distillation of heavy coker gas oil and vacuum gas oil. It predominantly consists of hydrocarbons having carbon numbers predominantly greater than C <sub>13</sub> and boiling above approximately 230 °C (446°F).]	270-796-4	68478-17-1	Carc. 1B	H350	GHS08 Dgr	H350			H
649-027-00-5	Residues (petroleum), heavy coker and light vacuum; Heavy Fuel oil; [A complex combination of hydrocarbons produced as the residual fraction from the distillation of heavy coker gas oil and light vacuum gas oil. It consists predominantly of hydrocarbons having carbon numbers predominantly greater than C <sub>13</sub> and boiling above approximately 230 °C (446°F).]	270-983-0	68512-61-8	Carc. 1B	H350	GHS08 Dgr	H350			H
649-028-00-0	Residues (petroleum), light vacuum; Heavy Fuel oil; [A complex residuum from the vacuum distillation of the residuum from the atmospheric distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly greater than C <sub>13</sub> and boiling above approximately 230 °C (446°F).]	270-984-6	68512-62-9	Carc. 1B	H350	GHS08 Dgr	H350			H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-029-00-6	Residues (petroleum), steam-cracked light; Heavy Fuel oil; [A complex residuum from the distillation of the products from a steam-cracking process. It consists predominantly of aromatic and unsaturated hydrocarbons having carbon numbers greater than C <sub>7</sub> and boiling in the range of approximately 101 °C to 555 °C (214°F to 1030°F).]	271-013-9	68513-69-9	Carc. 1B	H350	GHS08 Dgr	H350			H
649-030-00-1	Fuel oil, No 6; Heavy Fuel oil; [A distillate oil having a minimum viscosity of 900 SUS at 37.7 °C (100°F) to a maximum of 9000 SUS at 37.7 °C (100°F).]	271-384-7	68553-00-4	Carc. 1B	H350	GHS08 Dgr	H350			H
649-031-00-7	Residues (petroleum), topping plant, low-sulfur; Heavy Fuel oil; [A low-sulfur complex combination of hydrocarbons produced as the residual fraction from the topping plant distillation of crude oil. It is the residuum after the straight-run gasoline cut, kerosene cut and gas oil cut have been removed.]	271-763-7	68607-30-7	Carc. 1B	H350	GHS08 Dgr	H350			H
649-032-00-2	Gas oils (petroleum), heavy atmospheric; Heavy Fuel oil; [A complex combination of hydrocarbons obtained by the distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>7</sub> through C <sub>35</sub> and boiling in the range of approximately 121 °C to 510 °C (250°F to 950°F).]	272-184-2	68783-08-4	Carc. 1B	H350	GHS08 Dgr	H350			H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-033-00-8	Residues (petroleum), coker scrubber, Condensed-ring-arom.-contg.; Heavy Fuel oil; [A very complex combination of hydrocarbons produced as the residual fraction from the distillation of vacuum residuum and the products from a thermal cracking process. It consists predominantly of hydrocarbons having carbon numbers predominantly greater than C <sub>20</sub> and boiling above approximately 350 °C (662°F). This stream is likely to contain 5 wt.% or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	272-187-9	68783-13-1	Carc. 1B	H350	GHS08 Dgr	H350			H
649-034-00-3	Distillates (petroleum), petroleum residues vacuum; Heavy Fuel oil; [A complex combination of hydrocarbons produced by the vacuum distillation of the residuum from the atmospheric distillation of crude oil.]	273-263-4	68955-27-1	Carc. 1B	H350	GHS08 Dgr	H350			H
649-035-00-9	Residues (petroleum), steam-cracked, resinous; Heavy Fuel oil; [A complex residuum from the distillation of steam-cracked petroleum residues.]	273-272-3	68955-36-2	Carc. 1B	H350	GHS08 Dgr	H350			H
649-036-00-4	Distillates (petroleum), intermediate vacuum; Heavy Fuel oil; [A complex combination of hydrocarbons produced by the vacuum, distillation of the residuum from atmospheric distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>14</sub> through C <sub>42</sub> and boiling in the range of approximately 250 °C to 545 °C (482°F to 1013°F). This stream is likely to contain 5 wt. % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	274-683-0	70592-76-6	Carc. 1B	H350	GHS08 Dgr	H350			H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-037-00-X	Distillates (petroleum), light vacuum; Heavy Fuel oil; [A complex combination of hydrocarbons produced by the vacuum distillation of the residuum from atmospheric distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>11</sub> through C <sub>35</sub> and boiling in the range of approximately 250 °C to 545 °C (482°F to 1013°F).]	274-684-6	70592-77-7	Carc. 1B	H350	GHS08 Dgr	H350			H
649-038-00-5	Distillates (petroleum), vacuum; Heavy Fuel oil; [A complex combination of hydrocarbons produced by the vacuum distillation of the residuum from atmospheric distillation of crude oil. It consists of hydrocarbons having numbers predominantly in the range of C <sub>15</sub> through C <sub>50</sub> and boiling in the range of approximately 270 °C to 600 °C (518°F to 1112°F). This stream is likely to contain 5 wt.% or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	274-685-1	70592-78-8	Carc. 1B	H350	GHS08 Dgr	H350			H
649-039-00-0	Gas oils (petroleum), hydrodesulfurized coker heavy vacuum; Heavy Fuel oil; [A complex combination of hydrocarbons obtained by hydrodesulfurization of heavy coker distillate stocks, It consists predominantly of hydrocarbons having carbon numbers predominantly in the range C <sub>18</sub> to C <sub>44</sub> and boiling in the range of approximately 304 °C to 548 °C (579°F to 1018°F). Likely to contain 5 % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	285-555-9	85117-03-9	Carc. 1B	H350	GHS08 Dgr	H350			H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-040-00-6	Residues (petroleum), steam-cracked, distillates; Heavy Fuel oil; [A complex combination of hydrocarbons obtained during the production of refined petroleum tar by the distillation of steam cracked tar. It consists predominantly of aromatic and other hydrocarbons and organic sulfur compounds.]	292-657-7	90669-75-3	Carc. 1B	H350	GHS08 Dgr	H350			H
649-041-00-1	Residues (petroleum), vacuum, light; Heavy Fuel oil; [A complex residuum from the vacuum distillation of the residuum from atmospheric distillation of crude oil. It consists predominantly of hydrocarbons having carbon numbers predominantly greater than C <sub>24</sub> and boiling above approximately 390 °C (734°F).]	292-658-2	90669-76-4	Carc. 1B	H350	GHS08 Dgr	H350			H
649-042-00-7	Fuel oil, heavy, high-sulfur; Heavy Fuel oil; [A complex combination of hydrocarbons obtained by the distillation of crude petroleum. It consists predominantly of aliphatic, aromatic and cycloaliphatic hydrocarbons having carbon numbers predominantly higher than C <sub>25</sub> and boiling above approximately 400 °C (752°F).]	295-396-7	92045-14-2	Carc. 1B	H350	GHS08 Dgr	H350			H
649-043-00-2	Residues (petroleum), catalytic cracking; Heavy Fuel oil; [A complex combination of hydrocarbons produced as the residual fraction from the distillation of the products from a catalytic cracking process. It consists predominantly of hydrocarbons having carbon numbers predominantly greater than C <sub>11</sub> and boiling above approximately 200 °C (392°F).]	295-511-0	92061-97-7	Carc. 1B	H350	GHS08 Dgr	H350			H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-044-00-8	Distillates (petroleum), intermediate catalytic cracked, thermally degraded; Heavy Fuel oil; [A complex combination of hydrocarbons produced by the distillation of products from a catalytic cracking process which has been used as a heat transfer fluid. It consists predominantly of hydrocarbons boiling in the range of approximately 220 °C to 450 °C (428°F to 842°F). This stream is likely to contain organic sulfur compounds.]	295-990-6	92201-59-7	Carc. 1B	H350	GHS08 Dgr	H350			H
649-045-00-3	Residual oils (petroleum); Heavy Fuel oil; [A complex combination of hydrocarbons, sulfur compounds and metal-containing organic compounds obtained as the residue from refinery fractionation cracking processes. It produces a finished oil with a viscosity above 2cSt. at 100 °C.]	298-754-0	93821-66-0	Carc. 1B	H350	GHS08 Dgr	H350			H
649-046-00-9	Residues, steam cracked, thermally treated; Heavy Fuel oil; [A complex combination of hydrocarbons obtained by the treatment and distillation of raw steam-cracked naphtha. It consists predominantly of unsaturated hydrocarbons boiling in the range above approximately 180 °C (356°F).]	308-733-0	98219-64-8	Carc. 1B	H350	GHS08 Dgr	H350			H
649-047-00-4	Distillates (petroleum), hydrodesulfurized full-range middle; Heavy Fuel oil; [A complex combination of hydrocarbons obtained by treating a petroleum stock with hydrogen. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>9</sub> through C <sub>25</sub> and boiling in the range of approximately 150 °C to 400 °C (302°F to 752°F).]	309-863-0	101316-57-8	Carc. 1B	H350	GHS08 Dgr	H350			H



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-048-00-X	Residues (petroleum), catalytic reformer fractionator; Heavy Fuel oil; [A complex combination of hydrocarbons produced as the residual fraction from distillation of the product from a catalytic reforming process. It consists of predominantly aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>10</sub> through C <sub>25</sub> and boiling in the range of approximately 160 °C to 400 °C (320°F to 725°F). This stream is likely to contain 5 wt. % or more of 4- or 6-membered condensed ring aromatic hydrocarbons.]	265-069-3	64741-67-9	Carc. 1B	H350	GHS08 Dgr	H350			H
649-049-00-5	Petroleum; Crude oil; [A complex combination of hydrocarbons, It consists predominantly of aliphatic, alicyclic and aromatic hydrocarbons. It may also contain small amounts of nitrogen, oxygen and sulfur compounds. This category encompasses light, medium, and heavy petroleums, as well as the oils extended from tar sands. Hydrocarbonaceous materials requiring major chemical changes for their recovery or conversion to petroleum refinery feedstocks such as crude shale oils; upgraded shale oils and liquid coal fuels are not included in this definition.]	232-298-5	8002-05-9	Carc. 1B	H350	GHS08 Dgr	H350			H
649-050-00-0	Distillates (petroleum), light paraffinic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons produced by vacuum distillation of the residuum from atmospheric distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>30</sub> and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C). It contains a relatively large proportion of saturated aliphatic hydrocarbons normally present in this distillation range of crude oil.]	265-051-5	64741-50-0	Carc. 1A	H350	GHS08 Dgr	H350			H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-051-00-6	Distillates (petroleum), heavy paraffinic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons produced by vacuum distillation of the residuum from atmospheric distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C). It contains a relatively large proportion of saturated aliphatic hydrocarbons.]	265-052-0	64741-51-1	Carc. 1A	H350	GHS08 Dgr	H350			H
649-052-00-1	Distillates (petroleum), light naphthenic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons produced by vacuum distillation of the residuum from atmospheric distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>30</sub> and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-053-6	64741-52-2	Carc. 1A	H350	GHS08 Dgr	H350			H
649-053-00-7	Distillates (petroleum), heavy naphthenic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons produced by vacuum distillation of the residuum from atmospheric distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-054-1	64741-53-3	Carc. 1A	H350	GHS08 Dgr	H350			H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-054-00-2	Distillates (petroleum), acid-treated heavy naphthenic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons obtained as a raffinate from a sulfuric acid treating process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-117-3	64742-18-3	Carc. 1A	H350	GHS08 Dgr	H350			H
649-055-00-8	Distillates (petroleum), acid-treated light naphthenic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons obtained as a raffinate from a sulfuric acid treating process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>30</sub> and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-118-9	64742-19-4	Carc. 1A	H350	GHS08 Dgr	H350			H
649-056-00-3	Distillates (petroleum), acid-treated heavy paraffinic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons obtained as a raffinate from a sulfuric acid process. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and produces a finished oil having a viscosity of a least 100 SUS at 100°F (19cSt at 40 °C).]	265-119-4	64742-20-7	Carc. 1A	H350	GHS08 Dgr	H350			H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-057-00-9	Distillates (petroleum), acid-treated light paraffinic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons obtained as a raffinate from a sulfuric acid treating process. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>30</sub> and produces a finished oil having a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C).]	265-121-5	64742-21-8	Carc. 1A	H350	GHS08 Dgr	H350			H
649-058-00-4	Distillates (petroleum), chemically neutralized heavy paraffinic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons obtained from a treating process to remove acidic materials. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C). It contains a relatively large proportion of aliphatic hydrocarbons.]	265-127-8	64742-27-4	Carc. 1A	H350	GHS08 Dgr	H350			H
649-059-00-X	Distillates (petroleum), chemically neutralized light paraffinic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons produced by a treating process to remove acidic materials. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>30</sub> and produces a finished oil with a viscosity less than 100 SUS at 100°F (19cSt at 40 °C).]	265-128-3	64742-28-5	Carc. 1A	H350	GHS08 Dgr	H350			H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-060-00-5	Distillates (petroleum), chemically neutralized heavy naphthenic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons produced by a treating process to remove acidic materials. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-135-1	64742-34-3	Carc. 1A	H350	GHS08 Dgr	H350			H
649-061-00-0	Distillates (petroleum), chemically neutralized light naphthenic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons produced by a treating process to remove acidic materials. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>30</sub> and produces a finished oil with a viscosity of less than 100 SUS a 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-136-7	64742-35-4	Carc. 1A	H350	GHS08 Dgr	H350			H
649-062-00-6	Gases (petroleum), catalytic cracked naphtha depropanizer overhead, C <sub>3</sub> -rich acid-free; Petroleum gas; [A complex combination of hydrocarbons obtained from fractionation of catalytic cracked hydrocarbons and treated to remove acidic impurities. It consists of hydrocarbons having carbon numbers in the range of C <sub>2</sub> through C <sub>4</sub> , predominantly C <sub>3</sub> .]	270-755-0	68477-73-6	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-063-00-1	Gases (petroleum), catalytic cracker; Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of the products from a catalytic cracking process. It consists predominantly of aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>6</sub> .]	270-756-6	68477-74-7	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-064-00-7	Gases (petroleum), catalytic cracker, C <sub>1-5</sub> -rich; Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of products from a catalytic cracking process. It consists of aliphatic hydrocarbons having carbon numbers in the range of C <sub>1</sub> through C <sub>6</sub> , predominantly C <sub>1</sub> through C <sub>5</sub> .]	270-757-1	68477-75-8	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-065-00-2	Gases (petroleum), catalytic polymd. naphtha stabilizer overhead, C <sub>2,4</sub> -rich; Petroleum gas; [A complex combination of hydrocarbons obtained from the fractionation stabilization of catalytic polymerized naphtha. It consists of aliphatic hydrocarbons having carbon numbers in the range of C <sub>2</sub> through C <sub>6</sub> , predominantly C <sub>2</sub> through C <sub>4</sub> .]	270-758-7	68477-76-9	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-066-00-8	Gases (petroleum), catalytic reformer, C <sub>1,4</sub> -rich; Petroleum gas; [A complex combination of hydrocarbons produced by distillation of products from a catalytic reforming process. It consists of hydrocarbons having carbon numbers in the range of C <sub>1</sub> through C <sub>6</sub> , predominantly C <sub>1</sub> through C <sub>4</sub> .]	270-760-8	68477-79-2	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-067-00-3	Gases (petroleum), C <sub>3-5</sub> olefinic-paraffinic alkylation feed; Petroleum gas; [A complex combination of olefinic and paraffinic hydrocarbons having carbon numbers in the range of C <sub>3</sub> through C <sub>5</sub> which are used as alkylation feed. Ambient temperatures normally exceed the critical temperature of these combinations.]	270-765-5	68477-83-8	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-068-00-9	Gases (petroleum), C <sub>4</sub> -rich; Petroleum gas; [A complex combination of hydrocarbons produced by distillation of products from a catalytic fractionation process. It consists of aliphatic hydrocarbons having carbon numbers in the range of C <sub>3</sub> through C <sub>5</sub> , predominantly C <sub>4</sub> .]	270-767-6	68477-85-0	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-069-00-4	Gases (petroleum), deethanizer overheads; Petroleum gas; [A complex combination of hydrocarbons produced from distillation of the gas and gasoline fractions from the catalytic cracking process. It contains predominantly ethane and ethylene.]	270-768-1	68477-86-1	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-070-00-X	Gases (petroleum), deisobutanizer tower overheads; Petroleum gas; [A complex combination of hydrocarbons produced by the atmospheric distillation of a butane-butylene stream. It consists of aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>3</sub> through C <sub>4</sub> .]	270-769-7	68477-87-2	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-071-00-5	Gases (petroleum), depropanizer dry, propene-rich; Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of products from the gas and gasoline fractions of a catalytic cracking process. It consists predominantly of propylene with some ethane and propane.]	270-772-3	68477-90-7	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-072-00-0	Gases (petroleum), depropanizer overheads; Petroleum gas; [A complex combination of hydrocarbons produced by distillation of products from the gas and gasoline fractions of a catalytic cracking process. It consists of aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>2</sub> through C <sub>4</sub> .]	270-773-9	68477-91-8	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-073-00-6	Gases (petroleum), gas recovery plant depropanizer overheads; Petroleum gas; [A complex combination of hydrocarbons obtained by fractionation of miscellaneous hydrocarbon streams. It consists predominantly of hydrocarbons having carbon numbers in the range of C <sub>1</sub> through C <sub>4</sub> , predominantly propane.]	270-777-0	68477-94-1	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-074-00-1	Gases (petroleum), Girbatol unit feed; Petroleum gas; [A complex combination of hydrocarbons that is used as the feed into the Girbatol unit to remove hydrogen sulfide. It consists of aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>2</sub> through C <sub>4</sub> .]	270-778-6	68477-95-2	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-075-00-7	Gases (petroleum), isomerized naphtha fractionator, C <sub>4</sub> -rich, hydrogen sulfide-free; Petroleum gas	270-782-8	68477-99-6	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-076-00-2	Tail gas (petroleum), catalytic cracked clarified oil and thermal cracked vacuum residue fractionation reflux drum; Petroleum gas; [A complex combination of hydrocarbons obtained from fractionation of catalytic cracked clarified oil and thermal cracked vacuum residue. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>6</sub> .]	270-802-5	68478-21-7	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-077-00-8	Tail gas (petroleum), catalytic cracked naphtha stabilization absorber; Petroleum gas; [A complex combination of hydrocarbons obtained from the stabilization of catalytic cracked naphtha. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>6</sub> .]	270-803-0	68478-22-8	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-078-00-3	Tail gas (petroleum), catalytic cracker, catalytic reformer and hydrodesulfurizer combined fractionater; Petroleum gas; [A complex combination of hydrocarbons obtained from the fractionation of products from catalytic cracking, catalytic reforming and hydrodesulfurizing processes treated to remove acidic impurities. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	270-804-6	68478-24-0	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-079-00-9	Tail gas (petroleum), catalytic reformed naphtha fractionation stabilizer; Petroleum gas; [A complex combination of hydrocarbons obtained from the fractionation stabilization of catalytic reformed naphtha. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>4</sub> .]	270-806-7	68478-26-2	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-080-00-4	Tail gas (petroleum), saturate gas plant mixed stream, C <sub>4</sub> -rich; Petroleum gas; [A complex combination of hydrocarbons obtained from the fractionation stabilization of straight-run naphtha, distillation tail gas and catalytic reformed naphtha stabilizer tail gas. It consists of hydrocarbons having carbon numbers in the range of C <sub>3</sub> through C <sub>6</sub> , predominantly butane and isobutane.]	270-813-5	68478-32-0	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-081-00-X	Tail gas (petroleum), saturate gas recovery plant, C <sub>1,2</sub> -rich; Petroleum gas; [A complex combination of hydrocarbons obtained from fractionation of distillate tail gas, straight-run naphtha, catalytic reformed naphtha stabilizer tail gas. It consists predominantly of hydrocarbons having carbon numbers in the range of C <sub>1</sub> through C <sub>5</sub> , predominantly methane and ethane.]	270-814-0	68478-33-1	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-082-00-5	Tail gas (petroleum), vacuum residues thermal cracker; Petroleum gas; [A complex combination of hydrocarbons obtained from the thermal cracking of vacuum residues. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	270-815-6	68478-34-2	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-083-00-0	Hydrocarbons, C <sub>3,4</sub> -rich, petroleum distillate; Petroleum gas; [A complex combination of hydrocarbons produced by distillation and condensation of crude oil. It consists of hydrocarbons having carbon numbers in the range of C <sub>3</sub> through C <sub>5</sub> , predominantly C <sub>3</sub> through C <sub>4</sub> .]	270-990-9	68512-91-4	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-084-00-6	Gases (petroleum), full-range straight-run naphtha dehexanizer off; petroleum gas; [A complex combination of hydrocarbons obtained by the fractionation of the full-range straight-run naphtha. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>2</sub> through C <sub>6</sub> .]	271-000-8	68513-15-5	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-085-00-1	Gases (petroleum), hydrocracking depropanizer off, hydrocarbon-rich; Petroleum gas; [A complex combination of hydrocarbon produced by the distillation of products from a hydrocracking process. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>4</sub> . It may also contain small amounts of hydrogen and hydrogen sulfide.]	271-001-3	68513-16-6	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-086-00-7	Gases (petroleum), light straight-run naphtha stabilizer off; Petroleum gas; [A complex combination of hydrocarbons obtained by the stabilization of light straight-run naphtha. It consists of saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>2</sub> through C <sub>6</sub> .]	271-002-9	68513-17-7	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-087-00-2	Residues (petroleum), alkylation splitter, C <sub>4</sub> -rich; Petroleum gas; [A complex residuum from the distillation of streams various refinery operations. It consists of hydrocarbons having carbon numbers in the range of C <sub>4</sub> through C <sub>5</sub> , predominantly butane and boiling in the range of approximately - 11.7 °C to 27.8 °C (11°F to 82°F).]	271-010-2	68513-66-6	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-088-00-8	Hydrocarbons, C <sub>1-4</sub> ; Petroleum gas; [A complex combination of hydrocarbons provided by thermal cracking and absorber operations and by distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>4</sub> and boiling in the range of approximately minus 164 °C to minus 0.5 °C (-263°F to 31°F).]	271-032-2	68514-31-8	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-089-00-3	Hydrocarbons, C <sub>1-4</sub> , sweetened; Petroleum gas; [A complex combination of hydrocarbons obtained by subjecting hydrocarbon gases to a sweetening process to convert mercaptans or to remove acidic impurities. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>4</sub> and boiling in the range of approximately - 164 °C to - 0.5 °C (-263°F to 31°F).]	271-038-5	68514-36-3	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-090-00-9	Hydrocarbons, C <sub>1-3</sub> ; Petroleum gas; [A complex combination of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>3</sub> and boiling in the range of approximately minus 164 °C to minus 42 °C (-263°F to - 44°F).]	271-259-7	68527-16-2	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-091-00-4	Hydrocarbons, C <sub>1-4</sub> , debutanizer fraction; Petroleum gas	271-261-8	68527-19-5	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-092-00-X	Gases (petroleum), C <sub>1-5</sub> , wet; Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of crude oil and/or the cracking of tower gas oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	271-624-0	68602-83-5	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-093-00-5	Hydrocarbons, C <sub>2-4</sub> ; Petroleum gas	271-734-9	68606-25-7	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-094-00-0	Hydrocarbons, C <sub>3</sub> ; Petroleum gas	271-735-4	68606-26-8	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-095-00-6	Gases (petroleum), alkylation feed; Petroleum gas; [A complex combination of hydrocarbons produced by the catalytic cracking of gas oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>3</sub> through C <sub>4</sub> .]	271-737-5	68606-27-9	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-096-00-1	Gases (petroleum), depropanizer bottoms fractionation off; Petroleum gas; [A complex combination of hydrocarbons obtained from the fractionation of depropanizer bottoms. It consists predominantly of butane, isobutane and butadiene.]	271-742-2	68606-34-8	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-097-00-7	Gases (petroleum), refinery blend; Petroleum gas; [A complex combination obtained from various processes. It consists of hydrogen, hydrogen sulfide and hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	272-183-7	68783-07-3	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-098-00-2	Gases (petroleum), catalytic cracking; Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of the products from a catalytic cracking process. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>3</sub> through C <sub>5</sub> .]	272-203-4	68783-64-2	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-099-00-8	Gases (petroleum), C <sub>2-4</sub> , sweetened; Petroleum gas; [A complex combination of hydrocarbons obtained by subjecting a petroleum distillate to a sweetening process to convert mercaptans or to remove acidic impurities. It consists predominantly of saturated and unsaturated hydrocarbons having carbon numbers predominantly in the range of C <sub>2</sub> through C <sub>4</sub> and boiling in the range of approximately - 51 °C to - 34 °C (-60°F to - 30°F).]	272-205-5	68783-65-3	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-100-00-1	Gases (petroleum), crude oil fractionation off; Petroleum gas; [A complex combination of hydrocarbons produced by the fractionation of crude oil. It consists of saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	272-871-7	68918-99-0	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-101-00-7	Gases (petroleum), dehexanizer off; Petroleum gas; [A complex combination of hydrocarbons obtained by the fractionation of combined naphtha streams. It consists of saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	272-872-2	68919-00-6	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-102-00-2	Gases (petroleum), light straight run gasoline fractionation stabilizer off; Petroleum gas; [A complex combination of hydrocarbons obtained by the fractionation of light straight-run gasoline. It consists of saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	272-878-5	68919-05-1	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-103-00-8	Gases (petroleum), naphtha unifier desulfurization stripper off; Petroleum gas; [A complex combination of hydrocarbons produced by a naphtha unifier desulfurization process and stripped from the naphtha product. It consists of saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>4</sub> .]	272-879-0	68919-06-2	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-104-00-3	Gases (petroleum), straight-run naphtha catalytic reforming off; Petroleum gas; [A complex combination of hydrocarbons obtained by the catalytic reforming of straight-run naphtha and fractionation of the total effluent. It consists of methane, ethane, and propane.]	272-882-7	68919-09-5	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-105-00-9	Gases (petroleum), fluidized catalytic cracker splitter overheads; Petroleum gas; [A complex combination of hydrocarbons produced by the fractionation of the charge to the C <sub>3</sub> -C <sub>4</sub> splitter. It consists predominantly of C <sub>3</sub> hydrocarbons.]	272-893-7	68919-20-0	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-106-00-4	Gases (petroleum), straight-run stabilizer off; Petroleum gas; [A complex combination of hydrocarbons obtained from the fractionation of the liquid from the first tower used in the distillation of crude oil. It consists of saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>4</sub> .]	272-883-2	68919-10-8	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-107-00-X	Gases (petroleum), catalytic cracked naphtha debutanizer; Petroleum gas; [A complex combination of hydrocarbons obtained from fractionation of catalytic cracked naphtha. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>4</sub> .]	273-169-3	68952-76-1	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-108-00-5	Tail gas (petroleum), catalytic cracked distillate and naphtha stabilizer; Petroleum gas; [A complex combination of hydrocarbons obtained by the fractionation of catalytic cracked naphtha and distillate. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>4</sub> .]	273-170-9	68952-77-2	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-109-00-0	Tail gas (petroleum), thermal-cracked distillate, gas oil and naphtha absorber; petroleum gas; [A complex combination of hydrocarbons obtained from the separation of thermal-cracked distillates, naphtha and gas oil. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>6</sub> .]	273-175-6	68952-81-8	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-110-00-6	Tail gas (petroleum), thermal cracked hydrocarbon fractionation stabilizer, petroleum coking; Petroleum gas; [A complex combination of hydrocarbons obtained from the fractionation stabilization of thermal cracked hydrocarbons from petroleum coking process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>6</sub> .]	273-176-1	68952-82-9	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-111-00-1	Gases (petroleum, light steam-cracked, butadiene conc.); Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of products from a thermal cracking process, It consists of hydrocarbons having a carbon number predominantly of C <sub>4</sub> .]	273-265-5	68955-28-2	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-112-00-7	Gases (petroleum), straight-run naphtha catalytic reformer stabilizer overhead; Petroleum gas; [A complex combination of hydrocarbons obtained by the catalytic reforming of straight-run naphtha and the fractionation of the total effluent. It consists of saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>2</sub> through C <sub>4</sub> .]	273-270-2	68955-34-0	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-113-00-2	Hydrocarbons, C <sub>4</sub> ; Petroleum gas	289-339-5	87741-01-3	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-114-00-8	Alkanes, C <sub>1-4</sub> , C <sub>3</sub> -rich; Petroleum gas	292-456-4	90622-55-2	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-115-00-3	Gases (petroleum), steam-cracker C <sub>3</sub> -rich; Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of products from a steam cracking process. It consists predominantly of propylene with some propane and boils in the range of approximately - 70 °C to 0 °C (-94°F to 32°F).]	295-404-9	92045-22-2	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-116-00-9	Hydrocarbons, C <sub>4</sub> , steam-cracker distillate; Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of the products of a steam cracking process. It consists predominantly of hydrocarbons having a carbon number of C <sub>4</sub> , predominantly 1-butene and 2-butene, containing also butane and isobutene and boiling in the range of approximately minus 12 °C to 5 °C (10.4°F to 41°F).]	295-405-4	92045-23-3	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-117-00-4	Petroleum gases, liquefied, sweetened, C <sub>4</sub> fraction; Petroleum gas; [A complex combination of hydrocarbons obtained by subjecting a liquified petroleum gas mix to a sweetening process to oxidize mercaptans or to remove acidic impurities. It consists predominantly of C <sub>4</sub> saturated and unsaturated hydrocarbons.]	295-463-0	92045-80-2	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			HKSU
649-118-00-X	Hydrocarbons, C <sub>4</sub> , 1,3-butadiene- and isobutene-free; Petroleum gas	306-004-1	95465-89-7	Flam. Gas 1 Press. Gas Carc. 1B	H220 H350	GHS02 GHS04 GHS08 Dgr	H220 H350			H K U
649-119-00-5	Raffinates (petroleum), steam-cracked C <sub>4</sub> fraction cuprous ammonium acetate extrn., C <sub>3,5</sub> and C <sub>3,5</sub> unsatd., butadiene-free; Petroleum gas	307-769-4	97722-19-5	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-120-00-0	Gases (petroleum), amine system feed; Refinery gas; [The feed gas to the amine system for removal of hydrogen sulfide. It consists of hydrogen. Carbon monoxide, carbon dioxide, hydrogen sulfide and aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> may also be present.]	270-746-1	68477-65-6	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-121-00-6	Gases (petroleum), benzene unit hydrodesulfurizer off; Refinery gas; [Off gases produced by the benzene unit. It consists primarily of hydrogen. Carbon monoxide and hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>6</sub> , including benzene, may also be present.]	270-747-7	68477-66-7	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-122-00-1	Gases (petroleum), benzene unit recycle, hydrogen-rich; Refinery gas; [A complex combination of hydrocarbons obtained by recycling the gases of the benzene unit. It consists primarily of hydrogen with various small amounts of carbon monoxide and hydrocarbons having carbon numbers in the range of C <sub>1</sub> through C <sub>6</sub> .]	270-748-2	68477-67-8	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-123-00-7	Gases (petroleum), blend oil, hydrogen-nitrogen-rich; Refinery gas; [A complex combination of hydrocarbons obtained by distillation of a blend oil. It consists primarily of hydrogen and nitrogen with various small amounts of carbon monoxide, carbon dioxide, and aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	270-749-8	68477-68-9	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-124-00-2	Gases (petroleum), catalytic reformed naphtha stripper overheads; Refinery gas; [A complex combination of hydrocarbons obtained from stabilization of catalytic reformed naphtha. Its consists of hydrogen and saturated hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>4</sub> .]	270-759-2	68477-77-0	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-125-00-8	Gases (petroleum), C <sub>6-8</sub> catalytic reformer recycle; Refinery gas; [A complex combination of hydrocarbons produced by distillation of products from catalytic reforming of C <sub>6</sub> -C <sub>8</sub> feed and recycled to conserve hydrogen. It consists primarily of hydrogen. It may also contain various small amounts of carbon monoxide, carbon dioxide, nitrogen, and hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>6</sub> .]	270-761-3	68477-80-5	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-126-00-3	Gases (petroleum), C <sub>6-8</sub> catalytic reformer; Refinery gas; [A complex combination of hydrocarbons produced by distillation of products from catalytic reforming of C <sub>6</sub> -C <sub>8</sub> feed. It consists of hydrocarbons having carbon numbers in the range of C <sub>1</sub> through C <sub>5</sub> and hydrogen.]	270-762-9	68477-81-6	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-127-00-9	Gases (petroleum), C <sub>6-8</sub> catalytic reformer recycle, hydrogen-rich; Refinery gas	270-763-4	68477-82-7	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-128-00-4	Gases (petroleum), C <sub>2</sub> -return stream; Refinery gas; [A complex combination of hydrocarbons obtained by the extraction of hydrogen from a gas stream which consists primarily of hydrogen with small amounts of nitrogen, carbon monoxide, methane, ethane, and ethylene. It contains predominantly hydrocarbons such as methane, ethane, and ethylene with small amounts of hydrogen, nitrogen and carbon monoxide.]	270-766-0	68477-84-9	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-129-00-X	Gases (petroleum), dry sour, gas-concn.-unit-off; Refinery gas; [The complex combination of dry gases from a gas concentration unit. It consists of hydrogen, hydrogen sulfide and hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>3</sub> .]	270-774-4	68477-92-9	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-130-00-5	Gases (petroleum), gas concn. reabsorber distn.; Refinery gas; [A complex combination of hydrocarbons produced by distillation of products from combined gas streams in a gas concentration reabsorber. It consists predominantly of hydrogen, carbon monoxide, carbon dioxide, nitrogen, hydrogen sulfide and hydrocarbons having carbon numbers in the range of C <sub>1</sub> through C <sub>3</sub> .]	270-776-5	68477-93-0	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-131-00-0	Gases (petroleum), hydrogen absorber off; Refinery gas; [A complex combination obtained by absorbing hydrogen from a hydrogen rich stream. It consists of hydrogen, carbon monoxide, nitrogen, and methane with small amounts of C <sub>2</sub> hydrocarbons.]	270-779-1	68477-96-3	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-132-00-6	Gases (petroleum), hydrogen-rich; Refinery gas; [A complex combination separated as a gas from hydrocarbon gases by chilling. It consists primarily of hydrogen with various small amounts of carbon monoxide, nitrogen, methane, and C <sub>2</sub> hydrocarbons.]	270-780-7	68477-97-4	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-133-00-1	Gases (petroleum), hydrotreater blend oil recycle, hydrogen-nitrogen-rich; Refinery gas; [A complex combination obtained from recycled hydrotreated blend oil. It consists primarily of hydrogen and nitrogen with various small amounts of carbon monoxide, carbon dioxide and hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	270-781-2	68477-98-5	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-134-00-7	Gases (petroleum), recycle, hydrogen-rich; Refinery gas; [A complex combination obtained from recycled reactor gases. It consists primarily of hydrogen with various small amounts of carbon monoxide, carbon dioxide, nitrogen, hydrogen sulfide, and saturated aliphatic hydrocarbons having carbon numbers in the range of C <sub>1</sub> through C <sub>5</sub> .]	270-783-3	68478-00-2	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-135-00-2	Gases (petroleum), reformer make-up, hydrogen-rich; Refinery gas; [A complex combination obtained from the reformers. It consists primarily of hydrogen with various small amounts of carbon monoxide and aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	270-784-9	68478-01-3	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-136-00-8	Gases (petroleum), reforming hydrotreater; Refinery gas; [A complex combination obtained from the reforming hydrotreating process. It consists primarily of hydrogen, methane, and ethane with various small amounts of hydrogen sulfide and aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>3</sub> through C <sub>5</sub> .]	270-785-4	68478-02-4	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-137-00-3	Gases (petroleum), reforming hydrotreater, hydrogen-methane-rich; Refinery gas; [A complex combination obtained from the reforming hydrotreating process. It consists primarily of hydrogen and methane with various small amounts of carbon monoxide, carbon dioxide, nitrogen and saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>2</sub> through C <sub>5</sub> .]	270-787-5	68478-03-5	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-138-00-9	Gases (petroleum), reforming hydrotreater make-up, hydrogen-rich; Refinery gas; [A complex combination obtained from the reforming hydrotreating process. It consists primarily of hydrogen with various small amounts of carbon monoxide and aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	270-788-0	68478-04-6	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-139-00-4	Gases (petroleum), thermal cracking distn.; Refinery gas; [A complex combination produced by distillation of products from a thermal cracking process. It consists of hydrogen, hydrogen sulfide, carbon monoxide, carbon dioxide and hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>6</sub> .]	270-789-6	68478-05-7	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-140-00-X	Tail gas (petroleum), catalytic cracker refractionation absorber; Refinery gas; [A complex combination of hydrocarbons obtained from refractionation of products from a catalytic cracking process. It consists of hydrogen and hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>3</sub> .]	270-805-1	68478-25-1	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-141-00-5	Tail gas (petroleum), catalytic reformed naphtha separator; Refinery gas; [A complex combination of hydrocarbons obtained from the catalytic reforming of straight run naphtha. It consists of hydrogen and hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>6</sub> .]	270-807-2	68478-27-3	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-142-00-0	Tail gas (petroleum), catalytic reformed naphtha stabilizer; Refinery gas; [A complex combination of hydrocarbons obtained from the stabilization of catalytic reformed naphtha. It consists of hydrogen and hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>6</sub> .]	270-808-8	68478-28-4	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-143-00-6	Tail gas (petroleum), cracked distillate hydrotreater separator; Refinery gas; [A complex combination of hydrocarbons obtained by treating cracked distillates with hydrogen in the presence of a catalyst. It consists of hydrogen and saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	270-809-3	68478-29-5	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-144-00-1	Tail gas (petroleum), hydrodesulfurized straight-run naphtha separator; Refinery gas; [A complex combination of hydrocarbons obtained from hydrodesulfurization of straight-run naphtha. It consists of hydrogen and saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>6</sub> .]	270-810-9	68478-30-8	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-145-00-7	Gases (petroleum), catalytic reformed straight-run naphtha stabilizer overheads; Refinery gas; [A complex combination of hydrocarbons obtained from the catalytic reforming of straight-run naphtha followed by fractionation of the total effluent. It consists of hydrogen, methane, ethane and propane.]	270-999-8	68513-14-4	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-146-00-2	Gases (petroleum), reformer effluent high-pressure flash drum off; Refinery gas; [A complex combination produced by the high-pressure flashing of the effluent from the reforming reactor. It consists primarily of hydrogen with various small amounts of methane, ethane, and propane.]	271-003-4	68513-18-8	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-147-00-8	Gases (petroleum), reformer effluent low-pressure flash drum off; Refinery gas; [A complex combination produced by low-pressure flashing of the effluent from the reforming reactor. It consists primarily of hydrogen with various small amounts of methane, ethane, and propane.]	271-005-5	68513-19-9	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-148-00-3	Gases (petroleum), oil refinery gas distn. off; Refinery gas; [A complex combination separated by distillation of a gas stream containing hydrogen, carbon monoxide, carbon dioxide and hydrocarbons having carbon numbers in the range of C <sub>1</sub> through C <sub>6</sub> or obtained by cracking ethane and propane. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>2</sub> , hydrogen, nitrogen, and carbon monoxide.]	271-258-1	68527-15-1	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-149-00-9	Gases (petroleum), benzene unit hydrotreater depentanizer overheads; Refinery gas; [A complex combination produced by treating the feed from the benzene unit with hydrogen in the presence of a catalyst followed by depentanizing. It consists primarily of hydrogen, ethane and propane with various small amounts of nitrogen, carbon monoxide, carbon dioxide and hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>6</sub> . It may contain trace amounts of benzene.]	271-623-5	68602-82-4	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-150-00-4	Gases (petroleum), secondary absorber off, fluidized catalytic cracker overheads fractionator; Refinery gas; [A complex combination produced by the fractionation of the overhead products from the catalytic cracking process in the fluidized catalytic cracker. It consists of hydrogen, nitrogen, and hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>3</sub> .]	271-625-6	68602-84-6	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-151-00-X	Petroleum products, refinery gases; Refinery gas; [A complex combination which consists primarily of hydrogen with various small amounts of methane, ethane, and propane.]	271-750-6	68607-11-4	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-152-00-5	Gases (petroleum), hydrocracking low-pressure separator; Refinery gas; [A complex combination obtained by the liquid-vapor separation of the hydrocracking process reactor effluent. It consists predominantly of hydrogen and saturated hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>3</sub> .]	272-182-1	68783-06-2	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-153-00-0	Gases (petroleum), refinery; Refinery gas; [A complex combination obtained from various petroleum refining operations. It consists of hydrogen and hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>3</sub> .]	272-338-9	68814-67-5	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-154-00-6	Gases (petroleum), platformer products separator off; Refinery gas; [A complex combination obtained from the chemical reforming of naphthenes to aromatics. It consists of hydrogen and saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>2</sub> through C <sub>4</sub> .]	272-343-6	68814-90-4	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-155-00-1	Gases (petroleum), hydrotreated sour kerosine depentanizer stabilizer off; Refinery gas; [The complex combination obtained from the depentanizer stabilization of hydrotreated kerosine. It consists primarily of hydrogen, methane, ethane, and propane with various small amounts of nitrogen, hydrogen sulfide, carbon monoxide and hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>5</sub> .]	272-775-5	68911-58-0	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-156-00-7	Gases (petroleum), hydrotreated sour kerosine flash drum; Refinery gas; [A complex combination obtained from the flash drum of the unit treating sour kerosine with hydrogen in the presence of a catalyst. It consists primarily of hydrogen and methane with various small amounts of nitrogen, carbon monoxide, and hydrocarbons having carbon numbers predominantly in the range of C <sub>2</sub> through C <sub>5</sub> .]	272-776-0	68911-59-1	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-157-00-2	Gases (petroleum), distillate unfiner desulfurization stripper off; Refinery gas; [A complex combination stripped from the liquid product of the unfiner desulfurization process. It consists of hydrogen sulfide, methane, ethane, and propane.]	272-873-8	68919-01-7	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-158-00-8	Gases (petroleum), fluidized catalytic cracker fractionation off; Refinery gas; [A complex combination produced by the fractionation of the overhead product of the fluidized catalytic cracking process. It consists of hydrogen, hydrogen sulfide, nitrogen, and hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	272-874-3	68919-02-8	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-159-00-3	Gases (petroleum), fluidized catalytic cracker scrubbing secondary absorber off; Refinery gas; [A complex combination produced by scrubbing the overhead gas from the fluidized catalytic cracker. It consists of hydrogen, nitrogen, methane, ethane and propane.]	272-875-9	68919-03-9	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-160-00-9	Gases (petroleum), heavy distillate hydro-treater desulfurization stripper off; Refinery gas; [A complex combination stripped from the liquid product of the heavy distillate hydro-treater desulfurization process. It consists of hydrogen, hydrogen sulfide, and saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	272-876-4	68919-04-0	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-161-00-4	Gases (petroleum), platformer stabilizer off, light ends fractionation; Refinery gas; [A complex combination obtained by the fractionation of the light ends of the platinum reactors of the platformer unit. It consists of hydrogen, methane, ethane and propane.]	272-880-6	68919-07-3	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-162-00-X	Gases (petroleum), preflash tower off, crude distn.; Refinery gas; [A complex combination produced from the first tower used in the distillation of crude oil. It consists of nitrogen and saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	272-881-1	68919-08-4	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-163-00-5	Gases (petroleum), tar stripper off; Refinery gas; [A complex combination obtained by the fractionation of reduced crude oil. It consists of hydrogen and hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>4</sub> .]	272-884-8	68919-11-9	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-164-00-0	Gases (petroleum), unifier stripper off; Refinery gas; [A combination of hydrogen and methane obtained by fractionation of the products from the unifier unit.]	272-885-3	68919-12-0	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-165-00-6	Tail gas (petroleum), catalytic hydrodesulfurized naphtha separator; Refinery gas; [A complex combination of hydrocarbons obtained from the hydrodesulfurization of naphtha. It consists of hydrogen, methane, ethane, and propane.]	273-173-5	68952-79-4	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-166-00-1	Tail gas (petroleum), straight-run naphtha hydrodesulfurizer; Refinery gas; [A complex combination obtained from the hydrodesulfurization of straight-run naphtha. It consists of hydrogen and hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	273-174-0	68952-80-7	Press. Gas Flam. Gas 1 Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-167-00-7	Gases (petroleum), sponge absorber off, fluidized catalytic cracker and gas oil desulfurizer overhead fractionation; Refinery gas; [A complex combination obtained by the fractionation of products from the fluidized catalytic cracker and gas oil desulfurizer. It consists of hydrogen and hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>4</sub> .]	273-269-7	68955-33-9	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-168-00-2	Gases (petroleum), crude distn. and catalytic cracking; Refinery gas; [A complex combination produced by crude distillation and catalytic cracking processes. It consists of hydrogen, hydrogen sulfide, nitrogen, carbon monoxide and paraffinic and olefinic hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>6</sub> .]	273-563-5	68989-88-8	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-169-00-8	Gases (petroleum), gas oil diethanolamine scrubber off; Refinery gas; [A complex combination produced by desulfurization of gas oils with diethanolamine. It consists predominantly of hydrogen sulfide, hydrogen and aliphatic hydrocarbons having carbon numbers in the range of C <sub>1</sub> through C <sub>5</sub> .]	295-397-2	92045-15-3	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-170-00-3	Gases (petroleum), gas oil hydrodesulfurization effluent; Refinery gas; [A complex combination obtained by separation of the liquid phase from the effluent from the hydrogenation reaction. It consists predominantly of hydrogen, hydrogen sulfide and aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>3</sub> .]	295-398-8	92045-16-4	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-171-00-9	Gases (petroleum), gas oil hydrodesulfurization purge; Refinery gas; [A complex combination of gases obtained from the reformer and from the purges from the hydrogenation reactor. It consists predominantly of hydrogen and aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>4</sub> .]	295-399-3	92045-17-5	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-172-00-4	Gases (petroleum), hydrogenator effluent flash drum off; Refinery gas; [A complex combination of gases obtained from flash of the effluents after the hydrogenation reaction. It consists predominantly of hydrogen and aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>6</sub> .]	295-400-7	92045-18-6	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-173-00-X	Gases (petroleum), naphtha steam cracking high-pressure residual; Refinery gas; [A complex combination obtained as a mixture of the non-condensable portions from the product of a naphtha steam cracking process as well as residual gases obtained during the preparation of subsequent products. It consists predominantly of hydrogen and paraffinic and olefinic hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> with which natural gas may also be mixed.]	295-401-2	92045-19-7	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-174-00-5	Gases (petroleum), residue visbaking off; Refinery gas; [A complex combination obtained from viscosity reduction of residues in a furnace. It consists predominantly of hydrogen sulfide and paraffinic and olefinic hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	295-402-8	92045-20-0	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-175-00-0	Foot's oil (petroleum), acid-treated; Foot's oil; [A complex combination of hydrocarbons obtained by treatment of Foot's oil with sulfuric acid. It consists predominantly of branched-chain hydrocarbons with carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> .]	300-225-7	93924-31-3	Flam. Gas 1 Press. Gas Carc. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-176-00-6	Foot's oil (petroleum), clay-treated; Foot's oil; [A complex combination of hydrocarbons obtained by treatment of Foot's oil with natural or modified clay in either a contacting or percolation process to remove the trace amounts of polar compounds and impurities present. It consists predominantly of branched chain hydrocarbons with carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> .]	300-226-2	93924-32-4	Flam. Gas 1 Press. Gas Carc. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-177-00-1	Gases (petroleum), C <sub>3-4</sub> ; Petroleum gas; [A complex combination of hydrocarbons produced by distillation of products from the cracking of crude oil. It consists of hydrocarbons having carbon numbers in the range of C <sub>3</sub> through C <sub>4</sub> , predominantly of propane and propylene, and boiling in the range of approximately - 51 °C to - 1 °C (- 60°F to 30°F.)]	268-629-5	68131-75-9	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-178-00-7	Tail gas (petroleum), catalytic cracked distillate and catalytic cracked naphtha fractionation absorber; Petroleum gas; [The complex combination of hydrocarbons from the distillation of the products from catalytic cracked distillates and catalytic cracked naphtha. It consists predominantly of hydrocarbons having carbon numbers in the range of C <sub>1</sub> through C <sub>4</sub> .]	269-617-2	68307-98-2	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-179-00-2	Tail gas (petroleum), catalytic polymn. naphtha fractionation stabilizer; Petroleum gas; [A complex combination of hydrocarbons from the fractionation stabilization products from polymerization of naphtha. It consists predominantly of hydrocarbons having carbon numbers in the range of C <sub>1</sub> through C <sub>4</sub> .]	269-618-8	68307-99-3	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-180-00-8	Tail gas (petroleum), catalytic reformed naphtha fractionation stabilizer, hydrogen sulfide-free; Petroleum gas; [A complex combination of hydrocarbons obtained from fractionation stabilization of catalytic reformed naphtha and from which hydrogen sulfide has been removed by amine treatment. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>4</sub> .]	269-619-3	68308-00-9	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-181-00-3	Tail gas (petroleum), cracked distillate hydrotreater stripper; Petroleum gas; [A complex combination of hydrocarbons obtained by treating thermal cracked distillates with hydrogen in the presence of a catalyst. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>6</sub> .]	269-620-9	68308-01-0	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-182-00-9	Tail gas (petroleum), straight-run distillate hydrodesulfurizer, hydrogen sulfide-free; Petroleum gas; [A complex combination of hydrocarbons obtained from catalytic hydrodesulfurization of straight run distillates and from which hydrogen sulfide has been removed by amine treatment. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>4</sub> .]	269-630-3	68308-10-1	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-183-00-4	Tail gas (petroleum), gas oil catalytic cracking absorber; Petroleum gas; [A complex combination of hydrocarbons obtained from the distillation of products from the catalytic cracking of gas oil. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	269-623-5	68308-03-2	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-184-00-X	Tail gas (petroleum), gas recovery plant; Petroleum gas; [A complex combination of hydrocarbons from the distillation of products from miscellaneous hydrocarbon streams. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	269-624-0	68308-04-3	Press. Gas Flam. Gas 1 Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-185-00-5	Tail gas (petroleum), gas recovery plant deethanizer; Petroleum gas; [A complex combination of hydrocarbons from the distillation of products from miscellaneous hydrocarbon streams. It consists of hydrocarbon having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>4</sub> .]	269-625-6	68308-05-4	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-186-00-0	Tail gas (petroleum), hydrodesulfurized distillate and hydrodesulfurized naphtha fractionator, acid-free; Petroleum gas; [A complex combination of hydrocarbons obtained from fractionation of hydrodesulfurized naphtha and distillate hydrocarbon streams and treated to remove acidic impurities. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	269-626-1	68308-06-5	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-187-00-6	Tail gas (petroleum), hydrodesulfurized vacuum gas oil stripper, hydrogen sulfide-free; Petroleum gas; [A complex combination of hydrocarbons obtained from stripping stabilization of catalytic hydrodesulfurized vacuum gas oil and from which hydrogen sulfide has been removed by amine treatment. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>6</sub> .]	269-627-7	68308-07-6	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-188-00-1	Tail gas (petroleum), light straight-run naphtha stabilizer, hydrogen sulfide-free; Petroleum gas; [A complex combination of hydrocarbons obtained from fractionation stabilization of light straight run naphtha and from which hydrogen sulfide has been removed by amine treatment. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	269-629-8	68308-09-8	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-189-00-7	Tail gas (petroleum), propane-propylene alkylation feed prep deethanizer; Petroleum gas; [A complex combination of hydrocarbons obtained from the distillation of the reaction products of propane with propylene. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>4</sub> .]	269-631-9	68308-11-2	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-190-00-2	Tail gas (petroleum), vacuum gas oil hydrodesulfurizer, hydrogen sulfide-free; Petroleum gas; [A complex combination of hydrocarbons obtained from catalytic hydrodesulfurization of vacuum gas oil and from which hydrogen sulfide has been removed by amine treatment. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>6</sub> .]	269-632-4	68308-12-3	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-191-00-8	Gases (petroleum), catalytic cracked overheads; Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of products from the catalytic cracking process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>3</sub> through C <sub>5</sub> and boiling in the range of approximately - 48 °C to 32 °C (-54°F to 90°F).]	270-071-2	68409-99-4	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-193-00-9	Alkanes, C <sub>1,2</sub> ; Petroleum gas	270-651-5	68475-57-0	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-194-00-4	Alkanes, C <sub>2,3</sub> ; Petroleum gas	270-652-0	68475-58-1	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-195-00-X	Alkanes, C <sub>3,4</sub> ; Petroleum gas	270-653-6	68475-59-2	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-196-00-5	Alkanes, C <sub>4,5</sub> ; Petroleum gas	270-654-1	68475-60-5	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-197-00-0	Fuel gases; Petroleum gas; [A combination of light gases. It consists predominantly of hydrogen and/or low molecular weight hydrocarbons.]	270-667-2	68476-26-6	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-198-00-6	Fuel gases, crude oil of distillates; Petroleum gas; [A complex combination of light gases produced by distillation of crude oil and by catalytic reforming of naphtha. It consists of hydrogen and hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>4</sub> and boiling in the range of approximately - 217 °C to - 12 °C (-423°F to 10°F).]	270-670-9	68476-29-9	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-199-00-1	Hydrocarbons, C <sub>3,4</sub> ; Petroleum gas	270-681-9	68476-40-4	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-200-00-5	Hydrocarbons, C <sub>4,5</sub> ; Petroleum gas	270-682-4	68476-42-6	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-201-00-0	Hydrocarbons, C <sub>2,4</sub> , C <sub>3</sub> -rich; Petroleum gas	270-689-2	68476-49-3	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-202-00-6	Petroleum gases, liquefied; Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>3</sub> through C <sub>7</sub> and boiling in the range of approximately - 40 °C to 80 °C (-40 °F to 176 °F).]	270-704-2	68476-85-7	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			HKSU

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-203-00-1	Petroleum gases, liquefied, sweetened; Petroleum gas; [A complex combination of hydrocarbons obtained by subjecting liquefied petroleum gas mix to a sweetening process to convert mercaptans or to remove acidic impurities. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>3</sub> through C <sub>7</sub> and boiling in the range of approximately - 40 °C to 80 °C (-40 °F to 176 °F).]	270-705-8	68476-86-8	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			HKSU
649-204-00-7	Gases (petroleum), C <sub>3-4</sub> , isobutane-rich; Petroleum gas; [A complex combination of hydrocarbons from the distillation of saturated and unsaturated hydrocarbons usually ranging in carbon numbers from C <sub>3</sub> through C <sub>6</sub> , predominantly butane and isobutane. It consists of saturated and unsaturated hydrocarbons having carbon numbers in the range of C <sub>3</sub> through C <sub>4</sub> , predominantly isobutane.]	270-724-1	68477-33-8	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-205-00-2	Distillates (petroleum), C <sub>3-6</sub> , piperylene-rich; Petroleum gas; [A complex combination of hydrocarbons from the distillation of saturated and unsaturated aliphatic hydrocarbons usually ranging in the carbon numbers C <sub>3</sub> through C <sub>6</sub> . It consists of saturated and unsaturated hydrocarbons having carbon numbers in the range of C <sub>3</sub> through C <sub>6</sub> , predominantly piperylenes.]	270-726-2	68477-35-0	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-206-00-8	Gases (petroleum), butane splitter overheads; Petroleum gas; [A complex combination of hydrocarbons obtained from the distillation of the butane stream. It consists of aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>3</sub> through C <sub>4</sub> .]	270-750-3	68477-69-0	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-207-00-3	Gases (petroleum), C <sub>2</sub> ; Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of products from a catalytic fractionation process. It contains predominantly ethane, ethylene, propane, and propylene.]	270-751-9	68477-70-3	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-208-00-9	Gases (petroleum), catalytic-cracked gas oil depropanizer bottoms, C <sub>4</sub> -rich acid-free; Petroleum gas; [A complex combination of hydrocarbons obtained from fractionation of catalytic cracked gas oil hydrocarbon stream and treated to remove hydrogen sulfide and other acidic components. It consists of hydrocarbons having carbon numbers in the range of C <sub>3</sub> through C <sub>5</sub> , predominantly C <sub>4</sub> .]	270-752-4	68477-71-4	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-209-00-4	Gases (petroleum), catalytic-cracked naphtha debutanizer bottoms, C <sub>3,5</sub> -rich; Petroleum gas; [A complex combination of hydrocarbons obtained from the stabilization of catalytic cracked naphtha. It consists of aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>3</sub> through C <sub>5</sub> .]	270-754-5	68477-72-5	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U
649-210-00-X	Tail gas (petroleum), isomerized naphtha fractionation stabilizer; Petroleum gas; [A complex combination of hydrocarbons obtained from the fractionation stabilization products from isomerized naphtha. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>4</sub> .]	269-628-2	68308-08-7	Flam. Gas 1 Press. Gas Carc. 1A Muta. 1B	H220 H350 H340	GHS02 GHS04 GHS08 Dgr	H220 H350 H340			H K U



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-211-00-5	Foots oil (petroleum), carbon-treated; Foots oil; [A complex combination of hydrocarbons obtained by the treatment of Foots oil with activated carbon for the removal of trace constituents and impurities. It consists predominantly of saturated straight chain hydrocarbons having carbon numbers predominantly greater than C <sub>12</sub> .]	308-126-0	97862-76-5	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-212-00-0	Distillates (petroleum), sweetened middle; Gasoil — unspecified; [A complex combination of hydrocarbons obtained by subjecting a petroleum distillate to a sweetening process to convert mercaptans or to remove acidic impurities. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>9</sub> through C <sub>20</sub> and boiling in the range of approximately 150 °C to 345 °C (302°F to 653°F).]	265-088-7	64741-86-2	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-213-00-6	Gas oils (petroleum), solvent-refined; Gasoil — unspecified; [A complex combination of hydrocarbons obtained as the raffinate from a solvent extraction process. It consists predominantly of aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>11</sub> through C <sub>25</sub> and boiling in the range of approximately 205 °C to 400 °C (401°F to 752°F).]	265-092-9	64741-90-8	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-214-00-1	Distillates (petroleum), solvent-refined middle; Gasoil — unspecified; [A complex combination of hydrocarbons obtained as the raffinate from a solvent extraction process. It consists predominantly of aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>9</sub> through C <sub>20</sub> and boiling in the range of approximately 150 °C to 345 °C (302°F to 653°F).]	265-093-4	64741-91-9	Carc. 1B	H350	GHS08 Dgr	H350			H N

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-215-00-7	Gas oils (petroleum), acid-treated; Gasoil — unspecified; [A complex combination of hydrocarbons obtained as a raffinate from a sulfuric acid treating process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>13</sub> through C <sub>25</sub> and boiling in the range of approximately 230 °C to 400 °C (446°F to 752°F).]	265-112-6	64742-12-7	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-216-00-2	Distillates (petroleum), acid-treated middle; Gasoil — unspecified; [A complex combination of hydrocarbons obtained as a raffinate from a sulfuric acid treating process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>11</sub> through C <sub>20</sub> and boiling in the range of approximately 205 °C to 345 °C (401°F to 653°F).]	265-113-1	64742-13-8	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-217-00-8	Distillates (petroleum), acid-treated light; Gasoil — unspecified; [A complex combination of hydrocarbons obtained as a raffinate from a sulfuric acid treating process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>9</sub> through C <sub>16</sub> and boiling in the range of approximately 150 °C to 290 °C (302°F to 554°F).]	265-114-7	64742-14-9	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-218-00-3	Gas oils (petroleum), chemically neutralized; Gasoil — unspecified; [A complex combination of hydrocarbons produced by a treating process to remove acidic materials. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>13</sub> through C <sub>25</sub> and boiling in the range of approximately 230 °C to 400 °C (446°F to 752°F).]	265-129-9	64742-29-6	Carc. 1B	H350	GHS08 Dgr	H350			H N

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-219-00-9	Distillates (petroleum), chemically neutralized middle; Gasoil — unspecified; [A complex combination of hydrocarbons produced by a treating process to remove acidic materials. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>11</sub> through C <sub>20</sub> and boiling in the range of approximately 205 °C to 345 °C (401°F to 653°F).]	265-130-4	64742-30-9	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-220-00-4	Distillates (petroleum), clay-treated middle; Gasoil — unspecified; [A complex combination of hydrocarbons resulting from treatment of a petroleum fraction with natural or modified clay, usually in a percolation process to remove the trace amounts of polar compounds and impurities present. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>9</sub> through C <sub>20</sub> and boiling in the range of approximately 150 °C to 345 °C (302°F to 653°F).]	265-139-3	64742-38-7	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-221-00-X	Distillates (petroleum), hydrotreated middle; Gasoil — unspecified; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>11</sub> through C <sub>25</sub> and boiling in the range of approximately 205 °C to 400 °C (401°F to 752°F).]	265-148-2	64742-46-7	Carc. 1B	H350	GHS08 Dgr	H350			H N

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-222-00-5	Gas oils (petroleum), hydrodesulfurized; Gasoil — unspecified; [A complex combination of hydrocarbons obtained from a petroleum stock by treating with hydrogen to convert organic sulfur to hydrogen sulfide which is removed. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>13</sub> through C <sub>25</sub> and boiling in the range of approximately 230 °C to 400 °C (446°F to 752°F).]	265-182-8	64742-79-6	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-223-00-0	Distillates (petroleum), hydrodesulfurized middle; Gasoil — unspecified; [A complex combination of hydrocarbons obtained from a petroleum stock by treating with hydrogen to convert organic sulfur to hydrogen sulfide which is removed. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>11</sub> through C <sub>25</sub> and boiling in the range of approximately 205 °C to 400 °C (401°F to 752°F).]	265-183-3	64742-80-9	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-224-00-6	Fuels, diesel; Gasoil — unspecified; [A complex combination of hydrocarbons produced by the distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>9</sub> through C <sub>20</sub> and boiling in the range of approximately 163 °C to 357 °C (325°F to 675°F).]	269-822-7	68334-30-5	Carc. 2	H351	GHS08 Wng	H351			H N
649-225-00-1	Fuel oil, No 2; Gasoil — unspecified; [A distillate oil having a minimum viscosity of 32,6 SUS at 37,7 °C (100°F) to a maximum of 37,9 SUS at 37,7 °C (100°F).]	270-671-4	68476-30-2	Carc. 2	H351	GHS08 Wng	H351			H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-226-00-7	Fuel oil, No 4; Gasoil — unspecified; [A distillate oil having a minimum viscosity of 45 SUS at 37,7 °C (100°F) to a maximum of 125 SUS at 37,7 °C (100°F).]	270-673-5	68476-31-3	Carc. 2	H351	GHS08 Wng	H351			H
649-227-00-2	Fuels, diesel, No 2; Gasoil — unspecified; [A distillate oil having a minimum viscosity of 32,6 SUS at 37,7 °C (100°F).]	270-676-1	68476-34-6	Carc. 2	H351	GHS08 Wng	H351			H
649-228-00-8	Distillates (petroleum), catalytic reformer fractionator residue, high-boiling; Gasoil — unspecified; [A complex combination of hydrocarbons from the distillation of catalytic reformer fractionator residue. It boils in the range of approximately 343 °C to 399 °C (650°F to 750°F).]	270-719-4	68477-29-2	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-229-00-3	Distillates (petroleum), catalytic reformer fractionator residue, intermediate-boiling; Gasoil — unspecified; [A complex combination of hydrocarbons from the distillation of catalytic reformer fractionator residue. It boils in the range of approximately 288 °C to 371 °C (550°F to 700°F).]	270-721-5	68477-30-5	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-230-00-9	Distillates (petroleum), catalytic reformer fractionator residue, low-boiling; Gasoil — unspecified; [The complex combination of hydrocarbons from the distillation of catalytic reformer fractionator residue. It boils approximately below 288 °C (550°F).]	270-722-0	68477-31-6	Carc. 1B	H350	GHS08 Dgr	H350			H N

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-231-00-4	Distillates (petroleum), highly refined middle; Gasoil — unspecified; [A complex combination of hydrocarbons obtained by the subjection of a petroleum fraction to several of the following steps: filtration, centrifugation, atmospheric distillation, vacuum distillation, acidification, neutralization and clay treatment. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>10</sub> through C <sub>20</sub> .]	292-615-8	90640-93-0	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-232-00-X	Distillates (petroleum) catalytic reformer, heavy arom. conc.; Gasoil — unspecified; [A complex combination of hydrocarbons obtained from the distillation of a catalytically reformed petroleum cut. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>10</sub> through C <sub>16</sub> and boiling in the range of approximately 200 °C to 300 °C (392°F to 572°F).]	295-294-2	91995-34-5	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-233-00-5	Gas oils, paraffinic; Gasoil — unspecified; [A distillate obtained from the redistillation of a complex combination of hydrocarbons obtained by the distillation of the effluents from a severe catalytic hydrotreatment of paraffins. It boils in the range of approximately 190 °C to 330 °C (374°F to 594°F).]	300-227-8	93924-33-5	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-234-00-0	Naphtha (petroleum), solvent-refined hydrodesulfurized heavy; Gasoil — unspecified	307-035-3	97488-96-5	Carc. 1B	H350	GHS08 Dgr	H350			H N

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-235-00-6	Hydrocarbons, C <sub>16-20</sub> , hydrotreated middle distillate, distn. lights; Gasoil — unspecified; [A complex combination of hydrocarbons obtained as first runnings from the vacuum distillation of effluents from the treatment of a middle distillate with hydrogen. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>16</sub> through C <sub>20</sub> and boiling in the range of approximately 290 °C to 350 °C (554°F to 662°F). It produces a finished oil having a viscosity of 2cSt at 100 °C (212°F).]	307-659-6	97675-85-9	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-236-00-1	Hydrocarbons, C <sub>12-20</sub> , hydrotreated paraffinic, distn. lights; Gasoil — unspecified; [A complex combination of hydrocarbons obtained as first runnings from the vacuum distillation of effluents from the treatment of heavy paraffins with hydrogen in the presence of a catalyst. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>12</sub> through C <sub>20</sub> and boiling in the range of approximately 230 °C to 350 °C (446°F to 662°F). It produces a finished oil having a viscosity of 2cSt at 100 °C (212°F).]	307-660-1	97675-86-0	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-237-00-7	Hydrocarbons, C <sub>11-17</sub> , solvent-extd. light naphthenic; Gasoil — unspecified; [A complex combination of hydrocarbons obtained by extraction of the aromatics from a light naphthenic distillate having a viscosity of 2.2 cSt at 40 °C (104°F). It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>11</sub> through C <sub>17</sub> and boiling in the range of approximately 200 °C to 300 °C (392°F to 572°F).]	307-757-9	97722-08-2	Carc. 1B	H350	GHS08 Dgr	H350			H N

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-238-00-2	Gas oils, hydrotreated; Gasoil — unspecified; [A complex combination of hydrocarbons obtained from the redistillation of the effluents from the treatment of paraffins with hydrogen in the presence of a catalyst. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>17</sub> through C <sub>27</sub> and boiling in the range of approximately 330 °C to 340 °C (626°F to 644°F).]	308-128-1	97862-78-7	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-239-00-8	Distillates (petroleum), carbon-treated light paraffinic; Gasoil — unspecified; [A complex combination of hydrocarbons obtained by the treatment of a petroleum oil fraction with activated charcoal for the removal of traces of polar constituents and impurities. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>12</sub> through C <sub>28</sub> .]	309-667-5	100683-97-4	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-240-00-3	Distillates (petroleum), intermediate paraffinic, carbon-treated; Gasoil — unspecified; [A complex combination of hydrocarbons obtained by the treatment of petroleum with activated charcoal for the removal of trace polar constituents and impurities. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>16</sub> through C <sub>36</sub> .]	309-668-0	100683-98-5	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-241-00-9	Distillates (petroleum), intermediate paraffinic, clay-treated; Gasoil — unspecified; [A complex combination of hydrocarbons obtained by the treatment of petroleum with bleaching earth for the removal of trace polar constituents and impurities. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>16</sub> through C <sub>36</sub> .]	309-669-6	100683-99-6	Carc. 1B	H350	GHS08 Dgr	H350			H N



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevaarlijkheidsklasse en categorie	Gevaarlijkheidsaanduiding	Pictogram, signaalwoord	Gevaarlijkheidsaanduiding	Aanvullende gevaarlijkheidsaanduiding		
649-242-00-4	Alkanes, C <sub>12-26</sub> -branched and linear	292-454-3	90622-53-0	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-243-00-X	Lubricating greases; Grease; [A complex combination of hydrocarbons having carbon numbers predominantly in the range of C <sub>12</sub> through C <sub>50</sub> . May contain organic salts of alkali metals, alkaline earth metals, and/or aluminium compounds.]	278-011-7	74869-21-9	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-244-00-5	Slack wax (petroleum); Slack wax; [A complex combination of hydrocarbons obtained from a petroleum fraction by solvent crystallization (solvent dewaxing) or as a distillation fraction from a very waxy crude. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C <sub>20</sub> .]	265-165-5	64742-61-6	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-245-00-0	Slack wax (petroleum), acid-treated; Slack wax; [A complex combination of hydrocarbons obtained as a raffinate by treatment of a petroleum slack wax fraction with sulfuric acid treating process. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C <sub>20</sub> .]	292-659-8	90669-77-5	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-246-00-6	Slack wax (petroleum), clay-treated; Slack wax; [A complex combination of hydrocarbons obtained by treatment of a petroleum slack wax fraction with natural or modified clay in either a contacting or percolation process. It consists predominantly of saturated straight and branched hydrocarbons having carbon numbers predominantly greater than C <sub>20</sub> .]	292-660-3	90669-78-6	Carc. 1B	H350	GHS08 Dgr	H350			H N

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-247-00-1	Slack wax (petroleum), hydrotreated; Slack wax; [A complex combination of hydrocarbons obtained by treating slack wax with hydrogen in the presence of a catalyst. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C <sub>20</sub> .]	295-523-6	92062-09-4	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-248-00-7	Slack wax (petroleum), low-melting; Slack wax; [A complex combination of hydrocarbons obtained from a petroleum fraction by solvent deparaffination. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C <sub>12</sub> .]	295-524-1	92062-10-7	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-249-00-2	Slack wax (petroleum), low-melting, hydrotreated; Slack wax; [A complex combination of hydrocarbons obtained by treatment of low-melting petroleum slack wax with hydrogen in the presence of a catalyst. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C <sub>12</sub> .]	295-525-7	92062-11-8	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-250-00-8	Slack wax (petroleum), low-melting, carbon-treated; Slack wax; [A complex combination of hydrocarbons obtained by the treatment of low-melting slack wax with activated carbon for the removal of trace polar constituents and impurities. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C <sub>12</sub> .]	308-155-9	97863-04-2	Carc. 1B	H350	GHS08 Dgr	H350			H N

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-251-00-3	Slack wax (petroleum), low-melting, clay-treated; Slack wax; [A complex combination of hydrocarbons obtained by the treatment of low-melting petroleum slack wax with bentonite for removal of trace polar constituents and impurities. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C <sub>12</sub> .]	308-156-4	97863-05-3	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-252-00-9	Slack wax (petroleum), low-melting, silicic acid-treated; Slack wax; [A complex combination of hydrocarbons obtained by the treatment of low-melting petroleum slack wax with silicic acid for the removal of trace polar constituents and impurities. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C <sub>12</sub> .]	308-158-5	97863-06-4	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-253-00-4	Slack wax (petroleum), carbon-treated; Slack wax; [A complex combination of hydrocarbons obtained by treatment of petroleum slack wax with activated charcoal for the removal of trace polar constituents and impurities.]	309-723-9	100684-49-9	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-254-00-X	Petrolatum; Petrolatum; [A complex combination of hydrocarbons obtained as a semi-solid from dewaxing paraffinic residual oil. It consists predominantly of saturated crystalline and liquid hydrocarbons having carbon numbers predominantly greater than C <sub>25</sub> .]	232-373-2	8009-03-8	Carc. 1B	H350	GHS08 Dgr	H350			H N

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-255-00-5	Petrolatum (petroleum), oxidized; Petrolatum; [A complex combination of organic compounds, predominantly high molecular weight carboxylic acids, obtained by the air oxidation of petrolatum.]	265-206-7	64743-01-7	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-256-00-0	Petrolatum (petroleum), alumina-treated; Petrolatum; [A complex combination of hydrocarbons obtained when petrolatum is treated with Al <sub>2</sub> O <sub>3</sub> to remove polar components and impurities. It consists predominantly of saturated, crystalline, and liquid hydrocarbons having carbon numbers predominantly greater than C <sub>25</sub> .]	285-098-5	85029-74-9	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-257-00-6	Petrolatum (petroleum), hydrotreated; Petrolatum; [A complex combination of hydrocarbons obtained as a semi-solid from dewaxed paraffinic residual oil treated with hydrogen in the presence of a catalyst. It consists predominantly of saturated microcrystalline and liquid hydrocarbons having carbon numbers predominantly greater than C <sub>20</sub> .]	295-459-9	92045-77-7	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-258-00-1	Petrolatum (petroleum), carbon-treated; Petrolatum; [A complex combination of hydrocarbons obtained by the treatment of petroleum petrolatum with activated carbon for the removal of trace polar constituents and impurities. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly greater than C <sub>20</sub> .]	308-149-6	97862-97-0	Carc. 1B	H350	GHS08 Dgr	H350			H N

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-259-00-7	Petrolatum (petroleum), silicic acid-treated; Petrolatum; [A complex combination of hydrocarbons obtained by the treatment of petroleum petrolatum with silicic acid for the removal of trace polar constituents and impurities. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly greater than C <sub>20</sub> .]	308-150-1	97862-98-1	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-260-00-2	Petrolatum (petroleum), clay-treated; Petrolatum; [A complex combination of hydrocarbons obtained by treatment of petrolatum with bleaching earth for the removal of traces of polar constituents and impurities. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of greater than C <sub>25</sub> .]	309-706-6	100684-33-1	Carc. 1B	H350	GHS08 Dgr	H350			H N
649-261-00-8	Gasoline, natural; Low boiling point naphtha; [A complex combination of hydrocarbons separated from natural gas by processes such as refrigeration or absorption. It consists predominantly of saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>8</sub> and boiling in the range of approximately minus 20 °C to 120 °C (-4°F to 248°F).]	232-349-1	8006-61-9	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-262-00-3	Naphtha; Low boiling point naphtha; [Refined, partly refined, or unrefined petroleum products by the distillation of natural gas. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>5</sub> through C <sub>6</sub> and boiling in the range of approximately 100 °C to 200 °C (212°F to 392°F).]	232-443-2	8030-30-6	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-263-00-9	Ligroïne; Low boiling point naphtha; [A complex combination of hydrocarbons obtained by the fractional distillation of petroleum. This fraction boils in a range of approximately 20 °C to 135 °C (58°F to 275°F).]	232-453-7	8032-32-4	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-264-00-4	Naphtha (petroleum), heavy straight-run; Low boiling point naphtha; [A complex combination of hydrocarbons produced by distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>6</sub> through C <sub>12</sub> and boiling in the range of approximately 65 °C to 230 °C (149°F to 446°F).]	265-041-0	64741-41-9	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-265-00-X	Naphtha (petroleum), full-range straight-run; Low boiling point naphtha; [A complex combination of hydrocarbons produced by distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>11</sub> and boiling in the range of approximately minus 20 °C to 220 °C (-4°F to 428°F).]	265-042-6	64741-42-0	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-266-00-5	Naphtha (petroleum), light straight-run; Low boiling point naphtha; [A complex combination of hydrocarbons produced by distillation of crude oil. It consists predominantly of aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>10</sub> and boiling in the range of approximately minus 20 °C to 180 °C (-4°F to 356°F).]	265-046-8	64741-46-4	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-267-00-0	Solvent naphtha (petroleum), light aliph.; Low boiling point naphtha; [A complex combination of hydrocarbons obtained from the distillation of crude oil or natural gasoline. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C <sub>5</sub> through C <sub>10</sub> and boiling in the range of approximately 35 °C to 160 °C (95°F to 320°F).]	265-192-2	64742-89-8	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-268-00-6	Distillates (petroleum), straight-run light; Low boiling point naphtha; [A complex combination of hydrocarbons produced by the distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>2</sub> through C <sub>7</sub> and boiling in the range of approximately - 88 °C to 99 °C (-127°F to 210°F).]	270-077-5	68410-05-9	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-269-00-1	Gasoline, vapor-recovery; Low boiling point naphtha; [A complex combination of hydrocarbons separated from the gases from vapor recovery systems by cooling. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>11</sub> and boiling in the range of approximately - 20 °C to 196 °C (-4°F to 384°F).]	271-025-4	68514-15-8	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-270-00-7	Gasoline, straight-run, topping-plant; Low boiling point naphtha; [A complex combination of hydrocarbons produced from the topping plant by the distillation of crude oil. It boils in the range of approximately 36,1 °C to 193,3 °C (97°F to 380°F).]	271-727-0	68606-11-1	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-271-00-2	Naphtha (petroleum), unsweetened; Low boiling point naphtha; [A complex combination of hydrocarbons produced from the distillation of naphtha streams from various refinery processes. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>5</sub> through C <sub>12</sub> and boiling in the range of approximately 0 °C to 230 °C (25°F to 446°F).]	272-186-3	68783-12-0	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-272-00-8	Distillates (petroleum), light straight-run gasoline fractionation stabilizer overheads; Low boiling point naphtha; [A complex combination of hydrocarbons having carbon numbers predominantly in the range of C <sub>3</sub> through C <sub>6</sub> .]	272-931-2	68921-08-4	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-273-00-3	Naphtha (petroleum), heavy straight run, arom.-contg.; Low boiling point naphtha; [A complex combination of hydrocarbons obtained from a distillation process of crude petroleum. It consists predominantly of hydrocarbons having carbon numbers in the range of C <sub>8</sub> through C <sub>12</sub> and boiling in the range of approximately 130 °C to 210 °C (266°F to 410°F).]	309-945-6	101631-20-3	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-274-00-9	Naphtha (petroleum), full-range alkylate; Low boiling point modified naphtha; [A complex combination of hydrocarbons produced by distillation of the reaction products of isobutane with monoolefinic hydrocarbons usually ranging in carbon numbers from C <sub>3</sub> through C <sub>5</sub> . It consist of predominantly branched chain saturated hydro-carbons having carbon numbers predominantly in the range of C <sub>7</sub> through C <sub>12</sub> and boiling in the range of approximately 90 °C to 220 °C (194°F to 428°F).]	265-066-7	64741-64-6	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-275-00-4	Naphtha (petroleum), heavy alkylate; Low boiling point modified naphtha; [A complex combination of hydrocarbons produced by distillation of the reaction products of isobutane with monoolefinic hydrocarbons usually ranging in carbon numbers from C <sub>3</sub> to C <sub>5</sub> . It consists of predominantly branched chain saturated hydrocarbons having carbon numbers predominantly in the range of C <sub>9</sub> through C <sub>12</sub> and boiling in the range of approximately 150 °C to 220 °C (302°F to 428°F).]	265-067-2	64741-65-7	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-276-00-X	Naphtha (petroleum), light alkylate; Low boiling point modified naphtha; [A complex combination of hydrocarbons produced by distillation of the reaction products of isobutane with monoolefinic hydrocarbons usually ranging in carbon numbers from C <sub>3</sub> through C <sub>5</sub> . It consists of predominantly branched chain saturated hydrocarbons having carbon numbers predominantly in the range of C <sub>7</sub> through C <sub>10</sub> and boiling in the range of approximately 90 °C to 160 °C (194°F to 320°F).]	265-068-8	64741-66-8	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-277-00-5	Naphtha (petroleum), isomerization; Low boiling point modified naphtha; [A complex combination of hydrocarbons obtained from catalytic isomerization of straight chain paraffinic C <sub>4</sub> through C <sub>6</sub> hydrocarbons. It consists predominantly of saturated hydrocarbons such as isobutane, isopentane, 2,2-dimethylbutane, 2-methylpentane, and 3-methylpentane.]	265-073-5	64741-70-4	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-278-00-0	Naphtha (petroleum), solvent-refined light; Low boiling point modified naphtha; [A complex combination of hydrocarbons obtained as the raffinate from a solvent extraction process. It consists predominantly of aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>5</sub> through C <sub>11</sub> and boiling in the range of approximately 35 °C to 190 °C (95°F to 374°F).]	265-086-6	64741-84-0	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-279-00-6	Naphtha (petroleum), solvent-refined heavy; Low boiling point modified naphtha; [A complex combination of hydrocarbons obtained as the raffinate from a solvent extraction process. It consists predominantly of aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>7</sub> through C <sub>12</sub> and boiling in the range of approximately 90 °C to 230 °C (194°F to 446°F).]	265-095-5	64741-92-0	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-280-00-1	Raffinates (petroleum), catalytic reformer ethylene glycol-water countercurrent exts.; Low boiling point modified naphtha; [A complex combination of hydrocarbons obtained as the raffinate from the UDEX extraction process on the catalytic reformer stream. It consists of saturated hydrocarbons having carbon numbers predominantly in the range of C <sub>6</sub> through C <sub>9</sub> .]	270-088-5	68410-71-9	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-281-00-7	Raffinates (petroleum), reformer, Lurgi unit-sepd.; Low boiling point modified naphtha; [The complex combination of hydrocarbons obtained as a raffinate from a Lurgi separation unit. It consists predominantly of non-aromatic hydrocarbons with various small amounts of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>6</sub> through C <sub>8</sub> .]	270-349-3	68425-35-4	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-282-00-2	Naphtha (petroleum), full-range alkylate, butane-contg.; Low boiling point modified naphtha; [A complex combination of hydrocarbons produced by the distillation of the reaction products of isobutane with monoolefinic hydrocarbons usually ranging in carbon numbers from C <sub>3</sub> through C <sub>5</sub> . It consists of predominantly branched chain saturated hydrocarbons having carbon numbers predominantly in the range of C <sub>7</sub> through C <sub>12</sub> with some butanes and boiling in the range of approximately 35 °C to 200 °C (95°F to 428°F).]	271-267-0	68527-27-5	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-283-00-8	Distillates (petroleum), naphtha steam cracking-derived, solvent-refined light hydro-treated; Low boiling point modified naphtha; [A complex combination of hydrocarbons obtained as the raffinate from a solvent extraction process of hydrotreated light distillate from steam-cracked naphtha.]	295-315-5	91995-53-8	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-284-00-3	Naphtha (petroleum), C <sub>4-12</sub> butane-alkylate, isooctane-rich; Low boiling point modified naphtha; [A complex combination of hydrocarbons obtained by alkylation of butanes. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>12</sub> , rich in isooctane, and boiling in the range of approximately 35 °C to 210 °C (95°F to 410°F).]	295-430-0	92045-49-3	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-285-00-9	Hydrocarbons, hydrotreated light naphtha distillates, solvent-refined; Low boiling point modified naphtha; [A combination of hydrocarbons obtained from the distillation of hydrotreated naphtha followed by a solvent extraction and distillation process. It consists predominantly of saturated hydrocarbons boiling in the range of approximately 94 °C to 99 °C (201°F to 210°F).]	295-436-3	92045-55-1	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-286-00-4	Naphtha (petroleum), isomerization, C <sub>6</sub> -fraction; Low boiling point modified naphtha; [A complex combination of hydrocarbons obtained by distillation of a gasoline which has been catalytically isomerized. It consists predominantly of hexane isomers boiling in the range of approximately 60 °C to 66 °C (140°F to 151°F).]	295-440-5	92045-58-4	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-287-00-X	Hydrocarbons, C <sub>6-7</sub> , naphtha-cracking, solvent-refined; Low boiling point modified naphtha; [A complex combination of hydrocarbons obtained by the sorption of benzene from a catalytically fully hydrogenated benzene-rich hydrocarbon cut that was distillatively obtained from prehydrogenated cracked naphtha. It consists predominantly of paraffinic and naphthenic hydrocarbons having carbon numbers predominantly in the range of C <sub>6</sub> through C <sub>7</sub> and boiling in the range of approximately 70 °C to 100 °C (158°F to 212°F).]	295-446-8	92045-64-2	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-288-00-5	Hydrocarbons, C <sub>6</sub> -rich, hydrotreated light naphtha distillates, solvent-refined; Low boiling point modified naphtha; [A complex combination of hydrocarbons obtained by distillation of hydrotreated naphtha followed by solvent extraction. It consists predominantly of saturated hydrocarbons and boiling in the range of approximately 65 °C to 70 °C (149°F to 158°F).]	309-871-4	101316-67-0	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-289-00-0	Naphtha (petroleum), heavy catalytic cracked; Low boiling point cat-cracked naphtha; [A complex combination of hydrocarbons produced by a distillation of products from a catalytic cracking process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>6</sub> through C <sub>12</sub> and boiling in the range of approximately 65 °C to 230 °C (148°F to 446°F). It contains a relatively large proportion of unsaturated hydrocarbons.]	265-055-7	64741-54-4	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-290-00-6	Naphtha (petroleum), light catalytic cracked; Low boiling point cat-cracked naphtha; [A complex combination of hydrocarbons produced by the distillation of products from a catalytic cracking process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>11</sub> and boiling in the range of approximately minus 20 °C to 190 °C (-4°F to 374°F). It contains a relatively large proportion of unsaturated hydrocarbons.]	265-056-2	64741-55-5	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-291-00-1	Hydrocarbons, C <sub>3-11</sub> , catalytic cracker distillates; Low boiling point cat-cracked naphtha; [A complex combination of hydrocarbons produced by the distillations of products from a catalytic cracking process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>3</sub> through C <sub>11</sub> and boiling in a range approximately up to 204 °C (400°F).]	270-686-6	68476-46-0	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-292-00-7	Naphtha (petroleum), catalytic cracked light distd.; Low boiling point cat-cracked naphtha; [A complex combination of hydrocarbons produced by the distillation of products from a catalytic cracking process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	272-185-8	68783-09-5	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-293-00-2	Distillates (petroleum), naphtha steam cracking-derived, hydrotreated light arom.; Low boiling point cat-cracked naphtha; [A complex combination of hydrocarbons obtained by treating a light distillate from steam-cracked naphtha. It consists predominantly of aromatic hydrocarbons.]	295-311-3	91995-50-5	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-294-00-8	Naphtha (petroleum), heavy catalytic cracked, sweetened; Low boiling point cat-cracked naphtha; [A complex combination of hydrocarbons obtained by subjecting a catalytic cracked petroleum distillate to a sweetening process to convert mercaptans or to remove acidic impurities. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>6</sub> through C <sub>12</sub> and boiling in the range of approximately 60 °C to 200 °C (140°F to 392°F).]	295-431-6	92045-50-6	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-295-00-3	Naphtha (petroleum), light catalytic cracked sweetened; Low boiling point cat-cracked naphtha; [A complex combination of hydrocarbons obtained by subjecting naphtha from a catalytic cracking process to a sweetening process to convert mercaptans or to remove acidic impurities. It consists predominantly of hydrocarbons boiling in a range of approximately 35 °C to 210 °C (95°F to 410°F).]	295-441-0	92045-59-5	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-296-00-9	Hydrocarbons, C <sub>8-12</sub> , catalytic-cracking, chem. neutralized; Low boiling point cat-cracked naphtha; [A complex combination of hydrocarbons produced by the distillation of a cut from the catalytic cracking process, having undergone an alkaline washing. It consists predominantly of hydrocarbons having carbon numbers in the range of C <sub>8</sub> through C <sub>12</sub> and boiling in the range of approximately 130 °C to 210 °C (266°F to 410°F).]	295-794-0	92128-94-4	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-297-00-4	Hydrocarbons, C <sub>8-12</sub> , catalytic cracker distillates; Low boiling point cat-cracked naphtha; [A complex combination of hydrocarbons obtained by distillation of products from a catalytic cracking process. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>8</sub> through C <sub>12</sub> and boiling in the range of approximately 140 °C to 210 °C (284°F to 410°F).]	309-974-4	101794-97-2	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-298-00-X	Hydrocarbons, C <sub>8-12</sub> , catalytic cracking, chem. neutralized, sweetened; Low boiling point cat-cracked naphtha	309-987-5	101896-28-0	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-299-00-5	Naphtha (petroleum), light catalytic reformed; Low boiling point cat-reformed naphtha; [A complex combination of hydrocarbons produced from the distillation of products from a catalytic reforming process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>5</sub> through C <sub>11</sub> and boiling in the range of approximately 35 °C to 190 °C (95°F to 374°F). It contains a relatively large proportion of aromatic and branched chain hydrocarbons. This stream may contain 10 vol. % or more benzene.]	265-065-1	64741-63-5	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-300-00-9	Naphtha (petroleum), heavy catalytic reformed; Low boiling point cat-reformed naphtha; [A complex combination of hydrocarbons produced from the distillation of products from a catalytic reforming process. It consists of predominantly aromatic hydrocarbons having numbers predominantly in the range of C <sub>7</sub> through C <sub>12</sub> and boiling in the range of approximately 90 °C to 230 °C (194°F to 446°F).]	265-070-9	64741-68-0	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-301-00-4	Distillates (petroleum), catalytic reformed depentanizer; Low boiling point cat-reformed naphtha; [A complex combination of hydrocarbons from the distillation of products from a catalytic reforming process. It consists predominantly of aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>3</sub> through C <sub>6</sub> and boiling in the range of approximately - 49 °C to 63 °C - 57°F to 145°F.]	270-660-4	68475-79-6	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-302-00-X	Hydrocarbons, C <sub>2-6</sub> , C <sub>6-8</sub> catalytic reformer; Low boiling point cat-reformed naphtha	270-687-1	68476-47-1	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-303-00-5	Residues (petroleum), C <sub>6-8</sub> catalytic reformer; Low boiling point cat-reformed naphtha; [A complex residuum from the catalytic reforming of C <sub>6-8</sub> feed. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>2</sub> through C <sub>6</sub> .]	270-794-3	68478-15-9	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-304-00-0	Naphtha (petroleum), light catalytic reformed, arom.-free; Low boiling point cat-reformed naphtha; [A complex combination of hydrocarbons obtained from distillation of products from a catalytic reforming process. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>5</sub> through C <sub>8</sub> and boiling in the range of approximately 35 °C to 120 °C (95°F to 248°F). It contains a relatively large proportion of branched chain hydrocarbons with the aromatic components removed.]	270-993-5	68513-03-1	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-305-00-6	Distillates (petroleum), catalytic reformed straight-run naphtha overheads; Low boiling point cat-reformed naphtha; [A complex combination of hydrocarbons obtained by the catalytic reforming of straight-run naphtha followed by the fractionation of the total effluent. It consists of saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>2</sub> through C <sub>6</sub> .]	271-008-1	68513-63-3	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-306-00-1	Petroleum products, hydrofiner-powerformer reformates; Low boiling point cat-reformed naphtha; [The complex combination of hydrocarbons obtained in a hydrofiner-powerformer process and boiling in a range of approximately 27 °C to 210 °C (80°F to 410°F).]	271-058-4	68514-79-4	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-307-00-7	Naphtha (petroleum, full-range reformed; Low boiling point cat-reformed naphtha; [A complex combination of hydrocarbons produced by the distillation of the products from a catalytic reforming process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>5</sub> through C <sub>12</sub> and boiling in the range of approximately 35 °C to 230 °C (95°F to 446°F).]	272-895-8	68919-37-9	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-308-00-2	Naphtha (petroleum), catalytic reformed; Low boiling point cat-reformed naphtha; [A complex combination of hydrocarbons produced by the distillation of products from a catalytic reforming process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>12</sub> and boiling in the range of approximately 30 °C to 220 °C (90°F to 430°F). It contains a relatively large proportion of aromatic and branched chain hydrocarbons. This stream may contain 10 vol.% or more benzene.]	273-271-8	68955-35-1	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-309-00-8	Distillates (petroleum), catalytic reformed hydrotreated light, C <sub>8-12</sub> arom. fraction; Low boiling point cat-reformed naphtha; [A complex combination of alkylbenzenes obtained by the catalytic reforming of petroleum naphtha. It consists predominantly of alkylbenzenes having carbon numbers predominantly in the range of C <sub>8</sub> through C <sub>10</sub> and boiling in the range of approximately 160 °C to 180 °C (320°F to 356°F).]	285-509-8	85116-58-1	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-310-00-3	Aromatic hydrocarbons, C <sub>8</sub> , catalytic reforming-derived; Low boiling point cat-reformed naphtha	295-279-0	91995-18-5	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-311-00-9	Aromatic hydrocarbons, C <sub>7-12</sub> , C <sub>8</sub> -rich; Low boiling point cat-reformed naphtha; [A complex combination of hydrocarbons obtained by separation from the platformate-containing fraction. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>7</sub> through C <sub>12</sub> (primarily C <sub>8</sub> ) and can contain nonaromatic hydrocarbons, both boiling in the range of approximately 130 °C to 200 °C (266°F to 392°F).]	297-401-8	93571-75-6	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-312-00-4	Gasoline, C <sub>5-11</sub> , high-octane stabilized reformed; Low boiling point cat-reformed naphtha; [A complex high octane combination of hydrocarbons obtained by the catalytic dehydrogenation of a predominantly naphthenic naphtha. It consists predominantly of aromatics and non-aromatics having carbon numbers predominantly in the range of C <sub>5</sub> through C <sub>11</sub> and boiling in the range of approximately 45 °C to 185 °C (113°F to 365°F).]	297-458-9	93572-29-3	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-313-00-X	Hydrocarbons, C <sub>7-12</sub> , C <sub>&gt;9</sub> -arom.-rich, reforming heavy fraction; Low boiling point cat-reformed naphtha; [A complex combination of hydrocarbons obtained by separation from the platformate-containing fraction. It consists predominantly of nonaromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>7</sub> through C <sub>12</sub> and boiling in the range of approximately 120 °C to 210 °C (248°F to 380°F) and C <sub>9</sub> and higher aromatic hydrocarbons.]	297-465-7	93572-35-1	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-314-00-5	Hydrocarbons, C <sub>5-11</sub> , nonaroms.-rich, reforming light fraction; Low boiling point cat-reformed naphtha; [A complex combination of hydrocarbons obtained by separation from the platformate-containing fraction. It consists predominantly of nonaromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>5</sub> to C <sub>11</sub> and boiling in the range of approximately 35 °C to 125 °C (94°F to 257°F), benzene and toluene.]	297-466-2	93572-36-2	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-315-00-0	Foots oil (petroleum), silicic acid-treated; Foots oil; [A complex combination of hydrocarbons obtained by the treatment of Foots oil with silicic acid for removal of trace constituents and impurities. It consists predominantly of straight chain hydrocarbons having carbon numbers predominantly greater than C <sub>12</sub> .]	308-127-6	97862-77-6	Carc. 1B	H350 H304	GHS08 Dgr	H350 H304			H L
649-316-00-6	Naphtha (petroleum), light thermal cracked; Low boiling point thermally cracked naphtha; [A complex combination of hydrocarbons from distillation of products from a thermal cracking process. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>8</sub> and boiling in the range of approximately minus 10 °C to 130 °C (14°F to 266°F).]	265-075-6	64741-74-8	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-317-00-1	Naphtha (petroleum), heavy thermal cracked; Low boiling point thermally cracked naphtha; [A complex combination of hydrocarbons from distillation of the products from a thermal cracking process. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly in the range of C <sub>6</sub> through C <sub>12</sub> and boiling in the range of approximately 65 °C to 220 °C (148°F to 428°F).]	265-085-0	64741-83-9	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-318-00-7	Distillates (petroleum), heavy arom.; Low boiling point thermally cracked naphtha; [The complex combination of hydrocarbons from the distillation of the products from the thermal cracking of ethane and propane. This higher boiling fraction consists predominantly of C <sub>5</sub> -C <sub>7</sub> aromatic hydrocarbons with some unsaturated aliphatic hydrocarbons having carbon number predominantly of C <sub>5</sub> . This stream may contain benzene.]	267-563-4	67891-79-6	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-319-00-2	Distillates (petroleum), light arom.; Low boiling point thermally cracked naphtha; [The complex combination of hydrocarbons from the distillation of the products from the thermal cracking of ethane and propane. This lower boiling fraction consists predominantly of C <sub>5</sub> -C <sub>7</sub> aromatic hydrocarbons with some unsaturated aliphatic hydrocarbons having a carbon number predominantly of C <sub>5</sub> . This stream may contain benzene.]	267-565-5	67891-80-9	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-320-00-8	Distillates (petroleum), naphtha-raffinate pyrolyzate-derived, gasoline-blending; Low boiling point thermally cracked naphtha; [The complex combination of hydrocarbons obtained by the pyrolysis fractionation at 816 °C (1500°F) of naphtha and raffinate. It consists predominantly of hydrocarbons having a carbon number of C <sub>9</sub> and boiling at approximately 204 °C (400°F).]	270-344-6	68425-29-6	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-321-00-3	Aromatic hydrocarbons, C <sub>6-8</sub> , naphtha-raffinate pyrolyzate-derived; Low boiling point thermally cracked naphtha; A complex combination of hydrocarbons obtained by the fractionation pyrolysis at 816 °C (1500°F) of naphtha and raffinate. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>6</sub> through C <sub>8</sub> , including benzene.]	270-658-3	68475-70-7	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-322-00-9	Distillates (petroleum), thermal cracked naphtha and gas oil; Low boiling point thermally cracked naphtha; [A complex combination of hydrocarbons produced by distillation of thermally cracked naphtha and/or gas oil. It consists predominantly of olefinic hydrocarbons having a carbon number of C <sub>5</sub> and boiling in the range of approximately 33 °C to 60 °C (91°F to 140°F).]	271-631-9	68603-00-9	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-323-00-4	Distillates (petroleum), thermal cracked naphtha and gas oil, C <sub>5</sub> -dimer-contg.; Low boiling point thermally cracked naphtha; [A complex combination of hydrocarbons produced by the extractive distillation of thermal cracked naphtha and/or gas oil. It consists predominantly of hydrocarbons having a carbon number of C <sub>5</sub> with some dimerized C <sub>5</sub> olefins and boiling in the range of approximately 33 °C to 184 °C (91°F to 363°F).]	271-632-4	68603-01-0	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-324-00-X	Distillates (petroleum), thermal cracked naphtha and gas oil, extractive; Low boiling point thermally cracked naphtha; [A complex combination of hydrocarbons produced by the extractive distillation of thermal cracked naphtha and/or gas oil. It consists of paraffinic and olefinic hydrocarbons, predominantly isoamylenes such as 2-methyl-1-butene and 2-methyl-2-butene and boiling in the range of approximately 31 °C to 40 °C (88°F to 104°F).]	271-634-5	68603-03-2	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-325-00-5	Distillates (petroleum), light thermal cracked, debutanized arom.; Low boiling point thermally cracked naphtha; [A complex combination of hydrocarbons produced by the distillation of products from a thermal cracking process. It consists predominantly of aromatic hydrocarbons, primarily benzene.]	273-266-0	68955-29-3	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-326-00-0	Naphtha (petroleum), light thermal cracked, sweetened; Low boiling point thermally cracked naphtha; [A complex combination of hydrocarbons obtained by subjecting a petroleum distillate from the high temperature thermal cracking of heavy oil fractions to a sweetening process to convert mercaptans. It consists predominantly of aromatics, olefins and saturated hydrocarbons boiling in the range of approximately 20 °C to 100 °C (68°F to 212°F).]	295-447-3	92045-65-3	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-327-00-6	Naphtha (petroleum), hydrotreated heavy; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>6</sub> through C <sub>13</sub> and boiling in the range of approximately 65 °C to 230 °C (149°F to 446°F).]	265-150-3	64742-48-9	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-328-00-1	Naphtha (petroleum), hydrotreated light; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>11</sub> and boiling in the range of approximately minus 20 °C to 190 °C (-4°F to 374°F).]	265-151-9	64742-49-0	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-329-00-7	Naphtha (petroleum), hydrodesulfurized light; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained from a catalytic hydrodesulfurization process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>11</sub> and boiling in the range of approximately minus 20 °C to 190 °C (-4°F to 374°F).]	265-178-6	64742-73-0	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-330-00-2	Naphtha (petroleum), hydrodesulfurized heavy; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained from a catalytic hydrodesulfurization process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>7</sub> through C <sub>12</sub> and boiling in the range of approximately 90 °C to 230 °C (194°F to 446°F).]	265-185-4	64742-82-1	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-331-00-8	Distillates (petroleum), hydrotreated middle, intermediate boiling; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained by the distillation of products from a middle distillate hydrotreating process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>5</sub> through C <sub>10</sub> and boiling in the range of approximately 127 °C to 188 °C (262°F to 370°F).]	270-092-7	68410-96-8	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-332-00-3	Distillates (petroleum), light distillate hydrotreating process, low-boiling; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained by the distillation of products from the light distillate hydrotreating process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>6</sub> through C <sub>9</sub> and boiling in the range of approximately 3 °C to 194 °C (37°F to 382°F).]	270-093-2	68410-97-9	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-333-00-9	Distillates (petroleum), hydrotreated heavy naphtha, deisohexanizer overheads; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained by distillation of the products from a heavy naphtha hydrotreating process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>3</sub> through C <sub>6</sub> and boiling in the range of approximately - 49 °C to 68 °C (-57°F to 155°F).]	270-094-8	68410-98-0	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-334-00-4	Solvent naphtha (petroleum), light arom., hydrotreated; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>8</sub> through C <sub>10</sub> and boiling in the range of approximately 135 °C to 210 °C (275°F to 410°F).]	270-988-8	68512-78-7	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-335-00-X	Naphtha (petroleum), hydrodesulfurized thermal cracked light; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained by fractionation of hydrodesulfurized thermal cracker distillate. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>5</sub> to C <sub>11</sub> and boiling in the range of approximately 23 °C to 195 °C (73°F to 383°F).]	285-511-9	85116-60-5	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-336-00-5	Naphtha (petroleum), hydrotreated light, cycloalkane-contg.; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained from the distillation of a petroleum fraction. It consists predominantly of alkanes and cycloalkanes boiling in the range of approximately minus 20 °C to 190 °C (-4°F to 374°F).]	285-512-4	85116-61-6	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-337-00-0	Naphtha (petroleum), heavy steam-cracked, hydrogenated; Low boiling point hydrogen treated naphtha	295-432-1	92045-51-7	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-338-00-6	Naphtha (petroleum), hydrodesulfurized full-range; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained from a catalytic hydrodesulfurization process. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>11</sub> and boiling in the range of approximately 30 °C to 250 °C (86°F to 482°F).]	295-433-7	92045-52-8	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-339-00-1	Naphtha (petroleum), hydrotreated light steam-cracked; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained by treating a petroleum fraction, derived from a pyrolysis process, with hydrogen in the presence of a catalyst. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly in the range of C <sub>5</sub> through C <sub>11</sub> and boiling in the range of approximately 35 °C to 190 °C (95°F to 374°F).]	295-438-4	92045-57-3	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-340-00-7	Hydrocarbons, C <sub>4-12</sub> , naphtha-cracking, hydrotreated; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained by distillation from the product of a naphtha steam cracking process and subsequent catalytic selective hydrogenation of gum formers. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>12</sub> and boiling in the range of approximately 30 °C to 230 °C (86°F to 446°F).]	295-443-1	92045-61-9	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-341-00-2	Solvent naphtha (petroleum), hydrotreated light naphthenic; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists predominantly of cycloparaffinic hydrocarbons having carbon numbers predominantly in the range of C <sub>6</sub> through C <sub>7</sub> and boiling in the range of approximately 73 °C to 85 °C (163°F to 185°F).]	295-529-9	92062-15-2	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-342-00-8	Naphtha (petroleum), light steam-cracked, hydrogenated; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons produced from the separation and subsequent hydrogenation of the products of a steam-cracking process to produce ethylene. It consists predominantly of saturated and unsaturated paraffins, cyclic paraffins and cyclic aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>10</sub> and boiling in the range of approximately 50 °C to 200 °C (122°F to 392°F). The proportion of benzene hydrocarbons may vary up to 30 wt. % and the stream may also contain small amounts of sulphur and oxygenated compounds.]	296-942-7	93165-55-0	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-343-00-3	Hydrocarbons, C <sub>6-11</sub> , hydrotreated, dearomatized; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained as solvents which have been subjected to hydrotreatment in order to convert aromatics to naphthenes by catalytic hydrogenation.]	297-852-0	93763-33-8	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-344-00-9	Hydrocarbons, C <sub>9-12</sub> , hydrotreated, dearomatized; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained as solvents which have been subjected to hydrotreatment in order to convert aromatics to naphthenes by catalytic hydrogenation.]	297-853-6	93763-34-9	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-345-00-4	Stoddard solvent; Low boiling point naphtha — unspecified; [A colourless, refined petroleum distillate that is free from rancid or objectionable odors and that boils in a range of approximately 300°F to 400°F.]	232-489-3	8052-41-3	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-346-00-X	Natural gas condensates (petroleum); Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons separated as a liquid from natural gas in a surface separator by retrograde condensation. It consists mainly of hydrocarbons having carbon numbers predominantly in the range of C <sub>2</sub> to C <sub>20</sub> . It is a liquid at atmospheric temperature and pressure.]	265-047-3	64741-47-5	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-347-00-5	Natural gas (petroleum), raw liq. mix; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons separated as a liquid from natural gas in a gas recycling plant by processes such as refrigeration or absorption. It consists mainly of saturated aliphatic hydrocarbons having carbon numbers in the range of C <sub>2</sub> through C <sub>8</sub> .]	265-048-9	64741-48-6	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-348-00-0	Naphtha (petroleum), light hydrocracked; Low boiling naphtha — unspecified; [A complex combination of hydrocarbons from distillation of the products from a hydrocracking process. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>10</sub> , and boiling in the range of approximately minus 20 °C to 180 °C (-4°F to 356°F).]	265-071-4	64741-69-1	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-349-00-6	Naphtha (petroleum), heavy hydrocracked; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons from distillation of the products from a hydrocracking process. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C <sub>6</sub> through C <sub>12</sub> , and boiling in the range of approximately 65 °C to 230 °C (148°F to 446°F).]	265-079-8	64741-78-2	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-350-00-1	Naphtha (petroleum), sweetened; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained by subjecting a petroleum naphtha to a sweetening process to convert mercaptans or to remove acidic impurities. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>12</sub> and boiling in the range of approximately minus 10 °C to 230 °C (14°F to 446°F).]	265-089-2	64741-87-3	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-351-00-7	Naphtha (petroleum), acid-treated; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained as a raffinate from a sulfuric acid treating process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>7</sub> through C <sub>12</sub> and boiling in the range of approximately 90 °C to 230 °C (194°F to 446°F).]	265-115-2	64742-15-0	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-352-00-2	Naphtha (petroleum), chemically neutralized heavy; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons produced by a treating process to remove acidic materials. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>6</sub> through C <sub>12</sub> and boiling in the range of approximately 65 °C to 230 °C (149°F to 446°F).]	265-122-0	64742-22-9	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-353-00-8	Naphtha (petroleum), chemically neutralized light; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons produced by a treating process to remove acidic materials. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>11</sub> and boiling in the range of approximately minus 20 °C to 190 °C (-4°F to 374°F).]	265-123-6	64742-23-0	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-354-00-3	Naphtha (petroleum), catalytic dewaxed; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained from the catalytic dewaxing of a petroleum fraction. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>5</sub> through C <sub>12</sub> and boiling in the range of approximately 35 °C to 230 °C (95°F to 446°F).]	265-170-2	64742-66-1	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-355-00-9	Naphtha (petroleum), light steam-cracked; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained by the distillation of the products from a steam cracking process. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>11</sub> and boiling in the range of approximately minus 20 °C to 190 °C (-4°F to 374°F). This stream is likely to contain 10 vol.% or more benzene.]	265-187-5	64742-83-2	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-356-00-4	Solvent naphtha (petroleum), light arom.; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained from distillation of aromatic streams. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>8</sub> through C <sub>10</sub> and boiling in the range of approximately 135 °C to 210 °C (275°F to 410°F).]	265-199-0	64742-95-6	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-357-00-X	Aromatic hydrocarbons, C <sub>6-10</sub> , acid-treated, neutralized; Low boiling point naphtha — unspecified	268-618-5	68131-49-7	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-358-00-5	Distillates (petroleum), C <sub>3-5</sub> , 2-methyl-2-butene-rich; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons from the distillation of hydrocarbons usually ranging in carbon numbers from C <sub>3</sub> through C <sub>5</sub> , predominantly isopentane and 3-methyl-1-butene. It consists of saturated and unsaturated hydrocarbons having carbon numbers in the range of C <sub>3</sub> through C <sub>5</sub> , predominantly 2-methyl-2-butene.]	270-725-7	68477-34-9	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-359-00-0	Distillates (petroleum), polymd. steam-cracked petroleum distillates, C <sub>5-12</sub> fraction; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained from the distillation of polymerized steam-cracked petroleum distillate. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>5</sub> through C <sub>12</sub> .]	270-735-1	68477-50-9	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-360-00-6	Distillates (petroleum), steam-cracked, C <sub>5-12</sub> fraction; Low boiling point naphtha — unspecified; [A complex combination of organic compounds obtained by the distillation of products from a steam cracking process. It consists of unsaturated hydrocarbons having carbon numbers predominantly in the range of C <sub>5</sub> through C <sub>12</sub> .]	270-736-7	68477-53-2	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-361-00-1	Distillates (petroleum), steam-cracked, C <sub>5-10</sub> fraction, mixed with light steam-cracked petroleum naphtha C <sub>5</sub> fraction; Low boiling point naphtha — unspecified	270-738-8	68477-55-4	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-362-00-7	Extracts (petroleum), cold-acid, C <sub>4-6</sub> ; Low boiling point naphtha — unspecified; [A complex combination of organic compounds produced by cold acid unit extraction of saturated and unsaturated aliphatic hydrocarbons usually ranging in carbon numbers from C <sub>3</sub> through C <sub>6</sub> , predominantly pentanes and amylenes. It consists predominantly of saturated and unsaturated hydrocarbons having carbon numbers in the range of C <sub>4</sub> through C <sub>6</sub> , predominantly C <sub>5</sub> .]	270-741-4	68477-61-2	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-363-00-2	Distillates (petroleum), depentanizer overheads; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained from a catalytic cracked gas stream. It consists of aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>6</sub> .]	270-771-8	68477-89-4	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-364-00-8	Residues (petroleum), butane splitter bottoms; Low boiling point naphtha — unspecified; [A complex residuum from the distillation of butane stream. It consists of aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>6</sub> .]	270-791-7	68478-12-6	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-365-00-3	Residual oils (petroleum), deisobutanizer tower; Low boiling point naphtha — unspecified; [A complex residuum from the atmospheric distillation of the butane-butylene stream. It consists of aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>6</sub> .]	270-795-9	68478-16-0	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-366-00-9	Naphtha (petroleum), full-range coker; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons produced by the distillation of products from a fluid coker. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>15</sub> and boiling in the range of approximately 43 °C to 250 °C (110°F to 500°F).]	270-991-4	68513-02-0	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-367-00-4	Naphtha (petroleum), steam-cracked middle arom.; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons produced by the distillation of products from a steam-cracking process. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>7</sub> through C <sub>12</sub> and boiling in the range of approximately 130 °C to 220 °C (266°F to 428°F).]	271-138-9	68516-20-1	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-368-00-X	Naphtha (petroleum), clay-treated full-range straight-run; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons resulting from treatment of full-range straight-run naphtha with natural or modified clay, usually in a percolation process to remove the trace amounts of polar compounds and impurities present. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>11</sub> and boiling in the range of approximately -20 °C to 220 °C (-4°F to 429°F).]	271-262-3	68527-21-9	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-369-00-5	Naphtha (petroleum), clay-treated light straight-run; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons resulting from treatment of light straight-run naphtha with a natural or modified clay, usually in a percolation process to remove the trace amounts of polar compounds and impurities, present. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>7</sub> through C <sub>10</sub> and boiling in the range of approximately 93 °C to 180 °C (200°F to 356°F).]	271-263-9	68527-22-0	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-370-00-0	Naphtha (petroleum), light steam-cracked arom.; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons produced by distillation of products from a steam-cracking process. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>7</sub> through C <sub>9</sub> and boiling in the range of approximately 110 °C to 165 °C (230°F to 329°F).]	271-264-4	68527-23-1	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-371-00-6	Naphtha (petroleum), light steam-cracked, debenzenized; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons produced by distillation of products from a steam-cracking process. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>12</sub> and boiling in the range of approximately 80 °C to 218 °C (176°F to 424°F).]	271-266-5	68527-26-4	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-372-00-1	Naphtha (petroleum), arom.-contg.; Low boiling point naphtha — unspecified	271-635-0	68603-08-7	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-373-00-7	Gasoline, pyrolysis, debutanizer bottoms; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained from the fractionation of depropanizer bottoms. It consists of hydrocarbons having carbon numbers predominantly greater than C <sub>5</sub> .]	271-726-5	68606-10-0	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-374-00-2	Naphtha (petroleum), light, sweetened; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained by subjecting a petroleum distillate to a sweetening process to convert mercaptans or to remove acidic impurities. It consists predominantly of saturated and unsaturated hydrocarbons having carbon numbers predominantly in the range of C <sub>3</sub> through C <sub>6</sub> and boiling in the range of approximately - 20 °C to 100 °C (-4°F to 212°F).]	272-206-0	68783-66-4	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-375-00-8	Natural gas condensates; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons separated and/or condensed from natural gas during transportation and collected at the wellhead and/or from the production, gathering, transmission, and distribution pipelines in deeps, scrubbers, etc. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>2</sub> through C <sub>8</sub> .]	272-896-3	68919-39-1	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H J
649-376-00-3	Distillates (petroleum), naphtha unfiner stripper; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons produced by stripping the products from the naphtha unfiner. It consists of saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>2</sub> through C <sub>6</sub> .]	272-932-8	68921-09-5	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-377-00-9	Naphtha (petroleum), catalytic reformed light, arom.-free fraction; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons remaining after removal of aromatic compounds from catalytic reformed light naphtha in a selective absorption process. It consists predominantly of paraffinic and cyclic compounds having carbon numbers predominantly in the range of C <sub>5</sub> to C <sub>8</sub> and boiling in the range of approximately 66 °C to 121 °C (151°F to 250°F).]	285-510-3	85116-59-2	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-378-00-4	Gasoline; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons consisting primarily of paraffins, cycloparaffins, aromatic and olefinic hydrocarbons having carbon numbers predominantly greater than C <sub>3</sub> and boiling in the range of 30 °C to 260 °C (86°F to 500°F).]	289-220-8	86290-81-5	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-379-00-X	Aromatic hydrocarbons, C <sub>7-8</sub> , dealkylation products, distn. residues; Low boiling point naphtha — unspecified	292-698-0	90989-42-7	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-380-00-5	Hydrocarbons, C <sub>4-6</sub> , depentanizer lights, arom. hydrotreater; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained as first runnings from the depentanizer column before hydrotreatment of the aromatic charges. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>6</sub> , predominantly pentanes and pentenes, and boiling in the range of approximately 25 °C to 40 °C (77°F to 104°F).]	295-298-4	91995-38-9	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-381-00-0	Distillates (petroleum), heat-soaked steam-cracked naphtha, C <sub>5</sub> -rich; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained by distillation of heat-soaked steam-cracked naphtha. It consists predominantly of hydrocarbons having carbon numbers in the range of C <sub>4</sub> through C <sub>6</sub> , predominantly C <sub>5</sub> .]	295-302-4	91995-41-4	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-382-00-6	Extracts (petroleum), catalytic reformed light naphtha solvent; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained as the extract from the solvent extraction of a catalytically reformed petroleum cut. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>7</sub> through C <sub>8</sub> and boiling in the range of approximately 100 °C to 200 °C (212°F to 392°F).]	295-331-2	91995-68-5	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-383-00-1	Naphtha (petroleum), hydrodesulfurized light, dearomatized; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained by distillation of hydrodesulfurized and dearomatized light petroleum fractions. It consists predominantly of C <sub>7</sub> paraffins and cycloparaffins boiling in a range of approximately 90 °C to 100 °C (194°F to 212°F).]	295-434-2	92045-53-9	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-384-00-7	Naphtha (petroleum), light, C <sub>5</sub> -rich, sweetened; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained by subjecting a petroleum naphtha to a sweetening process to convert mercaptans or to remove acidic impurities. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>5</sub> , predominantly C <sub>5</sub> , and boiling in the range of approximately minus 10 °C to 35 °C (14°F to 95°F).]	295-442-6	92045-60-8	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-385-00-2	Hydrocarbons, C <sub>8-11</sub> , naphtha-cracking, toluene cut; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained by distillation from prehydrogenated cracked naphtha. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>8</sub> through C <sub>11</sub> and boiling in the range of approximately 130 °C to 205 °C (266°F to 401°F).]	295-444-7	92045-62-0	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-386-00-8	Hydrocarbons, C <sub>4-11</sub> , naphtha-cracking, arom.-free; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained from prehydrogenated cracked naphtha after distillative separation of benzene- and toluene-containing hydrocarbon cuts and a higher boiling fraction. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range C <sub>4</sub> through C <sub>11</sub> and boiling in the range of approximately 30 °C to 205 °C (86°F to 401°F).]	295-445-2	92045-63-1	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-387-00-3	Naphtha (petroleum), light heat-soaked, steam-cracked; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained by the fractionation of steam cracked naphtha after recovery from a heat soaking process. It consists predominantly of hydrocarbons having a carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>6</sub> and boiling in the range of approximately 0 °C to 80 °C (32°F to 176°F).]	296-028-8	92201-97-3	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-388-00-9	Distillates (petroleum), C <sub>6</sub> -rich; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained from the distillation of a petroleum feedstock. It consists predominantly of hydrocarbons having carbon numbers of C <sub>5</sub> through C <sub>7</sub> , rich in C <sub>6</sub> , and boiling in the range of approximately 60 °C to 70 °C (140°F to 158°F).]	296-903-4	93165-19-6	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-389-00-4	Gasoline, pyrolysis, hydrogenated; Low boiling point naphtha-unspecified; [A distillation fraction from the hydrogenation of pyrolysis gasoline boiling in the range of approximately 20 °C to 200 °C (68°F to 392°F).]	302-639-3	94114-03-1	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-390-00-X	Distillates (petroleum), steam-cracked, C <sub>8-12</sub> fraction, polymd., distn. lights; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained by distillation of the polymerized C <sub>8</sub> through C <sub>12</sub> fraction from steam-cracked petroleum distillates. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>8</sub> through C <sub>12</sub> .]	305-750-5	95009-23-7	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-391-00-5	Extracts (petroleum) heavy naphtha solvent, clay-treated; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained by the treatment of heavy naphthic solvent petroleum extract with bleaching earth. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>6</sub> through C <sub>18</sub> and boiling in the range of approximately 80 °C to 180 °C (175°F to 356°F).]	308-261-5	97926-43-7	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-392-00-0	Naphtha (petroleum), light steam-cracked, debenzenized, thermally treated; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained by the treatment and distillation of debenzenized light steam-cracked petroleum naphtha. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>7</sub> through C <sub>12</sub> and boiling in the range of approximately 95 °C to 200 °C (203°F to 392°F).]	308-713-1	98219-46-6	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-393-00-6	Naphtha (petroleum), light steam-cracked, thermally treated; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained by the treatment and distillation of light steam-cracked petroleum naphtha. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>5</sub> through C <sub>6</sub> and boiling in the range of approximately 35 °C to 80 °C (95°F to 176°F).]	308-714-7	98219-47-7	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-394-00-1	Distillates (petroleum), C <sub>7-9</sub> , C <sub>8</sub> -rich, hydrodesulfurized dearomatized; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained by the distillation of petroleum light fraction, hydrodesulfurized and dearomatized. It consists predominantly of hydrocarbons having carbon numbers in the range of C <sub>7</sub> through C <sub>9</sub> , predominantly C <sub>8</sub> paraffins and cycloparaffins, boiling in the range of approximately 120 °C to 130 °C (248°F to 266°F).]	309-862-5	101316-56-7	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-395-00-7	Hydrocarbons, C <sub>6-8</sub> , hydrogenated sorption-dearomatized, toluene raffination; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained during the sorptions of toluene from a hydrocarbon fraction from cracked gasoline treated with hydrogen in the presence of a catalyst. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>6</sub> through C <sub>8</sub> and boiling in the range of approximately 80 °C to 135 °C (176°F to 275°F).]	309-870-9	101316-66-9	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-396-00-2	Naphtha (petroleum), hydrodesulfurized full-range coker; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained by fractionation from hydrodesulfurized coker distillate. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>5</sub> to C <sub>11</sub> and boiling in the range of approximately 23 °C to 196 °C (73°F to 385°F).]	309-879-8	101316-76-1	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-397-00-8	Naphtha (petroleum), sweetened light; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained by subjecting a petroleum naphtha to a sweetening process to convert mercaptans or to remove acidic impurities. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>5</sub> through C <sub>8</sub> and boiling in the range of approximately 20 °C to 130 °C (68°F to 266°F).]	309-976-5	101795-01-1	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-398-00-3	Hydrocarbons, C <sub>3-6</sub> , C <sub>5</sub> -rich, steam-cracked naphtha; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained by distillation of steam-cracked naphtha. It consists predominantly of hydrocarbons having carbon numbers in the range of C <sub>3</sub> through C <sub>6</sub> , predominantly C <sub>5</sub> .]	310-012-0	102110-14-5	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-399-00-9	Hydrocarbons, C <sub>5</sub> -rich, dicyclopentadienecontg.; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained by distillation of the products from a steam-cracking process. It consists predominantly of hydrocarbons having carbon numbers of C <sub>5</sub> and dicyclopentadiene and boiling in the range of approximately 30 °C to 170 °C (86°F to 338°F).]	310-013-6	102110-15-6	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-400-00-2	Residues (petroleum), steam-cracked light, arom.; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained by the distillation of the products of steam cracking or similar processes after taking off the very light products resulting in a residue starting with hydrocarbons having carbon numbers greater than C <sub>5</sub> . It consists predominantly of aromatic hydrocarbons having carbon numbers greater than C <sub>5</sub> and boiling above approximately 40 °C (104°F).]	310-057-6	102110-55-4	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-401-00-8	Hydrocarbons, C $\geq$ 5, C <sub>5-6</sub> -rich; Low boiling point naphtha — unspecified	270-690-8	68476-50-6	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-402-00-3	Hydrocarbons, C <sub>5</sub> -rich; Low boiling point naphtha — unspecified	270-695-5	68476-55-1	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-403-00-9	Aromatic hydrocarbons, C <sub>8-10</sub> ; Low boiling point naphtha — unspecified	292-695-4	90989-39-2	Carc. 1B Asp. Tox. 1	H350 H304	GHS08 Dgr	H350 H304			H P
649-404-00-4	Kerosine (petroleum); Straight run kerosine; [A complex combination of hydrocarbons produced by the distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>9</sub> through C <sub>16</sub> and boiling in the range of approximately 150 °C to 290 °C (320°F to 554°F).]	232-366-4	8008-20-6	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-405-00-X	Solvent naphtha (petroleum), medium aliph.; Straight run kerosine; [A complex combination of hydrocarbons obtained from the distillation of crude oil or natural gasoline. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C <sub>9</sub> through C <sub>12</sub> and boiling in the range of approximately 140 °C to 220 °C (284°F to 428°F).]	265-191-7	64742-88-7	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-406-00-5	Solvent naphtha (petroleum) heavy aliph.; Straight run kerosine; [A complex combination of hydrocarbons obtained from the distillation of crude oil or natural gasoline. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C <sub>11</sub> through C <sub>16</sub> and boiling in the range of approximately 190 °C to 290 °C (374°F to 554°F).]	265-200-4	64742-96-7	Asp. Tox. 1	H304	GHS08 Dgr	H304			H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-407-00-0	Kerosine (petroleum), straight-run wide-cut; Straight run kerosine; [A complex combination of hydrocarbons obtained as a wide cut hydrocarbon fuel cut from atmospheric distillation and boiling in the range of approximately 70 °C to 220 °C (158°F to 428°F).]	295-418-5	92045-37-9	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-408-00-6	Distillates (petroleum), steam-cracked; Cracked kerosine; [A complex combination of hydrocarbons obtained by the distillation of the products from a steam cracking process. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly in the range of C <sub>7</sub> through C <sub>16</sub> and boiling in the range of approximately 90 °C to 290 °C (190°F to 554°F).]	265-194-3	64742-91-2	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-409-00-1	Distillates (petroleum), cracked stripped steam-cracked petroleum distillates, C <sub>8-10</sub> fraction; Cracked kerosine; [A complex combination of hydrocarbons obtained by distilling cracked stripped steam-cracked distillates. It consists of hydro-carbons having carbon numbers in the range of C <sub>8</sub> through C <sub>10</sub> and boiling in the range of approximately 129 °C to 194 °C (264°F to 382°F).]	270-728-3	68477-39-4	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-410-00-7	Distillates (petroleum), cracked stripped steam-cracked petroleum distillates, C <sub>10-12</sub> fraction; Cracked kerosine; [A complex combination of hydrocarbons obtained by distilling cracked stripped steam-cracked distillates. It consists predominantly of aromatic hydrocarbons having carbon numbers in the range of C <sub>10</sub> through C <sub>12</sub> .]	270-729-9	68477-40-7	Asp. Tox. 1	H304	GHS08 Dgr	H304			H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-411-00-2	Distillates (petroleum), steam-cracked, C <sub>8-12</sub> fraction; Cracked kerosine; [A complex combination of organic compounds obtained by the distillation of products from a steam cracking process. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly in the range of C <sub>8</sub> through C <sub>12</sub> .]	270-737-2	68477-54-3	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-412-00-8	Kerosine (petroleum), hydrodesulfurized thermal cracked; Cracked kerosine; [A complex combination of hydrocarbons obtained by fractionation from hydrodesulfurized thermal cracker distillate. It consists predominantly of hydrocarbons predominantly in the range of C <sub>8</sub> to C <sub>16</sub> and boiling in the range of approximately 120 °C to 283 °C (284°F to 541°F).]	285-507-7	85116-55-8	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-413-00-3	Aromatic hydrocarbons, C <sub>≥10</sub> , steam-cracking, hydrotreated; Cracked kerosine; [A complex combination of hydrocarbons produced by the distillation of the products from a steam cracking process treated with hydrogen in the presence of a catalyst. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly greater than C <sub>10</sub> and boiling in the range of approximately 150 °C to 320 °C (302°F to 608°F).]	292-621-0	90640-98-5	Asp. Tox. 1	H304	GHS08 Dgr	H304			H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-414-00-9	Naphtha (petroleum), steam-cracked, hydrotreated, C <sub>9-10</sub> -arom.-rich; Cracked kerosine; [A complex combination of hydrocarbons produced by the distillation of the products from a steam cracking process thereafter treated with hydrogen in the presence of a catalyst. It consists predominantly of aromatic hydrocarbons having carbon numbers in the range of C <sub>9</sub> through C <sub>10</sub> and boiling in the range of approximately 140 °C to 200 °C (284°F to 392°F).]	292-637-8	90641-13-7	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-415-00-4	Distillates (petroleum), thermal-cracked, alkylarom. hydrocarbon-rich; Cracked kerosine; [A complex combination of hydrocarbons obtained by distillation of thermal-cracking heavy tars. It consists predominantly of highly alkylated aromatic hydrocarbons boiling in the range of approximately 100 °C to 250 °C (212°F to 482°F).]	309-866-7	101316-61-4	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-416-00-X	Distillates (petroleum), catalytic cracked heavy tar light; Cracked kerosine; [A complex combination of hydrocarbons obtained by distillation of catalytic cracking heavy tars. It consists predominantly of highly alkylated aromatic hydrocarbons boiling in the range of approximately 100 °C to 250 °C (212°F to 482°F).]	309-938-8	101631-13-4	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-417-00-5	Solvent naphtha (petroleum), hydrocracked heavy arom.; Cracked kerosine; [A complex combination of hydrocarbons obtained by the distillation of hydrocracked petroleum distillate. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>9</sub> through C <sub>16</sub> and boiling in the range of approximately 235 °C to 290 °C (455°F to 554°F).]	309-881-9	101316-80-7	Asp. Tox. 1	H304	GHS08 Dgr	H304			H



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-418-00-0	Distillates (petroleum), steam-cracked heavy tar light; Cracked kerosine; [A complex combination of hydrocarbons obtained by distillation of steam cracking heavy tars. It consists predominantly of highly alkylated aromatic hydrocarbons boiling in the range of approximately 100 °C to 250 °C (212°F to 482°F).]	309-940-9	101631-15-6	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-419-00-6	Distillates (petroleum), alkylate; Kerosine — unspecified; [A complex combination of hydrocarbons produced by distillation of the reaction products of isobutane with monoolefinic hydrocarbons usually ranging in carbon numbers from C <sub>3</sub> through C <sub>5</sub> . It consists of predominantly branched chain saturated hydro-carbons having carbon numbers predominantly in the range of C <sub>11</sub> through C <sub>17</sub> and boiling in the range of approximately 205 °C to 320 °C (401°F to 608°F).]	265-074-0	64741-73-7	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-420-00-1	Extracts (petroleum), heavy naphtha solvent; Kerosine — unspecified; [A complex combination of hydrocarbons obtained as the extract from a solvent extraction process. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>7</sub> through C <sub>12</sub> and boiling in the range of approximately 90 °C to 220 °C (194°F to 428°F).]	265-099-7	64741-98-6	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-421-00-7	Distillates (petroleum), chemically neutralized light; Kerosine — unspecified; [A complex combination of hydrocarbons produced by a treating process to remove acidic materials. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>9</sub> through C <sub>16</sub> and boiling in the range of approximately 150 °C to 290 °C (302°F to 554°F).]	265-132-5	64742-31-0	Asp. Tox. 1	H304	GHS08 Dgr	H304			H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-422-00-2	Distillates (petroleum), hydrotreated light; Kerosine — unspecified; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>9</sub> through C <sub>16</sub> and boiling in the range of approximately 150 °C to 290 °C (302°F to 554°F).]	265-149-8	64742-47-8	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-423-00-8	Kerosine (petroleum), hydrodesulfurized; Kerosine — unspecified; [A complex combination of hydrocarbons obtained from a petroleum stock by treating with hydrogen to convert organic sulfur to hydrogen sulfide which is removed. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>9</sub> through C <sub>16</sub> and boiling in the range of approximately 150 °C to 290 °C (302°F to 554°F).]	265-184-9	64742-81-0	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-424-00-3	Solvent naphtha (petroleum), heavy arom.; Kerosine — unspecified; [A complex combination of hydrocarbons obtained from distillation of aromatic streams. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>9</sub> through C <sub>16</sub> and boiling in the range of approximately 165 °C to 290 °C (330°F to 554°F).]	265-198-5	64742-94-5	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-425-00-9	Naphtha (petroleum), heavy coker; Kerosine — unspecified; [A complex combination of hydrocarbons from the distillation of products from a fluid coker. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly in the range of C <sub>6</sub> through C <sub>15</sub> and boiling in the range of approximately 157 °C to 288 °C (315°F to 550°F).]	269-778-9	68333-23-3	Asp. Tox. 1	H304	GHS08 Dgr	H304			H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-426-00-4	Naphtha (petroleum), catalytic reformed hydrodesulfurized heavy, arom. fraction; Kerosine — unspecified; [A complex combination of hydrocarbons produced by fractionation from catalytically reformed hydrodesulfurized naphtha. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>7</sub> to C <sub>13</sub> and boiling in the range of approximately 98 °C to 218 °C (208°F to 424°F).]	285-508-2	85116-57-0	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-427-00-X	Kerosine (petroleum), sweetened; Kerosine — unspecified; [A complex combination of hydrocarbons obtained by subjecting a petroleum distillate to a sweetening process to convert mercaptans or to remove acidic impurities. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>9</sub> through C <sub>16</sub> and boiling in the range of 130 °C to 290 °C (266°F to 554°F).]	294-799-5	91770-15-9	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-428-00-5	Kerosine (petroleum), solvent-refined sweetened; Kerosine — unspecified; [A complex combination of hydrocarbons obtained from a petroleum stock by solvent refining and sweetening and boiling in the range of approximately 150 °C to 260 °C (302°F to 500°F).]	295-416-4	92045-36-8	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-429-00-0	Hydrocarbons, C <sub>9-16</sub> , hydrotreated, dearomatized; Kerosine — unspecified; [A complex combination of hydrocarbons obtained as solvents which have been subjected to hydrotreatment in order to convert aromatics to naphthenes by catalytic hydrogenation.]	297-854-1	93763-35-0	Asp. Tox. 1	H304	GHS08 Dgr	H304			H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-430-00-6	Kerosine (petroleum), solvent-refined hydrodesulfurized; Kerosine — unspecified	307-033-2	97488-94-3	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-431-00-1	Distillates (petroleum), hydrodesulfurized full-range middle coker; Kerosine — unspecified; [A complex combination of hydrocarbons obtained by fractionation from hydrodesulfurized coker distillate. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>8</sub> through C <sub>16</sub> and boiling in the range of approximately 120 °C to 283 °C (248°F to 541°F).]	309-864-6	101316-58-9	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-432-00-7	Solvent naphtha (petroleum), hydrodesulfurized heavy arom.; Kerosine — unspecified; [A complex combination of hydrocarbons obtained by the catalytic hydrodesulfurization of a petroleum fraction. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>10</sub> through C <sub>13</sub> and boiling in the range of approximately 180 °C to 240 °C (356°F to 464°F).]	309-882-4	101316-81-8	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-433-00-2	Solvent naphtha (petroleum), hydrodesulfurized medium; Kerosine — unspecified; [A complex combination of hydrocarbons obtained by the catalytic hydrodesulfurization of a petroleum fraction. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>10</sub> through C <sub>13</sub> and boiling in the range of approximately 175 °C to 220 °C (347°F to 428°F).]	309-884-5	101316-82-9	Asp. Tox. 1	H304	GHS08 Dgr	H304			H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-434-00-8	Kerosine (petroleum), hydrotreated; Kerosine — unspecified; [A complex combination of hydrocarbons obtained from the distillation of petroleum and subsequent hydrotreatment. It consists predominantly of alkanes, cycloalkanes and alkylbenzenes having carbon numbers predominantly in the range of C <sub>12</sub> through C <sub>16</sub> and boiling in the range of approximately 230 °C to 270 °C (446°F to 518°F).]	309-944-0	101631-19-0	Asp. Tox. 1	H304	GHS08 Dgr	H304			H
649-435-00-3	Distillates (petroleum), light catalytic cracked; Cracked gasoil; [A complex combination of hydrocarbons produced by the distillation of products from a catalytic cracking process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>9</sub> through C <sub>25</sub> and boiling in the range of approximately 150 °C to 400 °C (302°F to 752°F). It contains a relatively large proportion of bicyclic aromatic hydrocarbons.]	265-060-4	64741-59-9	Carc. 1B	H350	GHS08 Dgr	H350			H
649-436-00-9	Distillates (petroleum), intermediate catalytic cracked; Cracked gasoil; [A complex combination of hydrocarbons produced by the distillation of products from a catalytic cracking process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>11</sub> through C <sub>30</sub> and boiling in the range of approximately 205 °C to 450 °C (401°F to 842°F). It contains a relatively large proportion of tricyclic aromatic hydrocarbons.]	265-062-5	64741-60-2	Carc. 1B	H350	GHS08 Dgr	H350			H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-437-00-4	Distillates (petroleum), light hydrocracked; Cracked gasoil; [A complex combination of hydrocarbons from distillation of the products from a hydrocracking process. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C <sub>10</sub> through C <sub>18</sub> and boiling in the range of approximately 160 °C to 320 °C (320°F to 608°F).]	265-078-2	64741-77-1	Carc. 2	H351	GHS08 Wng	H351			H
649-438-00-X	Distillates (petroleum), light thermal cracked; Cracked gasoil; [A complex combination of hydrocarbons from the distillation of the products from a thermal cracking process. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly in the range of C <sub>10</sub> through C <sub>22</sub> and boiling in the range of approximately 160 °C to 370 °C (320°F to 698°F).]	265-084-5	64741-82-8	Carc. 1B	H350	GHS08 Dgr	H350			H
649-439-00-5	Distillates (petroleum), hydrodesulfurized light catalytic cracked; Cracked gasoil; [A complex combination of hydrocarbons obtained by treating light catalytic cracked distillates with hydrogen to convert organic sulfur to hydrogen sulfide which is removed. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>9</sub> through C <sub>25</sub> and boiling in the range of approximately 150 °C to 400 °C (302°F to 752°F). It contains a relatively large proportion of bicyclic aromatic hydrocarbons.]	269-781-5	68333-25-5	Carc. 1B	H350	GHS08 Dgr	H350			H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-440-00-0	Distillates (petroleum), light steam-cracked naphtha; Cracked gasoil; [A complex combination of hydrocarbons from the multiple distillation of products from a steam cracking process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>10</sub> through C <sub>18</sub> .]	270-662-5	68475-80-9	Carc. 1B	H350	GHS08 Dgr	H350			H
649-441-00-6	Distillates (petroleum), cracked steam-cracked petroleum distillates; Cracked gasoil; [A complex combination of hydrocarbons produced by distilling cracked steam cracked distillate and/or its fractionation products. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>10</sub> to low molecular weight polymers.]	270-727-8	68477-38-3	Carc. 1B	H350	GHS08 Dgr	H350			H
649-442-00-1	Gas oils (petroleum), steam-cracked; Cracked gasoil; [A complex combination of hydrocarbons produced by distillation of the products from a steam cracking process. It consists of hydrocarbons having carbon numbers predominantly greater than C <sub>9</sub> and boiling in the range of from approximately 205 °C to 400 °C (400°F to 752°F).]	271-260-2	68527-18-4	Carc. 1B	H350	GHS08 Dgr	H350			H
649-443-00-7	Distillates (petroleum), hydrodesulfurized thermal cracked middle; Cracked gasoil; [A complex combination of hydrocarbons obtained by fractionation from hydrodesulfurized themal cracker distillate stocks. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>11</sub> to C <sub>25</sub> and boiling in the range of approximately 205 °C to 400 °C (401°F to 752°F).]	285-505-6	85116-53-6	Carc. 1B	H350	GHS08 Dgr	H350			H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-444-00-2	Gas oils (petroleum), thermal-cracked, hydrosulfurized; Cracked gasoil	295-411-7	92045-29-9	Carc. 1B	H350	GHS08 Dgr	H350			H
649-445-00-8	Residues (petroleum), hydrogenated steam-cracked naphtha; Cracked gasoil; [A complex combination of hydrocarbons obtained as a residual fraction from the distillation of hydrotreated steam-cracked naphtha. It consists predominantly of hydrocarbons boiling in the range of approximately 200 °C to 350 °C (32°F to 662°F).]	295-514-7	92062-00-5	Carc. 1B	H350	GHS08 Dgr	H350			H
649-446-00-3	Residues (petroleum), steam-cracked naphtha distn.; Cracked gasoil; [A complex combination of hydrocarbons obtained as a column bottom from the separation of effluents from steam cracking naphtha at a high temperature. It boils in the range of approximately 147 °C to 300 °C (297°F to 572°F) and produces a finished oil having a viscosity of 18cSt at 50 °C.]	295-517-3	92062-04-9	Carc. 1B	H350	GHS08 Dgr	H350			H
649-447-00-9	Distillates (petroleum), light catalytic cracked, thermally degraded; Cracked gasoil; [A complex combination of hydrocarbons produced by the distillation of products from a catalytic cracking process which has been used as a heat transfer fluid. It consists predominantly of hydrocarbons boiling in the range of approximately 190 °C to 340 °C (374°F to 644°F). This stream is likely to contain organic sulfur compounds.]	295-991-1	92201-60-0	Carc. 1B	H350	GHS08 Dgr	H350			H



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-448-00-4	Residues (petroleum), steam-cracked heat-soaked naphtha; Cracked gasoil; [A complex combination of hydrocarbons obtained as residue from the distillation of steam cracked heat soaked naphtha and boiling in the range of approximately 150 °C to 350 °C (302°F to 662°F).]	297-905-8	93763-85-0	Carc. 1B	H350	GHS08 Dgr	H350			H
649-449-00-X	Hydrocarbons, C <sub>16-20</sub> , solvent-dewaxed hydrocracked paraffinic distn. residue; Cracked gasoil; [A complex combination of hydrocarbons obtained by solvent dewaxing of a distillation residue from a hydrocracked paraffinic distillate. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>16</sub> through C <sub>20</sub> and boiling in the range of approximately 360 °C to 500 °C (680 °F to 932 °F). It produces a finished oil having a viscosity of 4,5 cSt at approximately 100 °C (212 °F).]	307-662-2	97675-88-2	Carc. 2	H351	GHS08 Wng	H351			H
649-450-00-5	Gas oils (petroleum), light vacuum, thermal-cracked hydrodesulfurized; Cracked gasoil; [A complex combination of hydrocarbons obtained by catalytic dehydrodesulfurization of thermal-cracked light vacuum petroleum. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>14</sub> through C <sub>20</sub> and boiling in the range of approximately 270 °C to 370 °C (518°F to 698°F).]	308-278-8	97926-59-5	Carc. 1B	H350	GHS08 Dgr	H350			H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-451-00-0	Distillates (petroleum), hydrodesulfurized middle coker; Cracked gasoil; [A complex combination of hydrocarbons by fractionation from hydrodesulfurised coker distillate stocks. Is consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>12</sub> through C <sub>21</sub> and boiling in the range of approximately 200 °C to 360 °C (392°F to 680°F).]	309-865-1	101316-59-0	Carc. 1B	H350	GHS08 Dgr	H350			H
649-452-00-6	Distillates (petroleum), heavy steam-cracked; Cracked gasoil; [A complex combination of hydrocarbons obtained by distillation of steam cracking heavy residues. It consists predominantly of highly alkylated heavy aromatic hydrocarbons boiling in the range of approximately 250 °C to 400 °C (482°F to 752°F).]	309-939-3	101631-14-5	Carc. 1B	H350	GHS08 Dgr	H350			H
649-453-00-1	Distillates (petroleum), heavy hydrocracked; Baseoil — unspecified; [A complex combination of hydrocarbons from the distillation of the products from a hydrocracking process. It consists predominantly of saturated hydrocarbons having carbon numbers in the range of C <sub>15</sub> -C <sub>39</sub> and boiling in the range of approximately 260 °C to 600 °C (500°F to 1112°F).]	265-077-7	64741-76-0	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-454-00-7	Distillates (petroleum), solvent-refined heavy paraffinic; Baseoil — unspecified; [A complex combination of hydrocarbons obtained as the raffinate from a solvent extraction process. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C).]	265-090-8	64741-88-4	Carc. 1B	H350	GHS08 Dgr	H350			H L

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-455-00-2	Distillates (petroleum), solvent-refined light paraffinic; Baseoil — unspecified; [A complex combination of hydrocarbons obtained as the raffinate from a solvent extraction process. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>30</sub> and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C).]	265-091-3	64741-89-5	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-456-00-8	Residual oils (petroleum), solvent deasphalted; Baseoil — unspecified; [A complex combination of hydrocarbons obtained as the solvent soluble fraction from C <sub>3</sub> -C <sub>4</sub> solvent deasphalting of a residuum. It consists of hydrocarbons having carbon numbers predominantly higher than C <sub>25</sub> and boiling above approximately 400 °C (752°F).]	265-096-0	64741-95-3	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-457-00-3	Distillates (petroleum), solvent-refined heavy naphthenic; Baseoil — unspecified; [A complex combination of hydrocarbons obtained as the raffinate from a solvent extraction process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt a 40 °C). It contains relatively few normal paraffins.]	265-097-6	64741-96-4	Carc. 1B	H350	GHS08 Dgr	H350			H L

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-458-00-9	Distillates (petroleum), solvent-refined light naphthenic; Baseoil — unspecified; [A complex combination of hydrocarbons obtained as the raffinate from a solvent extraction process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>30</sub> and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-098-1	64741-97-5	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-459-00-4	Residual oils (petroleum,) solvent-refined; Baseoil — unspecified; [A complex combination by hydrocarbons obtained as the solvent insoluble fraction from solvent refining of a residuum using a polar organic solvent such as phenol or furfural. It consists of hydrocarbons having carbon numbers predominantly higher than C <sub>25</sub> and boiling above approximately 400 °C (752°F).]	265-101-6	64742-01-4	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-460-00-X	Distillates (petroleum), clay-treated paraffinic; Baseoil — unspecified; [A complex combination of hydrocarbons resulting from treatment of a petroleum fraction with natural or modified clay in either a contacting or percolation process to remove the trace amounts of polar compounds and impurities present. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C). It contains a relatively large proportion of saturated hydrocarbons.]	265-137-2	64742-36-5	Carc. 1B	H350	GHS08 Dgr	H350			H L

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-461-00-5	Distillates (petroleum), clay-treated light paraffinic; Baseoil — unspecified; [A complex combination of hydrocarbons resulting from treatment of a petroleum fraction with natural or modified clay in either a contacting or percolation process to remove the trace amounts of polar compounds and impurities present. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>30</sub> and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C). It contains a relatively large proportion of saturated hydrocarbons.]	265-138-8	64742-37-6	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-462-00-0	Residual oils (petroleum), clay-treated; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by treatment of a residual oil with a natural or modified clay in either a contacting or percolation process to remove the trace amounts of polar compounds and impurities present. It consists of hydrocarbons having carbon numbers predominantly higher than C <sub>25</sub> and boiling above approximately 400 °C (752°F).]	265-143-5	64742-41-2	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-463-00-6	Distillates (petroleum), clay-treated heavy naphthenic; Baseoil — unspecified; [A complex combination of hydrocarbons resulting from treatment of a petroleum fraction with natural or modified clay in either a contacting or percolation process to remove the trace amounts of polar compounds and impurities present. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-146-1	64742-44-5	Carc. 1B	H350	GHS08 Dgr	H350			H L

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-464-00-1	Distillates (petroleum), clay-treated light naphthenic; Baseoil — unspecified; [A complex combination of hydrocarbons resulting from treatment of a petroleum fraction with natural or modified clay in either a contacting or percolation process to remove the trace amounts of polar compounds and impurities present. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>30</sub> and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-147-7	64742-45-6	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-465-00-7	Distillates (petroleum), hydrotreated heavy naphthenic; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and produces a finished oil of at least 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-155-0	64742-52-5	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-466-00-2	Distillates (petroleum), hydrotreated light naphthenic; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>30</sub> and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-156-6	64742-53-6	Carc. 1B	H350	GHS08 Dgr	H350			H L

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-467-00-8	Distillates (petroleum), hydrotreated heavy paraffinic; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and produces a finished oil of at least 100 SUS at 100°F (19cSt at 40 °C). It contains a relatively large proportion of saturated hydrocarbons.]	265-157-1	64742-54-7	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-468-00-3	Distillates (petroleum), hydrotreated light paraffinic; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>30</sub> and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C). It contains a relatively large proportion of saturated hydrocarbons.]	265-158-7	64742-55-8	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-469-00-9	Distillates (petroleum), solvent-dewaxed light paraffinic; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by removal of normal paraffins from a petroleum fraction by solvent crystallization. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>30</sub> and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C).]	265-159-2	64742-56-9	Carc. 1B	H350	GHS08 Dgr	H350			H L

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-470-00-4	Residual oils (petroleum), hydrotreated; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists of hydrocarbons having carbon numbers predominantly greater than C <sub>25</sub> and boiling above approximately 400 °C (752°F).]	265-160-8	64742-57-0	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-471-00-X	Residual oils (petroleum), solvent-dewaxed; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by removal of long, branched chain hydrocarbons from a residual oil by solvent crystallization. It consists of hydrocarbons having carbon numbers predominantly greater than C <sub>25</sub> and boiling above approximately 400 °C (752°F).]	265-166-0	64742-62-7	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-472-00-5	Distillates (petroleum), solvent-dewaxed heavy naphthenic; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by removal of normal paraffins from a petroleum fraction by solvent crystallization. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and produces a finished oil of not less than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-167-6	64742-63-8	Carc. 1B	H350	GHS08 Dgr	H350			H L



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-473-00-0	Distillates (petroleum), solvent-dewaxed light naphthenic; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by removal of normal paraffins from a petroleum fraction by solvent crystallization. It consists of hydrocarbons having carbon numbers predominantly in the range C <sub>15</sub> through C <sub>30</sub> and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-168-1	64742-64-9	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-474-00-6	Distillates (petroleum), solvent-dewaxed heavy paraffinic; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by removal of normal paraffins from a petroleum fraction by solvent crystallization. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and produces a finished oil with a viscosity not less than 100 SUS at 100°F (19cSt at 40 °C).]	265-169-7	64742-65-0	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-475-00-1	Naphthenic oils (petroleum), catalytic dewaxed heavy; Baseoil — unspecified; [A complex combination of hydrocarbons obtained from a catalytic dewaxing process. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-172-3	64742-68-3	Carc. 1B	H350	GHS08 Dgr	H350			H L

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-476-00-7	Naphthenic oils (petroleum), catalytic dewaxed light; Baseoil — unspecified; [A complex combination of hydrocarbons obtained from a catalytic dewaxing process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>30</sub> and produces a finished oil with a viscosity less than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-173-9	64742-69-4	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-477-00-2	Paraffin oils (petroleum), catalytic dewaxed heavy; Baseoil — unspecified; [A complex combination of hydrocarbons obtained from a catalytic dewaxing process. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C).]	265-174-4	64742-70-7	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-478-00-8	Paraffin oils (petroleum), catalytic dewaxed light; Baseoil — unspecified; [A complex combination of hydrocarbons obtained from a catalytic dewaxing process. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>30</sub> and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C).]	265-176-5	64742-71-8	Carc. 1B	H350	GHS08 Dgr	H350			H L

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-479-00-3	Naphthenic oils (petroleum), complex dewaxed heavy; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by removing straight chain paraffin hydrocarbons as a solid by treatment with an agent such as urea. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and produces a finished oil having a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-179-1	64742-75-2	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-480-00-9	Naphthenic oils (petroleum), complex dewaxed light; Baseoil — unspecified; [A complex combination of hydrocarbons obtained from a catalytic dewaxing process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>30</sub> and produces a finished oil having a viscosity less than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-180-7	64742-76-3	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-481-00-4	Lubricating oils (petroleum), C <sub>20-50</sub> , hydro-treated neutral oil-based, high-viscosity; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by treating light vacuum gas oil, heavy vacuum gas oil, and solvent deasphalted residual oil with hydrogen in the presence of a catalyst in a two stage process with dewaxing being carried out between the two stages. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and produces a finished oil having a viscosity of approximately 112cSt at 40 °C. It contains a relatively large proportion of saturated hydrocarbons.]	276-736-3	72623-85-9	Carc. 1B	H350	GHS08 Dgr	H350			H L

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-482-00-X	Lubricating oils (petroleum), C <sub>15-30</sub> , hydro-treated neutral oil-based; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by treating light vacuum gas oil and heavy vacuum gas oil with hydrogen in the presence of a catalyst in a two stage process with dewaxing being carried out between the two stages. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>30</sub> and produces a finished oil having a viscosity of approximately 15cSt at 40 °C. It contains a relatively large proportion of saturated hydrocarbons.]	276-737-9	72623-86-0	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-483-00-5	Lubricating oils (petroleum), C <sub>20-50</sub> , hydro-treated neutral oil-based; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by treating light vacuum gas oil, heavy vacuum gas oil and solvent deasphalted residual oil with hydrogen in the presence of a catalyst in a two stage process with dewaxing being carried out between the two stages. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and produces a finished oil with a viscosity of approximately 32cSt at 40 °C. It contains a relatively large proportion of saturated hydrocarbons.]	276-738-4	72623-87-1	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-484-00-0	Lubricating oils; Baseoil — unspecified; [A complex combination of hydrocarbons obtained from solvent extraction and dewaxing processes. It consists predominantly of saturated hydrocarbons having carbon numbers in the range C <sub>15</sub> through C <sub>50</sub> .]	278-012-2	74869-22-0	Carc. 1B	H350	GHS08 Dgr	H350			H L

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-485-00-6	Distillates (petroleum), complex dewaxed heavy paraffinci; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by dewaxing heavy paraffinic distillate. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and produces a finished oil with a viscosity of equal to or greater than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	292-613-7	90640-91-8	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-486-00-1	Distillates (petroleum), complex dewaxed light paraffinic; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by dewaxing light paraffinic distillate. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>12</sub> through C <sub>30</sub> and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	292-614-2	90640-92-9	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-487-00-7	Distillates (petroleum), solvent dewaxed heavy paraffinic, clay-treated; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by treating dewaxed heavy paraffinic distillate with neutral or modified clay in either a contacting or percolation process. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> .]	292-616-3	90640-94-1	Carc. 1B	H350	GHS08 Dgr	H350			H L

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-488-00-2	Hydrocarbons, C <sub>20-50</sub> , solvent dewaxed heavy paraffinic, hydrotreated; Baseoil — unspecified; [A complex combination of hydrocarbons produced by treating dewaxed heavy paraffinic distillate with hydrogen in the presence of a catalyst. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> .]	292-617-9	90640-95-2	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-489-00-8	Distillates (petroleum), solvent dewaxed light paraffinic, clay-treated; Baseoil — unspecified; [A complex combination of hydrocarbons resulting from treatment of dewaxed light paraffinic distillate with natural or modified clay in either a contacting or percolation process. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>30</sub> .]	292-618-4	90640-96-3	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-490-00-3	Distillates (petroleum), solvent dewaxed light paraffinic, hydrotreated; Baseoil — unspecified; [A complex combination of hydrocarbons produced by treating a dewaxed light paraffinic distillate with hydrogen in the presence of a catalyst. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>30</sub> .]	292-620-5	90640-97-4	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-491-00-9	Residual oils (petroleum), hydrotreated solvent dewaxed; Baseoil — unspecified	292-656-1	90669-74-2	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-492-00-4	Residual oils (petroleum), catalytic dewaxed; Baseoil — unspecified	294-843-3	91770-57-9	Carc. 1B	H350	GHS08 Dgr	H350			H L

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-493-00-X	Distillates (petroleum), dewaxed heavy paraffinic, hydrotreated; Baseoil — unspecified; [A complex combination of hydrocarbons obtained from an intensive treatment of dewaxed distillate by hydrogenation in the presence of a catalyst. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C <sub>25</sub> through C <sub>39</sub> and produces a finished oil with a viscosity of approximately 44 cSt at 50 °C.]	295-300-3	91995-39-0	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-494-00-5	Distillates (petroleum), dewaxed light paraffinic, hydrotreated; Baseoil — unspecified; [A complex combination of hydrocarbons obtained from an intensive treatment of dewaxed distillate by hydrogenation in the presence of a catalyst. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C <sub>21</sub> through C <sub>29</sub> and produces a finished oil with a viscosity of approximately 13 cSt at 50 °C.]	295-301-9	91995-40-3	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-495-00-0	Distillates (petroleum), hydrocracked solvent-refined, dewaxed; Baseoil — unspecified; [A complex combination of liquid hydrocarbons obtained by recrystallization of dewaxed hydrocracked solvent-refined petroleum distillates.]	295-306-6	91995-45-8	Carc. 1B	H350	GHS08 Dgr	H350			H L

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-496-00-6	Distillates (petroleum), solvent-refined light naphthenic, hydrotreated; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst and removing the aromatic hydrocarbons by solvent extraction. It consists predominantly of naphthenic hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>30</sub> and produces a finished oil with a viscosity of between 13-15cSt at 40 °C.]	295-316-0	91995-54-9	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-497-00-1	Lubricating oils (petroleum), C <sub>17-35</sub> , solvent-extd., dewaxed, hydrotreated; Baseoil — unspecified	295-423-2	92045-42-6	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-498-00-7	Lubricating oils (petroleum), hydrocracked nonarom. solvent-deparaffined; Baseoil — unspecified	295-424-8	92045-43-7	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-499-00-2	Residual oils (petroleum), hydrocracked acid-treated solvent-dewaxed; Baseoil — unspecified; [A complex combination of hydrocarbons produced by solvent removal of paraffins from the residue of the distillation of acid-treated, hydrocracked heavy paraffins and boiling approximately above 380 °C (716°F).]	295-499-7	92061-86-4	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-500-00-6	Paraffin oils (petroleum), solvent-refined dewaxed heavy; Baseoil — unspecified; [A complex combination of hydrocarbons obtained from sulfur-containing paraffinic crude oil. It consists predominantly of a solvent refined deparaffinated lubricating oil with a viscosity of 65cSt at 50 °C.]	295-810-6	92129-09-4	Carc. 1B	H350	GHS08 Dgr	H350			H L



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-501-00-1	Lubricating oils (petroleum), base oils, paraffinic; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by refining of crude oil. It consists predominantly of aromatics, naphthenics and paraffinics and produces a finished oil with a viscosity of 120 SUS at 100°F (23cSt at 40 °C).]	297-474-6	93572-43-1	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-502-00-7	Hydrocarbons, hydrocracked paraffinic distn. residues, solvent-dewaxed; Baseoil — unspecified	297-857-8	93763-38-3	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-503-00-2	Hydrocarbons, C <sub>20-50</sub> , residual oil hydrogenation vacuum distillate; Baseoil — unspecified	300-257-1	93924-61-9	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-504-00-8	Distillates (petroleum), solvent-refined hydrotreated heavy; hydrogenated; Baseoil — unspecified	305-588-5	94733-08-1	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-505-00-3	Distillates (petroleum), solvent-refined hydrocracked light; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by solvent dearomatization of the residue of hydrocracked petroleum. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>18</sub> through C <sub>27</sub> and boiling in the range of approximately 370 °C to 450 °C (698°F to 842°F).]	305-589-0	94733-09-2	Carc. 1B	H350	GHS08 Dgr	H350			H L

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-506-00-9	Lubricating oils (petroleum), C <sub>18-40</sub> , solvent-dewaxed hydrocracked distillate-based; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by solvent deparaffination of the distillation residue from hydrocracked petroleum. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>18</sub> through C <sub>40</sub> and boiling in the range of approximately 370 °C to 550 °C (698°F to 1022°F).]	305-594-8	94733-15-0	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-507-00-4	Lubricating oils (petroleum), C <sub>18-40</sub> , solvent-dewaxed hydrogenated raffinate-based; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by solvent deparaffination of the hydrogenated raffinate obtained by solvent extraction of a hydrotreated petroleum distillate. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>18</sub> through C <sub>40</sub> and boiling in the range of approximately 370 °C to 550 °C (698°F to 1022°F).]	305-595-3	94733-16-1	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-508-00-X	Hydrocarbons, C <sub>13-30</sub> , arom.-rich, solvent-extd. naphthenic distillate; Baseoil — unspecified	305-971-7	95371-04-3	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-509-00-5	Hydrocarbons, C <sub>16-32</sub> , arom. rich, solvent-extd. naphthenic distillate; Baseoil — unspecified	305-972-2	95371-05-4	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-510-00-0	Hydrocarbons, C <sub>37-68</sub> , dewaxed deasphalted hydrotreated vacuum distn. residues; Baseoil — unspecified	305-974-3	95371-07-6	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-511-00-6	Hydrocarbons, C <sub>37-65</sub> , hydrotreated deasphalted vacuum distn. residues; Baseoil — unspecified	305-975-9	95371-08-7	Carc. 1B	H350	GHS08 Dgr	H350			H L

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-512-00-1	Distillates (petroleum), hydrocracked solvent-refined light; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by the solvent treatment of a distillate from hydrocracked petroleum distillates. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>18</sub> through C <sub>27</sub> and boiling in the range of approximately 370 °C to 450 °C (698°F to 842°F).]	307-010-7	97488-73-8	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-513-00-7	Distillates (petroleum), solvent-refined hydrogenated heavy; Baseoil — unspecified; [A complex combination of hydrocarbons, obtained by the treatment of a hydrogenated petroleum distillate with a solvent. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>19</sub> through C <sub>40</sub> and boiling in the range of approximately 390 °C to 550 °C (734°F to 1022°F).]	307-011-2	97488-74-9	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-514-00-2	Lubricating oils (petroleum), C <sub>18-27</sub> , hydrocracked solvent-dewaxed; Baseoil — unspecified	307-034-8	97488-95-4	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-515-00-8	Hydrocarbons, C <sub>17-30</sub> , hydrotreated solvent-deasphalted atm. distn. residue, distn. lights; Baseoil — unspecified; [A complex combination of hydrocarbons obtained as first runnings from the vacuum distillation of effluents from the treatment of a solvent deasphalted short residue with hydrogen in the presence of a catalyst. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>17</sub> through C <sub>30</sub> and boiling in the range of approximately 300 °C to 400 °C (572°F to 752°F). It produces a finished oil having a viscosity of 4cSt at approximately 100 °C (212°F).]	307-661-7	97675-87-1	Carc. 1B	H350	GHS08 Dgr	H350			H L

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-516-00-3	Hydrocarbons, C <sub>17-40</sub> , hydrotreated solvent-deasphalted distn. residue, vacuum distn. lights; Baseoil — unspecified; [A complex combination of hydrocarbons obtained as first runnings from the vacuum distillation of effluents from the catalytic hydrotreatment of a solvent deasphalted short residue having a viscosity of 8cSt at approximately 100 °C (212°F). It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>17</sub> through C <sub>40</sub> and boiling in the range of approximately 300 °C to 500 °C (592°F to 932°F).]	307-755-8	97722-06-0	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-517-00-9	Hydrocarbons, C <sub>13-27</sub> , solvent-extd. light naphthenic; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by extraction of the aromatics from a light naphthenic distillate having a viscosity of 9.5cSt at 40 °C (104°F). It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>13</sub> through C <sub>27</sub> and boiling in the range of approximately 240 °C to 400 °C (464°F to 752°F).]	307-758-4	97722-09-3	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-518-00-4	Hydrocarbons, C <sub>14-29</sub> , solvent-extd. light naphthenic; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by extraction of the aromatics from a light naphthenic distillate having a viscosity of 16cSt at 40 °C (104°F). It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>14</sub> through C <sub>29</sub> and boiling in the range of approximately 250 °C to 425 °C (482°F to 797°F).]	307-760-5	97722-10-6	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-519-00-X	Hydrocarbons, C <sub>27-42</sub> , dearomatized; Baseoil — unspecified	308-131-8	97862-81-2	Carc. 1B	H350	GHS08 Dgr	H350			H L

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-520-00-5	Hydrocarbons, C <sub>17-30</sub> , hydrotreated distillates, distn. lights; Baseoil — unspecified	308-132-3	97862-82-3	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-521-00-0	Hydrocarbons, C <sub>27-45</sub> , naphthenic vacuum distn.; Baseoil — unspecified	308-133-9	97862-83-4	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-522-00-6	Hydrocarbons, C <sub>27-45</sub> , dearomatized; Baseoil — unspecified	308-287-7	97926-68-6	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-523-00-1	Hydrocarbons, C <sub>20-58</sub> , hydrotreated; Baseoil — unspecified	308-289-8	97926-70-0	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-524-00-7	Hydrocarbons, C <sub>27-42</sub> , naphthenic; Baseoil — unspecified	308-290-3	97926-71-1	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-525-00-2	Residual oils (petroleum), carbon-treated solvent-dewaxed; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by the treatment of solvent-dewaxed petroleum residual oils with activated charcoal for the removal of trace polar constituents and impurities.]	309-710-8	100684-37-5	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-526-00-8	Residual oils (petroleum), clay-treated solvent-dewaxed; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by treatment of solvent-dewaxed petroleum residual oils with bleaching earth for the removal of trace polar constituents and impurities.]	309-711-3	100684-38-6	Carc. 1B	H350	GHS08 Dgr	H350			H L

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-527-00-3	Lubricating oils (petroleum), C <sub>&gt;25</sub> , solvent-extd., deasphalted, dewaxed, hydrogenated; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by solvent extraction and hydrogenation of vacuum distillation residues. It consists predominantly of hydrocarbons having carbon numbers predominantly greater than C <sub>25</sub> and produces a finished oil with a viscosity in the order of 32cSt to 37cSt at 100 °C (212°F).]	309-874-0	101316-69-2	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-528-00-9	Lubricating oils (petroleum), C <sub>17-32</sub> , solvent-extd., dewaxed, hydrogenated; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by solvent extraction and hydrogenation of atmospheric distillation residues. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>17</sub> through C <sub>32</sub> and produced a finished oil with a viscosity in the order of 17cSt to 23cSt at 40 °C (104°F).]	309-875-6	101316-70-5	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-529-00-4	Lubricating oils (petroleum), C <sub>20-35</sub> , solvent-extd., dewaxed, hydrogenated; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by solvent extraction and hydrogenation of atmospheric distillation residues. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>35</sub> and produces a finished oil with a viscosity in the order of 37cSt to 44cSt at 40 °C (104°F).]	309-876-1	101316-71-6	Carc. 1B	H350	GHS08 Dgr	H350			H L

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-530-00-X	Lubricating oils (petroleum), C <sub>24-50</sub> , solvent-extd., dewaxed, hydrogenated; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by solvent extraction and hydrogenation of atmospheric distillation residues. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>24</sub> through C <sub>50</sub> and produces a finished oil with a viscosity in the order of 16cSt to 75cSt at 40 °C (104°F).]	309-877-7	101316-72-7	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-531-00-5	Extracts (petroleum), heavy naphthenic distillate solvent, arom. conc.; Distillate aromatic extract (treated); [An aromatic concentrate produced by adding water to heavy naphthenic distillate solvent extract and extraction solvent.]	272-175-3	68783-00-6	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-532-00-0	Extracts (petroleum), solvent-refined heavy paraffinic distillate solvent; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained as the extract from the re-extraction of solvent-refined heavy paraffinic distillate. It consists of saturated and aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> .]	272-180-0	68783-04-0	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-533-00-6	Extracts (petroleum), heavy paraffinic distillates, solvent-deasphalted; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained as the extract from a solvent extraction of heavy paraffinic distillate.]	272-342-0	68814-89-1	Carc. 1B	H350	GHS08 Dgr	H350			H L

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-534-00-1	Extracts (petroleum), heavy naphthenic distillate solvent, hydrotreated; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained by treating a heavy naphthenic distillate solvent extract with hydrogen in the presence of a catalyst. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and produces a finished oil of at least 19cSt at 40 °C (100 SUS at 100°F).]	292-631-5	90641-07-9	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-535-00-7	Extracts (petroleum), heavy paraffinic distillate solvent, hydrotreated; Distillate aromatic extract (treated); [A complex combination of hydrocarbons produced by treating a heavy paraffinic distillate solvent extract with hydrogen in the presence of a catalyst. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>21</sub> through C <sub>33</sub> and boiling in the range of approximately 350 °C to 480 °C (662°F to 896°F).]	292-632-0	90641-08-0	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-536-00-2	Extracts (petroleum), light paraffinic distillate solvent, hydrotreated; Distillate aromatic extract (treated); [A complex combination of hydrocarbons produced by treating a light paraffinic distillate solvent extract with hydrogen in the presence of a catalyst. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>17</sub> through C <sub>26</sub> and boiling in the range of approximately 280 °C to 400 °C (536°F to 752°F).]	292-633-6	90641-09-1	Carc. 1B	H350	GHS08 Dgr	H350			H L



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-537-00-8	Extracts (petroleum), hydrotreated light paraffinic distillate solvent; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained as the extract from solvent extraction of intermediate paraffinic top solvent distillate that is treated with hydrogen in the presence of a catalyst. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>16</sub> through C <sub>36</sub> .]	295-335-4	91995-73-2	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-538-00-3	Extracts (petroleum), light naphthenic distillate solvent, hydrodesulfurized; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained by treating the extract, obtained from a solvent extraction process, with hydrogen in the presence of a catalyst under conditions primarily to remove sulfur compounds. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>30</sub> . This stream is likely to contain 5 wt.% or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	295-338-0	91995-75-4	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-539-00-9	Extracts (petroleum), light paraffinic distillate solvent, acid-treated; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained as a fraction of the distillation of an extract from the solvent extraction of light paraffinic top petroleum distillates that is subjected to a sulfuric acid refining. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>16</sub> through C <sub>32</sub> .]	295-339-6	91995-76-5	Carc. 1B	H350	GHS08 Dgr	H350			H L

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-540-00-4	Extracts (petroleum), light paraffinic distillate solvent, hydrodesulfurized; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained by solvent extraction of a light paraffin distillate and treated with hydrogen to convert the organic sulfur to hydrogen sulfide which is eliminated. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>40</sub> and produces a finished oil with a viscosity of greater than 10cSt at 40 °C.]	295-340-1	91995-77-6	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-541-00-X	Extracts (petroleum), light vacuum gas oil solvent, hydrotreated; Distillate aromatic extract (treated); [A complex combination of hydrocarbons, obtained by solvent extraction from light vacuum petroleum gas oils and treated with hydrogen in the presence of a catalyst. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>13</sub> through C <sub>30</sub> .]	295-342-2	91995-79-8	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-542-00-5	Extracts (petroleum), heavy paraffinic distillate solvent, clay-treated; Distillate aromatic extract (treated); [A complex combination of hydrocarbons resulting from treatment of a petroleum fraction with natural or modified clay in either a contact or percolation process to remove the trace amounts of polar compounds and impurities present. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> . This stream is likely to contain 5 wt.% or more 4-6 membered ring aromatic hydrocarbons.]	296-437-1	92704-08-0	Carc. 1B	H350	GHS08 Dgr	H350			H L

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-543-00-0	Extracts (petroleum), heavy naphthenic distillate solvent, hydrodesulfurized; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained from a petroleum stock by treating with hydrogen to convert organic sulfur to hydrogen sulfide which is removed. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>50</sub> and produces a finished oil with a viscosity of greater than 19cSt at 40 °C.]	297-827-4	93763-10-1	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-544-00-6	Extracts (petroleum), solvent-dewaxed heavy paraffinic distillate solvent, hydrodesulfurized; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained from a solvent dewaxed petroleum stock by treating with hydrogen to convert organic sulfur to hydrogen sulfide which is removed. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>50</sub> and produces a finished oil with a viscosity of greater than 19cSt at 40 °C.]	297-829-5	93763-11-2	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-545-00-1	Extracts (petroleum), light paraffinic distillate solvent, carbon-treated; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained as a fraction from distillation of an extract recovered by solvent extraction of light paraffinic top petroleum distillate treated with activated charcoal to remove traces of polar constituents and impurities. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>16</sub> through C <sub>32</sub> .]	309-672-2	100684-02-4	Carc. 1B	H350	GHS08 Dgr	H350			H L

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-546-00-7	Extracts (petroleum), light paraffinic distillate solvent, clay-treated; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained as a fraction from distillation of an extract recovered by solvent extraction of light paraffinic top petroleum distillates treated with bleaching earth to remove traces of polar constituents and impurities. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>16</sub> through C <sub>32</sub> .]	309-673-8	100684-03-5	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-547-00-2	Extracts (petroleum), light vacuum, gas oil solvent, carbon-treated; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained by solvent extraction of light vacuum petroleum gas oil treated with activated charcoal for the removal of trace polar constituents and impurities. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>13</sub> through C <sub>30</sub> .]	309-674-3	100684-04-6	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-548-00-8	Extracts (petroleum), light vacuum gas oil solvent, clay-treated; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained by solvent extraction of light vacuum petroleum gas oils treated with bleaching earth for removal of trace polar constituents and impurities. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>13</sub> through C <sub>30</sub> .]	309-675-9	100684-05-7	Carc. 1B	H350	GHS08 Dgr	H350			H L

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
649-549-00-3	Foots oil (petroleum); Foots oil; [A complex combination of hydrocarbons obtained as the oil fraction from a solvent deoiling or a wax sweating process. It consists predominantly of branched chain hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> .]	265-171-8	64742-67-2	Carc. 1B	H350	GHS08 Dgr	H350			H L
649-550-00-9	Foots oil (petroleum), hydrotreated; Foots oil	295-394-6	92045-12-0	Carc. 1B	H350	GHS08 Dgr	H350			H L
650-002-00-6	turpentine, oil	232-350-7	8006-64-2	Flam. Liq. 3 Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*) Asp. Tox. 1 Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 2	H226 H332 H312 H302 H304 H319 H315 H317 H411	GHS02 GHS08 GHS07 GHS09 Dgr	H226 H332 H312 H302 H304 H319 H315 H317 H411			
650-003-00-1	fenson (ISO); 4-chlorophenyl benzenesulphonate;	201-274-6	80-38-6	Acute Tox. 4 (*) Eye Irrit. 2 Aquatic Chronic 2	H302 H319 H411	GHS07 GHS09 Wng	H302 H319 H411			
650-004-00-7	norbormide (ISO); 5-(a-hydroxy-a-2-pyridylbenzyl)-7-(a-2-pyridylbenzylidene)bicyclo [2.2.1] hept-5-ene-2,3-dicarboximide	213-589-6	991-42-4	Acute Tox. 4 (*)	H302	GHS07 Wng	H302			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
650-005-00-2	(2R,6aS,12aS)-1,2,6,6a,12,12a-hexahydro-2-isopropenyl-8,9-dimethoxychromeno[3,4-b]furo[2,3-h]chromen-6-one, rotenone	201-501-9	83-79-4	Acute Tox. 3 (*) Eye Irrit. 2 STOT SE 3 Skin Irrit. 2 Aquatic Acute 1 Aquatic Chronic 1	H301 H319 H335 H315 H400 H410	GHS06 GHS09 Dgr	H301 H319 H335 H315 H410			
650-006-00-8	benquinox (ISO); p-benzoquinone 1-benzoylhydrazone 4-oxime	207-807-9	495-73-8	Acute Tox. 3 (*) Acute Tox. 4 (*)	H301 H312	GHS06 Dgr	H301 H312			
650-007-00-3	chlordimeform (ISO); N <sub>2</sub> -(4-chloro-o-tolyl)-N <sub>1</sub> ,N <sub>1</sub> -dimethylformamide	228-200-5	6164-98-3	Carc. 2 Acute Tox. 4 (*) Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H351 H312 H302 H400 H410	GHS08 GHS07 GHS09 Wng	H351 H312 H302 H410			
650-008-00-9	drazoxolon (ISO); 4-(2-chlorophenylhydrazone)-3-methyl-5-isoxazolone	227-197-8	5707-69-7	Acute Tox. 3 (*) Aquatic Acute 1 Aquatic Chronic 1	H301 H400 H410	GHS06 GHS09 Dgr	H301 H410			
650-009-00-4	chlordimeform hydrochloride; N'-(4-chloro-o-tolyl)-N,N-dimethylformamide monohydrochloride; N <sup>2</sup> -(4-chloro-o-tolyl)-N <sup>1</sup> ,N <sup>1</sup> -dimethylformamide hydrochloride	243-269-1	19750-95-9	Carc. 2 Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H351 H302 H400 H410	GHS08 GHS07 GHS09 Wng	H351 H302 H410			
650-010-00-X	benzyl violet 4B; α-[4-(4-dimethylamino-α-[4-[ethyl(3-sodiumsulphonatobenzyl)amino] phenyl]benzylidene)cyclohexa-2,5-dienylidene(ethyl ammonio)]toluene-3-sulphonate	216-901-9	1694-09-3	Carc. 2	H351	GHS08 Wng	H351			
650-012-00-0	erionite	—	12510-42-8	Carc. 1A	H350	GHS08 Dgr	H350			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
650-013-00-6	asbestos	— — — — — — —	12001-28-4 132207-32-0 12172-73-5 77536-66-4 77536-68-6 77536-67-5 12001-29-5	Carc. 1A STOT RE 1	H350 H372 (**)	GHS08 Dgr	H350 H372 (**)			
650-014-00-1	diethyl 2,4-dihydroxycyclodisiloxane-2,4-diylbis(trimethylene)diphosphonate, tetrasodium salt, reaction products with disodium metasilicate	401-770-4	—	Skin Corr. 1B Acute Tox. 4 (*)	H314 H302	GHS05 GHS07 Dgr	H314 H302			
650-015-00-7	rosin; colophony	232-475-7 232-484-6 277-299-1	8050-09-7 8052-10-6 73138-82-6	Skin Sens. 1	H317	GHS07 Wng	H317			
650-016-00-2	Mineral wool, with the exception of those specified elsewhere in this Annex; [Man-made vitreous (silicate) fibres with random orientation with alkaline oxide and alkali earth oxide (Na <sub>2</sub> O+K <sub>2</sub> O+CaO+MgO +BaO) content greater than 18 % by weight]	—	—	Carc. 2 Skin Irrit. 2	H351 H315	GHS08 GHS07 Wng	H351 H315			AQR
650-017-00-8	Refractory Ceramic Fibres; Special Purpose Fibres, with the exception of those specified elsewhere in this Annex; [Man-made vitreous (silicate) fibres with random orientation with alkaline oxide and alkali earth oxide (Na <sub>2</sub> O+K <sub>2</sub> O+CaO+ MgO +BaO) content less or equal to 18 % by weight]	—	—	Carc. 1B Skin Irrit. 2	H350i H315	GHS08 GHS07 Dgr	H350i H315			A R

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
650-018-00-3	Reaction product of: acetophenone, formaldehyde, cyclohexylamine, methanol and acetic acid	406-230-1	—	Flam. Liq. 3 Carc. 2 Skin Corr. 1B Acute Tox. 4 (*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H226 H351 H314 H332 H317 H400 H410	GHS02 GHS08 GHS05 GHS07 GHS09 Dgr	H226 H351 H314 H332 H317 H410			
650-031-00-4	bis(4-hydroxy-N-methylanilinium) sulphate	200-237-1	55-55-0	Acute Tox. 4 (*) STOT RE 2 (*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H302 H373 (**) H317 H400 H410	GHS08 GHS07 GHS09 Wng	H302 H373 (**) H317 H410			
650-032-00-X	cyproconazole (ISO); (2RS,3RS;2RS,3SR)-2-(4-chlorophenyl)-3-cyclopropyl-1-(1H-1,2,4-triazol-1-yl)butan-2-ol	—	94361-06-5	Repr. 2 Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H361d (***) H302 H400 H410	GHS08 GHS07 GHS09 Wng	H361d (***) H302 H410			
650-033-00-5	(S)- $\alpha$ -cyano-3-phenoxybenzyl-(S)-2-(4-chlorophenyl)-3-methylbutyrate; esfenvalerate	—	66230-04-4	Acute Tox. 3 (*) Acute Tox. 3 (*) Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H331 H301 H317 H400 H410	GHS06 GHS09 Dgr	H331 H301 H317 H410			
650-041-00-9	triasulfuron (ISO) ; 1-[2-(2-chloroethoxy)phenylsulfonyl]-3-(4-methoxy-6-methyl-1,3,5-triazin-2-yl)urea	—	82097-50-5	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			
650-042-00-4	reaction product of: polyethylene-polyamine-(C <sub>16</sub> -C <sub>18</sub> )-alkylamides with monothio-(C <sub>2</sub> )-alkyl phosphonates	417-450-2	—	Eye Irrit. 2 Skin Irrit. 2 Skin Sens. 1 Aquatic Chronic 3	H319 H315 H317 H412	GHS07 Wng	H319 H315 H317 H412			



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
650-043-00-X	reaction product of: 3,5-bis- <i>tert</i> -butylsalicylic acid and aluminiumsulfate	420-310-3	—	Acute Tox. 4 (*) Aquatic Acute 1 Aquatic Chronic 1	H302 H400 H410	GHS07 GHS09 Wng	H302 H410			
650-044-00-5	mixed linear and branched C <sub>14-15</sub> alcohols ethoxylated, reaction product with epichlorohydrin	420-480-9	158570-99-1	Skin Irrit. 2 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H315 H317 H400 H410	GHS07 GHS09 Wng	H315 H317 H410			
650-045-00-0	reaction product of: 1,2,3-propanetricarboxylic acid, 2-hydroxy, diethyl ester, 1-propanol and zirconium tetra- <i>n</i> -propanolate	417-110-3	—	Flam. Liq. 2 Skin Irrit. 2 Eye Dam. 1 Aquatic Chronic 2	H225 H315 H318 H411	GHS02 GHS05 GHS09 Dgr	H225 H315 H318 H411			
650-046-00-6	di(tetramethylammonium)(29 <i>H</i> ,31 <i>H</i> -phthalocyanin- <i>N</i> 29, <i>N</i> 30, <i>N</i> 31, <i>N</i> 32)disulfonamide disulfonate, cuprate(2-)-complex, derivatives	416-180-2	12222-04-7	Acute Tox. 4 (*) STOT RE 2 (*) Aquatic Chronic 2	H302 H373 (**) H411	GHS08 GHS07 GHS09 Wng	H302 H373 (**) H411			
650-047-00-1	dibenzylphenylsulfonium hexafluoroantimonate	417-760-8	134164-24-2	STOT RE 1 Acute Tox. 4 (*) Eye Dam. 1 Skin Sens. 1 Aquatic Chronic 2	H372 (**) H302 H318 H317 H411	GHS08 GHS05 GHS07 GHS09 Dgr	H372 (**) H302 H318 H317 H411			
650-048-00-7	reaction product of: borax, hydrogen peroxide, acetic acid anhydride and acetic acid	420-070-1	—	Org. Perox. D (****) Acute Tox. 4 (*) Acute Tox. 4 (*) Acute Tox. 4 (*) Skin Corr. 1A Aquatic Acute 1	H242 H332 H312 H302 H314 H400	GHS02 GHS05 GHS07 GHS09 Dgr	H242 H332 H312 H302 H314 H400			

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling		Etikettering			Specifieke concentratiegrenzen, M-factoren	Opmerkingen
				Gevarenklasse en categorie	Gevarenaanduiding	Pictogram, signaalwoord	Gevarenaanduiding	Aanvullende gevarenaanduiding		
650-049-00-2	2-alkoxyloxyethyl hydrogen maleate, where alkoyl represents (by weight) 70 to 85 % unsaturated octadecoyl, 0.5 to 10 % saturated octadecoyl, and 2 to 18 % saturated hexadecoyl	417-960-5	—	Skin Irrit. 2 Eye Dam. 1 Skin Sens. 1 Aquatic Acute 1 Aquatic Chronic 1	H315 H318 H317 H400 H410	GHS05 GHS07 GHS09 Dgr	H315 H318 H317 H410			
650-050-00-8	reaction mass of: 1-methyl-3-hydroxypropyl 3,5-[1,1-dimethylethyl]-4-hydroxydihydrocinnamate and/or 3-hydroxybutyl 3,5-[1,1-dimethylethyl]-4-hydroxydihydrocinnamate; 1,3-butanediol bis[3-(3'-(1,1-dimethylethyl)-4'-hydroxy-phenyl)propionate] isomers; 1,3-butanediol bis[3-(3',5'-(1,1-dimethylethyl)-4'-hydroxyphenyl)propionate] isomers	423-600-8	—	Aquatic Chronic 2	H411	GHS09	H411			
650-055-00-5	silver sodium zirconium hydrogenphosphate	422-570-3	155925-27-2	Aquatic Acute 1 Aquatic Chronic 1	H400 H410	GHS09 Wng	H410			

Tabel 3.2

## Lijst van geharmoniseerde indeling en etikettering van gevaarlijke stoffen van Bijlage I bij Richtlijn 67/548/EEG

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
001-001-00-9	hydrogen	215-605-7	1333-74-0	F+; R12	F+ R: 12 S: (2-)9-16-33		
001-002-00-4	aluminium lithium hydride	240-877-9	16853-85-3	F; R15	F R: 15 S: (2-)7/8-24/25-43		
001-003-00-X	sodium hydride	231-587-3	7646-69-7	F; R15	F R: 15 S: (2-)7/8-24/25-43		
001-004-00-5	calcium hydride	232-189-2	7789-78-8	F; R15	F R: 15 S: (2-)7/8-24/25-43		
003-001-00-4	lithium	231-102-5	7439-93-2	F; R15 R14 C; R34	F; C R: 14/15-34 S: (1/2-)8-43-45		
003-002-00-X	n-hexyllithium	404-950-0	21369-64-2	F; R15-17 R14 C; R35	F; C R: 14/15-17-35 S: (1/2-)6-16-26-30-36/37/39-43-45		
004-001-00-7	beryllium	231-150-7	7440-41-7	Carc. Cat. 2; R49 T+; R26 T; R25-48/23 Xi; R36/37/ 38 R43	T+ R: 49-25-26-36/37/ 38-43-48/23 S: 53-45		E

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
004-002-00-2	beryllium compounds with the exception of aluminium beryllium silicates, and with those specified elsewhere in this Annex	—	—	Carc. Cat. 2; R49 T+; R26 T; R25-48/23 Xi; R36/37/ 38 R43 N; R51-53	T+; N R: 49-25-26-36/37/ 38-43-48/23-51/53 S: 53-45-61		AE
004-003-00-8	beryllium oxide	215-133-1	1304-56-9	Carc. Cat. 2; R49 T+; R26 T; R25-48/23 Xi; R36/37/ 38 R43	T+ R: 49-25-26-36/37/ 38-43-48/23 S: 53-45		E
005-001-00-X	boron trifluoride	231-569-5	7637-07-2	R14 T+; R26 C; R35	T+; C R: 14-26-35 S: (1/2-)9-26-28-36/ 37/39-45		
005-002-00-5	boron trichloride	233-658-4	10294-34-5	R14 T+; R26/28 C; R34	T+ R: 14-26/28-34 S: (1/2-)9-26-28-36/ 37/39-45		
005-003-00-0	boron tribromide	233-657-9	10294-33-4	R14 T+; R26/28 C; R35	T+; C R: 14-26/28-35 S: (1/2-)9-26-28-36/ 37/39-45		
005-004-00-6	trialkylboranes	—	—	F; R17 C; R34	F; C R: 17-34 S: (1/2-)7-23-26-36/ 37/39-43-45		A
005-005-00-1	trimethyl borate	204-468-9	121-43-7	R10 Xn; R21	Xn R: 10-21 S: (2-)23-25		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
005-006-00-7	dibutyltin hydrogen borate	401-040-5	75113-37-0	T; R48/25 Xn; R21/22 Xi; R41 R43 N; R50-53	T; N R: 21/22-41-43-48/ 25-50/53 S: (1/2-)22-26-36/37- 45-60-61		
005-009-00-3	tetrabutylammonium butyltriphenylborate	418-080-4	120307-06-4	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-56-61		
005-010-00-9	N,N-dimethylanilinium tetrakis(pentafluorophenyl)borate	422-050-6	118612-00-3	Carc. Cat. 3; R40 Xn; R22 Xi; R38-41	Xn R: 22-38-40-41 S: (2-)22-26-36/37/39		
005-012-00-X	diethyl[4-[1,5,5-tris(4-diethylaminophenyl)penta-2,4-dienylidene]cyclohexa-2,5-dienylidene]ammonium butyltriphenylborate	418-070-1	141714-54-7	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		
006-001-00-2	carbon monoxide	211-128-3	630-08-0	F+; R12 Repr. Cat. 1; R61 T; R23-48/23	F+; T R: 61-12-23-48/23 S: 53-45		E
006-002-00-8	phosgene; carbonyl chloride	200-870-3	75-44-5	T+; R26 C; R34	T+ R: 26-34 S: (1/2-)9-26-36/37/ 39-45		
006-003-00-3	carbon disulphide	200-843-6	75-15-0	F; R11 Repr. Cat. 3; R62-63 T; R48/23 Xi; R36/38	F; T R: 11-36/38-48/23- 62-63 S: (1/2-)16-33-36/37- 45	Repr. Cat. 3; R62-63: C ≥ 1 % T; R48/23: C ≥ 1 % Xn; R48/20: 0,2 % ≤ C < 1 %	
006-004-00-9	calcium carbide	200-848-3	75-20-7	F; R15	F R: 15 S: (2-)8-43		
006-005-00-4	thiram (ISO); tetramethylthiuram disulphide	205-286-2	137-26-8	Xn; R20/22- 48/22 Xi; R36/38 R43 N; R50-53	Xn; N R: 20/22-36/38-43- 48/22-50/53 S: (2-)26-36/37-60-61	N; R50-53: C ≥ 2,5 % N; R51-53: 0,25 % ≤ C < 2,5 % R52-53: 0,025 % ≤ C < 0,25 %	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
006-006-00-X	hydrogen cyanide; hydrocyanic acid	200-821-6	74-90-8	F+; R12 T+; R26 N; R50-53	F+; T+; N R: 12-26-50/53 S: (1/2-)7/9-16-36/ 37-38-45-60-61		
006-006-01-7	hydrogen cyanide ...%; hydrocyanic acid ...%	200-821-6	74-90-8	T+; R26/27/ 28 N; R50-53	T+; N R: 26/27/28-50/53 S: (1/2-)7/9-36/37- 38-45-60-61		B
006-007-00-5	salts of hydrogen cyanide with the exception of complex cyanides such as ferrocyanides, ferricyanides and mercuric oxycyanide	—	—	T+; R26/27/ 28 R32 N; R50-53	T+; N R: 26/27/28-32-50/ 53 S: (1/2-)7-28-29-45- 60-61		A
006-008-00-0	antu (ISO); 1-(1-naphthyl)-2-thiourea	201-706-3	86-88-4	T+; R28 Carc. Cat. 3; R40	T+ R: 28-40 S: (1/2-)25-36/37-45		
006-009-00-6	1-isopropyl-3-methylpyrazol-5-yl dimethylcarbamate; isolan	204-318-2	119-38-0	T+; R27/28	T+ R: 27/28 S: (1/2-)28-36/37/39- 45		
006-010-00-1	5,5-dimethyl-3-oxocyclohex-1-enyl dimethylcarbamate 5,5-dimethyldihydroresorcinol dimethylcarbamate; dimetan	204-525-8	122-15-6	T; R25	T R: 25 S: (1/2-)36/37-45		
006-011-00-7	carbaryl (ISO); 1-naphthyl methylcarbamate	200-555-0	63-25-2	Carc. Cat. 3; R40 Xn; R22 N; R50	Xn; N R: 22-40-50 S: (2-)22-24-36/37- 46-61		
006-012-00-2	ziram (ISO); zinc bis dimethyldithiocarbamate	205-288-3	137-30-4	T+; R26 Xn; R22-48/ 22 Xi; R37-41 R43 N; R50-53	T+; N R: 22-26-37-41-43- 48/22-50/53 S: (1/2-)22-26-28-36/ 37/39-45-60-61	N; R50-53: C ≥ 0,25 % N; R51-53: 0,025 % ≤ C < 0,25 % R52-53: 0,0025 % ≤ C < 0,025 %	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
006-013-00-8	metam-sodium (ISO); sodium methylthiocarbamate	205-293-0	137-42-8	Xn; R22 R31 C; R34 R43 N; R50-53	C; N R: 22-31-34-43-50/ 53 S: (1/2-)26-36/37/39- 45-60-61		
006-014-00-3	nabam (ISO); disodium ethylenebis(N, N'-dithiocarbamate)	205-547-0	142-59-6	Xn; R22 Xi; R37 R43 N; R50-53	Xn; N R: 22-37-43-50/53 S: (2-)8-24/25-46-60- 61		
006-015-00-9	diuron (ISO); 3-(3,4-dichlorophenyl)-1,1-dimethylurea	206-354-4	330-54-1	Carc. Cat. 3; R40 Xn; R22-48/ 22 N; R50-53	Xn; N R: 22-40-48/22-50/ 53 S: (2-)13-22-23-37- 46-60-61		
006-016-00-4	propoxur (ISO); 2-isopropoxyphenyl N-methylcarbamate; 2-isopropoxyphenyl methylcarbamate	204-043-8	114-26-1	T; R25 N; R50-53	T; N R: 25-50/53 S: (1/2-)37-45-60-61		
006-017-00-X	aldicarb (ISO); 2-methyl-2-(methylthio)propanal-O-(N-methylcarbamoyl) oxime	204-123-2	116-06-3	T+; R26/28 T; R24 N; R50-53	T+; N R: 24-26/28-50/53 S: (1/2-)22-36/37-45- 60-61		
006-018-00-5	aminocarb (ISO); 4-dimethylamino-3-tolyl methylcarbamate	217-990-7	2032-59-9	T; R24/25 N; R50-53	T; N R: 24/25-50/53 S: (1/2-)28-36/37-45- 60-61		
006-019-00-0	di-allate (ISO); S—(2,3-dichloroallyl)-N,N-diisopropylthiocarbamate	218-961-1	2303-16-4	Carc. Cat. 3; R40 Xn; R22 N; R50-53	Xn; N R: 22-40-50/53 S: (2-)25-36/37-60-61		
006-020-00-6	barban (ISO); 4-chlorbut-2-ynyl N-(3-chlorophenyl)carbamate	202-930-4	101-27-9	Xn; R22 R43 N; R50-53	Xn; N R: 22-43-50/53 S: (2-)24-36/37-60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
006-021-00-1	linuron (ISO); 3-(3,4-dichlorophenyl)-1-methoxy-1-methylurea	206-356-5	330-55-2	Repr. Cat. 2; R61 Repr. Cat. 3; R62 Carc. Cat. 3; R40 Xn; R22-48/ 22 N; R50-53	T; N R: 61-22-40-48/22- 62-50/53 S: 53-45-60-61		E
006-022-00-7	decarbofuran (ISO); 2,3-dihydro-2-methylbenzofuran-7-yl methylcarbamate	—	1563-67-3	T; R23/24/25	T R: 23/24/25 S: (1/2-)13-36/37-45		
006-023-00-2	mercaptodimethur (ISO); methiocarb (ISO); 3,5-dimethyl-4-methylthiophenyl N-methylcarbamate	217-991-2	2032-65-7	T; R25 N; R50-53	T; N R: 25-50/53 S: (1/2-)22-37-45-60- 61		
006-024-00-8	proxan-sodium (ISO); sodium O-isopropylidithiocarbonate	205-443-5	140-93-2	Xn; R22 Xi; R38 N; R51-53	Xn; N R: 22-38-51/53 S: (2-)13-61		
006-025-00-3	allethrin; (RS)-3-allyl-2-methyl-4-oxocyclopent-2-enyl (1RS,3RS;1RS,3SR)-2,2-dimethyl-3-(2-methylprop-1-enyl) cyclopropanecarboxylate; bioallethrin; (RS)-3-allyl-2-methyl-4-oxocyclopent-2-enyl (1R,3R)-2,2- dimethyl-3-(2-methylprop-1-enyl)cyclopropanecarboxylate; [1] S-bioallethrin; (S)-3-allyl-2-methyl-4-oxocyclopent-2-enyl (1R,3R)-2,2-dime- thyl-3-(2-methylprop-1-enyl)cyclopropanecarboxylate; [2] esbiothrin; (RS)-3-allyl-2-methyl-4-oxocyclopent-2-enyl (1R,3R)-2,2- dimethyl-3-(2-methylprop-1-enyl)cyclopropanecarboxylate [3]	209-542-4 [1] 249-013-5 [2] - [3]	584-79-2 [1] 28434-00-6 [2] 84030-86-4 [3]	Xn; R20/22 N; R50-53	Xn; N R: 20/22-50/53 S: (2-)36-60-61		C
006-026-00-9	carbofuran (ISO); 2,3-dihydro-2,2-dimethylbenzofuran-7-yl N-methylcarbamate	216-353-0	1563-66-2	T+; R26/28 N; R50-53	T+; N R: 26/28-50/53 S: (1/2-)36/37-45-60- 61		



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
006-028-00-X	dinobuton (ISO); 2-(1-methylpropyl)-4,6-dinitrophenyl isopropyl carbonate	213-546-1	973-21-7	T; R25 N; R50-53	T; N R: 25-50/53 S: (1/2-)37-45-60-61		
006-029-00-5	dioxacarb (ISO); 2-(1,3-dioxolan-2-yl)phenyl N-methylcarbamate	230-253-4	6988-21-2	T; R25 N; R51-53	T; N R: 25-51/53 S: (1/2-)37-45-61		
006-030-00-0	EPTC (ISO); S-ethyl dipropylthiocarbamate	212-073-8	759-94-4	Xn; R22	Xn R: 22 S: (2-)23		
006-031-00-6	formetanate (ISO); 3-[(EZ)-dimethylaminomethyleneamino]phenyl methylcarbamate	244-879-0	22259-30-9	T+; R26/28 R43 N; R50-53	T+; N R: 26/28-43-50/53 S: (1/2-)24-28-37/39-45-60-61		
006-032-00-1	monolinuron (ISO); 3-(4-chlorophenyl)-1-methoxy-1-methylurea	217-129-5	1746-81-2	Xn; R22-48/ 22 N; R50-53	Xn; N R: 22-48/22-50/53 S: (2-)22-60-61		
006-033-00-7	metoxuron (ISO); 3-(3-chloro-4-methoxyphenyl)-1,1-dimethylurea	243-433-2	19937-59-8	N; R50-53	N R: 50/53 S: 60-61		
006-034-00-2	pebulate (ISO); N-butyl-N-ethyl-S-propylthiocarbamate	214-215-4	1114-71-2	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)23-61		
006-035-00-8	pirimicarb (ISO); 5,6-dimethyl-2-dimethylamino-pyrimidin-4-yl N,N-dimethylcarbamate	245-430-1	23103-98-2	T; R25 N; R50-53	T; N R: 25-50/53 S: (1/2-)22-37-45-60-61		
006-036-00-3	benzthiazuron (ISO); 1-benzothiazol-2-yl-3-methylurea	217-685-9	1929-88-0	Xn; R22	Xn R: 22 S: (2-)24/25		
006-037-00-9	promecarb (ISO); 3-isopropyl-5-methylphenyl N-methylcarbamate	220-113-0	2631-37-0	T; R25 N; R50-53	T; N R: 25-50/53 S: (1/2-)24-37-45-60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
006-038-00-4	sulfallate (ISO); 2-chloroallyl N,N-dimethyldithiocarbamate	202-388-9	95-06-7	Carc. Cat. 2; R45 Xn; R22 N; R50-53	T; N R: 45-22-50/53 S: 53-45-60-61		E
006-039-00-X	tri-allate (ISO); S-2,3,3-trichloroallyl diisopropylthiocarbamate	218-962-7	2303-17-5	Xn; R22-48/ 22 R43 N; R50-53	Xn; N R: 22-43-48/22-50/ 53 S: (2-)24-37-60-61		
006-040-00-5	3-methylpyrazol-5-yl-dimethylcarbamate; monometilan	—	2532-43-6	T; R23/24/25	T R: 23/24/25 S: (1/2-)13-45		
006-041-00-0	dimethylcarbamoyl chloride	201-208-6	79-44-7	Carc. Cat. 2; R45 T; R23 Xn; R22 Xi; R36/37/ 38	T R: 45-22-23-36/37/ 38 S: 53-45	Carc. Cat. 2; R45: C ≥ 0,001 %	E
006-042-00-6	monuron (ISO); 3-(4-chlorophenyl)-1,1-dimethylurea	205-766-1	150-68-5	Carc. Cat. 3; R40 Xn; R22 N; R50-53	Xn; N R: 22-40-50/53 S: (2-)36/37-60-61		
006-043-00-1	3-(4-chlorophenyl)-1,1-dimethyluronium trichloroacetate; monuron-TCA	—	140-41-0	Xi; R36/38 Carc. Cat. 3; R40 N; R50-53	Xn; N R: 36/38-40-50/53 S: (2-)36/37-60-61		
006-044-00-7	isoproturon (ISO); 3-(4-isopropylphenyl)-1,1-dimethylurea	251-835-4	34123-59-6	Carc. Cat. 3; R40 N; R50-53	Xn; N R: 40-50/53 S: (2-)36/37-60-61	N; R50-53: C ≥ 2,5 % N; R51-53: 0,25 % ≤ C < 2,5 % R52-53: 0,025 % ≤ C < 0,25 %	
006-045-00-2	methomyl (ISO); 1-(methylthio)ethylideneamino N-methylcarbamate	240-815-0	16752-77-5	T+;R28 N; R50-53	T+; N R: 28-50/53 S: (1/2-)22-36/37-45- 60-61		
006-046-00-8	bendiocarb (ISO); 2,2-dimethyl-1,3-benzodioxol-4-yl N-methylcarbamate	245-216-8	22781-23-3	T; R23/25 Xn; R21 N; R50-53	T; N R: 21-23/25-50/53 S: (1/2-)22-36/37-45- 60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
006-047-00-3	bufencarb (ISO); reaction mass of 3-(1-methylbutyl)phenyl N-methylcarbamate and 3-(1-ethylpropyl)phenyl N-methylcarbamate	—	8065-36-9	T; R24/25 N; R50-53	T; N R: 24/25-50/53 S: (1/2-)28-36/37-45- 60-61		
006-048-00-9	ethiofencarb (ISO); 2-(ethylthiomethyl)phenyl N-methylcarbamate	249-981-9	29973-13-5	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
006-049-00-4	dixanthogen; O,O-diethyl dithiobis(thioformate)	207-944-4	502-55-6	Xn; R22	Xn R: 22 S: (2-)24		
006-050-00-X	1,1-dimethyl-3-phenyluronium trichloroacetate; fenuron-TCA	—	4482-55-7	Xi; R38 N; R50-53	Xi; N R: 38-50/53 S: (2-)60-61		
006-051-00-5	ferbam (ISO); iron tris(dimethyldithiocarbamate)	238-484-2	14484-64-1	Xi; R36/37/ 38 N; R50-53	Xi; N R: 36/37/38-50/53 S: (2-)60-61		
006-052-00-0	formetanate hydrochloride; 3-(N,N-dimethylaminomethyleneamino)phenyl N-methylcarbamate	245-656-0	23422-53-9	T+; R26/28 R43 N; R50-53	T+; N R: 26/28-43-50/53 S: (1/2-)24-28-37/39- 45-60-61		
006-053-00-6	isoprocarb (ISO); 2-isopropylphenyl N-methylcarbamate	220-114-6	2631-40-5	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
006-054-00-1	mexacarbate (ISO); 3,5-dimethyl-4-dimethylaminophenyl N-methylcarbamate	206-249-3	315-18-4	T+; R28 Xn; R21 N; R50-53	T+; N R: 21-28-50/53 S: (1/2-)36/37-45-60- 61		
006-055-00-7	xylylcarb (ISO); 3,4-dimethylphenyl N-methylcarbamate; 3,4-xylyl methylcarbamate; MPMC	219-364-9	2425-10-7	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
006-056-00-2	metolcarb (ISO); m-tolyl methylcarbamate; MTMC	214-446-0	1129-41-5	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
006-057-00-8	nitrapyrin (ISO); 2-chloro-6-trichloromethylpyridine	217-682-2	1929-82-4	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)24-61		
006-058-00-3	noruron (ISO); 1,1-dimethyl-3-(perhydro-4,7-methanoinden-5-yl)urea	—	2163-79-3	Xn; R22	Xn R: 22 S: (2-)		
006-059-00-9	oxamyl (ISO); N,N'-dimethylcarbamoyl(methylthio)methylenamine N-methylcarbamate;	245-445-3	23135-22-0	T+; R26/28 Xn; R21 N; R51-53	T+; N R: 21-26/28-51/53 S: (1/2-)36/37-45-61		
006-060-00-4	oxycarboxin (ISO); 2,3-dihydro-6-methyl-5-(N-phenylcarbamoyl)-1,4-oxothiine 4,4-dioxide	226-066-2	5259-88-1	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)61		
006-061-00-X	S-ethyl N-(dimethylaminopropyl)thiocarbamatehydrochloride; prothiocarb hydrochloride	243-193-9	19622-19-6	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)61		
006-062-00-5	methyl 3,4-dichlorophenylcarbanilate; SWEP.	—	1918-18-9	Xn; R22	Xn R: 22 S: (2-)		
006-063-00-0	thiobencarb (ISO); S-4-chlorobenzyl diethylthiocarbamate;	248-924-5	28249-77-6	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
006-064-00-6	thiofanox (ISO); 3,3-dimethyl-1-(methylthio)butanone-O-(N-methylcarbamoyl)oxime;	254-346-4	39196-18-4	T+; R27/28 N; R50-53	T+; N R: 27/28-50/53 S: (1/2-)27-36/37-45-60-61		
006-065-00-1	3-chloro-6-cyano-bicyclo(2,2,1)heptan-2-one-O-(N-methylcarbamoyl)oxime; triamid	—	15271-41-7	T+; R28 T; R24 N; R51-53	T+; N R: 24-28-51/53 S: (1/2-)28-36/37-45-61		
006-066-00-7	vernolate (ISO); S-propyl dipropylthiocarbamate;	217-681-7	1929-77-7	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
006-067-00-2	XMC; 3,5-xylyl methylcarbamate	—	2655-14-3	Xn; R22	Xn R: 22 S: (2-)		
006-068-00-8	diazomethane	206-382-7	334-88-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		
006-069-00-3	thiophanate-methyl (ISO); 1,2-di-(3-methoxycarbonyl-2-thioureido)benzene	245-740-7	23564-05-8	Muta. Cat. 3; R68 Xn; R20 R43 N; R50-53	Xn; N R: 20-43-50/53-68 S: (2-)36/37-46-60-61		
006-070-00-9	furmecyclox (ISO); N-cyclohexyl-N-methoxy-2,5-dimethyl-3-furamide;	262-302-0	60568-05-0	Carc. Cat. 3; R40 N; R50-53	Xn; N R: 40-50/53 S: (2-)36/37-60-61		
006-071-00-4	cyclooct-4-en-1-yl methyl carbonate	401-620-8	87731-18-8	R43	Xi R: 43 S: (2-)24-37		
006-072-00-X	prosulfocarb(ISO); S-benzyl N,N-dipropylthiocarbamate;	401-730-6	52888-80-9	Xn; R22 R43 N; R51-53	Xn; N R: 22-43-51/53 S: (2-)24-37-61		
006-073-00-5	3-(dimethylamino)propylurea	401-950-2	31506-43-1	Xi; R41	Xi R: 41 S: (2-)26-39		
006-074-00-0	2-(3-(prop-1-en-2-yl)phenyl)prop-2-yl isocyanate	402-440-2	2094-99-7	T+; R26 C; R34 Xn; R48/20 R42/43 N; R50-53	T+; N R: 26-34-42/43-48/ 20-50/53 S: (1/2-)7-15-28-36/ 37/39-38-45-60-61		
006-076-00-1	mancozeb (ISO)	—	8018-01-7	Xi; R37 R43	Xi R: 37-43 S: (2-)8-24/25-46		
006-077-00-7	maneb (ISO)	235-654-8	12427-38-2	Xi; R37 R43	Xi R: 37-43 S: (2-)8-24/25-46		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
006-078-00-2	zineb (ISO); zinc ethylenebis(dithiocarbamate) (polymeric)	235-180-1	12122-67-7	Xi; R37 R43	Xi R: 37-43 S: (2-)8-24/25-46		
006-079-00-8	disulfiram; tetraethylthiuramdisulfide	202-607-8	97-77-8	Xn; R22-48/ 22 R43 N; R50-53	Xn; N R: 22-43-48/22-50/ 53 S: (2-)24-37-60-61		
006-080-00-3	tetramethylthiuram monosulphide	202-605-7	97-74-5	Xn; R22 R43 N; R51-53	Xn; N R: 22-43-51/53 S: (2-)24-26-37-61		
006-081-00-9	zinc bis(dibutyl)dithiocarbamate)	205-232-8	136-23-2	Xi; R36/37/ 38 R43 N; R50-53	Xi; N R: 36/37/38-43-50/ 53 S: (2-)24-37-60-61		
006-082-00-4	zinc bis(diethyldithiocarbamate)	238-270-9	14324-55-1	Xn; R22 Xi; R36/37/ 38 R43 N; R50-53	Xn; N R: 22-36/37/38-43- 50/53 S: (2-)24-37-60-61		
006-083-00-X	butocarboxim (ISO); 3-(methylthio)-2-butanone O-[(methylamino)carbonyl]oxime	252-139-3	34681-10-2	R10 T; R23/24/25 Xi; R36 N; R50-53	T; N R: 10-23/24/25-36- 50/53 S: (1/2-)36/37-45-60- 61		
006-084-00-5	carbosulfan (ISO); 2,3-dihydro-2,2-dimethyl-7-benzofuryl [(dibutylamino)thio] methylcarbamate;	259-565-9	55285-14-8	T; R23/25 R43 N; R50-53	T; N R: 23/25-43-50/53 S: (1/2-)24-37-38-45- 60-61		
006-085-00-0	fenobucarb (ISO); 2-butyphenyl methylcarbamate;	223-188-8	3766-81-2	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
006-086-00-6	ethyl [2-(4-phenoxyphenoxy)ethyl]carbamate; fenoxycarb	276-696-7	72490-01-8	N; R50-53	N R: 50/53 S: 60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
006-087-00-1	2,3-dihydro-2,2-dimethyl-7-benzofuryl 2,4-dimethyl-6-oxa-5-oxo-3-thia-2,4-diazadecanoate; furathiocarb	265-974-3	65907-30-4	T+; R26 T; R25 Xn; R48/22 Xi; R36/38 R43 N; R50-53	T+; N R: 25-26-36/38-43-48/22-50/53 S: (1/2-)28-36/37-38-45-60-61		
006-088-00-7	benfuracarb; ethyl N—[2,3-dihydro-2,2-dimethylbenzofuran-7-yloxy-carbonyl(methyl)aminothio]-N-isopropyl- β-alaninate	—	82560-54-1	T; R23/25 N; R50-53	T; N R: 23/25-50/53 S: (1/2-)36/37-45-60-61		
006-089-00-2	chlorine dioxide	233-162-8	10049-04-4	O; R8 R6 T+; R26 C; R34 N; R50	O; T+; N R: 6-8-26-34-50 S: (1/2-)23-26-28-36/37/39-38-45-61	N; R50: C ≥ 0,02 %	5
006-089-01-X	chlorine dioxide . . . %	233-162-8	10049-04-4	T; R25 C; R34 N; R50	T; N R: 25-34-50 S: (1/2-)23-26-28-36/37/39-45-61	C; R34: C ≥ 10 % Xi; R36/37/38: 3 % ≤ C < 10 % Xi; R36: 0,3 % ≤ C < 3 % N; R50: C ≥ 3 %	B
006-090-00-8	2-(3-iodoprop-2-yn-1-yloxy)ethyl phenylcarbamate	408-010-0	88558-41-2	Xn; R20 Xi; R41 R52-53	Xn R: 20-41-52/53 S: (2-)22-26-39-61		
007-001-00-5	ammonia, anhydrous	231-635-3	7664-41-7	R10 ⊗ T; R23 C; R34 N; R50	T; N R: 10-23-34-50 S: (1/2-)9-16-26-36/37/39-45-61		
007-001-01-2	ammonia ....%	215-647-6	1336-21-6	C; R34 N; R50	C; N R: 34-50 S: (1/2-)26-36/37/39-45-61	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	B
007-002-00-0	nitrogen dioxide; [1] dinitrogen tetraoxide [2]	233-272-6 [1] 234-126-4 [2]	10102-44-0 [1] 10544-72-6 [2]	T+; R26 C; R34	T+ R: 26-34 S: (1/2-)9-26-28-36/37/39-45	T+; R26: C ≥ 10 % T; R23: 1 % ≤ C < 10 % Xn; R20: 0,1 % ≤ C < 1 %	5

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
007-003-00-6	chlormequat chloride (ISO); 2-chloroethyltrimethylammonium chloride	213-666-4	999-81-5	Xn; R21/22	Xn R: 21/22 S: (2-)36/37		
007-004-00-1	nitric acid ... %	231-714-2	7697-37-2	O; R8 C; R35	O; C R: 8-35 S: (1/2-)23-26-36-45	C; R35: C ≥ 20 % C; R34: 5 % ≤ C < 20 % Footnote: O; R8: C ≥ 70 %	B
007-006-00-2	ethyl nitrite	203-722-6	109-95-5	E; R2 Xn; R20/21/ 22	E; Xn R: 2-20/21/22 S: (2-)		
007-007-00-8	ethyl nitrate	210-903-3	625-58-1	E; R2 ⊗	E R: 2 S: (2-)23-24/25		
007-008-00-3	hydrazine	206-114-9	302-01-2	R10 Carc. Cat. 2; R45 T; R23/24/25 C; R34 R43 N; R50-53	T; N R: 45-10-23/24/25- 34-43-50/53 S: 53-45-60-61	C; R34: C ≥ 10 % Xi; R36/38: 3 % ≤ C < 10 %	E
007-009-00-9	dicyclohexylammonium nitrite	221-515-9	3129-91-7	Xn; R20/22	Xn R: 20/22 S: (2-)15-41	Xn; R20/22: C ≥ 10 %	
007-010-00-4	sodium nitrite	231-555-9	7632-00-0	O; R8 T; R25 N; R50	O; T; N R: 8-25-50 S: (1/2-)45-61	T; R25: C ≥ 5 % Xn; R22: 1 % ≤ C < 5 %	
007-011-00-X	potassium nitrite	231-832-4	7758-09-0	O; R8 T; R25 N; R50	O; T; N R: 8-25-50 S: (1/2-)45-61	T; R25: C ≥ 5 % Xn; R22: 1 % ≤ C < 5 %	
007-012-00-5	N,N-dimethylhydrazine	200-316-0	57-14-7	F; R11 Carc. Cat. 2; R45 T; R23/25 C; R34 N; R51-53	F; T; N R: 45-11-23/25-34- 51/53 S: 53-45-61		E



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
007-013-00-0	1,2-dimethylhydrazine	—	540-73-8	Carc. Cat. 2; R45 T; R23/24/25 N; R51-53	T; N R: 45-23/24/25-51/ 53 S: 53-45-61	Carc. Cat. 2; R45: C ≥ 0,01 %	E
007-014-00-6	salts of hydrazine	—	—	Carc. Cat. 2; R45 T; R23/24/25 R43 N; R50-53	T; N R: 45-23/24/25-43- 50/53 S: 53-45-60-61		AE
007-015-00-1	O-ethylhydroxylamine	402-030-3	624-86-2	F; R11 T; R23/24/ 25-48/23 Xi; R36 R43 N; R50	F; T; N R: 11-23/24/25-36- 43-48/23-50 S: (1/2-)16-26-36/37/ 39-45-60-61		
007-016-00-7	butyl nitrite	208-862-1	544-16-1	F; R11 T; R23/25	F; T R: 11-23/25 S: (1/2-)16-24-45		
007-017-00-2	isobutyl nitrite	208-819-7	542-56-3	F; R11 Carc. Cat. 2; R45 Muta. Cat. 3; R68 Xn; R20/22	F; T R: 11-20/22-45-68 S: 53-45		E
007-018-00-8	sec-butyl nitrite	213-104-8	924-43-6	F; R11 Xn; R20/22	F; Xn R: 11-20/22 S: (2-)16-24-46		
007-019-00-3	tert-butyl nitrite	208-757-0	540-80-7	F; R11 Xn; R20/22	F; Xn R: 11-20/22 S: (2-)16-24-46		
007-020-00-9	pentyl nitrite; [1] 'amyl nitrite', mixed isomers [2]	207-332-7 [1] 203-770-8 [2]	463-04-7 [1] 110-46-3 [2]	F; R11 Xn; R20/22	F; Xn R: 11-20/22 S: (2-)16-24-46		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
007-021-00-4	hydrazobenzene; 1,2-diphenylhydrazine	204-563-5	122-66-7	Carc. Cat. 2; R45 Xn; R22 N; R50-53	T; N R: 45-22-50/53 S: 53-45-60-61		E
007-022-00-X	hydrazine bis(3-carboxy-4-hydroxybenzensulfonate)	405-030-1	—	Carc. Cat. 2; R45 Xn; R22 C; R34 R43 R52-53	T R: 45-22-34-43-52/ 53 S: 53-45-61		E
007-023-00-5	sodium 3,5-bis(3-(2,4-di-tert-pentylphenoxy)propylcarbamoyl)benzenesulfonate	405-510-0	—	Xi; R38 R43	Xi R: 38-43 S: (2-)24-37		
007-024-00-0	2-(decylthio)ethylammonium chloride	405-640-8	36362-09-1	Xn; R48/22 Xi; R38-41 N; R50-53	Xn; N R: 38-41-48/22-50/ 53 S: (2-)26-36/37/39- 60-61		
007-025-00-6	(4-hydrazinophenyl)-N-methylmethanesulfonamide hydrochloride	406-090-1	81880-96-8	Muta. Cat. 3; R68 T; R25-48/25 R43 N; R50-53	T; N R: 25-43-48/25-68- 50/53 S: (1/2-)22-36/37/39- 45-60-61		
007-026-00-1	oxo-((2,2,6,6-tetramethylpiperidin-4-yl)amino)carbonylaceto- hydrazide	413-230-5	122035-71-6	Xi; R41 R43	Xi R: 41-43 S: (2-)8-22-24-26-30- 37/39		
007-027-00-7	1,6-bis(3,3-bis((1-methylpentylidenimino)propyl)ureido) hexane	420-190-2	771478-66-1	C; R34 Xn; R21/22- 48/21 R43 N; R50-53	C; N R: 21/22-34-43-48/ 21-50/53 S: (1/2-)7-26-36/37/ 39-45-60-61		
008-001-00-8	oxygen	231-956-9	7782-44-7	O; R8	O R: 8 S: (2-)17		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
008-003-00-9	hydrogen peroxide solution ... %	231-765-0	7722-84-1	R5 O; R8 C; R35 Xn; R20/22	O; C R: 5-8-20/22-35 S: (1/2-)17-26-28-36/ 37/39-45	Xn; R20: C ≥ 50 % Xn; R22: C ≥ 8 % C; R35: C ≥ 70 % C; R34: 50 % ≤ C < 70 % Xi; R37/38: 35 % ≤ C < 50 % Xi; R41: 8 % ≤ C < 50 % Xi; R36: 5 % ≤ C < 8 % Footnote: O; R8: C ≥ 50 % R5: C ≥ 70 %	B
009-001-00-0	fluorine	231-954-8	7782-41-4	R7 ☉ T+; R26 C; R35	T+; C R: 7-26-35 S: (1/2-)9-26-36/37/ 39-45		
009-002-00-6	hydrogen fluoride	231-634-8	7664-39-3	T+; R26/27/ 28 C; R35	T+; C R: 26/27/28-35 S: (1/2-)7/9-26-36/37/ 39-45		
009-003-00-1	hydrofluoric acid ... %	231-634-8	7664-39-3	T+; R26/27/ 28 C; R35	T+; C R: 26/27/28-35 S: (1/2-)7/9-26-36/ 37-45	C; R35: C ≥ 7 % C; R34: 1 % ≤ C < 7 % Xi; R36: 0,1 % ≤ C < 1 %	B
009-004-00-7	sodium fluoride	231-667-8	7681-49-4	T; R25 Xi; R36/38 R32	T R: 25-32-36/38 S: (1/2-)22-36-45		
009-005-00-2	potassium fluoride	232-151-5	7789-23-3	T; R23/24/25	T R: 23/24/25 S: (1/2-)26-45		
009-006-00-8	ammonium fluoride	235-185-9	12125-01-8	T; R23/24/25	T R: 23/24/25 S: (1/2-)26-45		
009-007-00-3	sodium bifluoride; sodium hydrogen difluoride	215-608-3	1333-83-1	T; R25 C; R34	T; C R: 25-34 S: (1/2-)22-26-37-45	T; R25: C ≥ 10 % Xn; R22: 1 % ≤ C < 10 % C; R34: C ≥ 1 % Xi; R36/38: 0,1 % ≤ C < 1 %	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
009-008-00-9	potassium bifluoride; potassium hydrogen difluoride	232-156-2	7789-29-9	T; R25 C; R34	T; C R: 25-34 S: (1/2-)22-26-37-45	T; R25: C ≥ 10 % Xn; R22: 1 % ≤ C < 10 % C; R34: C ≥ 1 % Xi; R36/38: 0,1 % ≤ C < 1 %	
009-009-00-4	ammonium bifluoride; ammonium hydrogen difluoride	215-676-4	1341-49-7	T; R25 C; R34	T; C R: 25-34 S: (1/2-)22-26-37-45	T; R25: C ≥ 10 % Xn; R22: 1 % ≤ C < 10 % C; R34: C ≥ 1 % Xi; R36/38: 0,1 % ≤ C < 1 %	
009-010-00-X	fluoroboric acid ... %	240-898-3	16872-11-0	C; R34	C R: 34 S: (1/2-)26-27-45	C; R34: C ≥ 25 % Xi; R36/38: 10 % ≤ C < 25 %	B
009-011-00-5	fluorosilicic acid ... %	241-034-8	16961-83-4	C; R34	C R: 34 S: (1/2-)26-27-45		B
009-012-00-0	alkali fluorosilicates(Na); [1] alkali fluorosilicates(K); [2] alkali fluorosilicates(NH4) [3]	240-934-8 [1] 240-896-2 [2] 240-968-3 [3]	16893-85-9 [1] 16871-90-2 [2] 16919-19-0 [3]	T; R23/24/25	T R: 23/24/25 S: (1/2-)26-45	T; R23/24/25: C ≥ 10 % Xn; R20/21/22: 1 % ≤ C < 10 %	A
009-013-00-6	fluorosilicates, with the exception of those specified elsewhere in this annex	—	—	Xn; R22	Xn R: 22 S: (2-)13-24/25	Xn; R22: C ≥ 10 %	A
009-014-00-1	lead hexafluorosilicate	247-278-1	25808-74-6	Repr. Cat. 1; R61 Repr. Cat. 3; R62 Xn; R20/22 R33 N; R50-53	T; N R: 61-62-20/22-33- 50/53 S: 53-45-60-61		E 1
009-015-00-7	sulphuryl difluoride	220-281-5	2699-79-8	T; R23 Xn; R48/20 N; R50	T; N R: 23-48/20-50 S: (1/2-)45-63-60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
009-016-00-2	trisodium hexafluoroaluminate; cryolite	237-410-6 239-148-8	13775-53-6 15096-52-3	T; R48/23/25 Xn; R20/22 N; R51-53	T; N R: 20/22-48/23/25- 51/53 S: (1/2-)22-37-45-61		C
009-017-00-8	potassium mu-fluoro-bis(triethylaluminium)	400-040-2	12091-08-6	F; R11-14/15 C; R35 Xn; R20	F; C R: 11-14/15-20-35 S: (1/2-)16-30-36/39- 43-45		
009-018-00-3	magnesium hexafluorosilicate	241-022-2	16949-65-8	T; R25	T R: 25 S: (1/2-)24/25-45	T; R25: C $\geq$ 10 % Xn; R22: 1 % $\leq$ C < 10 %	
011-001-00-0	sodium	231-132-9	7440-23-5	F; 15 R14 C; R34	F; C R: 14/15-34 S: (1/2-)5-8-43-45		
011-002-00-6	sodium hydroxide; caustic soda	215-185-5	1310-73-2	C; R35	C R: 35 S: (1/2-)26-37/39-45	C; R35: C $\geq$ 5 % C; R34: 2 % $\leq$ C < 5 % Xi; R36/38: 0,5 % $\leq$ C < 2 %	
011-003-00-1	sodium peroxide	215-209-4	1313-60-6	O; R8 C; R35	O; C R: 8-35 S: (1/2-)8-27-39-45		
011-004-00-7	sodium azide	247-852-1	26628-22-8	T+; R28 R32 N; R50-53	T+; N R: 28-32-50/53 S: (1/2-)28-45-60-61		
011-005-00-2	sodium carbonate	207-838-8	497-19-8	Xi; R36	Xi R: 36 S: (2-)22-26		
011-006-00-8	sodium cyanate	213-030-6	917-61-3	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)24/25-61		
011-007-00-3	propoxycarbazone-sodium	—	181274-15-7	N; R50-53	N R: 50/53 S: 60-61	N; R50-53: C $\geq$ 2,5 % N; R51-53: 0,25 % $\leq$ C < 2,5 % R52-53: 0,025 % $\leq$ C < 0,25 %	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
012-001-00-3	magnesium powder (pyrophoric)	231-104-6	7439-95-4	F; R15-17	F R: 15-17 S: (2-)7/8-43		
012-002-00-9	magnesium, powder or turnings	231-104-6	—	F; R11-15	F R: 11-15 S: (2-)7/8-43		
012-003-00-4	magnesium alkyls	—	—	R14 F; R17 C; R34	F; C R: 14-17-34 S: (1/2-)16-43-45		A
013-001-00-6	aluminium powder (pyrophoric)	231-072-3	7429-90-5	F; R15-17	F R: 15-17 S: (2-)7/8-43		
013-002-00-1	aluminium powder (stabilised)	231-072-3	—	F; R15 R10 ⊗	F R: 10-15 S: (2-)7/8-43		
013-003-00-7	aluminium chloride, anhydrous	231-208-1	7446-70-0	C; R34	C R: 34 S: (1/2-)7/8-28-45		
013-004-00-2	aluminium alkyls	—	—	R14 F; R17 C; R34	F; C R: 14-17-34 S: (1/2-)16-43-45		A
013-005-00-8	diethyl(ethyl-dimethylsilanolato)aluminium	401-160-8	55426-95-4	F; R 15-17 R14 C; R35	F; C R: 14/15-17-35 S: (1/2-)6-16-30-36/ 39-43-45		
013-006-00-3	(ethyl-3-oxobutanoato-O'1,O'3)(2-dimethylaminoethanolato)(1-methoxypropan-2-olato)aluminium(III), dimerised	402-370-2	—	R10 Xi; R41	Xi R: 10-41 S: (2-)26-39		
013-007-00-9	poly(oxo(2-butoxyethyl-3-oxobutanoato-O'1,O'3)aluminium)	403-430-0	—	Xi; R41	Xi R: 41 S: (2-)26-39		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
013-008-00-4	di-n-octylaluminium iodide	408-190-0	7585-14-0	R14 F; R17 C; R34 N; R50-53	F; C; N R: 14-17-34-50/53 S: (1/2-)6-16-26-36/ 37/39-43-45-60-61		
013-009-00-X	sodium((n-butyl)x(ethyl)y-1,5-dihydro)aluminat) x = 0.5, y = 1.5	418-720-2	—	F; R11-15-17 R14 Xn; R20 C; R35	F; C R: 11-14/15-17-20- 35 S: (1/2-)6-16-26-30- 36/37/39-43-45		
014-001-00-9	trichlorosilane	233-042-5	10025-78-2	F+; R12 R14 F; R17 Xn; R20/22 R29 C; R35	F+; C R: 12-14-17-20/22- 29-35 S: (2-)7/9-16-26-36/ 37/39-43-45	Xn; R20/22: C ≥ 10 % C; R35: C ≥ 10 % C; R34: 5 % ≤ C < 10 % Xi; R36/37/38: 1 % ≤ C < 5 %	
014-002-00-4	silicon tetrachloride	233-054-0	10026-04-7	R14 Xi; R36/37/ 38	Xi R: 14-36/37/38 S: (2-)7/8-26		
014-003-00-X	dimethyldichlorosilane	200-901-0	75-78-5	F; R11 Xi; R36/37/ 38	F; Xi R: 11-36/37/38 S: (2-)		
014-004-00-5	trichloro(methyl)silane; methyltrichlorosilane	200-902-6	75-79-6	R14 F; R11 Xi; R36/37/ 38	F; Xi R: 11-14-36/37/38 S: (2-)26-39	Xi; R36/37/38: C ≥ 1 %	
014-005-00-0	tetraethyl silicate; ethyl silicate	201-083-8	78-10-4	R10 Xn; R20 Xi; R36/37	Xn R: 10-20-36/37 S: (2-)		
014-006-00-6	bis(4-fluorophenyl)-methyl-(1,2,4-triazol-4-ylmethyl)silane hydrochloride	401-380-4	—	Xi; R36 N; R51-53	Xi; N R: 36-51/53 S: (2-)26-61		
014-007-00-1	triethoxyisobutylsilane	402-810-3	17980-47-1	Xi; R38	Xi R: 38 S: (2-)24		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
014-008-00-7	(chloromethyl)bis(4-fluorophenyl)methylsilane	401-200-4	85491-26-5	N; R51-53	N R: 51/53 S: 61		
014-009-00-2	isobutylisopropyldimethoxysilane	402-580-4	111439-76-0	R10 Xn; R20 Xi; R38	Xn R: 10-20-38 S: (2-)25-26-36/37		
014-010-00-8	disodium metasilicate	229-912-9	6834-92-0	C; R34 Xi; R37	C R: 34-37 S: (1/2-)13-24/25-36/ 37/39-45		
014-011-00-3	cyclohexyldimethoxymethylsilane	402-140-1	17865-32-6	Xi; R38 N; R51-53	Xi; N R: 38-51/53 S: (2-)24-61		
014-012-00-9	bis(3-(trimethoxysilyl)propyl)amine	403-480-3	—	Xi; R41 N; R51-53	Xi; N R: 41-51/53 S: (2-)24-26-39-61		
014-013-00-4	$\alpha$ -hydroxypoly(methyl-(3-(2,2,6,6-tetramethylpiperidin-4-yloxy)propyl)siloxane)	404-920-7	—	Xn; R21/22 C; R34 N; R51-53	C; N R: 21/22-34-51/53 S: (1/2-)26-36/37/39- 45-61		
014-014-00-X	etacelasil (ISO); 6-(2-chloroethyl)-6-(2-methoxyethoxy)-2,5,7,10-tetraoxa-6-silaundecane;	253-704-7	37894-46-5	Repr. Cat. 2; R61 Xn; R22-48/ 22	T R: 61-22-48/22 S: 53-45		E
014-015-00-5	$\alpha$ -trimethylsilylanyl- $\omega$ -trimethylsiloxypoly[oxy(methyl-3-(2-(2-methoxypropoxy)propoxy)propylsilanediyl)-co-oxy(dimethylsilane)]	406-420-4	69430-40-6	R53	R: 53 S: 61		
014-016-00-0	reaction mass of: 1,3-dihex-5-en-1-yl-1,1,3,3-tetramethyldisiloxane; 1,3-dihex-n-en-1-yl-1,1,3,3-tetramethyldisiloxane	406-490-6	—	N; R51-53	N R: 51/53 S: 61		
014-017-00-6	flusilazole (ISO); bis(4-fluorophenyl)(methyl)(1H-1,2,4-triazol-1-ylmethyl)silane	—	85509-19-9	Carc. Cat. 3; R40 Repr. Cat. 2; R61 Xn; R22 N; R51-53	T; N R: 61-22-40-51/53 S: 53-45-61		E



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
014-018-00-1	octamethylcyclotetrasiloxane	209-136-7	556-67-2	Repr. Cat. 3; R62 R53	Xn R: 53-62 S: (2-)36/37-46-51-61		
014-019-00-7	reaction mass of: 4-[[bis-(4-fluorophenyl)methylsilyl]methyl]-4H-1,2,4-triazole; 1-[[bis-(4-fluorophenyl)methylsilyl]methyl]-1H-1,2,4-triazole	403-250-2	—	Carc. Cat. 3; R40 Repr. Cat. 2; R61 Xn; R22 N; R51-53	T; N R: 61-22-40-51/53 S: 53-45-61		E
014-020-00-2	bis(1,1-dimethyl-2-propynyloxy)dimethylsilane	414-960-7	53863-99-3	Xn; R20	Xn R: 20 S: (2)		
014-021-00-8	tris(isopropenyloxy)phenyl silane	411-340-8	52301-18-5	N; R50-53	N R: 50/53 S: 60-61		
014-022-00-3	reaction product of: (2-hydroxy-4-(3-propenoxy)benzophenone and triethoxysilane) with (hydrolysis product of silica and methyltrimethoxysilane)	401-530-9	—	F; R11 T; R39/23/ 24/25 Xn; R20/21/ 22	F; T R: 11-20/21/22-39/ 23/24/25 S: (1/2-)16-29-36/37- 45		
014-023-00-9	$\alpha$ , $\omega$ -dihydroxypoly(hex-5-en-1-ylmethylsiloxane)oxysilane with (hydrolysis product of silica and methyltrimethoxysilane)iazole	408-160-7	125613-45-8	N; R51-53	N R: 51/53 S: 61		
014-024-00-4	1-((3-(3-chloro-4-fluorophenyl)propyl)dimethylsilyl)-4-ethoxybenzene	412-620-2	121626-74-2	N; R51-53	N R: 51/53 S: 61		
014-025-00-X	4-[3-(diethoxymethylsilyl)propoxy]-2,2,6,6-tetramethylpiperidine	411-400-3	102089-33-8	Xn; R22-48/ 21 Xi; R38-41 R52-53	Xn R: 22-38-41-48/21- 52/53 S: (2-)26-36/37/39-61		
014-026-00-5	dichloro-(3-(3-chloro-4-fluorophenyl)propyl)methylsilane	407-180-3	770722-36-6	C; R35	C R: 35 S: (1/2-)26-36/37/39- 45		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
014-027-00-0	chloro(3-(3-chloro-4-fluorophenyl)propyl)dimethylsilane	410-270-5	770722-46-8	C; R35	C R: 35 S: (1/2-)8-26-28-36/ 37/39-45		
014-028-00-6	$\alpha$ -[3-(1-oxoprop-2-enyl)-1-oxypropyl]dimethoxysilyloxy- $\omega$ -[3-(1-oxoprop-2-enyl)-1-oxypropyl]dimethoxysilyl poly(dimethylsiloxane)	415-290-8	193159-06-7	R43	Xi R: 43 S: (2-)24-37		
014-029-00-1	O,O'-(ethenylmethylsilylene)di[(4-methylpentan-2-one)oxime]	421-870-1	156145-66-3	Repr. Cat. 3; R62 Xn; R22-48/ 22	Xn R: 22-48/22-62 S: (2-)36/37		
014-030-00-7	[(dimethylsilylene)bis((1,2,3,3a,7a- $\eta$ )-1H-inden-1-ylidene)dimethyl]hafnium	422-060-0	137390-08-0	T+; R28	T+ R: 28 S: (1/2-)6-22-28-36/ 37-45		
014-031-00-2	bis(1-methylethyl)-dimethoxysilane	421-540-7	18230-61-0	R10 Xi; R38 R43 R52-53	Xi R: 10-38-43-52/53 S: (2-)24-37-61		
014-032-00-8	dicyclopentyl dimethoxysilane	404-370-8	126990-35-0	Xi; R38-41 N; R50-53	Xi; N R: 38-41-50/53 S: (2-)26-37/39-60-61		
015-001-00-1	white phosphorus	231-768-7	12185-10-3	F; R17 T+; R26/28 C; R35 N; R50	F; T+; C; N R: 17-26/28-35-50 S: (1/2-)5-26-38-45- 61		
015-002-00-7	red phosphorus	231-768-7	7723-14-0	F; R11 R16 R52-53	F R: 11-16-52/53 S: (2-)7-43-61		
015-003-00-2	calcium phosphide; tricalcium diphosphide	215-142-0	1305-99-3	F; R15/29 T+; R28 N; R50	F; T+; N R: 15/29-28-50 S: (1/2-)22-43-45-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
015-004-00-8	aluminium phosphide	244-088-0	20859-73-8	F; R15/29 T+; R28 R32 N; R50	F; T+; N R: 15/29-28-32-50 S: (1/2-)3/9/14-30-36/ 37-45-61		
015-005-00-3	magnesium phosphide; trimagnesium diphosphide	235-023-7	12057-74-8	F; R15/29 T+; R28 N; R50	F; T+; N R: 15/29-28-50 S: (1/2-)22-43-45-61		
015-006-00-9	trizinc diphosphide; zinc phosphide	215-244-5	1314-84-7	F; R15/29 T+; R28 R32 N; R50-53	F; T+; N R: 15/29-28-32-50/ 53 S: (1/2-)3/9/14-30-36/ 37-45-60-61		
015-007-00-4	phosphorus trichloride	231-749-3	7719-12-2	R14 T+; R26/28 Xn; R48/20 C; R35 R29	T+; C R: 14-26/28-35-48/ 20 S: (1/2-)7/8-26-36/37/ 39-45		
015-008-00-X	phosphorus pentachloride	233-060-3	10026-13-8	R14 T+; R26 Xn; R22-48/ 20 C; R34 R29	T+ R: 14-22-26-34-48/ 20 S: (1/2-)7/8-26-36/37/ 39-45		
015-009-00-5	phosphoryl trichloride	233-046-7	10025-87-3	R14 T+; R26 T; R48/23 Xn; R22 C; R35 R29	T+; C R: 14-22-26-35-48/ 23 S: (1/2-)7/8-26-36/37/ 39-45		
015-010-00-0	phosphorus pentoxide	215-236-1	1314-56-3	C; R35	C R: 35 S: (1/2-)22-26-45		
015-011-00-6	phosphoric acid ... %, orthophosphoric acid ... %	231-633-2	7664-38-2	C; R34	C R: 34 S: (1/2-)26-45	C; R34: C ≥ 25 % Xi; R36/38: 10 % ≤ C < 25 %	B

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
015-012-00-1	tetraphosphorus trisulphide; phosphorus sesquisulphid	215-245-0	1314-85-8	F; R11 Xn; R22 N; R50	F; Xn; N R: 11-22-50 S: (2-)7-16-24/25-61		
015-013-00-7	triethyl phosphate	201-114-5	78-40-0	Xn; R22	Xn R: 22 S: (2-)25		
015-014-00-2	tributyl phosphate	204-800-2	126-73-8	Carc. Cat. 3; R40 Xn; R22 Xi; R38	Xn R: 22-38-40 S: (2-)36/37-46		
015-015-00-8	tricresyl phosphate (o-o-o-, o-o-m-, o-o-p-, o-m-m-, o-m-p-, o-p-p-); tritolyl phosphate (o-o-o-, o-o-m-, o-o-p-, o-m-m-, o-m-p-, o-p-p-);	201-103-5	78-30-8	T; R39/23/ 24/25 N; R51-53	T; N R: 39/23/24/25-51/ 53 S: (1/2-)20/21-28-45- 61	T; R39/23/24/25: C ≥ 1 % Xn; R68/20/21/22: 0,2 % ≤ C < 1 %	C
015-016-00-3	tricresyl phosphate (m-m-m-, m-m-p-, m-p-p-, p-p-p-); tritolyl phosphate (m-m-m-, m-m-p-, m-p-p-, p-p-p-);	201-105-6	78-32-0	Xn; R21/22 N; R51-53	Xn; N R: 21/22-51/53 S: (2-)28-61	Xn; R21/22: C ≥ 5 %	C
015-019-00-X	dichlorvos (ISO); 2,2-dichlorovinyl dimethyl phosphate	200-547-7	62-73-7	T+; R26 T; R24/25 R43 N; R50	T+; N R: 24/25-26-43-50 S: (1/2-)28-36/37-45- 61		
015-020-00-5	mevinphos (ISO); 2-methoxycarbonyl-1-methylvinyl dimethyl phosphate	232-095-1	7786-34-7	T+; R27/28 N; R50-53	T+; N R: 27/28-50/53 S: (1/2-)23-28-36/37- 45-60-61	N; R50-53: C ≥ 0,0025 % N; R51-53: 0,00025 % ≤ C < 0,0025 % R52-53: 0,000025 % ≤ C < 0,00025 %	
015-021-00-0	trichlorfon (ISO); dimethyl 2,2,2-trichloro-1-hydroxyethylphosphonate	200-149-3	52-68-6	Xn; R22 R43 N; R50-53	Xn; N R: 22-43-50/53 S: (2-)24-37-60-61	N; R50-53: C ≥ 0,025 % N; R51-53: 0,0025 % ≤ C < 0,025 % R52-53: 0,00025 % ≤ C < 0,0025 %	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
015-022-00-6	phosphamidon (ISO); 2-chloro-2-diethylcarbamoyl-1-methylvinyl dimethyl phosphate	236-116-5	13171-21-6	T+; R28 T; R24 Muta. Cat. 3; R68 N; R50-53	T+; N R: 24-28-50/53-68 S: (1/2-)23-36/37-45-60-61		
015-023-00-1	pyrazoxon; diethyl 3-methylpyrazol-5-yl phosphate	—	108-34-9	T+; R26/27/ 28	T+ R: 26/27/28 S: (1/2-)13-28-45		
015-024-00-7	triamiphos (ISO); 5-amino-3-phenyl-1,2,4-triazol-1-yl-N,N,N',N'-tetramethylphosphonic diamide	—	1031-47-6	T+; R27/28	T+ R: 27/28 S: (1/2-)22-28-36/37-45		
015-025-00-2	TEPP (ISO); tetraethyl pyrophosphate	203-495-3	107-49-3	T+; R27/28 N; R50	T+; N R: 27/28-50 S: (1/2-)36/37/39-38-45-61		
015-026-00-8	schradan (ISO); octamethylpyrophosphoramidate	205-801-0	152-16-9	T+; R27/28	T+ R: 27/28 S: (1/2-)36/37-38-45		
015-027-00-3	sulfotep (ISO); O,O,O,O-tetraethyl dithiopyrophosphate	222-995-2	3689-24-5	T+; R27/28 N; R50-53	T+; N R: 27/28-50/53 S: (1/2-)23-28-36/37-45-60-61	N; R50-53: $C \geq 0,025 \%$ N; R51-53: $0,0025 \% \leq C < 0,025 \%$ R52-53: $0,00025 \% \leq C < 0,0025 \%$	
015-028-00-9	demeton-O (ISO); O,O-diethyl-O-2-ethylthioethyl phosphorothioate	206-053-8	298-03-3	T+; R27/28 N; R50	T+; N R: 27/28-50 S: (1/2-)28-36/37-45-61		
015-029-00-4	demeton-S (ISO); diethyl-S-2-ethylthioethyl phosphorothioate	204-801-8	126-75-0	T+; R27/28	T+ R: 27/28 S: (1/2-)28-36/37-45		
015-030-00-X	demeton-O-methyl (ISO); O-2-ethylthioethyl O,O-dimethyl phosphorothioate	212-758-1	867-27-6	T; R25	T R: 25 S: (1/2-)24-36/37-45		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
015-031-00-5	demeton-S-methyl (ISO); S-2-ethylthioethyl dimethyl phosphorothioate	213-052-6	919-86-8	T; R24/25 N; R51-53	T; N R: 24/25-51/53 S: (1/2-)28-36/37-45-61		
015-032-00-0	prothoate (ISO); O,O-diethyl isopropylcarbamoylmethyl phosphorodithioate	218-893-2	2275-18-5	T+; R27/28 R52-53	T+ R: 27/28-52/53 S: (1/2-)28-36/37-45-61		
015-033-00-6	phorate (ISO); O,O-diethyl ethylthiomethyl phosphorodithioate	206-052-2	298-02-2	T+; R27/28 N; R50-53	T+; N R: 27/28-50/53 S: (1/2-)28-36/37-45-60-61	N; R50-53: $C \geq 0,025\%$ N; R51-53: $0,0025\% \leq C < 0,025\%$ R52-53: $0,00025\% \leq C < 0,0025\%$	
015-034-00-1	parathion (ISO); O,O-diethyl O-4-nitrophenyl phosphorothioate	200-271-7	56-38-2	T+; R26/28 T; R24-48/25 N; R50-53	T+; N R: 24-26/28-48/25-50/53 S: (1/2-)28-36/37-45-60-61	N; R50-53: $C \geq 0,25\%$ N; R51-53: $0,025\% \leq C < 0,25\%$ R52-53: $0,0025\% \leq C < 0,025\%$	
015-035-00-7	parathion — methyl (ISO); O,O-dimethyl O-4-nitrophenyl phosphorothioate	206-050-1	298-00-0	R5 R10 T+; R26/28 T; R24 Xn; R48/22 N; R50-53	T+; N R: 5-10-24-26/28-48/22-50/53 S: (1/2-)28-36/37-45-60-61	N; R50-53: $C \geq 0,25\%$ N; R51-53: $0,025\% \leq C < 0,25\%$ R52-53: $0,0025\% \leq C < 0,025\%$	
015-036-00-2	O-ethyl O-4-nitrophenyl phenylphosphonothioate; EPN	218-276-8	2104-64-5	T+; R27/28 N; R50-53	T+; N R: 27/28-50/53 S: (1/2-)22-36/37-45-60-61		
015-037-00-8	phenkapton (ISO); S—(2,5-dichlorophenylthiomethyl) O,O-diethyl phosphorodithioate	218-892-7	2275-14-1	T; R23/24/25 N; R50-53	T; N R: 23/24/25-50/53 S: (1/2-)13-45-60-61		
015-038-00-3	coumaphos (ISO); O-3-chloro-4-methylcoumarin-7-yl O,O-diethyl phosphorothioate	200-285-3	56-72-4	T+; R28 Xn; R21 N; R50-53	T+; N R: 21-28-50/53 S: (1/2-)28-36/37-45-60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
015-039-00-9	azinphos-methyl (ISO); O,O-dimethyl-4-oxobenzotriazin-3-ylmethyl phosphorodithioate	201-676-1	86-50-0	T+; R26/28 T; R24 R43 N; R50-53	T+; N R: 24-26/28-43-50/ 53 S: (1/2-)28-36/37-45- 60-61		
015-040-00-4	diazinon (ISO); O,O-diethyl O-2-isopropyl-6-methylpyrimidin-4-yl phosphorothioate	206-373-8	333-41-5	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)24/25-60-61		
015-041-00-X	malathion (ISO); 1,2-bis (ethoxycarbonyl) ethyl O,O-dimethyl phosphorodithioate	204-497-7	121-75-5	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)24-60-61	N; R50-53: $C \geq 0,25 \%$ N; R51-53: $0,025 \% \leq C < 0,25 \%$ R52-53: $0,0025 \% \leq C < 0,025 \%$	
015-042-00-5	chlorthion O-(3-chloro-4-nitrophenyl) O,O-dimethyl phosphorothioate	207-902-5	500-28-7	Xn; R20/21/ 22 N; R50-53	Xn; N R: 20/21/22-50/53 S: (2-)13-60-61	N; R50-53: $C \geq 0,25 \%$ N; R51-53: $0,025 \% \leq C < 0,25 \%$ R52-53: $0,0025 \% \leq C < 0,025 \%$	
015-043-00-0	phosnichlor (ISO); O-4-chloro-3-nitrophenyl O,O-dimethyl phosphorothioate	—	5826-76-6	Xn; R20/21/ 22	Xn R: 20/21/22 S: (2-)13		
015-044-00-6	carbophenothion (ISO); 4-chlorophenylthiomethyl O,O-diethyl phosphorodithioate	212-324-1	786-19-6	T; R24/25 N; R50-53	T; N R: 24/25-50/53 S: (1/2-)28-36/37-45- 60-61		
015-045-00-1	mecarbam (ISO); N-ethoxycarbonyl-N-methylcarbamoylmethyl O,O-diethyl phosphorodithioate	219-993-9	2595-54-2	T; R24/25 N; R50-53	T; N R: 24/25-50/53 S: (1/2-)36/37-45-60- 61		
015-046-00-7	oxydemeton-methyl; S-2-(ethylsulphinyl)ethyl O,O-dimethyl phosphorothioate	206-110-7	301-12-2	T; R24/25 N; R50	T; N R: 24/25-50 S: (1/2-)23-36/37-45- 61		
015-047-00-2	ethion (ISO); O,O,O',O'-tetraethyl S,S'-methylenedi (phosphorodithioate); diethion	209-242-3	563-12-2	T; R25 Xn; R21 N; R50-53	T; N R: 21-25-50/53 S: (1/2-)25-36/37-45- 60-61	N; R50-53: $C \geq 0,0025 \%$ N; R51-53: $0,00025 \% \leq C < 0,0025 \%$ R52-53: $0,000025 \% \leq C < 0,00025 \%$	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
015-048-00-8	fenthion (ISO); O,O-dimethyl-O-(4-methylthion- <i>m</i> -tolyl) phosphorothioate	200-231-9	55-38-9	Muta. Cat. 3; R68 T; R23-48/25 Xn; R21/22 N; R50-53	T; N R: 21/22-23-48/25-50/53-68 S: (1/2-)36/37-45-60-61		
015-049-00-3	endosulfon (ISO); S-5-methoxy-4-oxopyran-2-ylmethyl dimethyl phosphorothioate	220-472-3	2778-04-3	T; R24/25	T R: 24/25 S: (1/2-)36/37-45		
015-050-00-9	thiometon (ISO); S-2-ethylthioethyl O,O-dimethyl phosphorodithioate	211-362-6	640-15-3	T; R25 Xn; R21	T R: 21-25 S: (1/2-)36/37-45		
015-051-00-4	dimethoate (ISO); O,O-dimethyl methylcarbamoylmethyl phosphorodithioate	200-480-3	60-51-5	Xn; R21/22	Xn R: 21/22 S: (2-)36/37		
015-052-00-X	fenchlorphos (ISO); O,O-dimethyl O-2,4,5-trichlorophenyl phosphorothioate	206-082-6	299-84-3	Xn; R21/22 N; R50-53	Xn; N R: 21/22-50/53 S: (2-)25-36/37-60-61		
015-053-00-5	menazon (ISO); S-[(4,6-diamino-1,3,5-triazin-2-yl)methyl] O, O-dimethyl phosphorodithioate	201-123-4	78-57-9	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)61		
015-054-00-0	fenitrothion (ISO); O,O-dimethyl O-4-nitro- <i>m</i> -tolyl phosphorothioate	204-524-2	122-14-5	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
015-055-00-6	naled (ISO); 1,2-dibromo-2,2-dichloroethyl dimethyl phosphate	206-098-3	300-76-5	Xn; R21/22 Xi; R36/38 N; R50	Xn; N R: 21/22-36/38-50 S: (2-)36/37-61	N; R50: C ≥ 0,025 %	
015-056-00-1	azinphos-ethyl (ISO); O,O-diethyl 4-oxobenzotriazin-3-ylmethyl phosphorodithioate	220-147-6	2642-71-9	T+; R28 T; R24 N; R50-53	T+; N R: 24-28-50/53 S: (1/2-)28-36/37-45-60-61		
015-057-00-7	formothion (ISO); N-formyl-N-methylcarbamoylmethyl O,O-dimethyl phosphorodithioate	219-818-6	2540-82-1	Xn; R21/22	Xn R: 21/22 S: (2-)36/37		



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
015-058-00-2	morphothion (ISO); O,O-dimethyl-S-(morpholinocarbonylmethyl) phosphorodithioate	205-628-0	144-41-2	T; R23/24/25 N; R50-53	T; N R: 23/24/25-50/53 S: (1/2-)13-45-60-61		
015-059-00-8	vamidothion (ISO); O,O-dimethyl S-2-(1-methylcarbamoylethylthio) ethyl phosphorothioate	218-894-8	2275-23-2	T; R25 Xn; R21 N; R50	T; N R: 21-25-50 S: (1/2-)36/37-45-61		
015-060-00-3	disulfoton (ISO); O,O-diethyl 2-ethylthioethyl phosphorodithioate	206-054-3	298-04-4	T+; R27/28 N; R50-53	T+; N R: 27/28-50/53 S: (1/2-)28-36/37-45-60-61		
015-061-00-9	dimefox (ISO); tetramethylphosphorodiamidic fluoride	204-076-8	115-26-4	T+; R27/28	T+ R: 27/28 S: (1/2-)23-28-36/37-38-45		
015-062-00-4	mipafox (ISO); N,N'- di-isopropylphosphorodiamidic fluoride	206-742-3	371-86-8	T+; R39/26/ 27/28	T+ R: 39/26/27/28 S: (1/2-)13-45		
015-063-00-X	dioxathion (ISO); 1,4-dioxan-2,3-diyl-O,O',O'-tetraethyl di(phosphorodithioate)	201-107-7	78-34-2	T+; R26/28 T; R24 N; R50-53	T+; N R: 24-26/28-50/53 S: (1/2-)28-36/37-45-60-61	N; R50-53: C ≥ 0,025 % N; R51-53: 0,0025 % ≤ C < 0,025 % R52-53: 0,00025 % ≤ C < 0,0025 %	
015-064-00-5	bromophos-ethyl (ISO); O-4-bromo-2,5-dichlorophenyl O,O-diethyl phosphorothioate	225-399-0	4824-78-6	T; R25 Xn; R21 N; R50-53	T; N R: 21-25-50/53 S: (1/2-)28-36/37-45-60-61		
015-065-00-0	S-[2-(ethylsulphinyl)ethyl] O,O-dimethyl phosphorodithioate	—	2703-37-9	T+; R26/27/ 28 N; R51-53	T+; N R: 26/27/28-51/53 S: (1/2-)13-28-45-61		
015-066-00-6	omethoate (ISO); O,O-dimethyl S-methylcarbamoylmethyl phosphorothioate	214-197-8	1113-02-6	T; R25 Xn; R21 N; R50	T; N R: 21-25-50 S: (1/2-)23-36/37-45-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
015-067-00-1	phosalone (ISO); S-(6-chloro-2-oxobenzoxazolin-3-ylmethyl) O,O-diethyl phosphorodithioate	218-996-2	2310-17-0	T; R25 Xn; R21 N; R50-53	T; N R: 21-25-50/53 S: (1/2-)36/37-45-60-61		
015-068-00-7	dichlofenthion (ISO); O-2,4-dichlorophenyl O,O-diethyl phosphorothioate	202-564-5	97-17-6	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
015-069-00-2	methidathion (ISO); 2,3-dihydro-5-methoxy-2-oxo-1,3,4-thiadiazol-3-ylmethyl-O, O-dimethylphosphorodithioate	213-449-4	950-37-8	T+; R28 Xn; R21 N; R50-53	T+; N R: 21-28-50/53 S: (1/2-)22-28-36/37-45-60-61		
015-070-00-8	cyanthoate (ISO); S-(N-(1-cyano-1-methylethyl)carbamoylmethyl) O,O-diethyl phosphorothioate	223-099-4	3734-95-0	T+; R28 T; R24	T+ R: 24-28 S: (1/2-)36/37-45		
015-071-00-3	chlorfenvinphos (ISO); 2-chloro-1-(2,4 dichlorophenyl) vinyl diethyl phosphate	207-432-0	470-90-6	T+; R28 T; R24 N; R50-53	T+; N R: 24-28-50/53 S: (1/2-)28-36/37-45-60-61		
015-072-00-9	monocrotophos (ISO); dimethyl-1-methyl-2-(methylcarbamoyl)vinyl phosphate	230-042-7	6923-22-4	Muta. Cat. 3; R68 T+; R26/28 T; R24 N; R50-53	T+; N R: 24-26/28-50/53-68 S: (1/2-)36/37-45-60-61		
015-073-00-4	dicrotophos (ISO); (Z)-2-dimethylcarbamoyl-1-methylvinyl dimethyl phosphate	205-494-3	141-66-2	T+; R28 T; R24 N; R50-53	T+; N R: 24-28-50/53 S: (1/2-)28-36/37-45-60-61		
015-074-00-X	crufomate (ISO); 4-tert-butyl-2-chlorophenyl methyl methylphosphoramidate	206-083-1	299-86-5	Xn; R21/22 N; R50-53	Xn; N R: 21/22-50/53 S: (2-)36/37-60-61		
015-075-00-5	S-[2-(isopropylsulphinyl)ethyl] O,O-dimethyl phosphorothioate	—	2635-50-9	T; R23/24/25	T R: 23/24/25 S: (1/2-)13-45		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
015-076-00-0	potasan; O, O-diethyl O-(4-methylcoumarin-7-yl) phosphorothioate	—	299-45-6	T+; R26/27/28 N; R50-53	T+; N R: 26/27/28-50/53 S: (1/2-)13-28-45-60-61	N; R50-53: $C \geq 0,025\%$ N; R51-53: $0,0025\% \leq C < 0,025\%$ R52-53: $0,00025\% \leq C < 0,0025\%$	
015-077-00-6	2,2-dichlorovinyl 2-ethylsulphinylethyl methyl phosphate	—	7076-53-1	T; R23/24/25	T R: 23/24/25 S: (1/2-)13-45		
015-078-00-1	demeton-S-methylsulphon (ISO); S-2-ethylsulphonylethyl dimethyl phosphorothioate	241-109-5	17040-19-6	T; R25 Xn; R21 N; R51-53	T; N R: 21-25-51/53 S: (1/2-)22-28-36/37-45-61		
015-079-00-7	acephate (ISO); O,S-dimethyl acetylphosphoramidothioate	250-241-2	30560-19-1	Xn; R22	Xn R: 22 S: (2-)36		
015-080-00-2	amidithion (ISO); 2-methoxyethylcarbamoylmethyl O,O-dimethyl phosphorodithioate	—	919-76-6	Xn; R22	Xn R: 22 S: (2-)24-36		
015-081-00-8	O,O,O',O'-tetrapropyl dithiopyrophosphate	221-817-0	3244-90-4	Xn; R21/22 N; R50-53	Xn; N R: 21/22-50/53 S: (2-)36/37-60-61		
015-082-00-3	azothoate (ISO); O-4-(4-chlorophenylazo)phenyl O,O-dimethyl phosphorothioate	227-419-3	5834-96-8	Xn; R20/22	Xn R: 20/22 S: (2-)13		
015-083-00-9	bensulide (ISO); O,O-diisopropyl 2-phenylsulphonylaminoethyl phosphorodithioate	212-010-4	741-58-2	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)24-36-60-61		
015-084-00-4	chlorpyrifos (ISO); O,O-diethyl O-3,5,6-trichloro-2-pyridyl phosphorothioate	220-864-4	2921-88-2	T; R25 N; R50-53	T; N R: 25-50/53 S: (1/2-)45-60-61	N; R50-53: $C \geq 0,0025\%$ N; R51-53: $0,00025\% \leq C < 0,0025\%$ R52-53: $0,000025\% \leq C < 0,00025\%$	
015-085-00-X	chlorphonium chloride (ISO); tributyl (2,4-dichlorobenzyl) phosphonium chloride	204-105-4	115-78-6	T; R25 Xn; R21 Xi; R36/38	T R: 21-25-36/38 S: (1/2-)36/37/39-45		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
015-086-00-5	coumithoate (ISO); O,O-diethyl O-7,8,9,10-tetrahydro-6-oxo-benzo(c)chromen-3-yl phosphorothioate	—	572-48-5	T; R25	T R: 25 S: (1/2-)28-36/37-45		
015-087-00-0	cyanophos (ISO); O-4-cyanophenyl O,O-dimethyl phosphorothioate	220-130-3	2636-26-2	Xn; R21/22 N; R50-53	Xn; N R: 21/22-50/53 S: (2-)36/37-60-61		
015-088-00-6	dialifos (ISO); 2-chloro-1-phthalimidoethyl O,O-diethyl phosphorodithioate	233-689-3	10311-84-9	T+; R28 T; R24 N; R50-53	T+; N R: 24-28-50/53 S: (1/2-)28-36/37-45-60-61		
015-089-00-1	ethoate-methyl (ISO); ethylcarbamoylmethyl O,O-dimethyl phosphorodithioate	204-121-1	116-01-8	Xn; R21/22	Xn R: 21/22 S: (2-)36/37		
015-090-00-7	fensulfotion (ISO); O,O-diethyl O-4-methylsulfinylphenyl phosphorothioate	204-114-3	115-90-2	T+; R27/28 N; R50-53	T+; N R: 27/28-50/53 S: (1/2-)23-28-36/37-45-60-61		
015-091-00-2	fonofos (ISO); O-ethyl phenyl ethylphosphonodithioate	213-408-0	944-22-9	T+; R27/28 N; R50-53	T+; N R: 27/28-50/53 S: (1/2-)28-36/37-45-60-61		
015-092-00-8	phosacetim (ISO); O,O-bis(4-chlorophenyl) N-acetimidoylphosphoramidothioate	223-874-7	4104-14-7	T+; R27/28 N; R50-53	T+; N R: 27/28-50/53 S: (1/2-)28-36/37-45-60-61		
015-093-00-3	leptophos (ISO); O-4-bromo-2,5-dichlorophenyl O-methyl phenylphosphorothioate	244-472-8	21609-90-5	T; R25-39/25 Xn; R21 N; R50-53	T; N R: 21-25-39/25-50/53 S: (1/2-)25-36/37/39-45-60-61		
015-094-00-9	mephosfolan (ISO); diethyl 4-methyl-1,3-dithiolan-2-ylidenephosphoramidate	213-447-3	950-10-7	T+; R27/28 N; R51-53	T+; N R: 27/28-51/53 S: (1/2-)36/37/39-45-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
015-095-00-4	methamidophos (ISO); O,S-dimethyl phosphoramidothioate	233-606-0	10265-92-6	T+; R26/28 T; R24 N; R50	T+; N R: 24-26/28-50 S: (1/2-)28-36/37-45-61		
015-096-00-X	oxydisulfoton (ISO); O, O-diethyl S-2-ethylsulphinylethyl phosphorodithioate	219-679-1	2497-07-6	T+; R28 T; R24 N; R50-53	T+; N R: 24-28-50/53 S: (1/2-)28-36/37-45-60-61	N; R50-53: $C \geq 2,5 \%$ N; R51-53: $0,25 \% \leq C < 2,5 \%$ R52-53: $0,025 \% \leq C < 0,25 \%$	
015-097-00-5	phenthoate (ISO); ethyl 2-(dimethoxyphosphinothioylthio)-2-phenylacetate	219-997-0	2597-03-7	Xn; R21/22 N; R50-53	Xn; N R: 21/22-50/53 S: (2-)22-36/37-60-61	N; R50-53: $C \geq 0,25 \%$ N; R51-53: $0,025 \% \leq C < 0,25 \%$ R52-53: $0,0025 \% \leq C < 0,025 \%$	
015-098-00-0	trichloronate (ISO); O-ethyl O-2,4,5-trichlorophenyl ethylphosphonothioate	206-326-1	327-98-0	T+; R28 T; R24 N; R50-53	T+; N R: 24-28-50/53 S: (1/2-)23-28-36/37-45-60-61		
015-099-00-6	pirimiphos-ethyl (ISO); O,O-diethyl O-2-diethylamino-6-methylpyrimidin-4-yl phosphorothioate	245-704-0	23505-41-1	T; R25 Xn; R21 N; R50-53	T; N R: 21-25-50/53 S: (1/2-)23-36/37-45-60-61		
015-100-00-X	phoxim (ISO); $\alpha$ -(diethoxyphosphinothioylimino) phenylacetone nitrile	238-887-3	14816-18-3	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)36-60-61	N; R50-53: $C \geq 0,025 \%$ N; R51-53: $0,0025 \% \leq C < 0,025 \%$ R52-53: $0,00025 \% \leq C < 0,0025 \%$	
015-101-00-5	phosmet (ISO); O,O-dimethyl phthalimidomethyl S-phosphorodithioate	211-987-4	732-11-6	Xn; R21/22 N; R50-53	Xn; N R: 21/22-50/53 S: (2-)22-36/37-60-61	N; R50-53: $C \geq 0,25 \%$ N; R51-53: $0,025 \% \leq C < 0,25 \%$ R52-53: $0,0025 \% \leq C < 0,025 \%$	
015-102-00-0	tris(2-chloroethyl) phosphate	204-118-5	115-96-8	Carc. Cat. 3; R40 Xn; R22 N; R51-53	Xn; N R: 22-40-51/53 S: (2-)36/37-61		
015-103-00-6	phosphorus tribromide	232-178-2	7789-60-8	R14 C; R34 Xi; R37	C R: 14-34-37 S: (1/2-)26-45		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
015-104-00-1	diphosphorus pentasulphide; phosphorus pentasulphide	215-242-4	1314-80-3	F; R11 R29 Xn; R20/22 N; R50	F; Xn; N R: 11-20/22-29-50 S: (2-)61		
015-105-00-7	triphenyl phosphite	202-908-4	101-02-0	Xi; R36/38 N; R50-53	Xi; N R: 36/38-50/53 S: (2-)28-60-61	Xi; R36/38: C ≥ 5 %	
015-106-00-2	hexamethylphosphoric triamide; hexamethylphosphoramidate	211-653-8	680-31-9	Carc. Cat. 2; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45	Carc. Cat. 2; R45: C ≥ 0,01 %	
015-107-00-8	ethoprophos (ISO); ethyl-S,S-dipropyl phosphorodithioate	236-152-1	13194-48-4	T+; R26/27 T; R25 R43 N; R50-53	T+; N R: 25-26/27-43-50/ 53 S: (1/2-)27/28-36/37/ 39-45-60-61		
015-108-00-3	bromophos (ISO); O-4-bromo-2,5-dichlorophenyl O,O-dimethyl phosphorothioate	218-277-3	2104-96-3	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-) 46-60-61	N; R50-53: C ≥ 0,25 % N; R51-53: 0,025 % ≤ C < 0,25 % R52-53: 0,0025 % ≤ C < 0,025 %	
015-109-00-9	crotoxyphos (ISO); 1-phenylethyl 3-(dimethoxyphosphinyloxy) isocrotonate	231-720-5	7700-17-6	T; R24/25 N; R50-53	T; N R: 24/25-50/53 S: (1/2-)28-36/37-45- 60-61	N; R50-53: C ≥ 2,5 % N; R51-53: 0,25 % ≤ C < 2,5 % R52-53: 0,025 % ≤ C < 0,25 %	
015-110-00-4	cyanofenphos (ISO); O-4-cyanophenyl O-ethyl phenylphosphonothioate	—	13067-93-1	T; R25-39/25 Xn; R21 Xi; R36 N; R51-53	T; N R: 21-25-36-39/25- 51/53 S: (1/2-)36/37-45-61		
015-111-00-X	phosfolan (ISO); diethyl 1,3-dithiolan-2-ylidenephosphoramidate	213-423-2	947-02-4	T+; R27/28	T+ R: 27/28 S: (1/2-)28-36/37-45		
015-112-00-5	thionazin (ISO); O,O-diethyl O-pyrazin-2-yl phosphorothioate;	206-049-6	297-97-2	T+; R27/28	T+ R: 27/28 S: (1/2-)36/37/39-38- 45		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
015-114-00-6	chlormephos (ISO); S-chloromethyl O,O-diethyl phosphorodithioate	246-538-1	24934-91-6	T+; R27/28 N; R50-53	T+; N R: 27/28-50/53 S: (1/2-)28-36/37-45-60-61		
015-115-00-1	chlorthiophos (ISO)	244-663-6	21923-23-9	T+; R28 T; R24 N; R50-53	T+; N R: 24-28-50/53 S: (1/2-)28-36/37-45-60-61		
015-116-00-7	demephion-O (ISO); O,O-dimethyl O-2-methylthioethyl phosphorothioate	211-666-9	682-80-4	T+; R28 T; R24	T+ R: 24-28 S: (1/2-)28-36/37-45		
015-117-00-2	demephion-S (ISO); O,O-dimethyl S-2-methylthioethyl phosphorothioate	219-971-9	2587-90-8	T+; R28 T; R24	T+ R: 24-28 S: (1/2-)28-36/37-45		
015-118-00-8	demeton	—	8065-48-3	T+; R27/28 N; R50	T+; N R: 27/28-50 S: (1/2-)28-36/37-45-61		
015-119-00-3	dimethyl 4-(methylthio)phenyl phosphate	—	3254-63-5	T+; R27/28	T+ R: 27/28 S: (1/2-)28-36/37-45		
015-120-00-9	ditalimfos (ISO); O,O-diethyl phthalimidophosphonothioate;	225-875-8	5131-24-8	Xi; R38 R43	Xi R: 38-43 S: (2-)36/37		
015-121-00-4	edifenphos (ISO); O-ethyl S,S-diphenyl phosphorodithioate	241-178-1	17109-49-8	T; R23/25 Xn; R21 R43 N; R50-53	T; N R: 21-23/25-43-50/ 53 S: (1/2-)36/37-45-60-61		
015-122-00-X	etrimfos (ISO); O-6-ethoxy-2-ethylpyrimidin-4-yl O,O-dimethylphosphorothioate;	253-855-9	38260-54-7	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61	N; R50-53: C ≥ 2,5 % N; R51-53: 0,25 % ≤ C < 2,5 % R52-53: 0,025 % ≤ C < 0,25 %	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
015-123-00-5	fenamiphos (ISO); ethyl-4-methylthio- <i>m</i> -tolyl isopropyl phosphoramidate	244-848-1	22224-92-6	T+; R28 T; R24 N; R50-53	T+; N R: 24-28-50/53 S: (1/2-)23-28-36/37-45-60-61	N; R50-53: $C \geq 0,25\%$ N; R51-53: $0,025\% \leq C < 0,25\%$ R52-53: $0,0025\% \leq C < 0,025\%$	
015-124-00-0	fosthietan (ISO); diethyl 1,3-dithietan-2-ylidenephosphoramidate;	244-437-7	21548-32-3	T+; R27/28	T+ R: 27/28 S: (1/2-)36/37-45		
015-125-00-6	glyphosine (ISO); N,N-bis(phosphonomethyl)glycine	219-468-4	2439-99-8	Xi; R41	Xi R: 41 S: (2-)26		
015-126-00-1	heptenophos (ISO); 7-chlorobicyclo(3.2.0)hepta-2,6-dien-6-yl dimethyl phosphate	245-737-0	23560-59-0	T; R25 N; R50-53	T; N R: 25-50/53 S: (1/2-)23-28-37-45-60-61	N; R50-53: $C \geq 0,25\%$ N; R51-53: $0,025\% \leq C < 0,25\%$ R52-53: $0,0025\% \leq C < 0,025\%$	
015-127-00-7	iprobenfos (ISO); S-benzyl diisopropyl phosphorothioate	247-449-0	26087-47-8	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)61		
015-128-00-2	IPSP; S-ethylsulphinylmethyl O,O-diisopropylphosphorodithioate	—	5827-05-4	T+; R27 T; R25 N; R50-53	T+; N R: 25-27-50/53 S: (1/2-)28-36/37-45-60-61	N; R50-53: $C \geq 0,25\%$ N; R51-53: $0,025\% \leq C < 0,25\%$ R52-53: $0,0025\% \leq C < 0,025\%$	
015-129-00-8	isofenphos (ISO); O-ethyl O-2-isopropoxycarbonylphenyl-isopropylphosphoramidothioate	246-814-1	25311-71-1	T; R24/25 N; R50-53	T; N R: 24/25-50/53 S: (1/2-)36/37-45-60-61	N; R50-53: $C \geq 0,25\%$ N; R51-53: $0,025\% \leq C < 0,25\%$ R52-53: $0,0025\% \leq C < 0,025\%$	
015-130-00-3	isothioate (ISO) S-2-isopropylthioethyl O,O-dimethyl phosphorodithioate;	—	36614-38-7	T; R24/25	T R: 24/25 S: (1/2-)28-36/37-45		
015-131-00-9	isoxathion (ISO); O,O-diethyl O-5-phenylisoxazol-3-ylphosphorothioate	242-624-8	18854-01-8	T; R24/25 N; R50-53	T; N R: 24/25-50/53 S: (1/2-)28-36/37-45-60-61		



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
015-132-00-4	S-(chlorophenylthiomethyl) O,O-dimethylphosphorodithioate; methylcarbophenothione	—	953-17-3	T; R24/25 N; R50-53	T; N R: 24/25-50/53 S: (1/2-)28-36/37-45-60-61	N; R50-53: C ≥ 0,025 % N; R51-53: 0,0025 % ≤ C < 0,025 % R52-53: 0,00025 % ≤ C < 0,0025 %	
015-133-00-X	piperophos (ISO); S-2-methylpiperidinocarbonylmethyl-O,O-dipropyl phosphorodithioate	—	24151-93-7	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61	N; R50-53: C ≥ 2,5 % N; R51-53: 0,25 % ≤ C < 2,5 % R52-53: 0,025 % ≤ C < 0,25 %	
015-134-00-5	pirimiphos-methyl (ISO); O-(2-diethylamino-6-methylpyrimidin-4-yl) O,O-dimethyl phosphorothioate	249-528-5	29232-93-7	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
015-135-00-0	profenofos (ISO); O-(4-bromo-2-chlorophenyl) O-ethyl S-propyl phosphorothioate	255-255-2	41198-08-7	Xn; R20/21/22 N; R50-53	Xn; N R: 20/21/22-50/53 S: (2-)36/37-60-61	N; R50-53: C ≥ 0,025 % N; R51-53: 0,0025 % ≤ C < 0,025 % R52-53: 0,00025 % ≤ C < 0,0025 %	
015-136-00-6	<i>trans</i> -isopropyl-3-[[[(ethylamino)methoxyfosfinothioyl]oxy]crotonate; isopropyl 3-[[[(ethylamino)methoxyphosphinothioyl]oxy]isocrotonate; propetamphos (ISO)	250-517-2	31218-83-4	T; R25 N; R50-53	T; N R: 25-50/53 S: (1/2-)37-45-60-61	N; R50-53: C ≥ 0,25 % N; R51-53: 0,025 % ≤ C < 0,25 % R52-53: 0,0025 % ≤ C < 0,025 %	
015-137-00-1	pyrazophos (ISO); O,O-diethyl O-(6-ethoxycarbonyl-5-methylpyrazolo[2,3-a]pyrimidin-2-yl) phosphorothioate	236-656-1	13457-18-6	Xn; R20/22 N; R50-53	Xn; N R: 20/22-50/53 S: (2-)36/37-46-60-61		
015-138-00-7	quinalphos (ISO); O,O-diethyl-O-quinoxalin-2-yl phosphorothioate	237-031-6	13593-03-8	T; R25 Xn; R21 N; R50-53	T; N R: 21-25-50/53 S: (1/2-)22-36/37-45-60-61	N; R50-53: C ≥ 0,025 % N; R51-53: 0,0025 % ≤ C < 0,025 % R52-53: 0,00025 % ≤ C < 0,0025 %	
015-139-00-2	terbufos (ISO) S— <i>tert</i> -butylthiomethyl O, O-diethylphosphorodithioate;	235-963-8	13071-79-9	T+; R27/28 N; R50-53	T+; N R: 27/28-50/53 S: (1/2-)36/37-45-60-61	N; R50-53: C ≥ 0,025 % N; R51-53: 0,0025 % ≤ C < 0,025 % R52-53: 0,00025 % ≤ C < 0,0025 %	
015-140-00-8	triazophos (ISO); O,O-diethyl-O-1-phenyl-1H,2,4-triazol-3-yl phosphorothioate	245-986-5	24017-47-8	T; R23/25 Xn; R21 N; R50-53	T; N R: 21-23/25-50/53 S: (1/2-)36/37-45-60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
015-141-00-3	ethylenediammonium O,O-bis(octyl) phosphorodithioate, mixed isomers	400-520-1	—	C; R34 Xn; R22 N; R50-53	C; N R: 22-34-50/53 S: (1/2-)24/25-26-28-39-45-60-61		
015-142-00-9	butyl (dialkyloxy(dibutoxyphosphoryloxy))titanium (trialkyloxy)titanium phosphate	401-100-0	—	F; R11 Xi; R36 N; R51-53	F; Xi; N R: 11-36-51/53 S: (2-)7/9-16-26-43-61		
015-143-00-4	reaction mass of 2-chloroethyl chloropropyl 2-chloroethylphosphonate, mixture reaction mass of isomers and 2-chloroethyl chloropropyl 2-chloropropylphosphonate, reaction mass of isomers	401-740-0	—	Xn; R22	Xn R: 22 S: (2-)		
015-144-00-X	reaction mass of pentyl methylphosphinate and 2-methylbutyl methylphosphinate	402-090-0	87025-52-3	C; R34	C R: 34 S: (1/2-)26-36/37/39-45		
015-145-00-5	reaction mass of copper(I) O,O-diisopropyl phosphorodithioate and copper(I) O-isopropyl O-(4-methylpent-2-yl) phosphorodithioate and copper(I) O,O-bis(4-methylpent-2-yl) phosphorodithioate	401-520-4	—	N; R50-53	N R: 50/53 S: 60-61		
015-146-00-0	S-(tricyclo(5.2.1.0 <sup>2,6</sup> )deca-3-en-8(or 9)-yl O-(isopropyl or isobutyl or 2-ethylhexyl) O-(isopropyl or isobutyl or 2-ethylhexyl) phosphorodithioate	401-850-9	—	N; R50-53	N R: 50/53 S: 60-61		
015-147-00-6	reaction mass of C <sub>12-14</sub> -tert-alkylammonium diphenyl phosphorothioate and dinonyl sulphide (or disulphide)	400-930-0	—	Xi; R38-41 N; R51-53 R43	Xi; N R: 38-41-43-51/53 S: (2-)24-26-37/39-61		
015-148-00-1	2-(diphosphonomethyl)succinic acid	403-070-4	51395-42-7	C; R34 R43	C R: 34-43 S: (1/2-)26-36/37/39-45		
015-149-00-7	reaction mass of: hexyldioctylphosphineoxide; dihexyloctylphosphineoxide; trioctylphosphineoxide	403-470-9	—	C; R34 N; R50-53	C; N R: 34-50/53 S: (1/2-)26-36/37/39-45-60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
015-150-00-2	(2-(1,3-dioxolan-2-yl)ethyl)triphenylphosphonium bromide	404-940-6	86608-70-0	Xn; R22 Xi; R41 R33 R52-53	Xn R: 22-33-41-52/53 S: (2-)22-26-39-61		
015-151-00-8	tris(isopropyl/tert-butylphenyl) phosphate	405-010-2	—	N; R51-53	N R: 51/53 S: 61		
015-152-00-3	dioxabenzofos (ISO); 2-methoxy-4 <i>H</i> -1,3,2-benzodioxaphosphorin 2-sulphide;	223-292-3	3811-49-2	T; R24/25-39/25 N; R51-53	T; N R: 24/25-39/25-51/53 S: (1/2-)36/37-38-45-61		
015-153-00-9	isazofos (ISO); O-(5-chloro-1-isopropyl-1,2,4-triazol-3-yl) O,O-diethyl phosphorothioate;	255-863-8	42509-80-8	T+; R26 T; R24/25 Xn; R48/20 R43 N; R50-53	T+; N R: 24/25-26-43-48/20-50/53 S: (1/2-)28-36/37-38-45-59-61		
015-154-00-4	2-chloroethylphosphonic acid; ethephon	240-718-3	16672-87-0	Xn; R20/21 C; R34 R52-53	C R: 20/21-34-52/53 S: (1/2-)26-28-36/37/39-45-61	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	
015-155-00-X	ammonium 2-amino-4-(hydroxymethylphosphinyl)butyrate; glufosinate ammonium	278-636-5	77182-82-2	Xn; R22	Xn R: 22 S: (2-)		
015-156-00-5	methyl 3-[(dimethoxyphosphinothioyl)oxy]methacrylate; [1] methacrifos (ISO); methyl ( <i>E</i> )-3-[(dimethoxyphosphinothioyl)oxy]methacrylate [2]	250-366-9 [1] - [2]	30864-28-9 [1] 62610-77-9 [2]	Xn; R22 R43 N; R50-53	Xn; N R: 22-43-50/53 S: (2-)36/37-60-61		
015-157-00-0	phosphonic acid; [1] phosphorous acid [2]	237-066-7 [1] 233-663-1 [2]	13598-36-2 [1] 10294-56-1 [2]	Xn; R22 C; R35	C R: 22-35 S: (1/2-)26-36/37/39-45		
015-158-00-6	(η-cyclopentadienyl)(η-cumenyl)iron(1+)hexafluorophosphate (1-)	402-340-9	32760-80-8	R52-53	R: 52/53 S: 61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
015-159-00-1	hydroxyphosphonoacetic acid	405-710-8	23783-26-8	Xn; R22-48/ 22 C; R34 R43	C R: 22-34-43-48/22 S: (1/2-)22-26-36/37/ 39-45		
015-160-00-7	vanadyl pyrophosphate	406-260-5	58834-75-6	Xi; R36 R43 R52-53	Xi R: 36-43-52/53 S: (2-)24-26-37-61		
015-161-00-2	divanadyl pyrophosphate	407-130-0	65232-89-5	Xn; R22 Xi; R41 R43 N; R51-53	Xn; N R: 22-41-43-51/53 S: (2-)24-26-37/39-61		
015-162-00-8	vanadium(IV) oxide hydrogen phosphate hemihydrate, lithium, zinc, molybdenum, iron and chlorine-doped	407-350-7	—	Xn; R20-48/ 22 Xi; R41 N; R51-53	Xn; N R: 20-41-48/22-51/ 53 S: (2-)22-26-36/39-61		
015-163-00-3	bis(2,6-dimethoxybenzoyl)-2,4,4-trimethylpentylphosphin-oxide	412-010-6	145052-34-2	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		
015-164-00-9	calcium P,P'-(1-hydroxyethylene)bis(hydrogen phosphonate) dihydrate	400-480-5	36669-85-9	R52-53	R: 52/53 S: 61		
015-165-00-4	reaction mass of: thiobis(4,1-phenylene)-S,S,S',S'-tetraphenyl-disulfonium bishexafluorophosphate; diphenyl(4-phenylthiophenyl)sulfonium hexafluorophosphate	404-986-7	—	Xi; R41 N; R50-53	Xi; N R: 41-50/53 S: (2-)15-26-39-60- 61		
015-166-00-X	3,9-bis(2,6-di-tert-butyl-4-methylphenoxy)-2,4,8,10-tetraoxa-3,9-diphosphaspiro[5.5]undecane	410-290-4	80693-00-1	R53	R: 53 S: 61		
015-167-00-5	3-(hydroxyphenylphosphinyl)propanoic acid	411-200-6	14657-64-8	Xi; R41	Xi R: 41 S: (2-)26-39		
015-168-00-0	fosthiazate (ISO); (RS)-S—sec-butyl-O-ethyl-2-oxo-1,3-thiazolidin-3-ylphosphonothioate	—	98886-44-3	T; R23/25-39 Xn; R21 Xi; R41 R43 N; R50-53	T; N R: 21-23/25-39-41- 43-50/53 S: (1/2-)53-45-25-26- 39-60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
015-169-00-6	tributyltetradecylphosphonium tetrafluoroborate	413-520-1	—	Xn; R22-48/22 C; R34 R43 N; R50-53	C; N R: 22-34-43-48/22-50/53 S: (1/2-)26-28-36/37/39-45-60-61		
015-170-00-1	reaction mass of: di-(1-octane- <i>N,N,N</i> -trimethylammonium) octylphosphate; 1-octane- <i>N,N,N</i> -trimethylammonium di-octylphosphate; 1-octane- <i>N,N,N</i> -trimethylammonium octylphosphate	407-490-9	—	Xn; R21/22 C; R34	C R: 21/22-34 S: (1/2-)26-36/37/39-45		
015-171-00-7	<i>O,O,O</i> -tris(2(or 4)- <i>C</i> <sub>9,10</sub> -isoalkylphenyl) phosphorothioate	406-940-1	—	N; R51-53	N R: 51/53 S: 61		
015-172-00-2	reaction mass of: bis(isotridecylammonium)mono(di-(4-methylpent-2-yloxy)thiophosphorothionylisopropyl)phosphate; isotridecylammonium bis(di-(4-methylpent-2-yloxy)thiophosphorothionylisopropyl)phosphate	406-240-6	—	R10 C; R34 N; R51-53	C; N R: 10-34-51/53 S: (1/2-)23-26-28-36/37/39-45-61		
015-173-00-8	methyl [2-(1,1-dimethylethyl)-6-methoxypyrimidin-4-yl] ethylphosphonothioate	414-080-3	117291-73-3	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)23-36-60-61		
015-174-00-3	1-chloro- <i>N,N</i> -diethyl-1,1-diphenyl-1-(phenylmethyl)phosphoramine	411-370-1	82857-68-9	T; R25 Xi; R41 N; R51-53	T; N R: 25-41-51/53 S: (1/2-)26-37/39-41-45-61		
015-175-00-9	<i>tert</i> -butyl (triphenylphosphoranylidene) acetate	412-880-7	35000-38-5	T; R25 Xn; R48/22 Xi; R36 R43 N; R51-53	T; N R: 25-36-43-48/22-51/53 S: (1/2-)26-36/37/39-45-61		
015-176-00-4	<i>P,P,P,P</i> -tetrakis-( <i>o</i> -methoxyphenyl)propane-1,3-diphosphine	413-430-2	116163-96-3	N; R50-53	N R: 50/53 S: 60-61		
015-177-00-X	((4-phenylbutyl)hydroxyphosphoryl)acetic acid	412-170-7	83623-61-4	Xn; R48/22 Xi; R41 R43	Xn R: 41-43-48/22 S: (2-)22-26-36/37/39		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
015-178-00-5	(R)- $\alpha$ -phenylethylammonium (-)-(1R, 2S)-(1,2-epoxypropyl)phosphonate monohydrate	418-570-8	25383-07-7	Repr. Cat. 3; R62 N; R51-53	Xn; N R: 62-51/53 S: (2-)22-36/37-61		
015-179-00-0	UVCB condensation product of: tetrakis-hydroxymethylphosphonium chloride, urea and distilled hydrogenated C <sub>16-18</sub> tallow alkylamine	422-720-8	166242-53-1	Carc. Cat. 3; R40 Xn; R22-48/ 22 C; R34 R43 N; R50-53	C; N R: 22-34-40-43-48/ 22-50/53 S: (1/2-)26-36/37/39- 45-60-61		
015-180-00-6	[R-(R*,S*)]-[[2-methyl-1-(1-oxopropoxy)propoxy]-(4-phenylbutyl)phosphinyl] acetic acid, (-)-cinchonidine (1:1) salt	415-820-8	137590-32-0	Xi; R41 R43 R52-53	Xi R: 41-43-52/53 S: (2-)24-26-37/39-61		
015-181-00-1	phosphine	232-260-8	7803-51-2	F+; R12 R17 T+; R26 C; R34 N; R50	F+; T+; N R: 12-17-26-34-50 S: (1/2-)28-36/37-45- 61-63		
015-184-00-8	Salts of glyphosate, with the exception of those specified elsewhere in this Annex	—	—	N; R51-53	N R: 51/53 S: 61		A
015-186-00-9	chlorpyrifos-methyl (ISO), O, O-dimethyl O-3,5,6-trichloro-2-pyridyl phosphorothioate	227-011-5	5598-13-0	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)36/37-60-61	N; R50-53: C $\geq$ 0,0025 % N; R51-53: 0,00025 % $\leq$ C < 0,0025 % R52-53: 0,000025 % $\leq$ C < 0,00025 %	
015-187-00-4	reaction mass of: tetrasodium(((2-hydroxyethyl)imino)bis(methylene))bisphosphonate, N-oxide; trisodium ((tetrahydro-2-hydroxy-4H-1,4,2-oxazaphosphorin-4-yl)-methyl)phosphonate, N-oxide, P-oxide	417-540-1	—	Xi; R41 N; R51-53	Xi; N R: 41-51/53 S: (2-)26-39-61		
015-189-00-5	phenyl bis(2,4,6-trimethylbenzoyl)-phosphine oxide	423-340-5	162881-26-7	R43 R53	Xi R: 43-53 S: (2-)22-24-37-61		
016-001-00-4	hydrogen sulphide	231-977-3	7783-06-4	F+; R12 T+; R26 N; R50	F+; T+; N R: 12-26-50 S: (1/2-)9-16-36-38- 45-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
016-002-00-X	barium sulphide	244-214-4	21109-95-5	R31 Xn; R20/22 N; R50	Xn; N R: 20/22-31-50 S: (2-)28-61		
016-003-00-5	barium polysulphides	256-814-3	50864-67-0	R31 Xi; R36/37/ 38 N; R50	Xi; N R: 31-36/37/38-50 S: (2-)28-61		
016-004-00-0	calcium sulphide	243-873-5	20548-54-3	R31 Xi; R36/37/ 38 N; R50	Xi; N R: 31-36/37/38-50 S: (2-)28-61		
016-005-00-6	calcium polysulphides	215-709-2	1344-81-6	R31 Xi; R36/37/ 38 N; R50	Xi; N R: 31-36/37/38-50 S: (2-)28-61		
016-006-00-1	dipotassium sulphide; potassium sulphide	215-197-0	1312-73-8	R31 C; R34 N; R50	C; N R: 31-34-50 S: (1/2-)26-45-61		
016-007-00-7	potassium polysulphides	253-390-1	37199-66-9	R31 C; R34 N; R50	C; N R: 31-34-50 S: (1/2-)26-45-61		
016-008-00-2	ammonium polysulphides	232-989-1	9080-17-5	R31 C; R34 N; R50	C; N R: 31-34-50 S: (1/2-)26-45-61	C; R34: C ≥ 5 % Xi; R36/38: 1 % ≤ C < 5 % R31: C ≥ 1 %	
016-009-00-8	disodium sulphide; sodium sulphide	215-211-5	1313-82-2	R31 C; R34 N; R50	C; N R: 31-34-50 S: (1/2-)26-45-61		
016-010-00-3	sodium polysulphides	215-686-9	1344-08-7	T; R25 R31 C; R34 N; R50	T; N R: 25-31-34-50 S: (1/2-)26-36/37/39- 45-61		
016-011-00-9	sulphur dioxide	231-195-2	7446-09-5	T; R23 C; R34	T R: 23-34 S: (1/2-)9-26-36/37/ 39-45	T; R23: C ≥ 20 % Xn; R20: 5 % ≤ C < 20 %	5

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
016-012-00-4	disulphur dichloride; sulfur monochloride	233-036-2	10025-67-9	R14 T; R25 Xn; R20 R29 C; R35 N; R50	T; C; N R: 14-20-25-29-35-50 S: (1/2-)26-36/37/39-45-61	C; R35: C ≥ 10 % C; R34: 5 % ≤ C < 10 % Xi; R36/37/38: 1 % ≤ C < 5 %	
016-013-00-X	sulphur dichloride	234-129-0	10545-99-0	R14 C; R34 Xi; R37 N; R50	C; N R: 14-34-37-50 S: (1/2-)26-45-61		
016-014-00-5	sulphur tetrachloride	—	13451-08-6	R14 C; R34 N; R50	C; N R: 14-34-50 S: (1/2-)26-45-61	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	
016-015-00-0	thionyl dichloride; thionyl chloride	231-748-8	7719-09-7	R14 Xn; R20/22 R29 C; R35	C R: 14-20/22-29-35 S: (1/2-)26-36/37/39-45	C; R35: C ≥ 10 % C; R34: 5 % ≤ C < 10 % Xi; R36/37/38: 1 % ≤ C < 5 %	
016-016-00-6	sulphuryl chloride	232-245-6	7791-25-5	R14 C; R34 Xi; R37	C R: 14-34-37 S: (1/2-)26-45		
016-017-00-1	chlorosulphonic acid	232-234-6	7790-94-5	R14 C; R35 Xi; R37	C R: 14-35-37 S: (1/2-)26-45		
016-018-00-7	fluorosulphonic acid	232-149-4	7789-21-1	Xn; R20 C; R35	C R: 20-35 S: (1/2-)26-45		
016-019-00-2	oleum ... % SO <sub>3</sub>	—	—	R14 C; R35 Xi; R37	C R: 14-35-37 S: (1/2-)26-30-45		B
016-020-00-8	sulphuric acid ... %	231-639-5	7664-93-9	C; R35	C R: 35 S: (1/2-)26-30-45	C; R35: C ≥ 15 % Xi; R36/38: 5 % ≤ C < 15 %	B



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
016-021-00-3	methanethiol; methyl mercaptan	200-822-1	74-93-1	F+; R12 T; R23 N; R50-53	F+; T; N R: 12-23-50/53 S: (2-)16-25-60-61		
016-022-00-9	ethanethiol; ethyl mercaptan	200-837-3	75-08-1	F; R11 Xn; R20 N; R50-53	F; Xn; N R: 11-20-50/53 S: (2-)16-25-60-61		
016-023-00-4	dimethyl sulphate	201-058-1	77-78-1	Carc. Cat. 2; R45 Muta. Cat. 3; R68 T+; R26 T; R25 C; R34 R43	T+ R: 45-25-26-34-43-68 S: 53-45	Car. Cat. 2; R45: C ≥ 0,01 % Muta. Cat. 3, R68: C ≥ 0,01 % C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	E
016-024-00-X	dimexano (ISO); bis(methoxythiocarbonyl) disulphide	215-993-8	1468-37-7	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
016-025-00-5	disul (ISO); 2-(2,4-dichlorophenoxy)ethyl hydrogensulphate; 2,4-DES	205-259-5	149-26-8	Xn; R22 Xi; R38-41	Xn R: 22-38-41 S: (2-)26		
016-026-00-0	sulphamic acid; sulphamic acid; sulfamic acid	226-218-8	5329-14-6	Xi; R36/38 R52-53	Xi R: 36/38-52/53 S: (2-)26-28-61		
016-027-00-6	diethyl sulphate	200-589-6	64-67-5	Carc. Cat. 2; R45 Muta. Cat. 2; R46 Xn; R20/21/ 22 C; R34	T R: 45-46-20/21/22-34 S: 53-45		E
016-028-00-1	sodium dithionite; sodium hydrosulphite	231-890-0	7775-14-6	R7 R31 Xn; R22	Xn R: 7-22-31 S: (2-)7/8-26-28-43		
016-029-00-7	p-toluenesulphonic acid, containing more than 5 % H <sub>2</sub> SO <sub>4</sub>	—	—	C; R34	C R: 34 S: (1/2-)26-37/39-45	C; R34: C ≥ 25 % Xi; R36/38: 10 % ≤ C < 25 %	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
016-030-00-2	p-toluenesulphonic acid (containing a maximum of 5 % H <sub>2</sub> SO <sub>4</sub> )	203-180-0	104-15-4	Xi; R36/37/38	Xi R: 36/37/38 S: (2-)26-37		
016-031-00-8	tetrahydrothiophene-1,1-dioxide; sulpholane	204-783-1	126-33-0	Xn; R22	Xn R: 22 S: (2-)25		
016-032-00-3	1,3-propanesultone; 1,2-oxathiolane 2,2-dioxide	214-317-9	1120-71-4	Carc. Cat. 2; R45 Xn; R21/22	T R: 45-21/22 S: 53-45	Carc. Cat. 2; R45: C ≥ 0,01 %	E
016-033-00-9	dimethylsulfamoylchloride	236-412-4	13360-57-1	Carc. Cat. 2; R45 T+; R26 Xn; R21/22 C; R34	T+ R: 45-21/22-26-34 S: 53-45		E
016-034-00-4	tetrasodium 3,3'-(piperazine-1,4-diylbis((6-chloro-1,3,5-triazine-2,4-diyl)imino(2-acetamido)-4,1-phenyleneazo))bis (naphthalene-1,5-disulphonate)	400-010-9	81898-60-4	R43	Xi R: 43 S: (2-)22-24-37		
016-035-00-X	pentasodium 5-anilino-3-(4-(4-(6-chloro-4-(3-sulphonatoanilino)-1,3,5-triazin-2-ylamino)-2,5-dimethylphenylazo)-2,5-disulphonatophenylazo)-4-hydroxynaphthalene-2,7-disulphonate	400-120-7	—	Xi; R36	Xi R: 36 S: (2-)22-26		
016-036-00-5	tetrasodium 5-(4,6-dichloro-5-cyanopyrimidin-2-ylamino)-4-hydroxy-2,3-azodinaphthalene-1,2,5,7-disulphonate	400-130-1	—	R42 N; R51-53	Xn; N R: 42-51/53 S: (2-)22-61		
016-037-00-0	disodium 1-amino-4-(4-benzenesulphonamido-3-sulphonatoanilino)anthraquinone-2-sulphonate	400-350-8	85153-93-1	Xi; R41 R52-53	Xi R: 41-52/53 S: (2-)26-39-61		
016-038-00-6	disodium 6-((4-chloro-6-(N-methyl)-2-toluidino)-1,3,5-triazin-2-ylamino)-1-hydroxy-2-(4-methoxy-2-sulphonatophenylazo)naphthalene-3-sulphonate	400-380-1	86393-35-3	R43	Xi R: 43 S: (2-)22-24-37		
016-039-00-1	tetrasodium 2-(6-chloro-4-(4-(2,5-dimethyl-4-(2,5-disulphonatophenylazo)phenylazo)-3-ureidoanilino)-1,3,5-triazin-2-ylamino)benzene-1,4-disulphonate	400-430-2	—	R43	Xi R: 43 S: (2-)22-24-37		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
016-040-00-7	reaction mass of disodium 6-(2,4-dihydroxyphenylazo)-3-(4-(4-(2,4-dihydroxyphenylazo)anilino)-3-sulphonatophenylazo)-4-hydroxynaphthalene-2-sulphonate and disodium 6-(2,4-diaminophenylazo)-3-(4-(4-(2,4-diaminophenylazo)anilino)-3-sulphonatophenylazo)-4-hydroxynaphthalene-2-sulphonate and trisodium 6-(2,4-dihydroxyphenylazo)-3-(4-(4-(7-(2,4-dihydroxyphenylazo)-1-hydroxy-3-sulphonato-2-naphthylazo)anilino)-3-sulphonatophenylazo)-4-hydroxynaphthalene-2-sulphonate	400-570-4	—	Xi; R36	Xi R: 36 S: (2-)26		
016-041-00-2	calcium 2,5-dichloro-4-(4-((5-chloro-4-methyl-2-sulphonatophenyl)azo)-5-hydroxy-3-methylpyrazol-1-yl)benzenesulphonate	400-710-4	—	Xn; R20	Xn R: 20 S: (2-)		
016-042-00-8	tetrasodium 5-benzamido-3-(5-(4-fluoro-6-(1-sulphonato-2-naphthylamino)-1,3,5-triazin-2-ylamino)-2-sulphonatophenylazo)-4-hydroxynaphthalene-2,7-disulphonate	400-790-0	85665-97-0	Xi; R36/38 R43	Xi R: 36/38-43 S: (2-)22-24/25-37		
016-043-00-3	dilithium 6-acetamido-4-hydroxy-3-(4-((2-sulphonatooxy)ethylsulphonyl)phenylazo)naphthalene-2-sulphonate	401-010-1	—	R43	Xi R: 43 S: (2-)24-37		
016-044-00-9	disodium S,S-hexane-1,6-diyl di(thiosulphate) dihydrate	401-320-7	—	R43 R52-53	Xi R: 43-52/53 S: (2-)22-24-37-61		
016-045-00-4	lithium sodium hydrogen 4-amino-6-(5-(5-chloro-2,6-difluoropyrimidin-4-ylamino)-2-sulphonatophenylazo)-5-hydroxy-3-(4-(2-(sulphonatooxy)ethylsulphonyl)phenylazo)naphthalene-2,7-disulphonate	401-560-2	108624-00-6	R43	Xi R: 43 S: (2-)22-24-37		
016-046-00-X	sodium hydrogensulphate	231-665-7	7681-38-1	Xi; R41	Xi R: 41 S: (2-)24-26		
016-047-00-5	hexasodium 7-(4-(4-(4-(2,5-disulphonatoanilino)-6-fluoro-1,3,5-triazin-2-ylamino)-2-methylphenylazo)-7-sulphonatophenylazo)naphthalene-1,3,5-trisulphonate	401-650-1	85665-96-9	R43	Xi R: 43 S: (2-)22-24-37		
016-048-00-0	sodium 3,5-dichloro-2-(5-cyano-2,6-bis(3-hydroxypropylamino)-4-methylpyridin-3-ylazo)benzenesulphonate	401-870-8	—	Xi; R41 R52-53	Xi R: 41-52/53 S: (2-)26-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
016-049-00-6	calcium octadecylxylenesulphonate	402-040-8	—	C; R34 N; R51-53	C; N R: 34-51/53 S: (1/2-)26-28-36/37/ 39-45-61		
016-050-00-1	potassium sodium 5-(4-chloro-6-(N-(4-(4-chloro-6-(5-hydroxy-2,7-disulphonato-6-(2-sulphonatophenylazo)-4-naphthylamino)-1,3,5-triazin-2-ylamino) phenyl-N-methyl) amino)-1,3,5-triazin-2-ylamino)-4-hydroxy-3-(2-sulphonatophenylazo)naphthalene-2,7-disulphonat	402-150-6	—	Xi; R36 R43	Xi R: 36-43 S: (2-)22-24-26-37		
016-051-00-7	trisodium 7-(4-(6-fluoro-4-(2-(2-vinylsulphonylethoxy)ethylamino)-1,3,5-triazin-2-ylamino)-2-ureidophenylazo)naphthalene-1,3,6-trisulphonate	402-170-5	106359-91-5	R43	Xi R: 43 S: (2-)22-24-37		
016-052-00-2	benzyltributylammonium 4-hydroxynaphthalene-1-sulphonate	402-240-5	102561-46-6	Xn; R20 N; R51-53	Xn; N R: 20-51/53 S: (2-)22-61		
016-053-00-8	(C <sub>16</sub> or C <sub>18</sub> -n-alkyl)(C <sub>16</sub> or C <sub>18</sub> -n-alkyl)ammonium 2-((C <sub>16</sub> or C <sub>18</sub> -n-alkyl)(C <sub>16</sub> or C <sub>18</sub> -n-alkyl)carbamoyl)benzenesulphonate	402-460-1	—	Xi; R38 R43 R53	Xi R: 38-43-53 S: (2-)24-37-61		
016-054-00-3	sodium 4-(2,4,4-trimethylpentylcarboxyloxy)benzenesulfonate	400-030-8	—	T; R23-48/23 Xn; R22 Xi; R36/37 R43	T R: 22-23-36/37-43- 48/23 S: (1/2-)22-24-36-45		
016-055-00-9	tetrasodium 4-amino-3,6-bis(5-(6-chloro-4-(2-hydroxyethylamino)-1,3,5-triazin-2-ylamino)-2-sulfonatophenylazo)-5-hydroxynaphthalene-2,7-sulfonate (containing > 35 % sodium chloride and sodium acetate)	400-510-7	—	Xi; R41 R43	Xi R: 41-43 S: (2-)22-24-26-37/39		
016-056-00-4	potassium hydrogensulphate	231-594-1	7646-93-7	C; R34 Xi; R37	C R: 34-37 S: (1/2-)26-36/37/39- 45		
016-057-00-X	styrene-4-sulfonyl chloride	404-770-2	2633-67-2	Xi; R38-41 R43	Xi R: 38-41-43 S: (2-)24-26-37/39		
016-058-00-5	thionyl chloride, reaction products with 1,3,4-thiadiazol-2,5-dithiol, tert-nonanethiol and C <sub>12-14</sub> -tert-alkylamine	404-820-3	—	Xi; R38 R43 R52-53	Xi R: 38-43-52/53 S: (2-)36/37-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
016-059-00-0	N,N,N',N'-tetramethyldithiobis(ethylene)diamine dihydrochloride	405-300-9	17339-60-5	Xn; R22 Xi; R36 R43 N; R50-53	Xn; N R: 22-36-43-50/53 S: (2-)26-36/37-60-61		
016-060-00-6	diammonium peroxodisulphate; ammonium persulphate	231-786-5	7727-54-0	O; R8 Xn; R22 Xi; R36/37/ 38 R42/43	O; Xn R: 8-22-36/37/38-42/ 43 S: (2-)22-24-26-37		
016-061-00-1	dipotassium peroxodisulphate; potassium persulphate	231-781-8	7727-21-1	O; R8 Xn; R22 Xi; R36/37/ 38 R42/43	O; Xn R: 8-22-36/37/38-42/ 43 S: (2-)22-24-26-37		
016-062-00-7	bensultap (ISO); 1,3-bis(phenylsulfonylthio)-2-(N,N-dimethylamino)propane	—	17606-31-4	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
016-063-00-2	sodium metabisulphite	231-673-0	7681-57-4	Xn; R22 Xi; R41 R31	Xn R: 22-31-41 S: (2-)26-39-46		
016-064-00-8	sodium hydrogensulphite . . . %; sodium bisulphite . . . %	231-548-0	7631-90-5	Xn; R22 R31	Xn R: 22-31 S: (2-)25-46		B
016-065-00-3	sodium 1-amino-4-[2-methyl-5-(4-methylphenylsulfonylamino)phenylamino]anthraquinone-2-sulfonate	400-100-8	84057-97-6	N; R51-53	N R: 51/53 S: 61		
016-066-00-9	tetrasodium [5-((4-amino-6-chloro-1,3,5-triazin-2-yl)amino)-2-((2-hydroxy-3,5-disulfonatophenylazo)-2-sulfonatobenzylidenehydrazino)benzoate]copper(II)	404-070-7	116912-62-0	R52-53	R: 52/53 S: 61		
016-067-00-4	(4-methylphenyl)mesitylene sulfonate	407-530-5	67811-06-7	R53	R: 53 S: 61		
016-068-00-X	sodium 3,5-bis(tetradecyloxycarbonyl)benzenesulfinate	407-720-8	155160-86-4	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
016-069-00-5	3,5-bis-(tetradecyloxy-carbonyl)benzenesulfinic acid	407-990-7	141915-64-2	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
016-070-00-0	4-benzyloxy-4'-(2,3-epoxy-2-methylprop-1-yloxy)diphenylsulfone	408-220-2	—	R53	R: 53 S: 61		
016-071-00-6	trisodium 3-amino-6,13-dichloro-10-((3-((4-chloro-6-(2-sulfophenylamino)-1,3,5-triazin-2-yl)amino)propyl) amino)-4,11-triphenoxydioxazinedisulfonate	410-130-3	136248-03-8	R43	Xi R: - 43 S: (2-)22-24-37		
016-072-00-1	3-amino-4-hydroxy-N-(2-methoxyethyl)-benzenesulfonamide	411-520-6	112195-27-4	Xi; R41 R43 N; R51-53	Xi; N R: 41-43-51/53 S: (2-)24-26-37/39-61		
016-073-00-7	tetrakis(phenylmethyl)thioperoxydi(carbothioamide)	404-310-0	10591-85-2	R53	R: 53 S: 61		
016-074-00-2	6-fluoro-2-methyl-3-(4-methylthiobenzyl)indene	405-410-7	—	Xi; R38-41 R43 N; R51-53	Xi; N R: 38-41-43-51/53 S: (2-)26-36/37/39-61		
016-075-00-8	2,2'-diallyl-4,4'-sulfonyldiphenol	411-570-9	41481-66-7	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
016-076-00-3	2,3-bis((2-mercaptoethyl)thio)-1-propanethiol	411-290-7	131538-00-6	Xn; R22-48/ 22 N; R50-53	Xn; N R: 22-48/22-50/53 S: (2-)23-24/25-36-60-61		
016-077-00-9	2-chloro-p-toluenesulfochloride	412-890-1	42413-03-6	C; R34 R43 R52-53	C R: 34-43-52/53 S: (1/2-)23-26-36/37/ 39-45-61		
016-078-00-4	4-methyl-N,N-bis(2-((4-methylphenyl)sulfonyl)amino)ethyl benzenesulfonamide	413-300-5	56187-04-3	R53	R: 53 S: 61		
016-079-00-X	N,N-bis(2-(p-toluenesulfonyloxy)ethyl)-p-toluenesulfonamide	412-920-3	16695-22-0	R43 R53	Xi R: 43-53 S: (2-)24-37-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
016-080-00-5	sodium 2-anilino-5-(2-nitro-4-(N-phenylsulfamoyl))anilinobenzenesulfonate	412-320-1	31361-99-6	Xi; R41 R52-53	Xi R: 41-52/53 S: (2-)26-39-61		
016-081-00-0	hexahydrocyclopenta[c]pyrrole-1-(1H)-ammonium N-ethoxycarbonyl-N-(p-tolylsulfonyl)azanide	418-350-1	—	Muta. Cat. 3; R68 Xn; R22 Xi; R36 R43 N; R51-53	Xn; N R: 22-36-43-68-51/ 53 S: (2-)26-36/37-61		
016-082-00-6	ethoxysulfuron (ISO); 1-(4,6-dimethoxypyrimidin-2-yl)-3-(2-ethoxyphenoxy-sulfonyl)urea	—	126801-58-9	N; R50-53	N R: 50/53 S: 60-61		
016-083-00-1	acibenzolar-S-methyl; benzo[1,2,3]thiadiazole-7-carbothioic acid S-methyl ester	420-050-0	135158-54-2	Xi; R36/37/ 38 R43 N; R50-53	Xi; N R: 36/37/38-43-50/ 53 S: (2-)24/25-37-46- 59-60-61		
016-084-00-7	prosulfuron; 1-(4-methoxy-6-methyl-1,3,5-triazin-2-yl)-3-[2-(3,3,3-trifluoropropyl)phenylsulfonyl]urea	—	94125-34-5	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
016-085-00-2	flazasulfuron (ISO); 1-(4,6-dimethoxypyrimidin-2-yl)-3-(3-trifluoromethyl-2-pyridylsulfonyl)urea	—	104040-78-0	N; R50-53	N R: 50/53 S: 60-61		
016-086-00-8	tetrasodium 10-amino-6,13-dichloro-3-(3-(4-(2,5-disulfonatoanilino)-6-fluoro-1,3,5-triazin-2-ylamino)prop-3-ylamino)-5,12-dioxa-7,14-diazapentacene-4,11-disulfonate	402-590-9	109125-56-6	Xi; R41	Xi R: 41 S: (2-)22-26-39		
016-087-00-3	reaction mass of: thiobis(4,1-phenylene)-S,S,S',S'-tetraphenyl-disulfonium bishexafluorophosphate; diphenyl(4-phenylthiophenyl)sulfonium hexafluorophosphate; propylene carbonate	403-490-8	104558-95-4	Xi; R36 R43 N; R50-53	Xi; N R: 36-43-50/53 S: (2-)24-26-37-60- 61		
016-088-00-9	4-(bis(4-(diethylamino)phenyl)methyl)benzene-1,2-dimethanesulfonic acid	407-280-7	71297-11-5	R52-53	R: 52/53 S: 61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
016-089-00-4	reaction mass of esters of 5,5',6,6',7,7'-hexahydroxy-3,3,3',3'-tetramethyl-1,1'-spirobiindan and 2-diazo-1,2-dihydro-1-oxo-5-sulfonaphthalene	413-840-1	—	E; R2 F; R11 R53	E R: 2-11-53 S: (2-)33-35-40-61		
016-090-00-X	4-methyl-N-(methylsulfonyl)benzenesulfonamide	415-040-8	14653-91-9	Xn; R22 Xi; R37-41	Xn R: 22-37-41 S: (2-)26-39		
016-091-00-5	C <sub>12-14</sub> — <i>tert</i> -alkyl ammonium 1-amino-9,10-dihydro-9,10-dioxo-4-(2,4,6-trimethylanilino)-anthracen-2-sulfonate	414-110-5	—	Xi; R41 N; R50-53	Xi; N R: 41-50/53 S: (2-)26-39-60-61		
016-093-00-6	reaction mass of: 4-(7-hydroxy-2,4,4-trimethyl-2-chromanil)resorcinol-4-yl-tris(6-diazo-5,6-dihydro-5-oxonaphthalen-1-sulfonate); 4-(7-hydroxy-2,4,4-trimethyl-2-chromanil)resorcinolbis(6-diazo-5,6-dihydro-5-oxonaphthalen-1-sulfonate) (2:1)	414-770-4	140698-96-0	F; R11 Carc. Cat. 3; R40	F; Xn R: 11-40 S: (2-)7-36/37		
016-095-00-7	reaction mass of: reaction product of 4,4'-methylenebis[2-(4-hydroxybenzyl)-3,6-dimethylphenol] and 6-diazo-5,6-dihydro-5-oxo-naphthalenesulfonate (1:2); Reaction product of 4,4'-methylenebis[2-(4-hydroxybenzyl)-3,6-dimethylphenol] and 6-diazo-5,6-dihydro-5-oxo-naphthalenesulfonate (1:3)	417-980-4	—	F; R11 Carc. Cat. 3; R40	F; Xn R: 11-40 S: (2-)7-36/37		
016-096-00-2	thifensulfuron-methyl (ISO); methyl 3-(4-methoxy-6-methyl-1,3,5-triazin-2-ylcarbamoyl-sulfamoyl)thiophene-2-carboxylate	—	79277-27-3	N; R50-53	N R: 50/53 S: 60-61		
017-001-00-7	chlorine	231-959-5	7782-50-5	T; R23 Xi; R36/37/ 38 N; R50	T; N R: 23-36/37/38-50 S: (1/2-)9-45-61		
017-002-00-2	hydrogen chloride	231-595-7	7647-01-0	T; R23 C; R35	T; C R: 23-35 S: (1/2-)9-26-36/37/ 39-45		5
017-002-01-X	hydrochloric acid ... %	231-595-7	—	C; R34 Xi; R37	C R: 34-37 S: (1/2-)26-45	C; R34-37: C ≥ 25 % Xi; R36/37/38: 10 % ≤ C < 25 %	B



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
017-003-00-8	barium chlorate	236-760-7	13477-00-4	O; R9 Xn; R20/22 N; R51-53	O; Xn; N R: 9-20/22-51/53 S: (2-)13-27-61		
017-004-00-3	potassium chlorate	223-289-7	3811-04-9	O; R9 Xn; R20/22 N; R51-53	O; Xn; N R: 9-20/22-51/53 S: (2-)13-16-27-61		
017-005-00-9	sodium chlorate	231-887-4	7775-09-9	O; R9 Xn; R22 N; R51-53	O; Xn; N R: 9-22-51/53 S: (2-)13-17-46-61		
017-006-00-4	perchloric acid ... %	231-512-4	7601-90-3	R5 O; R8 C; R35	O; C R: 5-8-35 S: (1/2-)23-26-36-45	C; R35: C ≥ 50 % C; R34: 10 % ≤ C < 50 % Xi; R36/38: 1 % ≤ C < 10 % Footnote O; R5-8: C > 50 %	B
017-007-00-X	barium perchlorate	236-710-4	13465-95-7	O; R9 Xn; R20/22	O; Xn R: 9-20/22 S: (2-)27		
017-008-00-5	potassium perchlorate	231-912-9	7778-74-7	O; R9 Xn; R22	O; Xn R: 9-22 S: (2-)13-22-27		
017-009-00-0	ammonium perchlorate	232-235-1	7790-98-9	O; R9 R44 ☉	O R: 9-44 S: (2-)14-16-27-36/37		G
017-010-00-6	sodium perchlorate	231-511-9	7601-89-0	O; R9 Xn; R22	O; Xn R: 9-22 S: (2-)13-22-27		
017-011-00-1	sodium hypochlorite, solution ... % Cl active	231-668-3	7681-52-9	C; R34 R31 N; R50	C; N R: 31-34-50 S: (1/2-)28-45-50-61	R31: C ≥ 5 %	B
017-012-00-7	calcium hypochlorite	231-908-7	7778-54-3	O; R8 ☉ Xn; R22 R31 C; R34 N; R50	O; C; N R: 8-22-31-34-50 S: (1/2-)26-36/37/39-45-61	C; R34: C ≥ 10 % Xi; R37/38-41: 3 % ≤ C < 10 % Xi; R36: 0,5 % ≤ C < 3 %	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
017-013-00-2	calcium chloride	233-140-8	10043-52-4	Xi; R36	Xi R: 36 S: (2-)22-24		
017-014-00-8	ammonium chloride	235-186-4	12125-02-9	Xn; R22 Xi; R36	Xn R: 22-36 S: (2-)22		
017-015-00-3	(2-(aminomethyl)phenyl)acetylchloride hydrochloride	417-410-4	61807-67-8	Xn; R22 C; R35 R43	C R: 22-35-43 S: (1/2-)26-36/37/39-45		
017-016-00-9	methyltriphenylphosphonium chloride	418-400-2	1031-15-8	Xn; R21/22 Xi; R38-41 N; R51-53	Xn; N R: 21/22-38-41-51/53 S: (2-)22-26-36/37/39-61		
017-017-00-4	(Z)-13-docosenyl-N,N-bis(2-hydroxyethyl)-N-methyl-ammonium-chloride	426-210-6	120086-58-0	C; R34 N; R50-53	C; N R: 34-50/53 S: (2-)26-36/37/39-45-60-61		
017-018-00-X	N,N,N-trimethyl-2,3-bis(stearoyloxy)propylammonium chloride	405-660-7	—	N; R51-53	N R: 51/53 S: 61		
017-019-00-5	(R)-1,2,3,4-tetrahydro-6,7-dimethoxy-1-veratryloquinoline hydrochloride	415-110-8	54417-53-7	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)22-61		
017-020-00-0	ethyl propoxy aluminium chloride	421-790-7	13014-29-4	F; R15 R 14 C; R35	F; C R: 14/15-35 S: (1/2-)16-23-26-30-36/37/39-43-45		
017-021-00-6	behenamidopropyl-dimethyl-(dihydroxypropyl) ammonium chloride	423-420-1	136920-10-0	Xi; R41 R43 N; R50-53	Xi; N R: 41-43-50/53 S: (2-)26-36/37/39-60-61		
019-001-00-2	potassium	231-119-8	7440-09-7	F; R15 R14 C; R34	F; C R: 14/15-34 S: (1/2-)5-8-45		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
019-002-00-8	potassium hydroxide; caustic potash	215-181-3	1310-58-3	Xn; R22 C; R35	C R: 22-35 S: (1/2-)26-36/37/39-45	C; R35: C ≥ 5 % C; R34: 2 % ≤ C < 5 % Xi; R36/38: 0.5 % ≤ C < 2 %	
020-001-00-X	calcium	231-179-5	7440-70-2	F; R15	F R: 15 S: (2-)8-24/25-43		
020-002-00-5	calcium cyanide	209-740-0	592-01-8	T+; R28 R32 N; R50-53	T+; N R: 28-32-50/53 S: (1/2-)7/8-23-36/ 37-45-60-61		
020-003-00-0	reaction mass of: dicalcium (bis(2-hydroxy-5-tetra-propenyl-phenylmethyl)methylamine)dihydroxide; tri-calcium (tris(2-hydroxy-5-tetra-propenylphenylmethyl)methylamine)tri-hydroxide; poly[calcium ((2-hydroxy-5-tetra-propenyl-phenylmethyl)methylamine)hydroxide]	420-470-4	—	Xi; R36/38 R43	Xi R: 36/38-43 S: (2-)24-26-37		
022-001-00-5	titanium tetrachloride	231-441-9	7550-45-0	R14 C; R34	C R: 14-34 S: (1/2-)7/8-26-36/37/ 39-45		
022-002-00-0	titanium(4+) oxalate	403-260-7	—	Xi; R41	Xi R: 41 S: (2-)26-39		
022-003-00-6	bis(η <sup>5</sup> -cyclopentadienyl)-bis(2,6-difluoro-3-[pyrrol-1-yl]-phenyl)titanium	412-000-1	125051-32-3	F; R11 Repr. Cat. 3; R62 Xn; R48/22 N; R51-53	F; Xn; N R: 11-48/22-62-51/ 53 S: (2-)7-22-33-36/37-61		
023-001-00-8	divanadium pentaoxide; vanadium pentoxide	215-239-8	1314-62-1	Muta. Cat. 3; R68 Repr. Cat. 3; R63 T; R48/23 Xn; R20/22 Xi; R37 N; R51-53	T; N R: 20/22-37-48/23-51/53-63-68 S: (1/2-)36/37-38-45-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
024-001-00-0	chromium (VI) trioxide	215-607-8	1333-82-0	O; R9 Carc. Cat. 1; R45 Muta. Cat. 2; R46 Repr. Cat. 3; R62 T+; R26 T; R24/25- 48/23 C; R35 R42/43 N; R50-53	O; T+; N R: 45-46-9-24/25-26- 35-42/43-48/23-62- 50/53 S: 53-45-60-61	C: R35: C ≥ 10 % C; R34: 5 % ≤ C < 10 % Xi; R36/37/38: 1 % ≤ C < 5 %	E
024-002-00-6	potassium dichromate	231-906-6	7778-50-9	O; R8 Carc. Cat. 2; R45 Muta. Cat. 2; R46 Repr. Cat. 2; R60-61 T+; R26 T; R25-48/23 Xn; R21 C; R34 R42/43 N; R50-53	T+; N; O R: 45-46-60-61-8-21- 25-26-34-42/43-48/ 23-50/53 S: 53-45-60-61	C; R34: C ≥ 10 %; Xi; R36/37/38: 5 % ≤ C < 10 %	E 3
024-003-00-1	ammonium dichromate	232-143-1	7789-09-5	E; R2 O; R8 Carc. Cat. 2; R45 Muta. Cat. 2; R46 Repr. Cat. 2; R60-61 T+; R26 T; R25-48/23 Xn; R21 C; R34 R42/43 N; R50-53	E; T+; N R: 45-46-60-61-2-8- 21-25-26-34-42/43- 48/23-50/53 S: 53-45-60-61	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 % R42/43: C ≥ 0,2 %	E 3

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
024-004-00-7	sodium dichromate anhydrate	234-190-3	10588-01-9	O; R8 Carc. Cat. 2; R45 Muta. Cat. 2; R46 Repr. Cat. 2; R60-61 T+; R26 T; R25-48/23 Xn; R21 C; R34 R42/43 N; 50-53	T+; N; O R: 45-46-60-61-8-21- 25-26-34-42/43-48/ 23-50/53 S: 53-45-60-61	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 % R42/43: C ≥ 0,2 %	E 3
024-004-01-4	sodium dichromate, dihydrate	234-190-3	7789-12-0	O; R8 Carc. Cat. 2; R45 Muta. Cat. 2; R46 Repr. Cat. 2; R60-61 T+; R26 T; R25-48/23 Xn; R21 C; R34 R42/43 N; R50-53	T+; N; O R: 45-46-60-61-8-21- 25-26-34-42/43-48/ 23-50/53 S: 53-45-60-61	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 % R42/43: C ≥ 0,2 %	E 3
024-005-00-2	chromyl dichloride; chromic oxychloride	239-056-8	14977-61-8	O; R8 Carc. Cat. 2; R49 Muta. Cat. 2; R46 C; R35 R43 N; R50-53	O; T; C; N R: 49-46-8-35-43-50/ 53 S: 53-45-60-61	C; R35: C ≥ 10 % C; R34: 5 % ≤ C < 10 % Xi; R36/37/38: 0,5 % ≤ C < 5 % R43: C ≥ 0,5 %	3
024-006-00-8	potassium chromate	232-140-5	7789-00-6	Carc. Cat. 2; R49 Muta. Cat. 2; R46 Xi; R36/37/ 38 R43 N; R50-53	T; N R: 49-46-36/37/38- 43-50/53 S: 53-45-60-61	R43: C ≥ 0,5 %	3

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
024-007-00-3	zinc chromates including zinc potassium chromate	—	—	Carc. Cat. 1; R45 Xn; R22 R43 N; R50-53	T; N R: 45-22-43-50/53 S: 53-45-60-61		AE
024-008-00-9	calcium chromate	237-366-8	13765-19-0	Carc. Cat. 2; R45 Xn; R22 N; R50-53	T; N R: 45-22-50/53 S: 53-45-60-61		E
024-009-00-4	strontium chromate	232-142-6	7789-06-2	Carc. Cat. 2; R45 Xn; R22 N; R50-53	T; N R: 45-22-50/53 S: 53-45-60-61		E
024-010-00-X	dichromium tris(chromate); chromium III chromate; chromic chromate	246-356-2	24613-89-6	O; R8 Carc. Cat. 2; R45 C; R35 R43 N; R50-53	O; T; C; N R: 45-8-35-43-50/53 S: 53-45-60-61		
024-011-00-5	ammonium bis(1-(3,5-dinitro-2-oxidophenylazo)-3-(N-phenylcarbamoyl)-2-naphtholato)chromate(1-)	400-110-2	109125-51-1	F; R11 N; R50-53	F; N R: 11-50/53 S: (2-)33-60-61		
024-012-00-0	trisodium bis(7-acetamido-2-(4-nitro-2-oxidophenylazo)-3-sulphonato-1-naphtholato)chromate(1-)	400-810-8	—	Muta. Cat. 3; R68	Xn R: 68 S: (2-)22-36/37		
024-013-00-6	trisodium (6-anilino-2-(5-nitro-2-oxidophenylazo)-3-sulphonato-1-naphtholato)(4-sulphonato-1,1'-azodi-2,2'naphtholato)chromate(1-)	402-500-8	—	Xi; R41 N; R51-53	Xi; N R: 41-51/53 S: (2-)26-39-61		
024-014-00-1	trisodium bis(2-(5-chloro-4-nitro-2-oxidophenylazo)-5-sulphonato-1-naphtholato)chromate(1-)	402-870-0	93952-24-0	Xi; R41 R52-53	Xi R: 41-52/53 S: (2-)26-39-61		
024-015-00-7	disodium (3-methyl-4-(5-nitro-2-oxidophenylazo)-1-phenylpyrazololato)(1-(3-nitro-2-oxido-5-sulfonatophenylazo)-2-naphtholato)chromate(1-)	404-930-1	—	Xn; R20 Xi; R41 N; R51-53	Xn; N R: 20-41-51/53 S: (2-)26-39-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
024-016-00-2	tetradecylammonium bis(1-(5-chloro-2-oxidophenylazo)-2-naphtholato)chromate(1-)	405-110-6	88377-66-6	Xn; R48/22 R53	Xn R: 48/22-53 S: (2-)22-36-61		
024-017-00-8	Chromium (VI) compounds, with the exception of barium chromate and of compounds specified elsewhere in this Annex	—	—	Carc. Cat. 2; R49 R43 N; R50-53	T; N R: 49-43-50/53 S: 53-45-60-61		A
024-018-00-3	sodium chromate	231-889-5	7775-11-3	Carc. Cat. 2; R45 Muta. Cat. 2; R46 Repr. Cat. 2; R60-61 T+; R26 T; R25-48/23 Xn; R21 C; R34 R42/43 N; R50-53	T+; N R: 45-46-60-61-21- 25-26-34-42/43-48/ 23-50/53 S: 53-45-60-61	R42/43: C ≥ 0,2 %	E 3
024-019-00-9	Main component: acetoacetic acid anilide/3-amino-1-hydroxybenzene (ATAN-MAP): trisodium {6-[(2 or 3 or 4)-amino-(4 or 5 or 6)-hydroxyphenylazo]-5'-(phenylsulfamoyl)-3-sulfonatonaphthalene-2-azobenzene-1,2'-diolato}-{6"-[1-(phenylcarbamoyl)ethylazo]-5"--(phenylsulfamoyl)-3"-sulfonatonaphthalene-2"-azobenzene-1",2"-diolato}chromate (III); by-product 1: acetoacetic acid anilide/acetoacetic acid anilide (ATAN-ATAN): trisodium bis{6-[1-(phenylcarbamoyl)ethylazo]-5'-(phenylsulfonyl)-3-sulfonatonaphthalene-2-azobenzene-1,2'-diolato}chromate (III); by-product 2: 3-amino-1-hydroxybenzene/3-amino-1-hydroxybenzene (MAP-MAP): trisodium bis{6-[(2 or 3 or 4)-amino-(4 or 5 or 6)-hydroxyphenylazo]-5'-(phenylsulfamoyl)-3-sulfonatonaphthalene-2-azobenzene-1,2'-diolato} chromate (III)	419-230-1	—	R43 R52-53	Xi R: 43-52/53 S: (2-)22-24-37-61		
024-020-00-4	trisodium bis[(3'-nitro-5'-sulfonato(6-amino-2-[4-(2-hydroxy-1-naphthylazo)phenylsulfonylamino]pyrimidin-5-azo)benzene-2',4'-diolato)]chromate(III)	418-220-4	—	R43 R52-53	Xi R: 43-52/53 S: (2-)22-24-37-61		
025-001-00-3	manganese dioxide	215-202-6	1313-13-9	Xn; R20/22	Xn R: 20/22 S: (2-)25		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
025-002-00-9	potassium permanganate	231-760-3	7722-64-7	O; R8 Xn; R22 N; R50-53	O; Xn; N R: 8-22-50/53 S: (2-)60-61		
025-003-00-4	manganese sulphate	232-089-9	7785-87-7	Xn; R48/20/ 22 N; R51-53	Xn; N R: 48/20/22-51/53 S: (2-)22-61		
025-004-00-X	bis(N,N',N''-trimethyl-1,4,7-triazacyclononane)-trioxo-dimanganese (IV) di(hexafluorophosphate) monohydrate	411-760-1	116633-53-5	N; R51-53	N R: 51/53 S: 61		
025-005-00-5	reaction mass of: tri-sodium [29H, 31H-phthalocyanine-C,C,C-trisulfonato (6-)-N29,N30,N31,N32] manganate (3-); tetrasodium [29H,31H-phthalocyanine-C,C,C,C-tetrasulfonato (6-)-N29,N30,N31,N32], manganate (3-); pentasodium [29H,31H-phthalocyanine-C,C,C,C,C-pentasulfonato (6-)-N29,N30,N31,N32] manganate (3-)	417-660-4	—	N; R50-53	N R: 50/53 S: 60-61		
026-001-00-6	(η-cumene)-(η-cyclopentadienyl)iron(II) hexafluoroantimonate	407-840-0	100011-37-8	Xn; R22 Xi; R41 R52-53	Xn R: 22-41-52/53 S: (2-)22-26-39-61		
026-002-00-1	(η-cumene)-(η-cyclopentadienyl)iron(II) trifluoromethane-sulfonate	407-880-9	117549-13-0	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)26-61		
027-001-00-9	cobalt	231-158-0	7440-48-4	R42/43 R53	Xn R: 42/43-53 S: (2-)22-24-37-61		
027-002-00-4	cobalt oxide	215-154-6	1307-96-6	Xn; R22 R43 N; R50-53	Xn; N R: 22-43-50/53 S: (2-)24-37-60-61		
027-003-00-X	cobalt sulphide	215-273-3	1317-42-6	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		
027-004-00-5	cobalt dichloride	231-589-4	7646-79-9	Carc. Cat. 2; R49 Xn; R22 R42/43 N; R50-53	T; N R: 49-22-42/43-50/ 53 S: (2-)22-53-45-60- 61	Carc. Cat. 2; R49: C ≥ 0,01 % Xn; R22: C ≥ 2,5 %	E 1



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
027-005-00-0	cobalt sulphate	233-334-2	10124-43-3	Carc. Cat. 2; R49 Xn; R22 R42/43 N; R50-53	T; N R: 49-22-42/43-50/ 53 S: (2-)22-53-45-60- 61	Carc. Cat. 2; R49: C ≥ 0,01 %	E 1
028-001-00-1	tetracarbonylnickel; nickel tetracarbonyl	236-669-2	13463-39-3	F; R11 Carc. Cat. 3; R40 Repr. Cat. 2; R61 T+; R26 N; R50-53	F; T+; N R: 61-11-26-40-50/ 53 S: 53-45-60-61		E
028-002-00-7	nickel	231-111-4	7440-02-0	Carc. Cat. 3; R40 R43	Xn R: 40-43 S: (2-)22-36		
028-003-00-2	nickel monoxide	215-215-7	1313-99-1	Carc. Cat. 1; R49 R43 R53	T R: 49-43-53 S: 53-45-61		
028-004-00-8	nickel dioxide	234-823-3	12035-36-8	Carc. Cat. 1; R49 R43 R53	T R: 49-43-53 S: 53-45-61		
028-005-00-3	dinickel trioxide	215-217-8	1314-06-3	Carc. Cat. 1; R49 R43 R53	T R: 49-43-53 S: 53-45-61		
028-006-00-9	nickel sulphide	240-841-2	16812-54-7	Carc. Cat. 1; R49 R43 N; R50-53	T; N R: 49-43-50/53 S: 53-45-60-61		
028-007-00-4	nickel subsulphide; trinickel disulphide	234-829-6	12035-72-2	Carc. Cat. 1; R49 R43 N; R51-53	T; N R: 49-43-51/53 S: 53-45-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
028-008-00-X	nickel dihydroxide	235-008-5	12054-48-7	Carc. Cat. 3; R40 Xn; R20/22 R43 N; R50-53	Xn; N R: 20/22-40-43-50/ 53 S: (2-)22-36-60-61		
028-009-00-5	nickel sulphate	232-104-9	7786-81-4	Carc. Cat. 3; R40 Xn; R22 R42/43 N; R50-53	Xn; N R: 22-40-42/43-50/ 53 S: (2-)22-36/37-60-61		
028-010-00-0	nickel carbonate	222-068-2	3333-67-3	Carc. Cat. 3; R40 Xn; R22 R43 N; R50-53	Xn; N R: 22-40-43-50/53 S: (2-)22-36/37-60-61		
029-001-00-4	copper chloride; copper (I) chloride; cuprous chloride	231-842-9	7758-89-6	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)22-60-61		
029-002-00-X	dicopper oxide; copper (I) oxide	215-270-7	1317-39-1	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)22-60-61		
029-003-00-5	Naphthenic acids, copper salts; copper naphthenate	215-657-0	1338-02-9	R10 Xn; R22 N; R50-53	Xn; N R: 10-22-50/53 S: (2-)60-61		
029-004-00-0	copper sulphate	231-847-6	7758-98-7	Xn; R22 Xi; R36/38 N; R50-53	Xn; N R: 22-36/38-50/53 S: (2-)22-60-61		
029-005-00-6	(tris(chloromethyl)phthalocyaninato)copper(II), reaction products with N-methylpiperazine and methoxyacetic acid	401-260-1	—	Xi; R36	Xi R: 36 S: (2-)26		
029-006-00-1	tris(octadec-9-enylammonium) (trisulfonatophthalocyaninato) copper(II)	403-210-4	—	Xi; R41 N; R51-53	Xi; N R: 41-51/53 S: (2-)22-26-39-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
029-007-00-7	(trisodium (2-((3-(6-(2-chloro-5-sulfonato)anilino)-4-(3-carboxypyridinio)-1,3,5-triazin-2-ylamino)-2-oxido-5-sulfonato-phenylazo)phenylmethylazo)-4-sulfonatobenzoato)copper(3-)) hydroxide	404-670-9	89797-01-3	E; R2 R43	E; Xi R: 2-43 S: (2-)22-24-35-37		
029-008-00-2	copper(II) methanesulfonate	405-400-2	54253-62-2	Xn; R22 Xi; R41 N; R50-53	Xn; N R: 22-41-50/53 S: (2-)26-36/37/39-60-61		
029-009-00-8	phthalocyanine-N-[3-(diethylamino)propyl]sulfonamide copper complex	413-650-9	93971-95-0	R52-53	R: 52/53 S: 61		
029-010-00-3	reaction mass of compounds from (dodecakis(p-tolylthio)phthalocyaninato)copper(II) to (hexadecakis(p-tolylthio)phthalocyaninato)copper(II)	407-700-9	101408-30-4	R43	Xi R: 43 S: (2-)24-37		
029-011-00-9	sodium [29H,31H-phthalocyaninato-(2-)-N29,N30,N31,N32]-((3-(N-methyl-N-(2-hydroxyethyl)amino)propyl)amino)sulfonyl-sulfonato, copper complex	412-730-0	150522-10-4	C; R34	C R: 34 S: (1/2-)22-26-36/37/39-45		
029-012-00-4	sodium ((N-(3-trimethylammoniopropyl)sulfamoyl)methylsulfonatophthalocyaninato)copper(II)	407-340-2	124719-24-0	Xi; R41	Xi R: 41 S: (2-)26-39		
029-013-00-X	trisodium(2-(α-(3-(4-chloro-6-(2-(2-(vinylsulfonyl)ethoxy)ethylamino)-1,3,5-triazin-2-ylamino)-2-oxido-5-sulfonato-phenylazo)benzylidenehydrazino)-4-sulfonatobenzoato)copper(II)	407-580-8	130201-51-3	Xi; R41 R52-53	Xi R: 41-52/53 S: (2-)24-37-61		
030-001-00-1	zinc powder — zinc dust (pyrophoric)	231-175-3	7440-66-6	F; R15-17 N; R50-53	F; N R: 15-17-50/53 S: (2-)43-46-60-61		
030-001-01-9	zinc powder — zinc dust (stabilised)	231-175-3	7440-66-6	N; R50-53	N R: 50/53 S: 60-61		
030-003-00-2	zinc chloride	231-592-0	7646-85-7	C; R34 Xn; R22 N; R50-53	C; N R: 22-34-50/53 S: (1/2-)26-36/37/39-45-60-61	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
030-004-00-8	dimethylzinc; [1] diethylzinc [2]	208-884-1 [1] 209-161-3 [2]	544-97-8 [1] 557-20-0 [2]	F; R17 R14 C; R34 N; R50-53	F; C; N R: 14-17-34-50/53 S: (1/2-)16-43-45-60-61		
030-005-00-3	diamminediisocyanatozinc	401-610-3	—	Xn; R22 Xi; R41 R42/43 N; R50	Xn; N R: 22-41-42/43-50 S: (2-)22-26-36/37/39-41-61		
030-006-00-9	zinc sulphate (hydrous) (mono-, hexa- and hepta hydrate); [1] zinc sulphate (anhydrous) [2]	231-793-3 [1] 231-793-3 [2]	7446-19-7 [1] 7733-02-0 [2]	Xn; R22 Xi; R41 N; R50-53	Xn; N R: 22-41-50/53 S: (2-)22-26-39-46-60-61		
030-007-00-4	bis(3,5-di- <i>tert</i> -butylsalicylato-O <sup>1</sup> ,O <sup>2</sup> )zinc	403-360-0	42405-40-3	F; R11 Xn; R22 N; R50-53	F; Xn; N R: 11-22-50/53 S: (2-)7-22-60-61		
030-008-00-X	hydroxo(2-(benzenesulfonamido)benzoato)zinc(II)	403-750-0	113036-91-2	Xn; R20 N; R51-53	Xn; N R: 20-51/53 S: (2-)22-57-61		
030-011-00-6	trizinc bis(orthophosphate)	231-944-3	7779-90-0	N; R50-53	N R: 50/53 S: 60-61		
030-013-00-7	zinc oxide	215-222-5	1314-13-2	N; R50-53	N R: 50/53 S: 60-61		
033-001-00-X	arsenic	231-148-6	7440-38-2	T; R23/25 N; R50-53	T; N R: 23/25-50/53 S: (1/2-)20/21-28-45-60-61		
033-002-00-5	arsenic compounds, with the exception of those specified elsewhere in this Annex	—	—	T; R23/25 N; R50-53	T; N R: 23/25-50/53 S: (1/2-)20/21-28-45-60-61	T; R23/25: C ≥ 0,2 % Xn; R20/22: 0,1 % ≤ C < 0,2 %	A 1

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
033-003-00-0	diarsenic trioxide; arsenic trioxide	215-481-4	1327-53-3	Carc. Cat. 1; R45 T+; R28 C; R34 N; R50-53	T+; N R: 45-28-34-50/53 S: 53-45-60-61		E
033-004-00-6	diarsenic pentaoxide; arsenic pentoxide; arsenic oxide	215-116-9	1303-28-2	Carc. Cat. 1; R45 T; R23/25 N; R50-53	T; N R: 45-23/25-50/53 S: 53-45-60-61		E
033-005-00-1	arsenic acid and its salts	—	—	Carc. Cat. 1; R45 T; R23/25 N; R50-53	T; N R: 45-23/25-50/53 S: 53-45-60-61		AE
033-006-00-7	arsine	232-066-3	7784-42-1	F+; R12 T+; R26 Xn; R48/20 N; R50-53	F+; T+; N R: 12-26-48/20-50/ 53 S: (1/2-)9-16-28-33- 36/37-45-60-61		
033-007-00-2	tert-butylarsine	423-320-6	4262-43-5	F; R17 T+; R26	F; T+ R: 17-26 S: (1/2-)9-28-36/37- 43-45		
034-001-00-2	selenium	231-957-4	7782-49-2	T; R23/25 R33 R53	T R: 23/25-33-53 S: (1/2-)20/21-28-45- 61		
034-002-00-8	selenium compounds except cadmium sulphoselenide	—	—	T; R23/25 R33 N; R50-53	T; N R: 23/25-33-50/53 S: (1/2-)20/21-28-45- 60-61		A
034-003-00-3	sodium selenite	233-267-9	10102-18-8	T+; R28 T; R23 R31 R43 N; R51-53	T+; N R: 23-28-31-43-51/ 53 S: (1/2-)28-36/37-45- 61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
035-001-00-5	bromine	231-778-1	7726-95-6	T+; R26 C; R35 N; R50	T+; C; N R: 26-35-50 S: (1/2-)7/9-26-45-61		
035-002-00-0	hydrogen bromide	233-113-0	10035-10-6	C; R35 Xi; R37	C R: 35-37 S: (1/2-)7/9-26-45		
035-002-01-8	hydrobromic acid ... %	—	—	C; R34 Xi; R37	C R: 34-37 S: (1/2-)7/9-26-45	C; R34: C ≥ 40 % Xi; R36/38: 10 % ≤ C < 40 % Xi; R37: C ≥ 10 %	B
035-003-00-6	potassium bromate	231-829-8	7758-01-2	O; R9 Carc. Cat. 2; R45 T; R25	T; O R: 45-9-25 S: 53-45		E
035-004-00-1	2-hydroxyethylammonium perbromide	407-440-6	—	O; R8 Xn; R22 C; R35 R43 N; R50	O; C; N R: 8-22-35-43-50 S: (1/2-)3/7-14-26-36/37/39-45-60-61		
040-001-00-3	zirconium powder (pyrophoric)	231-176-9	7440-67-7	F; R15-17	F R: 15-17 S: (2-)7/8-43		
040-002-00-9	zirconium powder (non pyrophoric)	—	—	F; R15	F R: 15 S: (2-)7/8-43		
042-001-00-9	molybdenum trioxide	215-204-7	1313-27-5	Xn; R48/20/ 22 Xi; R36/37	Xn R: 36/37-48/20/22 S: (2-)22-25		
042-002-00-4	tetrakis(dimethylditetradecylammonium) hexa-μ-oxotetra-μ3-oxodi-μ5-oxotetradecaooctamolybdate(4-)	404-760-8	117342-25-3	T; R23 Xi; R41 R53	T R: 23-41-53 S: (1/2-)26-37/39-45-61		
042-003-00-X	tetrakis(trimethylhexadecylammonium) hexa-μ-oxotetra-μ3-oxodi-μ5-oxotetradecaooctamolybdate(4-)	404-860-1	116810-46-9	F; R11 Xi; R41 N; R50-53	F; Xi; N R: 11-41-50/53 S: (2-)26-39-60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
042-004-00-5	Reaction product of ammonium molybdate and C <sub>12</sub> -C <sub>24</sub> -diethoxylated alkylamine (1:5-1:3)	412-780-3	—	Xi; R38 R43 N; R51-53	Xi; N R: 38-43-51/53 S: 24/25-37-61		
047-001-00-2	silver nitrate	231-853-9	7761-88-8	⊗ C; R34 N; R50-53	C; N R: 34-50/53 S: (1/2-)26-45-60-61		
048-001-00-5	cadmium compounds, with the exception of cadmium sulphoselenide (xCdS.yCdSe), reaction mass of cadmium sulphide with zinc sulphide (xCdS.yZnS), reaction mass of cadmium sulphide with mercury sulphide (xCdS.yHgS), and those specified elsewhere in this Annex	—	—	Xn; R20/21/22 N; R50-53	Xn; N R: 20/21/22-50/53 S: (2-)60-61	Xn; R20/21/22: C ≥ 0,1 %	A 1
048-002-00-0	cadmium (non-pyrophoric); [1] cadmium oxide (non-pyrophoric) [2]	231-152-8 [1] 215-146-2 [2]	7440-43-9 [1] 1306-19-0 [2]	Carc. Cat. 2; R45 Muta. Cat. 3; R68 Repr. Cat. 3; R62-63 T+; R26 T; R48/23/25 N; R50-53	T+; N R: 45-26-48/23/25-62-63-68-50/53 S: 53-45-60-61		E
048-003-00-6	cadmium diformate; cadmiumformate	224-729-0	4464-23-7	T; R23/25 R33 Xn; R68 N; R50-53	T; N R: 23/25-33-68-50/53 S: (1/2-)22-45-60-61	T; R23/25: C ≥ 10 % Xn; R20/22: 0,25 % ≤ C < 10 % R33: C ≥ 0,25 %	
048-004-00-1	cadmium cyanide	208-829-1	542-83-6	T+; R26/27/28 R32 R33 Xn; R68 N; R50-53	T+; N R: 26/27/28-32-33-68-50/53 S: (1/2-)7-28-29-45-60-61	R32: C ≥ 1 % R33: C ≥ 0,1 %	
048-005-00-7	cadmiumhexafluorosilicate(2-); cadmium fluorosilica	241-084-0	17010-21-8	T; R23/25 R33 Xn; R68 N; R50-53	T; N R: 23/25-33-68-50/53 S: (1/2-)22-45-60-61	T; R23/25: C ≥ 10 % Xn; R20/22: 0,1 % ≤ C < 10 % R33: C ≥ 0,1 %	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
048-006-00-2	cadmium fluoride	232-222-0	7790-79-6	Carc. Cat. 2; R45 Muta. Cat. 2; R46 Repr. Cat. 2; R60-61 T+; R26 T; R25-48/ 23/25 N; R50-53	T+; N R: 45-46-60-61-25- 26-48/23/25-50/53 S: 53-45-60-61	Carc. Cat. 2; R45: C ≥ 0,01 % T; R25: C ≥ 10 % Xn; R22: 0,1 % ≤ C < 10 % T; R48/23/25: C ≥ 7 % Xn; R48/20/22: 0,1 % ≤ C < 7 %	E
048-007-00-8	cadmium iodide	232-223-6	7790-80-9	T; R23/25 R33 Xn; R68 N; R50-53	T; N R: 23/25-33-68-50/ 53 S: (1/2-)22-45-60-61	T; R23/25: C ≥ 10 % Xn; R20/22: 0.1 % ≤ C < 10 % R33: C ≥ 0.1 %	
048-008-00-3	cadmium chloride	233-296-7	10108-64-2	Carc. Cat. 2; R45 Muta. Cat. 2; R46 Repr. Cat. 2; R60-61 T+; R26 T; R25-48/ 23/25 N; R50-53	T+; N R: 45-46-60-61-25- 26-48/23/25-50/53 S: 53-45-60-61	Carc. Cat. 2; R45: C ≥ 0,01 % T; R25: C ≥ 10 % Xn; R22: 0,1 % ≤ C < 10 % T; R48/23/25: C ≥ 7 % Xn; R48/20/22: 0,1 % ≤ C < 7 %	E
048-009-00-9	cadmium sulphate	233-331-6	10124-36-4	Carc. Cat. 2; R45 Muta. Cat. 2; R46 Repr. Cat. 2; R60-61 T+; R26 T; R25-48/ 23/25 N; R50-53	T+; N R: 45-46-60-61-25- 26-48/23/25-50/53 S: 53-45-60-61	Carc. Cat. 2; R45: C ≥ 0,01 % T; R25: C ≥ 10 % Xn; R22: 0,1 % ≤ C < 10 % T; R48/23/25: C ≥ 7 % Xn; R48/20/22: 0,1 % ≤ C < 7 %	E



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
048-010-00-4	cadmium sulphide	215-147-8	1306-23-6	Carc. Cat. 2; R45 Muta. Cat. 3; R68 Repr. Cat. 3; R62-63 T; R48/23/25 Xn; R22 R53	T; R: 45-22-48/23/25- 62-63-68-53 S: 53-45-61	Xn; R22: C ≥ 10 % T; R48/23/25: C ≥ 10 % Xn; R48/20/22: 0,1 % ≤ C < 10 %	E 1
048-011-00-X	cadmium (pyrophoric)	231-152-8	7440-43-9	F; R17 Carc. Cat. 2; R45 Muta. Cat. 3; R68 Repr. Cat. 3; R62-63 T+; R26 T; R48/23/25 N; R50-53	F; T+; N R: 45-17-26-48/23/ 25-62-63-68-50/53 S: 53-45-7/8-43-60- 61		E
050-001-00-5	tin tetrachloride; stannic chloride	231-588-9	7646-78-8	C; R34 R52-53	C R: 34-52/53 S: (1/2-)7/8-26-45-61	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	
050-002-00-0	cyhexatin (ISO); hydroxytricyclohexylstannane; tri(cyclohexyl)tin hydroxide	236-049-1	13121-70-5	Xn; R20/21/ 22 N; R50-53	Xn; N R: 20/21/22-50/53 S: (2-)13-60-61		
050-003-00-6	fentin acetate (ISO); triphenyltin acetate	212-984-0	900-95-8	Carc. Cat. 3; R40 Repr. Cat. 3; R63 T+; R26 T; R24/25- 48/23 Xi; R37/38- 41 N; R50-53	T+; N R: 24/25-26-37/38- 40-41-48/23-50/53- 63 S: (1/2-)26-28-36/37/ 39-45-60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
050-004-00-1	fentinydroxide (ISO); triphenyltin hydroxide	200-990-6	76-87-9	Carc. Cat. 3; R40 Repr. Cat. 3; R63 T+; R26 T; R24/25- 48/23 Xi; R37/38- 41 N; R50-53	T+; N R: 24/25-26-37/38- 40-41-48/23-50/53- 63 S: (1/2-)26-28-36/37/ 39-45-60-61		
050-005-00-7	trimethyltin compounds, with the exception of those specified elsewhere in this Annex	—	—	T+; R26/27/ 28 N; R50-53	T+; N R: 26/27/28-50/53 S: (1/2-)26-27-28-45- 60-61	T+; R26/27/28: C ≥ 0,5 % T; R23/24/25: 0,1 % ≤ C < 0,5 % Xn; R20/21/22: 0,05 % ≤ C < 0,1 %	A 1
050-006-00-2	triethyltin compounds, with the exception of those specified elsewhere in this Annex	—	—	T+; R26/27/ 28 N; R50-53	T+; N R: 26/27/28-50/53 S: (1/2-)26-27-28-45- 60-61	T+; R26/27/28: C ≥ 0,5 % T; R23/24/25: 0,1 % ≤ C < 0,5 % Xn; R20/21/22: 0,05 % ≤ C < 0,1 %	A 1
050-007-00-8	tripropyltin compounds, with the exception of those specified elsewhere in this Annex	—	—	T; R23/24/25 N; R50-53	T; N R: 23/24/25-50/53 S: (1/2-)26-27-28-45- 60-61	T; R23/24/25: C ≥ 0,5 % Xn; R20/21/22: 0,1 % ≤ C < 0,5 %	A 1
050-008-00-3	tributyltin compounds, with the exception of those specified elsewhere in this Annex	—	—	T; R25-48/ 23/25 Xn; R21 Xi; R36/38 N; R50-53	T; N R: 21-25-36/38-48/ 23/25-50/53 S: (1/2-)35-36/37/39- 45-60-61	T; R25: C ≥ 1 % Xn; R22: 0,25 % ≤ C < 1 % T; R48/23/25: C ≥ 1 % Xn; R48/20/22: 0,25 % ≤ C < 1 % Xn; R21: C ≥ 1 % Xi; R36/38: C ≥ 1 %	A 1
050-009-00-9	fluorotripentylstannane; [1] hexapentylstannoxane [2]	243-546-7 [1] 247-143-7 [2]	20153-49-5 [1] 25637-27-8 [2]	Xn; R20/21/ 22 N; R50-53	Xn; N R: 20/21/22-50/53 S: (2-)26-28-60-61	Xn; R20/21/22: C ≥ 1 %	1
050-010-00-4	fluorotrihexylstannane	243-547-2	20153-50-8	Xn; R20/21/ 22 N; R50-53	Xn; N R: 20/21/22-50/53 S: (2-)26-28-60-61	Xn; R20/21/22: C ≥ 1 %	1

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
050-011-00-X	triphenyltin compounds, with the exception of those specified elsewhere in this Annex	—	—	T; R23/24/25 N; R50-53	T; N R: 23/24/25-50/53 S: (1/2-)26-27-28-45-60-61	T; R23/24/25: C ≥ 1 % Xn; R20/21/22: 0,25 % ≤ C < 1 %	A 1
050-012-00-5	tetracyclohexylstannane; [1] chlorotricyclohexylstannane; [2] butyltricyclohexylstannane [3]	215-910-5 [1] 221-437-5 [2] 230-358-5 [3]	1449-55-4 [1] 3091-32-5 [2] 7067-44-9 [3]	Xn; R20/21/22 N; R50-53	Xn; N R: 20/21/22-50/53 S: (2-)26-28-60-61	Xn; R20/21/22: C ≥ 1 %	A 1
050-013-00-0	triocetyl tin compounds, with the exception of those specified elsewhere in this Annex	—	—	Xi; R36/37/38 R53	Xi R: 36/37/38-53 S: (2-)61	Xi; R36/37/38: C ≥ 1 %	A 1
050-017-00-2	fenbutatin oxide (ISO); bis(tris(2-methyl-2-phenylpropyl)tin)oxide	236-407-7	13356-08-6	T+; R26 Xi; R36/38 N; R50-53	T+; N R: 26-36/38-50/53 S: (1/2-)28-36/37-45-60-61		
050-018-00-8	tin(II) methanesulphonate	401-640-7	53408-94-9	C; R34 Xn; R22 R43	C R: 22-34-43 S: (1/2-)22-26-36/37/39-45		
050-019-00-3	azocyclotin (ISO); 1-(tricyclohexylstannyl)-1H-1,2,4-triazole;	255-209-1	41083-11-8	T+; R26 T; R25 Xi; R37/38-41 N; R50-53	T+; N R: 25-26-37/38-41-50/53 S: (1/2-)26-28-36/37/39-38-45-60-61		
050-020-00-9	triocetyl stannane	413-320-4	869-59-0	T; R48/25 Xi; R38 R53	T R: 38-48/25-53 S: (1/2-)23-36/37-45-61		
051-001-00-8	antimony trichloride	233-047-2	10025-91-9	C; R34 N; R51-53	C; N R: 34-51/53 S: (1/2-)26-45-61	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	
051-002-00-3	antimony pentachloride	231-601-8	7647-18-9	C; R34 N; R51-53	C; N R: 34-51/53 S: (1/2-)26-45-61	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
051-003-00-9	antimony compounds, with the exception of the tetroxide (Sb <sub>2</sub> O <sub>4</sub> ), pentoxide (Sb <sub>2</sub> O <sub>5</sub> ), trisulphide (Sb <sub>2</sub> S <sub>3</sub> ), pentasulphide (Sb <sub>2</sub> S <sub>5</sub> ) and those specified elsewhere in this Annex	—	—	Xn; R20/22 N; R51-53	Xn; N R: 20/22-51/53 S: (2-)61	Xn; R20/22: C ≥ 0,25 %	A 1
051-004-00-4	antimony trifluoride	232-009-2	7783-56-4	T; R23/24/25 N; R51-53	T; N R: 23/24/25-51/53 S: (1/2-)7-26-45-61		
051-005-00-X	antimony trioxide	215-175-0	1309-64-4	Carc. Cat. 3; R40	Xn R: 40 S: (2-)22-36/37		
051-006-00-5	diphenyl(4-phenylthiophenyl)sulfonium hexafluoroantimonate	403-500-0	—	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		
051-007-00-0	bis(4-dodecylphenyl)iodonium hexafluoroantimonate	404-420-9	71786-70-4	R43 R52-53	Xi R: 43-52/53 S: (2-)24-37-61		
053-001-00-3	iodine	231-442-4	7553-56-2	Xn; R20/21 N; R50	Xn; N R: 20/21-50 S: (2-)23-25-61		
053-002-00-9	hydrogen iodide	233-109-9	10034-85-2	C; R35	C R: 35 S: (1/2-)9-26-36/37/ 39-45	C; R35: C ≥ 10 % C; R34: 0,2 % ≤ C < 10 % Xi; R36/37/38: 0,02 % ≤ C < 0,2 %	5
053-002-01-6	hydriodic acid ... %	—	—	C; R34	C R: 34 S: (1/2-)26-45	C; R34: C ≥ 25 % Xi; R36/38: 10 % ≤ C < 25 %	B
053-003-00-4	iodoxybenzene	—	696-33-3	E; R1 ⊗	E R: 1 S: (2-)35		
053-004-00-X	calcium iodoxybenzoate	—	—	E; R1 ⊗	E R: 1 S: (2-)35		C

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
053-005-00-5	(4-(1-methylethyl)phenyl)-(4-methylphenyl)iodonium tetrakis (pentafluorophenyl)borate (1-)	422-960-3	178233-72-2	Xn; R21/22-48/22 N; R50-53	Xn; N R: 21/22-48/22-50/53 S: (2-)22-36/37-60-61		
056-001-00-1	barium peroxide	215-128-4	1304-29-6	O; R8 Xn; R20/22	O; Xn R: 8-20/22 S: (2-)13-27		
056-002-00-7	barium salts, with the exception of barium sulphate, salts of 1-azo-2-hydroxynaphthalenyl aryl sulphonic acid, and of salts specified elsewhere in this Annex	—	—	Xn; R20/22	Xn R: 20/22 S: (2-)28	Xn; R20/22: C ≥ 1 %	A 1
056-003-00-2	barium carbonate	208-167-3	513-77-9	Xn; R22	Xn R: 22 S: (2-)24/25		
056-004-00-8	barium chloride	233-788-1	10361-37-2	T; R25 Xn; R20	T R: 20-25 S: (1/2-)45		
072-001-00-4	hafnium tetra- <i>n</i> -butoxide	411-740-2	22411-22-9	Xi; R41 R43	Xi R: 41-43 S: (2-)24/25-26-37/39		
074-001-00-X	hexasodium tungstate hydrate	412-770-9	12141-67-2	Xn; R22 Xi; R41 R52-53	Xn R: 22-41-52/53 S: (2-)22-26-39-61		
074-002-00-5	Reaction products of tungsten hexachloride with 2-methylpropan-2-ol, nonylphenol and pentane-2,4-dione	408-250-6	—	F; R11 Xn; R20 C; R34 R43 N; R50-53	F; C; N R: 11-20-34-43-50/53 S: (1/2-)16-26-29-33-36/37/39-45-60-61		
076-001-00-5	osmium tetroxide; osmic acid	244-058-7	20816-12-0	T+; R26/27/28 C; R34	T+ R: 26/27/28-34 S: (1/2-)7/9-26-45		
078-001-00-0	tetrachloroplatinates with the exception of those specified elsewhere in this Annex	—	—	T; R25 Xi; R41 R42/43	T R: 25-41-42/43 S: (2-)22-26-36/37/39-45		A

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
078-002-00-6	diammonium tetrachloroplatinate	237-499-1	13820-41-2	T; R25 Xi; R38-41 R42/43	T R: 25-38-41-42/43 S: (2-)22-26-36/37/ 39-45		
078-003-00-1	disodium tetrachloroplatinate	233-051-4	10026-00-3	T; R25 Xi; R38-41 R42/43	T R: 25-38-41-42/43 S: (2-)22-26-36/37/ 39-45		
078-004-00-7	dipotassium tetrachloroplatinate	233-050-9	10025-99-7	T; R25 Xi; R38-41 R42/43	T R: 25-38-41-42/43 S: (2-)22-26-36/37/ 39-45		
078-005-00-2	hexachloroplatinates with the exception of those specified elsewhere in this Annex	—	—	T; R25 Xi; R41 R42/43	T R: 25-41-42/43 S: (1/2-)22-26-36/37/ 39-45		A
078-006-00-8	disodium hexachloroplatinate	240-983-5	16923-58-3	T; R25 Xi; R41 R42/43	T R: 25-41-42/43 S: (1/2-)22-26-36/37/ 39-45		
078-007-00-3	dipotassium hexachloroplatinate	240-979-3	16921-30-5	T; R25 Xi; R41 R42/43	T R: 25-41-42/43 S: (1/2-)22-26-36/37/ 39-45		
078-008-00-9	diammonium hexachloroplatinate	240-973-0	16919-58-7	T; R25 Xi; R41 R42/43	T R: 25-41-42/43 S: (1/2-)22-26-36/37/ 39-45		
078-009-00-4	hexachloroplatinic acid	241-010-7	16941-12-1	T; R25 C; R34 R42/43	T R: 25-34-42/43 S: (1/2-)22-26-36/37/ 39-45		
080-001-00-0	mercury	231-106-7	7439-97-6	T; R23 R33 N; R50-53	T; N R: 23-33-50/53 S: (1/2-)7-45-60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
080-002-00-6	inorganic compounds of mercury with the exception of mercuric sulphide and those specified elsewhere in this Annex	—	—	T+; R26/27/28 R33 N; R50-53	T+; N R: 26/27/28-33-50/53 S: (1/2-)13-28-45-60-61	T+; R26/27/28: C ≥ 2 % T; R23/24/25: 0,5 % ≤ C < 2 % Xn; R20/21/22: 0,1 % ≤ C < 0,5 % R33: C ≥ 0,1 %	A 1
080-003-00-1	dimercury dichloride; mercurous chloride; calomel	233-307-5	10112-91-1	Xn; R22 Xi; R36/37/38 N; R50-53	Xn; N R: 22-36/37/38-50/53 S: (2-)13-24/25-46-60-61		
080-004-00-7	organic compounds of mercury with the exception of those specified elsewhere in this Annex	—	—	T+; R26/27/28 R33 N; R50-53	T+; N R: 26/27/28-33-50/53 S: (1/2-)13-28-36-45-60-61	T+; R26/27/28: C ≥ 2 % T; R23/24/25: 0,5 % ≤ C < 2 % Xn; R20/21/22: 0,05 % ≤ C < 0,5 % R33: C ≥ 0,05 %	A 1
080-005-00-2	mercury difulminate; mercuric fulminate; fulminate of mercury	211-057-8	628-86-4	E; R3 T; R23/24/25 R33 N; R50-53	E; T; N R: 3-23/24/25-33-50/53 S: (1/2-)3 — 45-60-61		
080-006-00-8	dimercury dicyanide oxide; mercuric oxycyanide	215-629-8	1335-31-5	E; R3 ⊗ T; R23/24/25 R33 N; R50-53	E; T; N R: 3-23/24/25-33-50/53 S: (1/2-)28-35-45-60-61		
080-007-00-3	dimethylmercury; [1] diethylmercury [2]	209-805-3 [1] 211-000-7 [2]	593-74-8 [1] 627-44-1 [2]	T+; R26/27/28 R33 N; R50-53	T+; N R: 26/27/28-33-50/53 S: (1/2-)13-28-36-45-60-61	T+; R26/27/28: C ≥ 0,5 % T; R23/24/25: 0,1 % ≤ C < 0,5 % Xn; R20/21/22: 0,05 % ≤ C < 0,1 % R33: C ≥ 0,05 %	1
080-008-00-9	phenylmercury nitrate; [1] phenylmercury hydroxide; [2] basic phenylmercury nitrate [3]	200-242-9 [1] 202-866-7 [2] - [3]	55-68-5 [1] 100-57-2 [2] 8003-05-2 [3]	T; R25-48/24/25 C; R34 N; R50-53	T; N R: 25-34-48/24/25-50/53 S: (1/2-)23-24/25-37-45-60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
080-009-00-4	2-methoxyethylmercury chloride	204-659-7	123-88-6	T; R25-48/25 C; R34 N; R50-53	T; N R: 25-34-48/25-50/53 S: (1/2-)36/37/39-45-60-61		
080-010-00-X	mercury dichloride; mercuric chloride	231-299-8	7487-94-7	T+; R28 T; R48/24/25 C; R34 N; R50-53	T+; N R: 28-34-48/24/25-50/53 S: (1/2-)36/37/39-45-60-61		
080-011-00-5	phenylmercury acetate	200-532-5	62-38-4	T; R25-48/ 24/25 C; R34 N; R50-53	T; N R: 25-34-48/24/25-50/53 S: (1/2-)23-24/25-37-45-60-61		
081-001-00-3	thallium	231-138-1	7440-28-0	T+; R26/28 R33 R53	T+ R: 26/28-33-53 S: (1/2-)13-28-45-61		
081-002-00-9	thallium compounds, with the exception of those specified elsewhere in this Annex	—	—	T+; R26/28 R33 N; R51-53	T+; N R: 26/28-33-51/53 S: (1/2-)13-28-45-61		A
081-003-00-4	dithallium sulphate; thallic sulphate	231-201-3	7446-18-6	T+; R28 T; R48/25 Xi; R38 N; R51-53	T+; N R: 28-38-48/25-51/53 S: (1/2-)13-36/37-45-61		
082-001-00-6	lead compounds with the exception of those specified elsewhere in this Annex	—	—	Repr. Cat. 1; R61 Repr. Cat. 3; R62 Xn; R20/22 R33 N; R50-53	T; N R: 61-20/22-33-62-50/53 S: 53-45-60-61	Repr. Cat. 3; R62: C ≥ 2,5 % Xn; R20/22: C ≥ 1 % R33: C ≥ 0,5 %	AE 1



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
082-002-00-1	lead alkyls	—	—	Repr. Cat. 1; R61 Repr. Cat. 3; R62 T+; R26/27/ 28 R33 N; R50-53	T+; N R: 61-26/27/28-33- 62-50/53 S: 53-45-60-61	Repr. Cat. 1; R61: C ≥ 0,1 % T+; R26/27/28: C ≥ 0,25 % T; R23/24/25: 0,1 % ≤ C < 0,25 % Xn; R20/21/22: 0,05 % ≤ C < 0,1 % R33: C ≥ 0,05 %	AE 1
082-003-00-7	lead diazide; lead azide	236-542-1	13424-46-9	E; R3 Repr. Cat. 1; R61 Repr. Cat. 3; R62 Xn; R20/22 R33 N; R50-53	E; T; N R: 61-3-20/22-33-50/ 53-62 S: 53-45-60-61		E 1
082-004-00-2	lead chromate	231-846-0	7758-97-6	Carc. Cat. 3; R40 Repr. Cat. 1; R61 Repr. Cat. 3; R62 R33 N; R50-53	T; N R: 61-33-40-50/53- 62 S: 53-45-60-61		1
082-005-00-8	lead di(acetate)	206-104-4	301-04-2	Repr. Cat. 1; R61 Repr. Cat. 3; R62 Xn; R48/22 R33 N; R50-53	T; N R: 61-33-48/22-50/ 53-62 S: 53-45-60-61		E 1
082-006-00-3	trilead bis(orthophosphate)	231-205-5	7446-27-7	Repr. Cat. 1; R61 Repr. Cat. 3; R62 Xn; R48/22 R33 N; R50-53	T; N R: 61-33-48/22-50/ 53-62 S: 53-45-60-61		E 1

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
082-007-00-9	lead acetate, basic;	215-630-3	1335-32-6	Carc. Cat. 3; R40 Repr. Cat. 1; R61 Repr. Cat. 3; R62 Xn; R48/22 R33 N; R50-53	T; N R: 61-33-40-48/22-50/53-62 S: 53-45-60-61		E 1
082-008-00-4	lead(II) methanesulphonate	401-750-5	17570-76-2	Repr. Cat. 1; R61 Repr. Cat. 3; R62 Xn; R20/22-48/20/22 Xi; R38-41 N; R58 R33	T; N R: 61-62-20/22-33-38-41-48/20/22-58 S: 53-45-57-61		E 1
082-009-00-X	Lead sulfochromate yellow; C.I. Pigment Yellow 34; [This substance is identified in the Colour Index by Colour Index Constitution Number, C.I. 77603.]	215-693-7	1344-37-2	Carc. Cat. 3; R40 Repr. Cat. 1; R61 Repr. Cat. 3; R62 R33 N; R50-53	T; N R: 61-33-40-50/53-62 S: 53-45-60-61		1
082-010-00-5	Lead chromate molybdate sulfate red; C.I. Pigment Red 104; [This substance is identified in the Colour Index by Colour Index Constitution Number, C.I. 77605.]	235-759-9	12656-85-8	Carc. Cat. 3; R40 Repr. Cat. 1; R61 Repr. Cat. 3; R62 R33 N; R50-53	T; N R: 61-33-40-50/53-62 S: 53-45-60-61		1

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
082-011-00-0	lead hydrogen arsenate	232-064-2	7784-40-9	Carc. Cat. 1; R45 Repr. Cat. 1; R61 Repr. Cat. 3; R62 T; R23/25 R33 N; R50-53	T; N R: 45-61-23/25-33-50/53-62 S: 53-45-60-61		E 1
092-001-00-8	uranium	231-170-6	7440-61-1	T+; R26/28 R33 R53	T+ R: 26/28-33-53 S: (1/2-)20/21-45-61		
092-002-00-3	uranium compounds	—	—	T+; R26/28 R33 N; R51-53	T+; N R: 26/28-33-51/53 S: (1/2-)20/21-45-61		A
601-001-00-4	methane	200-812-7	74-82-8	F+; R12	F+ R: 12 S: (2-)9-16-33		
601-002-00-X	ethane	200-814-8	74-84-0	F+; R12	F+ R: 12 S: (2-)9-16-33		
601-003-00-5	propane	200-827-9	74-98-6	F+; R12	F+ R: 12 S: (2-)9-16		
601-004-00-0	butane; [1] and isobutane [2]	203-448-7 [1] 200-857-2 [2]	106-97-8 [1] 75-28-5 [2]	F+; R12	F+ R: 12 S: (2-)9-16		C
601-004-01-8	butane (containing $\geq$ 0.1 % butadiene (203-450-8)); [1] isobutane (containing $\geq$ 0.1 % butadiene (203-450-8)) [2]	203-448-7 [1] 200-857-2 [2]	106-97-8 [1] 75-28-5 [2]	F+; R12 Carc. Cat. 1; R45 Muta. Cat. 2; R46	F+; T R: 45-46-12 S: 53-45		CS
601-005-00-6	2,2-dimethylpropane; neopentane	207-343-7	463-82-1	F+; R12 N; R51-53	F+; N R: 12-51/53 S: (2-)9-16-33-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
601-006-00-1	pentane; [1] isopentane; 2-methylbutane [2]	203-692-4 [1] 201-142-8 [2]	109-66-0 [1] 78-78-4 [2]	F+; R12 Xn; R65 R66 R67 N; R51-53	F+; Xn; N R: 12-51/53-65-66- 67 S: (2-)9-16-29-33-61- 62		C
601-007-00-7	hexane, reaction mass of isomers (containing < 5 % <i>n</i> -hexane (203-777-6))	—	—	F; R11 Xn; R65 Xi; R38 R67 N; R51-53	F; Xn; N R: 11-38-51/53-65- 67 S: (2-)9-16-29-33-61- 62		C
601-008-00-2	heptane [and isomers] [1]	205-563-8 [1] 203-548-0 [2] 207-346-3 [3] 209-230-8 [4] 209-280-0 [5] 209-643-3 [6] 209-680-5 [7] 209-730-6 [8] 210-529-0 [9] 250-610-8 [10]	142-82-5 [1] 108-08-7 [2] 464-06-2 [3] 562-49-2 [4] 565-59-3 [5] 589-34-4 [6] 590-35-2 [7] 591-76-4 [8] 617-78-7 [9] 31394-54-4 [10]	F; R11 Xn; R65 Xi; R38 R67 N; R50-53	F; Xn; N R: 11-38-50/53-65- 67 S: (2-)9-16-29-33-60- 61-62		C

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
601-009-00-8	octane [and isomers] [1]	203-892-1 [1] 208-759-1 [2] 209-207-2 [3] 209-243-9 [4] 209-266-4 [5] 209-292-6 [6] 209-504-7 [7] 209-547-1 [8] 209-649-6 [9] 209-650-1 [10] 209-660-6 [11] 209-689-4 [12]	111-65-9 [1] 540-84-1 [2] 560-21-4 [3] 563-16-6 [4] 564-02-3 [5] 565-75-3 [6] 583-48-2 [7] 584-94-1 [8] 589-43-5 [9] 589-53-7 [10] 589-81-1 [11] 590-73-8 [12] 592-13-2 [13] 592-27-8 [14] 594-82-1 [15] 609-26-7 [16] 619-99-8 [17] 1067-08-9 [18] 26635-64-3 [19]	F; R11 Xn; R65 Xi; R38 R67 N; R50-53	F; Xn; N R: 11-38-50/53-65-67 S: (2-)9-16-29-33-60-61-62		C
		209-745-8 [13] 209-747-9 [14] 209-855-6 [15] 210-187-2 [16] 210-621-0 [17] 213-923-0 [18] 247-861-0 [19]					

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
601-010-00-3	ethylene	200-815-3	74-85-1	F+; R12 R67	F+ R: 12-67 S: (2-)9-16-33-45		
601-011-00-9	propene; propylene	204-062-1	115-07-1	F+; R12	F+ R: 12 S: (2-)9-16-33		
601-012-00-4	but-1-ene; [1] butene, mixed-1-and-2-isomers; [2] 2-methylpropene; [3] (Z)-but-2-ene; [4] (E)-but-2-ene [5]	203-449-2 [1] 203-452-9 [2] 204-066-3 [3] 209-673-7 [4] 210-855-3 [5]	106-98-9 [1] 107-01-7 [2] 115-11-7 [3] 590-18-1 [4] 624-64-6 [5]	F+; R12	F+ R: 12 S: (2-)9-16-33		C
601-013-00-X	1,3-butadiene; buta-1,3-diene	203-450-8	106-99-0	F+; R12 Carc. Cat. 1; R45 Muta. Cat. 2; R46	F+; T R: 45-46-12 S: 53-45		D
601-014-00-5	isoprene (stabilised) 2-methyl-1,3-butadiene	201-143-3	78-79-5	F+; R12 Carc. Cat. 2; R45 Muta. Cat. 3; R68 R52-53	F+; T R: 45-12-68-52/53 S: 53-45-61		D
601-015-00-0	acetylene; ethyne	200-816-9	74-86-2	R5 R6 F+; R12	F+ R: 5-6-12 S: (2-)9-16-33		
601-016-00-6	cyclopropane	200-847-8	75-19-4	F+; R12	F+ R: 12 S: (2-)9-16-33		
601-017-00-1	cyclohexane	203-806-2	110-82-7	F; R11 Xn; R65 Xi; R38 R67 N; R50-53	F; Xn; N R: 11-38-65-67-50/ 53 S: (2-)9-16-25-33-60- 61-62		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
601-018-00-7	methylcyclohexane	203-624-3	108-87-2	F; R11 Xn; R65 Xi; R38 R67 N; R51-53	F; Xn; N R: 11-38-51/53-65-67 S: (2-)9-16-33-61-62		
601-019-00-2	1,4-dimethylcyclohexane	209-663-2	589-90-2	F; R11 Xn; R65 Xi; R38 R67 N; R51-53	F; Xn; N R: 11-38-51/53-65-67 S: (2-)9-16-33-61-62		
601-020-00-8	benzene	200-753-7	71-43-2	F; R11 Carc. Cat. 1; R45 Muta. Cat. 2; R46 T; R48/23/ 24/25 Xn; R65 Xi; R36/38	F; T R: 45-46-11-36/38-48/23/24/25-65 S: 53-45		E
601-021-00-3	toluene	203-625-9	108-88-3	F; R11 Repr. Cat. 3; R63 Xn; R48/20-65 Xi; R38 R67	F; Xn R: 11-38-48/20-63-65-67 S: (2-)36/37-46-62		
601-022-00-9	<i>o</i> -xylene; [1] <i>p</i> -xylene; [2] <i>m</i> -xylene; [3] xylene [4]	202-422-2 [1] 203-396-5 [2] 203-576-3 [3] 215-535-7 [4]	95-47-6 [1] 106-42-3 [2] 108-38-3 [3] 1330-20-7 [4]	R10 Xn; R20/21 Xi; R38	Xn R: 10-20/21-38 S: (2-)25	Xn; R20/21: C ≥ 12,5 %	C
601-023-00-4	ethylbenzene	202-849-4	100-41-4	F; R11 Xn; R20	F; Xn R: 11-20 S: (2-)16-24/25-29		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
601-024-00-X	cumene; [1] propylbenzene [2]	202-704-5 [1] 203-132-9 [2]	98-82-8 [1] 103-65-1 [2]	R10 Xn; R65 Xi; R37 N; R51-53	Xn; N R: 10-37-51/53-65 S: (2-)24-37-61-62		C
601-025-00-5	mesitylene; 1,3,5-trimethylbenzene	203-604-4	108-67-8	R10 Xi; R37 N; R51-53	Xi; N R: 10-37-51/53 S: (2-)61	Xi; R37: C ≥ 25 %	
601-026-00-0	styrene	202-851-5	100-42-5	R10 Xn; R20 Xi; R36/38	Xn R: 10-20-36/38 S: (2-)23	Xn; R20: C ≥ 12,5 % Xi; R36/38: C ≥ 12,5 %	D
601-027-00-6	2-phenylpropene; α-methylstyrene	202-705-0	98-83-9	R10 Xi; R36/37 N; R51-53	Xi; N R: 10-36/37-51/53 S: (2-)61	Xi; R36/37: C ≥ 25 %	
601-028-00-1	2-methylstyrene; 2-vinylnoluen	210-256-7	611-15-4	Xn; R20 N; R51-53	Xn; N R: 20-51/53 S: (2-)24-61		
601-029-00-7	dipentene; limonene; [1] (R)-p-mentha-1,8-diene; d-limonene; [2] (S)-p-mentha-1,8-diene; l-limonene; [3] trans-1-methyl-4-(1-methylvinyl)cyclohexene; [4] (±)-1-methyl-4-(1-methylvinyl)cyclohexene [5]	205-341-0 [1] 227-813-5 [2] 5989-54-8 [3] 227-815-6 [3] 229-977-3 [4] 231-732-0 [5]	138-86-3 [1] 5989-27-5 [2] 5989-54-8 [3] 6876-12-6 [4] 7705-14-8 [5]	R10 Xi; R38 R43 N; R50-53	Xi; N R: 10-38-43-50/53 S: (2-)24-37-60-61		C
601-030-00-2	cyclopentane	206-016-6	287-92-3	F; R11 R52-53	F R: 11-52/53 S: (2-)9-16-29-33-61		
601-031-00-8	2,4,4-trimethylpent-1-ene	203-486-4	107-39-1	F; R11 N; R51-53	F; N R: 11-51/53 S: (2-)9-16-29-33-61		



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
601-032-00-3	benzo[a]pyrene; benzo[def]chrysene	200-028-5	50-32-8	Carc. Cat. 2; R45 Muta. Cat. 2; R46 Repr. Cat. 2; R60-61 R43 N; R50-53	T; N R: 45-46-60-61-43- 50/53 S: 53-45-60-61	Carc. Cat. 2; R45: C ≥ 0,01 %	
601-033-00-9	benz[a]anthracene	200-280-6	56-55-3	Carc. Cat. 2; R45 N; R50-53	T; N R: 45-50/53 S: 53-45-60-61		
601-034-00-4	benz[e]acephenanthrylene	205-911-9	205-99-2	Carc. Cat. 2; R45 N; R50-53	T; N R: 45-50/53 S: 53-45-60-61		
601-035-00-X	benzo[j]fluoranthene	205-910-3	205-82-3	Carc. Cat. 2; R45 N; R50-53	T; N R: 45-50/53 S: 53-45-60-61		
601-036-00-5	benzo[k]fluoranthene	205-916-6	207-08-9	Carc. Cat. 2; R45 N; R50-53	T; N R: 45-50/53 S: 53-45-60-61		
601-037-00-0	n-hexane	203-777-6	110-54-3	F; R11 Repr. Cat. 3; R62 Xn; R65-48/ 20 Xi; R38 R67 N; R51-53	F; Xn; N R: 11-38-48/20-62- 65-67-51/53 S: (2-)9-16-29-33-36/ 37-61-62	Xn; R48/20: C ≥ 5 %	
601-041-00-2	dibenz[a,h]anthracene	200-181-8	53-70-3	Carc. Cat. 2; R45 N; R50-53	T; N R: 45-50/53 S: 53-45-60-61	Carc. Cat. 2; R45: C ≥ 0,01 %	
601-042-00-8	biphenyl; diphenyl	202-163-5	92-52-4	Xi; R36/37/ 38 N; R50-53	Xi; N R: 36/37/38-50/53 S: (2-)23-60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
601-043-00-3	1,2,4-trimethylbenzene	202-436-9	95-63-6	R10 Xn; R20 Xi; R36/37/ 38 N; R51-53	Xn; N R: 10-20-36/37/38- 51/53 S: (2-)26-61		
601-044-00-9	3a,4,7,7a-tetrahydro-4,7-methanoindene	201-052-9	77-73-6	F; R11 Xn; R20/22 Xi; R36/37/ 38 N; R51-53	F; Xn; N R: 11-20/22-36/37/ 38-51/53 S: (2-)36/37-61		
601-045-00-4	1,2,3,4-tetrahydronaphthalene	204-340-2	119-64-2	R19 Xi; R36/38 N; R51-53	Xi; N R: 19-36/38-51/53 S: (2-)26-28-61		
601-046-00-X	7-methylocta-1,6-diene	404-210-7	42152-47-6	R10 N; R50-53	N R: 10-50/53 S: (2-)60-61		
601-047-00-5	<i>m</i> -mentha-1,3(8)-diene	404-150-1	17092-80-7	Xi; R38 N; R51-53	Xi; N R: 38-51/53 S: (2-)37-61		
601-048-00-0	chrysene	205-923-4	218-01-9	Carc. Cat. 2; R45 Muta. Cat. 3; R68 N; R50-53	T; N R: 45-68-50/53 S: 53-45-60-61		
601-049-00-6	benzo[e]pyrene	205-892-7	192-97-2	Carc. Cat. 2; R45 N; R50-53	T; N R: 45-50/53 S: 53-45-60-61		
601-051-00-7	4-phenylbut-1-ene	405-980-7	768-56-9	Xi; R38 N; R51-53	Xi; N R: 38-51/53 S: (2-)37-61		
601-052-00-2	naphthalene	202-049-5	91-20-3	Carc. Cat. 3; R40 Xn; R22 N; R50-53	Xn; N R: 22-40-50/53 S: (2-)36/37-46-60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
601-053-00-8	nonylphenol; [1] 4-nonylphenol, branched [2]	246-672-0 [1] 284-325-5 [2]	25154-52-3 [1] 84852-15-3 [2]	Repr. Cat. 3; R62-63 Xn; R22 C; R34 N; R50-53	C; N R: 22-34-62-63-50/ 53 S: (1/2-)26-36/37/39- 45-46-60-61		
601-054-00-3	reaction mass of isomers of: dibenzylbenzene; dibenzyl(methyl)benzene; dibenzyl(dimethyl)benzene; dibenzyl(trimethyl)benzene	405-570-8	—	N; R50-53	N R: 50/53 S: 60-61		
601-055-00-9	reaction mass of isomers of: mono-(2-tetradecyl)naphthalenes; di-(2-tetradecyl)naphthalenes; tri-(2-tetradecyl)naphthalenes	410-190-0	132983-41-6	Xi; R36 R53	Xi R: 36-53 S: (2-)26-61		
601-056-00-4	reaction mass of isomers of: methyldiphenylmethane; dimethyldiphenylmethane	405-470-4	73807-39-3	Xi; R38 N; R50-53	Xi; N R: 38-50/53 S: (2-)37-60-61		
601-057-00-X	N-dodecyl-[3-(4-(dimethylamino)benzamido)-propyl]dime- thylammonium tosylate	421-130-8	156679-41-3	Xi; R41 R43 N; R50-53	Xi; N R: 41-43-50/53 S: (2-)24-26-37/39- 60-61		
601-058-00-5	di-L-para-menthene	417-870-6	83648-84-4	Xi; R38 R43 N; R50-53	Xi; N R: 38-43-50/53 S: (2-)23-24-37-60- 61		
601-059-00-0	methyl 2-benzylidene-3-oxobutyrate	420-940-9	15768-07-7	Xi; R36/38 N; R51-53	Xi; N R: 36/38-51/53 S: (2-)26-37/39-61		
601-060-00-6	1,2-bis[4-fluoro-6-(4-sulfo-5-(2-(4-sulfonaphtalene-3-ylazo)- 1-hydroxy-3,6-disulfo-8-aminonaphthalene-7-ylazo)phenyla- mino)-1,3,5-triazin-2ylamino]ethane; x-sodium, y-potassium salts x = 7,755 y = 0,245	417-610-1	155522-09-1	R43	Xi R: 43 S: (2-)22-24-37		
601-061-00-1	(ethyl-1,2-ethanediy)[2-[[[(2-hydroxyethyl)methylamino]ace- tyl]-propyl]ω-(nonylphenoxy)poly]oxy-(methyl-1,2-ethane- diyl)	418-960-8	—	C; R34 R43 N; R51-53	C; N R: 34-43-51/53 S: (1/2-)26-28-36/37/ 39-45-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
601-062-00-7	reaction mass of: branched triacontane; branched dotriacontane; branched tetratriacontane; branched hexatriacontane	417-030-9	151006-59-6	R53	R: 53 S: 61		
601-063-00-2	reaction mass of isomers of branched tetracosane	417-060-2	151006-61-0	Xn; R20 R53	Xn R: 20-53 S: (2-)61		
601-064-00-8	branched hexatriacontane	417-070-7	151006-62-1	R53	R: 53 S: 61		
601-065-00-3	reaction mass of: (1'- $\alpha$ ,3'- $\alpha$ ,6'- $\alpha$ -2,2,3',7',7'-pentamethylspiro(1,3-dioxane-5,2'-norcarane); (1' $\alpha$ ,3' $\beta$ ,6' $\alpha$ )-2,2,3',7',7'-pentamethylspiro(1,3-dioxane-5,2'-norcarane)	416-930-9	—	Xn; R48/22 Xi; R41 N; R51-53	Xn; N R: 41-48/22-51/53 S: (2-)22-26-37/39-61		
601-066-00-9	1-(4-( <i>trans</i> -4-heptylcyclohexyl)phenyl)ethanone	426-820-2	78531-60-9	R43 R53	Xi R: 43-53 S: (2-)24-37-61		
601-067-00-4	triethyl arsenate	427-700-2	15606-95-8	Carc. Cat. 1; R45 T; R23/25 N; R50-53	T; N R: 45-23/25-50/53 S: 53-45-60-61		E
601-068-00-X	1,2-diacetoxybut-3-ene	421-720-5	18085-02-4	Xn; R22	Xn R: 22 S: (2-)		
601-069-00-5	2-ethyl-1-(2-(1,3-dioxanyl)ethyl)-pyridinium bromide	422-680-1	287933-44-2	R52-53	R: 52/53 S: 61		
601-071-00-6	1-dimethoxymethyl-2-nitro-benzene	423-830-9	20627-73-0	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
601-073-00-7	1-bromo-3,5-difluorobenzene	416-710-2	461-96-1	R10 Xn; R22-48/ 22 Xi; R38 R43 N; R50-53	Xn; N R: 10-22-38-43-48/ 22-50/53 S: (2-)24-36/37-60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
601-074-00-2	reaction mass of: 4-(2,2,3-trimethylcyclopent-3-en-1-yl)-1-methyl-2-oxabicyclo[2.2.2]octane; 1-(2,2,3-trimethylcyclopent-3-en-1-yl)-5-methyl-6-oxabicyclo[3.2.1]octane; spiro[cyclohex-3-en-1-yl-[(4,5,6,6a-tetrahydro-3,6',6',6'a-tetramethyl)-1,3'(3'aH)-[2H]cyclopenta[b]furan]; spiro[cyclohex-3-en-1-yl-[4,5,6,6a-tetrahydro-4,6',6',6'a-tetramethyl)-1,3'(3'aH)-[2H]cyclopenta[b]furan]	422-040-1	—	Xi; R36/38 N; R51-53	Xi; N R: 36/38-51/53 S: (2-)26-37-61		
602-001-00-7	chloromethane; methyl chloride	200-817-4	74-87-3	F+; R12 Carc. Cat. 3; R40 Xn; R48/20	F+; Xn R: 12-40-48/20 S: (2-)9-16-33		
602-002-00-2	bromomethane; methylbromide	200-813-2	74-83-9	Muta. Cat. 3; R68 T; R23/25 Xn; R48/20 Xi; R36/37/ 38 N; R50 N; R59	T; N R: 23/25-36/37/38- 48/20-50-59-68 S: (1/2-)15-27-36/39- 38-45-59-61		
602-003-00-8	dibromomethane	200-824-2	74-95-3	Xn; R20 R52-53	Xn R: 20-52/53 S: (2-)24-61	Xn; R20: C ≥ 12,5 %	
602-004-00-3	dichloromethane; methylene chloride	200-838-9	75-09-2	Carc. Cat. 3; R40	Xn R: 40 S: (2-)23-24/25-36/37		
602-005-00-9	methyl iodide; iodomethane	200-819-5	74-88-4	Carc. Cat. 3; R40 Xn; R21 T; R23/25 Xi; R37/38	T R: 21-23/25-37/38- 40 S: (1/2-)36/37-38-45		
602-006-00-4	trichloromethane; chloroform	200-663-8	67-66-3	Xn; R22-48/ 20/22 Xi; R38 Carc. Cat. 3; R40	Xn R: 22-38-40-48/20/ 22 S: (2-)36/37	Xn; R22: C ≥ 5 % Xn; R48/20/22: C ≥ 5 %	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
602-007-00-X	bromoform; tribromomethane	200-854-6	75-25-2	T; R23 Xi; R36/38 N; R51-53	T; N R: 23-36/38-51/53 S: (1/2-)28-45-61		
602-008-00-5	carbon tetrachloride; tetrachloromethane	200-262-8	56-23-5	Carc. Cat. 3; R40 T; R23/24/ 25-48/23 N; R59 R52-53	T; N R: 23/24/25-40-48/ 23-59-52/53 S: (1/2-)23-36/37-45- 59-61	T; R23/24/25: C ≥ 1 % Xn; R20/21/22: 0,2 % ≤ C < 1 % T; R48/23: C ≥ 1 % Xn; R48/20: 0,2 % ≤ C < 1 %	
602-009-00-0	chloroethane	200-830-5	75-00-3	F+; R12 Carc. Cat. 3; R40 R52-53	F+; Xn R: 12-40-52/53 S: (2-)9-16-33-36/37- 61		
602-010-00-6	1,2-dibromoethane	203-444-5	106-93-4	Carc. Cat. 2; R45 T; R23/24/25 Xi; R36/37/ 38 N; R51-53	T; N R: 45-23/24/25-36/ 37/38-51/53 S: 53-45-61	T; R23/24/25: C ≥ 1 % Xn; R20/21/22: 0,1 % ≤ C < 1 %	E
602-011-00-1	1,1-dichloroethane	200-863-5	75-34-3	F; R11 Xn; R22 Xi; R36/37 R52-53	F; Xn R: 11-22-36/37-52/ 53 S: (2-)16-23-61	Xn; R22: C ≥ 12,5 %	
602-012-00-7	1,2-dichloroethane; ethylene dichloride	203-458-1	107-06-2	F; R11 Carc. Cat. 2; R45 Xn; R22 Xi; R36/37/ 38	F; T R: 45-11-22-36/37/ 38 S: 53-45		E
602-013-00-2	1,1,1-trichloroethane; methyl chloroform	200-756-3	71-55-6	Xn; R20 N; R59	Xn; N R: 20-59 S: (2-)24/25-59-61		F
602-014-00-8	1,1,2-trichloroethane	201-166-9	79-00-5	Carc. Cat. 3; R40 Xn; R20/21/ 22 R66	Xn R: 20/21/22-40-66 S: (2-)9-36/37-46	Xn; R20/21/22: C ≥ 5 %	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
602-015-00-3	1,1,2,2-tetrachloroethane	201-197-8	79-34-5	T+; R26/27 N; R51-53	T+; N R: 26/27-51/53 S: (1/2-)38-45-61		
602-016-00-9	1,1,2,2-tetrabromoethane	201-191-5	79-27-6	T+; R26 Xi; R36 R52-53	T+ R: 26-36-52/53 S: (1/2-)24-27-45-61		
602-017-00-4	pentachloroethane	200-925-1	76-01-7	Carc. Cat. 3; R40 T; R48/23 N; R51-53	T; N R: 40-48/23-51/53 S: (1/2-)23-36/37-45-61	T; R48/23: C ≥ 1 % Xn; R48/20: 0,2 % ≤ C < 1 %	
602-018-00-X	1-chloropropane; [1] 2-chloropropane [2]	208-749-7 [1] 200-858-8 [2]	540-54-5 [1] 75-29-6 [2]	F; R11 Xn; R20/21/ 22	F; Xn R: 11-20/21/22 S: (2-)9-29		C
602-019-00-5	1-bromopropane; n-propyl bromide	203-445-0	106-94-5	F; R11 Repr. Cat. 2; R60 Repr. Cat. 3; R63 Xn; R48/20 Xi; R36/37/ 38 R67	F; T R: 60-11-36/37/38- 48/20-63-67 S: 53-45		E
602-020-00-0	1,2-dichloropropane; propylene dichloride	201-152-2	78-87-5	F; R11 Xn; R20/22	F; Xn R: 11-20/22 S: (2-)16-24		
602-021-00-6	1,2-dibromo-3-chloropropane	202-479-3	96-12-8	Carc. Cat. 2; R45 Muta. Cat. 2; R46 Repr. Cat. 1; R60 T; R25 Xn; R48/20/ 22 R52-53	T R: 45-46-60-25-48/ 20/22-52/53 S: 53-45-61		E

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
602-022-00-1	1-chloropentane; [1] 2-chloropentane; [2] 3-chloropentane [3]	208-846-4 [1] 210-885-7 [2] 210-467-4 [3]	543-59-9 [1] 625-29-6 [2] 616-20-6 [3]	F; R11 Xn; R20/21/ 22	F; Xn R: 11-20/21/22 S: (2-)9-29		C
602-023-00-7	vinyl chloride; chloroethylene	200-831-0	75-01-4	F+; R12 Carc. Cat. 1; R45	F+; T R: 45-12 S: 53-45		D
602-024-00-2	bromoethylene	209-800-6	593-60-2	F+; R12 Carc. Cat. 2; R45	F+; T R: 45-12 S: 53-45		
602-025-00-8	1,1-dichloroethylene; vinylidene chloride	200-864-0	75-35-4	F+; R12 Carc. Cat. 3; R40 Xn; R20	F+; Xn R: 12-20-40 S: (2-)7-16-29-36/37- 46	Xn; R20: C ≥ 12,5 %	D
602-026-00-3	1,2-dichloroethylene; [1] cis-dichloroethylene; [2] trans-dichloroethylene [3]	208-750-2 [1] 205-859-7 [2] 205-860-2 [3]	540-59-0 [1] 156-59-2 [2] 156-60-5 [3]	F; R11 Xn; R20 R52-53	F; Xn R: 11-20-52/53 S: (2-)7-16-29-61	Xn; R20: C ≥ 12,5 %	C
602-027-00-9	trichloroethylene; trichloroethene	201-167-4	79-01-6	Carc. Cat. 2; R45 Muta. Cat. 3; R68 R67 Xi; R36/38 R52-53	T R: 45-36/38-52/53- 67 S: 53-45-61		
602-028-00-4	tetrachloroethylene	204-825-9	127-18-4	Carc. Cat. 3; R40 N; R51-53	Xn; N R: 40-51/53 S: (2-)23-36/37-61		



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
602-029-00-X	3-chloropropene; allyl chloride	203-457-6	107-05-1	F; R11 Carc. Cat. 3; R40 Muta. Cat. 3; R68 Xn; R20/21/ 22-48/20 Xi; R36/37/ 38 N; R50	F; Xn; N R: 11-20/21/22-36/ 37/38-40-48/20-68- 50 S: (2-)16-25-26-36/ 37-46-61		D
602-030-00-5	1,3-dichloropropene; [1] (Z)-1,3-dichloropropene [2]	208-826-5 [1] 233-195-8 [2]	542-75-6 [1] 10061-01-5 [2]	R10 T; R25 Xn; R20/21 Xi; R36/37/ 38 R43 N; R50-53	T; N R: 10-20/21-25-36/ 37/38-43-50/53 S: (1/2-)36/37-45-60- 61		DC
602-031-00-0	1,1-dichloropropene	209-253-3	563-58-6	F; R11 T; R25 R52-53	F; T R: 11-25-52/53 S: (1/2-)16-29-33-45- 61		
602-032-00-6	3-chloro-2-methylpropene	209-251-2	563-47-3	F; R11 Xn; R20/22 C; R34 R43 N; R51-53	F; C; N R: 11-20/22-34-43- 51/53 S: (2-)9-16-26-29-36/ 37/39-45-61		
602-033-00-1	chlorobenzene	203-628-5	108-90-7	R10 Xn; R20 N; R51-53	Xn; N R: 10-20-51/53 S: (2-)24/25-61	Xn; R20: C ≥ 5 %	
602-034-00-7	1,2-dichlorobenzene; o-dichlorobenzene	202-425-9	95-50-1	Xn; R22 Xi; R36/37/ 38 N; R50-53	Xn; N R: 22-36/37/38-50/ 53 S: (2-)23-60-61	Xn; R22: C ≥ 5 %	
602-035-00-2	1,4-dichlorobenzene; p-dichlorobenzene	203-400-5	106-46-7	Carc. Cat. 3; R40 Xi; R36 N; R50-53	Xn; N R: 36-40-50/53 S: (2-)36/37-46-60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
602-036-00-8	chloroprene (stabilised); 2-chlorobuta-1,3-diene (stabilised)	204-818-0	126-99-8	F; R11 Carc. Cat. 2; R45 Xn; R20/22- 48/20 Xi; R36/37/ 38	F; T R: 45-11-20/22-36/ 37/38-48/20 S: 53-45		D E
602-037-00-3	$\alpha$ -chlorotoluene; benzyl chloride	202-853-6	100-44-7	Carc. Cat. 2; R45 T; R23 Xn; R22-48/ 22 Xi; R37/38- 41	T R: 45-22-23-37/38- 41-48/22 S: 53-45		E
602-038-00-9	$\alpha$ , $\alpha$ , $\alpha$ -trichlorotoluene; benzotrichloride	202-634-5	98-07-7	Carc. Cat. 2; R45 T; R23 Xn; R22 Xi; R37/38- 41	T R: 45-22-23-37/38- 41 S: 53-45		E
602-039-00-4	polychlorobiphenyls; PCB	215-648-1	1336-36-3	R33 N; R50-53	N R: 33-50/53 S: (2-)-60-61	R33: C $\geq$ 0,005 %	C
602-040-00-X	2-chlorotoluene; [1] 3-chlorotoluene; [2] 4-chlorotoluene; [3] chlorotoluene [4]	202-424-3 [1] 203-580-5 [2] 203-397-0 [3] 246-698-2 [4]	95-49-8 [1] 108-41-8 [2] 106-43-4 [3] 25168-05-2 [4]	Xn; R20 N; R51-53	Xn; N R: 20-51/53 S: (2-)24/25-61		C
602-041-00-5	pentachloronaphthalene	215-320-8	1321-64-8	Xn; R21/22 Xi; R36/38 N; R50-53	Xn; N R: 21/22-36/38-50/ 53 S: (2-)-60-61		C
602-042-00-0	1,2,3,4,5,6-hexachlorocyclohexanes with the exception of those specified elsewhere in this Annex	—	—	Carc. Cat. 3; R40 T; R25 Xn; R21 N; R50-53	T; N R: 21-25-40-50/53 S: (1/2-)22-36/37-45- 60-61		A C

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
602-043-00-6	lindane (ISO) γ-HCH or γ-BHC; γ-1,2,3,4,5,6-hexachlorocyclohexane;	200-401-2	58-89-9	T; R25 Xn; R20/21-48/22 R64 N; R50-53	T; N R: 20/21-25-48/22-64-50/53 S: (1/2-)36/37-45-60-61	N; R50-53: C ≥ 2,5 % N; R51-53: 0,25 % ≤ C < 2,5 % R52-53: 0,025 % ≤ C < 0,25 %	
602-044-00-1	camphechlor (ISO) toxaphene;	232-283-3	8001-35-2	Carc. Cat. 3; R40 T; R25 Xn; R21 Xi; R37/38 N; R50-53	T; N R: 21-25-37/38-40-50/53 S: (1/2-)36/37-45-60-61		
602-045-00-7	DDT (ISO); clofenotane (INN); dicophane; 1,1,1-trichloro-2,2-bis(4-chlorophenyl)ethane; dichlorodiphenyltrichloroethane	200-024-3	50-29-3	T; R25-48/25 Carc. Cat. 3; R40 N; R50-53	T; N R: 25-40-48/25-50/53 S: (1/2-)22-36/37-45-60-61		
602-046-00-2	heptachlor (ISO); 1,4,5,6,7,8,8-heptachloro-3a,4,7,7a-tetrahydro-4,7-methanoindene	200-962-3	76-44-8	T; R24/25 Carc. Cat. 3; R40 R33 N; R50-53	T; N R: 24/25-33-40-50/53 S: (1/2-)36/37-45-60-61		
602-047-00-8	chlordane (ISO); 1,2,4,5,6,7,8,8-octachloro-3a,4,7,7a-tetrahydro-4,7-methanoindan	200-349-0	57-74-9	Carc. Cat. 3; R40 Xn; R21/22 N; R50-53	Xn; N R: 21/22-40-50/53 S: (2-)36/37-60-61		
602-048-00-3	aldrin (ISO)	206-215-8	309-00-2	T; R24/25-48/24/25 Carc. Cat. 3; R40 N; R50-53	T; N R: 24/25-40-48/24/25-50/53 S: (1/2-)22-36/37-45-60-61		
602-049-00-9	dieldrin (ISO)	200-484-5	60-57-1	T+; R27 T; R25-48/25 Carc. Cat. 3; R40 N; R50-53	T+; N R: 25-27-40-48/25-50/53 S: (1/2-)22-36/37-45-60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
602-050-00-4	(1 $\alpha$ ,4 $\alpha$ ,4 $\alpha\beta$ ,5 $\beta$ ,8 $\beta$ ,8 $\alpha\beta$ )-1,2,3,4,10,10-hexachloro-1,4,4a,5,8,8a-hexahydro-1,4:5,8-dimethanonaphthalene; isodrin	207-366-2	465-73-6	T+; R26/27/28 N; R50-53	T+; N R: 26/27/28-50/53 S: (1/2-)13-28-45-60-61		
602-051-00-X	endrin (ISO); 1,2,3,4,10,10-hexachloro-6,7-epoxy-1,4,4a,5,6,7,8,8a-octa-hydro-1,4:5,8-dimethanonaphthalene	200-775-7	72-20-8	T+; R28 T; R24 N; R50-53	T+; N R: 24-28-50/53 S: (1/2-)22-36/37-45-60-61		
602-052-00-5	endosulfan (ISO); 1,2,3,4,7,7-hexachloro-8,9,10-trinorborn-2-en-5,6-ylenedi-methyl sulphite	204-079-4	115-29-7	T; R24/25 Xi; R36 N; R50-53	T; N R: 24/25-36-50/53 S: (1/2-)28-36/37-45-60-61		
602-053-00-0	isobenzan (ISO); 1,3,4,5,6,7,8,8-octachloro-1,3,3a,4,7,7a-hexahydro-4,7-methanoisobenzofuran	206-045-4	297-78-9	T+; R27/28 N; R50	T+; N R: 27/28-50 S: (1/2-)28-36/37-45-61		
602-054-00-6	3-iodpropene; allyl iodide	209-130-4	556-56-9	R10 C; R34	C R: 10-34 S: (1/2-)7-26-45		
602-055-00-1	bromoethane; ethyl bromide	200-825-8	74-96-4	F; R11 Carc. Cat. 3; R40 Xn; R20/22	F; Xn R: 11-20/22-40 S: (2-)36/37		
602-056-00-7	$\alpha$ , $\alpha$ , $\alpha$ -trifluorotoluene; benzotrifluoride	202-635-0	98-08-8	F; R11 N; R51-53	F; N R: 11-51/53 S: (2-)16-23-61		
602-057-00-2	$\alpha$ -bromotoluene; benzyl bromide	202-847-3	100-39-0	Xi; R36/37/ 38	Xi R: 36/37/38 S: (2-)39		
602-058-00-8	$\alpha$ , $\alpha$ -dichlorotoluene; benzylidene chloride; benzal chloride	202-709-2	98-87-3	Carc. Cat. 3; R40 T; R23 Xn; R22 Xi; R37/38- 41	T R: 22-23-37/38-40- 41 S: (1/2-)36/37-38-45		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
602-059-00-3	1-chlorobutane; butyl chloride	203-696-6	109-69-3	F; R11	F R: 11 S: (2-)9-16-29		
602-060-00-9	bromobenzene	203-623-8	108-86-1	R10 Xi; R38 N; R51-53	Xi; N R: 10-38-51/53 S: (2-)61		
602-061-00-4	hexafluoropropene; hexafluoropropylene	204-127-4	116-15-4	Xn; R20 Xi; R37	Xn R: 20-37 S: (2-)41		
602-062-00-X	1,2,3-trichloropropane	202-486-1	96-18-4	Carc. Cat. 2; R45 Repr. Cat. 2; R60 Xn; R20/21/ 22	T R: 45-60-20/21/22 S: 53-45		E D
602-063-00-5	heptachlor epoxide; 2,3-epoxy-1,4,5,6,7,8,8-heptachloro-3a,4,7,7a-tetrahydro- 4,7-methanoindane	213-831-0	1024-57-3	T; R25 Carc. Cat. 3; R40 R33 N; R50-53	T; N R: 25-33-40-50/53 S: (1/2-)36/37-45-60- 61		
602-064-00-0	1,3-dichloro-2-propanol	202-491-9	96-23-1	Carc. Cat. 2; R45 T; R25 Xn; R21	T R: 45-21-25 S: 53-45		E
602-065-00-6	hexachlorobenzene	204-273-9	118-74-1	Carc. Cat. 2; R45 T; R48/25 N; R50-53	T; N R: 45-48/25-50/53 S: 53-45-60-61		E
602-066-00-1	tetrachloro-p-benzoquinone	204-274-4	118-75-2	Xi; R36/38 N; R50-53	Xi; N R: 36/38-50/53 S: (2-)37-60-61		
602-067-00-7	1,3-dichlorbenzene	208-792-1	541-73-1	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
602-068-00-2	ethylene bis(trichloroacetate)	219-732-9	2514-53-6	Xi; R38	Xi R: 38 S: (2-)		
602-069-00-8	dichloroacetylene	—	7572-29-4	E; R2 Carc. Cat. 3; R40 Xn; R48/20	E; Xn R: 2-40-48/20 S: (2-)36/37		
602-070-00-3	3-chloro-4,5,α, α,α-pentafluorotoluene	401-930-3	77227-99-7	R10 Xn; R20/22 N; R50-58	Xn; N R: 10-20/22-50-58 S: (2-)51-60-61		
602-071-00-9	bromobenzylbromotoluene, reaction mass of isomers	402-210-1	99688-47-8	Xn; R48/22 R43 N; R50-53	Xn; N R: 43-48/22-50/53 S: (2-)24-37-41-60-61		
602-072-00-4	dichloro [(dichlorophenyl)methyl]methylbenzene, reaction mass of isomers; (dichlorophenyl)(dichlorotolyl)methane, reaction mass of isomers (IUPAC)	278-404-3	76253-60-6	N; R50-53	N R: 50/53 S: 60-61		
602-073-00-X	1,4-dichlorobut-2-ene	212-121-8	764-41-0	Carc. Cat. 2; R45 T+; R26 T; R24/25 C; R34 N; R50-53	T+; N R: 45-24/25-26-34-50/53 S: 53-45-60-61	Carc. Cat. 2; R45: C ≥ 0,01 % C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	E
602-074-00-5	pentachlorobenzene	210-172-0	608-93-5	F; R11 Xn; R22 N; R50-53	F; Xn; N R: 11-22-50/53 S: (2-)41-46-50-60-61		
602-075-00-0	4,4,5,5-tetrachloro-1,3-dioxolan-2-one	404-060-2	22432-68-4	T+; R26 Xn; R22 C; R34	T+ R: 22-26-34 S: (1/2-)9-26-28-36/37/39-45		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
602-076-00-6	2,3,4-trichlorobut-1-ene	219-397-9	2431-50-7	Carc. Cat. 3; R40 T; R23 Xn; R22 Xi; R36/37/ 38 N; R50-53	T; N R: 22-23-36/37/38- 40-50/53 S: (1/2-)36/37-45-60- 61	Carc. Cat. 3; R40: C ≥ 0,1 %	
602-077-00-1	dodecachloropentacyclo[5.2.1.0 <sup>2,6</sup> .0 <sup>3,9</sup> .0 <sup>5,8</sup> ]decane; mirex	219-196-6	2385-85-5	Carc. Cat. 3; R40 Repr. Cat. 3; R62-63 R64 Xn; R21/22 N; R50/53	Xn; N R: 21/22-40-50/53- 62-63-64 S: (2-)13-36/37-46- 60-61		
602-078-00-7	hexachlorocyclopentadiene	201-029-3	77-47-4	T+; R26 T; R24 Xn; R22 C; R34 N; R50-53	T+; N R: 22-24-26-34-50/ 53 S: (1/2-)25-39-45-53- 60-61		
602-079-00-2	2,3-dichloropropene; 2,3-dichloropropylene	201-153-8	78-88-6	F; R11 Muta. Cat. 3; R68 Xn; R20/21/ 22 Xi; R37/38- 41 R52-53	F; Xn R: 11-20/21/22-37/ 38-41-52/53-68 S: (2-)9-16-23-26-36/ 37/39-61		
602-080-00-8	alkanes, C <sub>10-13</sub> , chloro	287-476-5	85535-84-8	Carc. Cat. 3; R40 N; R50-53	Xn; N R: 40-50/53 S: (2-)24-36/37-60-61		
602-081-00-3	2-chloro-4,5-difluorobenzoic acid	405-380-5	—	Xn; R21/22 Xi; R41 R43	Xn R: 21/22-41-43 S: (2-)26-36/37/39		
602-082-00-9	2,2,6,6-tetrakis(bromomethyl)-4-oxaheptane-1,7-diol	408-020-5	109678-33-3	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)22-24-37-41- 61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
602-083-00-4	diphenyl ether, pentabromo derivative pentabromodiphenyl ether	251-084-2	32534-81-9	Xn; R48/21/22 R64 N; R50-53	Xn; N R: 48/21/22-50/53-64 S: (1/2-)36/37-45-60-61		
602-084-00-X	1,1-dichloro-1-fluoroethane	404-080-1	1717-00-6	R52-53 N; R59	N R: 52/53-59 S: 59-61		
602-085-00-5	2-bromopropane	200-855-1	75-26-3	F; R11 Repr. Cat. 1; R60 Xn; R48/20 R66	F; T R: 60-11-48/20-66 S: 53-45		E
602-086-00-0	trifluoriodomethane; trifluoromethyl iodide	219-014-5	2314-97-8	Muta. Cat. 3; R68	Xn R: 68 S: (2-)36/37		
602-087-00-6	1,2,4-trichlorobenzene	204-428-0	120-82-1	Xn; R22 Xi; R38 N; R50-53	Xn; N R: 22-38-50/53 S: (2-)23-37/39-60-61		
602-088-00-1	2,3-dibromopropan-1-ol; 2,3-dibromo-1-propanol	202-480-9	96-13-9	Carc. Cat. 2; R45 Repr. Cat. 3; R62 T; R24 Xn; R20/22 R52-53	T R: 45-20/22-24-52/ 53-62 S: 53-45-61		E
602-089-00-7	4-bromo-2-chlorofluorobenzene	405-580-2	60811-21-4	Xn; R22 Xi; R38 N; R50-53	Xn; N R: 22-38-50/53 S: (2-)26-36/37-60-61		
602-090-00-2	1-allyl-3-chloro-4-fluorobenzene	406-630-6	121626-73-1	Xi; R38 N; R51-53	Xi; N R: 38-51/53 S: (2-)23-37-61		
602-091-00-8	1,3-dichloro-4-fluorobenzene	406-160-1	1435-48-9	Xn; R22-48/ 20/22 Xi; R38 N; R51-53	Xn; N R: 22-38-48/20/22- 51/53 S: (2-)36/37-61		



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
602-092-00-3	1-bromo-3,4,5-trifluorobenzene	418-480-9	138526-69-9	R10 Carc. Cat. 3; R40 Xi; R38-41 N; R51-53	Xn; N R: 10-38-40-41-51/ 53 S: (2-)23-26-36/37/ 39-61		
602-093-00-9	$\alpha$ , $\alpha$ , $\alpha$ ,4-tetrachlorotoluene; <i>p</i> -chlorobenzotrichloride	226-009-1	5216-25-1	Carc. Cat. 2; R45 Repr. Cat. 3; R62 T; R48/23 Xn; R21/22 Xi; R37/38	T R: 45-21/22-37/38- 48/23-62 S: 53-45		E
602-094-00-4	diphenylether; octabromo derivate	251-087-9	32536-52-0	Repr. Cat. 2; R61 Repr. Cat. 3; R62	T R: 61-62 S: 53-45		
602-096-00-5	malachite green hydrochloride; [1] malachite green oxalate [2]	209-322-8 [1] 219-441-7 [2]	569-64-2 [1] 2437-29-8 [2]	Repr. Cat. 3; R63 Xn; R22 Xi; R41 N; R50-53	Xn; N R: 22-41-63-50/53 S: (2-)26-36/37-39- 46-60-61		
602-097-00-0	1-bromo-9-(4,4,5,5,5-pentafluoropentylthio)nonane	422-850-5	148757-89-5	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		
603-001-00-X	methanol	200-659-6	67-56-1	F; R11 T; R23/24/ 25-39/23/ 24/25	F; T R: 11-23/24/25-39/ 23/24/25 S: (1/2-)7-16-36/37- 45	T; R23/24/25: C $\geq$ 20 % Xn; R20/21/22: 3 % $\leq$ C < 20 % T; R39/23/24/25: C $\geq$ 10 % Xn; R68/20/21/22: 3 % $\leq$ C < 10 %	
603-002-00-5	ethanol; ethyl alcohol	200-578-6	64-17-5	F; R11	F R: 11 S: (2-)7-16		
603-003-00-0	propan-1-ol; <i>n</i> -propanol	200-746-9	71-23-8	F; R11 Xi; R41 R67	F; Xi R: 11-41-67 S: (2-)7-16-24-26-39		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
603-004-00-6	butan-1-ol; <i>n</i> -butanol	200-751-6	71-36-3	R10 Xn; R22 Xi; R37/38-41 R67	Xn R: 10-22-37/38-41-67 S: (2-)7/9-13-26-37/39-46		
603-005-00-1	2-methylpropan-2-ol; <i>tert</i> -butyl alcohol	200-889-7	75-65-0	F; R11 Xn; R20	F; Xn R: 11-20 S: (2-)9-16		
603-006-00-7	pentanol isomers, with the exception fo those specified elsewhere in this Annex	250-378-8		R10 Xn; R20 Xi; R37 R66	Xn R: 10-20-37-66 S: (2-)46		C
603-007-00-2	2-methylbutan-2-ol; <i>tert</i> -pentanol	200-908-9	75-85-4	F; R11 Xn; R20 Xi; R37/38	F; Xn R: 11-20-37/38 S: (2-)46		
603-008-00-8	4-methylpentan-2-ol; methyl isobutyl carbinol	203-551-7	108-11-2	R10 Xi; R37	Xi R: 10-37 S: (2-)24/25	Xi; R37: C ≥ 25 %	
603-009-00-3	cyclohexanol	203-630-6	108-93-0	Xn; R20/22 Xi; R37/38	Xn R: 20/22-37/38 S: (2-)24/25		
603-010-00-9	2-methylcyclohexanol, mixed isomers; [1] <i>cis</i> -2-methylcyclohexanol; [2] <i>trans</i> -2-methylcyclohexanol [3]	209-512-0 [1] 231-187-9 [2] 231-186-3 [3]	583-59-5 [1] 7443-70-1 [2] 7443-52-9 [3]	Xn; R20	Xn R: 20 S: (2-)24/25		C
603-011-00-4	2-methoxyethanol; ethylene glycol monomethyl ether	203-713-7	109-86-4	R10 Repr. Cat. 2; R60-61 Xn; R20/21/22	T R: 60-61-10-20/21/22 S: 53-45		E
603-012-00-X	2-ethoxyethanol; ethylene glycol monoethyl ether	203-804-1	110-80-5	R10 Repr. Cat. 2; R60-61 Xn; R20/21/22	T R: 60-61-10-20/21/22 S: 53-45		E

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
603-013-00-5	2-isopropoxyethanol; ethylene glycol monoisopropyl ether	203-685-6	109-59-1	Xn; R20/21 Xi; R36	Xn R: 20/21-36 S: (2-)24/25		
603-014-00-0	2-butoxyethanol; ethylene glycol monobutyl ether; butyl cellosolve	203-905-0	111-76-2	Xn; R20/21/ 22 Xi; R36/38	Xn R: 20/21/22-36/38 S: (2-)36/37-46		
603-015-00-6	allyl alcohol	203-470-7	107-18-6	R10 T; R23/24/25 Xi; R36/37/ 38 N; R50	T; N R: 10-23/24/25-36/ 37/38-50 S: (1/2-)36/37/39-38- 45-61		
603-016-00-1	4-hydroxy-4-methylpentan-2-one; diacetone alcohol	204-626-7	123-42-2	Xi; R36	Xi R: 36 S: (2-)24/25	Xi; R36: C ≥ 10 %	
603-018-00-2	furfuryl alcohol	202-626-1	98-00-0	Xn; R20/21/ 22	Xn R: 20/21/22 S: (2-)	Xn; R20/21/22: C ≥ 5 %	
603-019-00-8	dimethyl ether	204-065-8	115-10-6	F+; R12	F+ R: 12 S: (2-)9-16-33		
603-020-00-3	ethyl methyl ether	—	540-67-0	F+; R12	F+ R: 12 S: (2-)9-16-33		
603-021-00-9	methyl vinyl ether	203-475-4	107-25-5	F+; R12	F+ R: 12 S: (2-)9-16-33		D
603-022-00-4	diethyl ether; ether	200-467-2	60-29-7	F+; R12 R19 Xn; R22 R66 R67	F+; Xn R: 12-19-22-66-67 S: (2-)9-16-29-33		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
603-023-00-X	ethylene oxide; oxirane	200-849-9	75-21-8	F+; R12 ⊗ Carc. Cat. 2; R45 Muta. Cat. 2; R46 T; R23 Xi; R36/37/ 38	F+; T R: 45-46-12-23-36/ 37/38 S: 53-45		E
603-024-00-5	1,4-dioxane	204-661-8	123-91-1	F; R11-19 Carc. Cat. 3; R40 Xi; R36/37 R66	F; Xn R: 11-19-36/37-40- 66 S: (2-)9-16-36/37-46		D
603-025-00-0	tetrahydrofuran	203-726-8	109-99-9	F; R11-19 Xi; R36/37	F; Xi R: 11-19-36/37 S: (2-)16-29-33	Xi; R36/37: C ≥ 25 %	
603-026-00-6	1-chloro-2,3-epoxypropane; epichlorhydrin	203-439-8	106-89-8	R10 Carc. Cat. 2; R45 T; R23/24/25 C; R34 R43	T R: 45-10-23/24/25- 34-43 S: 53-45	T; R23/24/25: C ≥ 1 % Xn; R20/21/22: 0,1 % ≤ C < 1 %	E
603-027-00-1	ethanediol; ethylene glycol	203-473-3	107-21-1	Xn; R22	Xn R: 22 S: (2-)		
603-028-00-7	2-chloroethanol; ethylene chlorohydrin	203-459-7	107-07-3	T+; R26/27/ 28	T+ R: 26/27/28 S: (1/2-)7/9-28-45		
603-029-00-2	bis(2-chloroethyl) ether	203-870-1	111-44-4	R10 ⊗ Carc. Cat. 3; R40 T+; R26/27/ 28	T+ R: 10-26/27/28-40 S: (1/2-)7/9-27-28- 36/37-45		
603-030-00-8	2-aminoethanol; ethanolamine	205-483-3	141-43-5	Xn; R20/21/ 22 C; R34	C R: 20/21/22-34 S: (1/2-)26-36/37/39- 45	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
603-031-00-3	1,2-dimethoxyethane; ethylene glycol dimethyl ether; EGDME	203-794-9	110-71-4	F; R11 R19 Repr. Cat. 2; R60 Repr. Cat. 2; R61 Xn; R20	F; T R: 60-61-11-19-20 S: 53-45		E
603-032-00-9	ethylene dinitrate; ethylene glycol dinitrate	211-063-0	628-96-6	E; R2 ⊗ T+; R26/27/ 28 R33	E; T+ R: 2-26/27/28-33 S: (1/2-)33-35-36/37- 45		
603-033-00-4	oxydiethylene dinitrate; diethylene glycol dinitrate; digol dinitrate	211-745-8	693-21-0	E; R3 T+; R26/27/ 28 R33 R52-53	E; T+ R: 3-26/27/28-33-52/ 53 S: (1/2-)33-35-36/37- 45-61		
603-034-00-X	glycerol trinitrate; nitroglycerine	200-240-8	55-63-0	E; R3 T+; R26/27/ 28 R33 N; R51-53	E; T+; N R: 3-26/27/28-33-51/ 53 S: (1/2-)33-35-36/37- 45-61		
603-035-00-5	pentaerythritol tetranitrate; P.E.T.N.	201-084-3	78-11-5	E; R3	E R: 3 S: (2-)35		
603-036-00-0	mannitol hexanitrate; nitromannite	239-924-6	15825-70-4	E; R3	E R: 3 S: (2-)35		
603-037-00-6	cellulose nitrate; nitrocellulose, containing more than 12,6 % nitrogen	—	—	E; R3 ⊗ R1	E R: 1-3 S: (2-)35		
603-037-01-3	cellulose nitrate; nitrocellulose, containing a maximum of 12,6 % nitrogen	—	—	F; R11 ⊗	F R: 11 S: (2-)16-33-37/39		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
603-038-00-1	allyl glycidyl ether; allyl 2,3-epoxypropyl ether; prop-2-en-1-yl 2,3-epoxypropyl ether	203-442-4	106-92-3	R10 Carc. Cat. 3; R40 Muta. Cat. 3; R68 Repr. Cat. 3; R62 Xn; R20/22 Xi; R37/38-41 R43 R52-53	Xn R: 10-20/22-37/38-40-41-43-52/53-62-68 S: (2-)24/25-26-36/37/39-61		
603-039-00-7	butyl glycidyl ether; butyl 2,3-epoxypropyl ether	219-376-4	2426-08-6	R10 Carc. Cat. 3; R40 Muta. Cat. 3; R68 Xn; R20/22 Xi; R37 R43 R52-53	Xn R: 10-20/22-37-40-43-52/53-68 S: (2-)24/25-36/37-61		
603-040-00-2	sodium methanolate; sodium methoxide; [1] potassium methanolate; potassium methoxide; [2] lithium methanolate; lithium methoxide [3]	204-699-5 [1] 212-736-1 [2] 212-737-7 [3]	124-41-4 [1] 865-33-8 [2] 865-34-9 [3]	F; R11 C; R34 R14	F; C R: 11-14-34 S: (1/2-)8-16-26-43-45		
603-041-00-8	potassium ethanolate; potassium ethoxide; [1] sodium ethanolate; sodium ethoxide [2]	213-029-0 [1] 205-487-5 [2]	917-58-8 [1] 141-52-6 [2]	F; R11 C; R34 R14	F; C R: 11-14-34 S: (1/2-)8-16-26-43-45		
603-042-00-3	aluminium-tri-isopropoxide	209-090-8	555-31-7	F; R11	F R: 11 S: (2-)8-16		
603-043-00-9	triarimol (ISO); 2,4-dichloro- $\alpha$ -(pyrimidin-5-yl) benzhydryl alcohol	—	26766-27-8	Xn; R22	Xn R: 22 S: (2-)		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
603-044-00-4	dicofol (ISO); 2,2,2-trichloro-1,1-bis(4-chlorophenyl)ethanol	204-082-0	115-32-2	Xn; R21/22 Xi; R38 R43 N; R50-53	Xn; N R: 21/22-38-43-50/ 53 S: (2-)36/37-60-61		
603-045-00-X	diisopropyl ether; [1] dipropyl ether [2]	203-560-6 [1] 203-869-6 [2]	108-20-3 [1] 111-43-3 [2]	F; R11 R19 R66 R67	F R: 11-19-66-67 S: (2-)9-16-29-33		C
603-046-00-5	bis (chloromethyl) ether; oxybis(chloromethane)	208-832-8	542-88-1	R10 ⊗ Carc. Cat. 1; R45 T+; R26 T; R24 Xn; R22	T+ R: 45-10-22-24-26 S: 53-45	Carc. Cat. 1; R45: C ≥ 0,001 %	E
603-047-00-0	2-dimethylaminoethanol; N,N-dimethylethanolamine	203-542-8	108-01-0	R10 Xn; R20/21/ 22 C; R34	C R: 10-20/21/22-34 S: (1/2-)25-26-36/37/ 39-45	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	
603-048-00-6	2-diethylaminoethanol; N,N-diethylethanolamine	202-845-2	100-37-8	R10 Xn; R20/21/ 22 C; R34	C R: 10-20/21/22-34 S: (1/2-)25-26-36/37/ 39-45	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	
603-049-00-1	chlorfenethol (ISO); 1,1-bis (4-chlorophenyl) ethanol	201-246-3	80-06-8	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)36-61		
603-050-00-7	1-(2-Butoxypropoxy)propan-2-ol	246-011-6	24083-03-2	Xn; R21/22	Xn R: 21/22 S: (2-)		
603-051-00-2	2-ethylbutan-1-ol	202-621-4	97-95-0	Xn; R21/22	Xn R: 21/22 S: (2-)		
603-052-00-8	3-butoxypropan-2-ol; propylene glycol monobutyl ether	225-878-4	5131-66-8	Xi; R36/38	Xi R: 36/38 S: (2-)		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
603-053-00-3	2-methylpentane-2,4-diol	203-489-0	107-41-5	Xi; R36/38	Xi R: 36/38 S: (2-)	Xi; R36/38: C ≥ 10 %	
603-054-00-9	di-n-butyl ether; dibutyl ether	205-575-3	142-96-1	R10 Xi; R36/37/ 38 R52-53	Xi R: 10-36/37/38-52/ 53 S: (2-)61	Xi; R36/37/38: C ≥ 10 %	
603-055-00-4	propylene oxide; 1,2-epoxypropane; methyloxirane	200-879-2	75-56-9	F+; R12 Carc. Cat. 2; R45 Muta. Cat. 2; R46 Xn; R20/21/ 22 Xi; R36/37/ 38	F+; T R: 45-46-12-20/21/ 22-36/37/38 S: 53-45		E
603-056-00-X	[(p-tolyloxy)methyl]oxirane; [1] [(m-tolyloxy)methyl]oxirane; [2] 2,3-epoxypropyl o-tolyl ether; [3] [(tolyloxy)methyl]oxirane; cresyl glycidyl ether [4]	218-574-8 [1] 218-575-3 [2] 218-645-3 [3] 247-711-4 [4]	2186-24-5 [1] 2186-25-6 [2] 2210-79-9 [3] 26447-14-3 [4]	Muta. Cat. 3; R68 Xi; R38 R43 N; R51-53	Xn; N R: 38-43-51/53-68 S: (2-)36/37-61		C
603-057-00-5	benzyl alcohol	202-859-9	100-51-6	Xn; R20/22	Xn R: 20/22 S: (2-)26		
603-058-00-0	1,3-propylene oxide	207-964-3	503-30-0	F; R11 Xn; R20/21/ 22	F; Xn R: 11-20/21/22 S: (2-)9-16-26-29		
603-059-00-6	hexan-1-ol	203-852-3	111-27-3	Xn; R22	Xn R: 22 S: (2-)24/25		



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
603-060-00-1	2,2'-bioxirane; 1,2:3,4-diepoxybutane	215-979-1	1464-53-5	Carc. Cat. 2; R45 Muta. Cat. 2; R46 T+; R26 T; R24/25 C; R34	T+ R: 45-46-24/25-26-34 S: 53-45		E
603-061-00-7	tetrahydro-2-furylmethanol; tetrahydrofurfuryl alcohol	202-625-6	97-99-4	Xi; R36	Xi R: 36 S: (2-)39	Xi; R36: C ≥ 10 %	
603-062-00-2	tetrahydrofuran-2,5-diyldimethanol	203-239-0	104-80-3	Xi; R36/37/ 38	Xi R: 36/37/38 S: (2-)39	Xi; R36/37/38: C ≥ 10 %	
603-063-00-8	2,3-epoxypropan-1-ol; glycidol; oxiranemethanol	209-128-3	556-52-5	Carc. Cat. 2; R45 Muta. Cat. 3; R68 Repr. Cat. 2; R60 T; R23 Xn; R21/22 Xi; R36/37/ 38	T R: 45-60-21/22-23-36/37/38-68 S: 53-45		E
603-064-00-3	1-methoxy-2-propanol; monopropylene glycol methyl ether	203-539-1	107-98-2	R10	R: 10 S: (2-)24		
603-065-00-9	resorcinol diglycidyl ether; 1,3-bis(2,3-epoxypropoxy)benzene	202-987-5	101-90-6	Carc. Cat. 3; R40 Muta. Cat. 3; R68 Xn; R21/22 Xi; R36/38 R43 R52-53	Xn R: 21/22-36/38-40-43-52/53-68 S: (2-)23-36/37-61		
603-066-00-4	1,2-epoxy-4-epoxyethylcyclohexane; vinylcyclohexane diepoxide	203-437-7	106-87-6	T; R23/24/25 Xn; R68	T R: 23/24/25-68 S: (1/2-)23-24-45	T; R23/24/25: C ≥ 1 %: Xn; R20/21/22: 0,1 % ≤ C < 1 %	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
603-067-00-X	phenyl glycidyl ether; 2,3-epoxypropyl phenyl ether; 1,2-epoxy-3-phenoxypropane	204-557-2	122-60-1	Carc. Cat. 2; R45 Muta. Cat. 3; R68 Xn; R20 Xi; R37/38 R43 R52-53	T R: 45-20-37/38-43- 68-52/53 S: 53-45-61		E
603-068-00-5	2,3-epoxypropyl-2-ethylcyclohexyl ether; ethylcyclohexylglycidyl ether	—	130014-35-6	Xi; R36/38 R43	Xi R: 36/38-43 S: (2-)26-28-37/39		
603-069-00-0	2,4,6-tris(dimethylaminomethyl)phenol	202-013-9	90-72-2	Xn; R22 Xi; R36/38	Xn R: 22-36/38 S: (2-)26-28		
603-070-00-6	2-amino-2-methylpropanol	204-709-8	124-68-5	Xi; R36/38 R52-53	Xi R: 36/38-52/53 S: (2-)61	Xi; R36/38: C ≥ 10 %	
603-071-00-1	2,2'-iminodiethanol; diethanolamine	203-868-0	111-42-2	Xn; R22-48/ 22 Xi; R38-41	Xn R: 22-38-41-48/22 S: (2-)26-36/37/39-46		
603-072-00-7	1,4-bis(2,3 epoxypropoxy)butane; butanedioldiglycidyl ether	219-371-7	2425-79-8	Xn; R20/21 Xi; R36/38 R43	Xn R: 20/21-36/38-43 S: (2-)26-28-37/39		
603-073-00-2	bis-[4-(2,3-epoxipropoxi)phenyl]propane	216-823-5	1675-54-3	Xi; R36/38 R43	Xi R: 36/38-43 S: (2-)28-37/39	Xi; R36/38: C ≥ 5 %	
603-074-00-8	reaction product: bisphenol-A-(epichlorhydrin); epoxy resin (number average molecular weight ≤ 700)	500-033-5	25068-38-6	Xi; R36/38 R43 N; R51-53	Xi; N R: 36/38-43-51/53 S: (2-)28-37/39-61	Xi; R36/38: C ≥ 5 %	
603-075-00-3	chlormethyl methyl ether; chlorodimethyl ether	203-480-1	107-30-2	F; R11 Carc. Cat. 1; R45 Xn; R20/21/ 22	F; T R: 45-11-20/21/22 S: 53-45		E

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
603-076-00-9	but-2-yne-1,4-diol; 2-butyne-1,4-diol	203-788-6	110-65-6	C; R34 T; R23/25 Xn; R21-48/ 22 R43	C; T R: 21-23/25-34-43- 48/22 S: (1/2-)25-26-36/37/ 39-45-46	C; R34: C ≥ 50 % Xi; R36/38: 25 % ≤ C < 50 %	D
603-077-00-4	1-dimethylaminopropan-2-ol; dimepranol (INN)	203-556-4	108-16-7	R10 Xn; R22 C; R34	C R: 10-22-34 S: (1/2-)23-26-36-45		
603-078-00-X	prop-2-yn-1-ol; propargyl alcohol	203-471-2	107-19-7	R10 T; R23/24/25 C; R34 N; R51-53	T; N R: 10-23/24/25-34- 51/53 S: (1/2-)26-28-36-45- 61		
603-079-00-5	2,2'-(methylimino)diethanol; N-methyldiethanolamine	203-312-7	105-59-9	Xi; R36	Xi R: 36 S: (2-)24		
603-080-00-0	2-methylaminoethanol; N-methylethanolamine; N-methyl-2-ethanolamine; N-methyl-2-amino ethanol; 2-(methylamino)ethanol	203-710-0	109-83-1	Xn; R21/22 C; R34	C R: 21/22-34 S: (1/2-)26-36/37/39- 45	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	
603-081-00-6	2,2'-thiodiethanol; thiodiglycol	203-874-3	111-48-8	Xi; R36	Xi R: 36 S: (2-)		
603-082-00-1	1-aminopropan-2-ol; isopropanolamine	201-162-7	78-96-6	C; R34	C R: 34 S: (1/2-)23-26-36-45		
603-083-00-7	1,1'-iminodipropan-2-ol; di-isopropanolamine	203-820-9	110-97-4	Xi; R36	Xi R: 36 S: (2-)26		
603-084-00-2	styrene oxide; (epoxyethyl)benzene; phenyloxirane	202-476-7	96-09-3	Carc. Cat. 2; R45 Xn; R21 Xi; R36	T R: 45-21-36 S: 53-45		E

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
603-085-00-8	bronopol (INN); 2-bromo-2-nitropropane-1,3-diol	200-143-0	52-51-7	Xn; R21/22 Xi; R37/38-41 N; R50	Xn; N R: 21/22-37/38-41-50 S: (2-)26-37/39-61		
603-086-00-3	ethirimol (ISO); 5-butyl-2-ethylamino-6-methylpyrimidin-4-ol	245-949-3	23947-60-6	Xn; R21	Xn R: 21 S: (2-)36/37		
603-087-00-9	2-ethylhexane-1,3-diol; octylene glycol; ethoexadiol	202-377-9	94-96-2	Xi; R41	Xi R: 41 S: (2-)25-26-39-46		
603-088-00-4	2-(octylthio)ethanol; 2-hydroxyethyl octyl sulphide	222-598-4	3547-33-9	Xi; R41	Xi R: 41 S: (2-)26		
603-089-00-X	7,7-dimethyl-3-oxa-6-azaoctan-1-ol	400-390-6	—	C; R35 Xn; R22	C R: 22-35 S: (1/2-)26-28-36/37/39-45		
603-090-00-5	2-(2-bromoethoxy)anisole	402-010-4	4463-59-6	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)22-61		
603-091-00-0	exo-1-methyl-4-(1-methylethyl)-7-oxabicyclo[2.2.1]heptan-2-ol	402-470-6	87172-89-2	Xn; R22 Xi; R41	Xn R: 22-41 S: (2-)26-39		
603-092-00-6	2-methyl-4-phenylpentanol	402-770-7	92585-24-5	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
603-093-00-1	cinmethylin (ISO) exo-(±)-1-methyl-2-(2-methylbenzyloxy)-4-isopropyl-7-oxabicyclo(2.2.1)heptane	402-410-9	87818-31-3	Xn; R20 N; R51-53	Xn; N R: 20-51/53 S: (2-)23-61		
603-094-00-7	1,3-bis(2,3-epoxypropoxy)-2,2-dimethylpropane	241-536-7	17557-23-2	Xi; R38 R43	Xi R: 38-43 S: (2-)24-37		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
603-095-00-2	2-(propyloxy)ethanol; EGPE	220-548-6	2807-30-9	Xn; R21 Xi; R36	Xn R: 21-36 S: (2-)26-36/37-46		
603-096-00-8	2-(2-butoxyethoxy)ethanol; diethylene glycol monobutyl ether	203-961-6	112-34-5	Xi; R36	Xi R: 36 S: (2-)24-26		
603-097-00-3	1,1',1"-nitriilotripropan-2-ol; triisopropanolamine	204-528-4	122-20-3	Xi; R36 R52-53	Xi R: 36-52/53 S: (2-)26-61		
603-098-00-9	2-phenoxyethanol	204-589-7	122-99-6	Xn; R22 Xi; R36	Xn R: 22-36 S: (2-)26		
603-099-00-4	3-(N-methyl-N-(4-methylamino-3-nitrophenyl)amino)propane-1,2-diol hydrochloride	403-440-5	93633-79-5	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)61		
603-100-00-8	1,2-dimethoxypropane	404-630-0	7778-85-0	F; R11-19	F R: 11-19 S: (2-)9-16-24/25-33		
603-101-00-3	tetrahydro-2-isobutyl-4-methylpyran-4-ol, mixed isomers ( <i>cis</i> and <i>trans</i> )	405-040-6	—	Xi; R36	Xi R: 36 S: (2-)25-26		
603-102-00-9	1,2-epoxybutane	203-438-2	106-88-7	F; R11 Carc. Cat. 3; R40 Xn; R20/21/ 22 Xi; R36/37/ 38 R52-53	F; Xn R: 11-20/21/22-36/ 37/38-40-52/53 S: (2-)9-16-29-36/37- 61		
603-103-00-4	oxirane, mono[(C <sub>12-14</sub> -alkyloxy)methyl] derivs.	271-846-8	68609-97-2	Xi; R38 R43	Xi R: 38-43 S: (2-)24-37		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
603-104-00-X	fenarimol (ISO); 2,4'-dichloro- $\alpha$ -(pyrimidin-5-yl)benzhydryl alcohol	262-095-7	60168-88-9	Repr. Cat. 3; R62-63 R64 N; R51-53	Xn; N R: 51/53-62-63-64 S: (2-)36/37-61		
603-105-00-5	furan	203-727-3	110-00-9	F+; R12 R19 Carc. Cat. 2; R45 Muta. Cat. 3; R68 Xn; R20/22- 48/22 Xi; R38 R52-53	F+; T R: 45-12-19-20/22- 38-48/22-68-52/53 S: 53-45-61		E
603-106-00-0	2-methoxypropanol	216-455-5	1589-47-5	R10 Repr. Cat. 2; R61 Xi; R37/38- 41	T R: 61-10-37/38-41 S: 53-45		
603-107-00-6	2-(2-methoxyethoxy)ethanol; diethylene glycol monomethyl ether	203-906-6	111-77-3	Repr. Cat. 3; R63	Xn R: 63 S: (2-)36/37		
603-108-00-1	2-methylpropan-1-ol; iso-butanol	201-148-0	78-83-1	R10 Xi; R37/38- 41 R67	Xi R: 10-37/38-41-67 S: (2-)7/9-13-26-37/ 39-46		
603-117-00-0	propan-2-ol; isopropyl alcohol; isopropanol	200-661-7	67-63-0	F; R11 Xi; R36 R67	F; Xi R: 11-36-67 S: (2-)7-16-24/25-26		
603-118-00-6	6-dimethylaminohexan-1-ol	404-680-3	1862-07-3	Xn; R22 C; R34 R52-53	C R: 22-34-52/53 S: (1/2-)26-36/37/39- 45-61		
603-119-00-1	1,1'—(1,3-phenylenedioxy)bis(3-(2-(prop-2-enyl)phenoxy) propan-2-ol)	405-840-5	—	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
603-120-00-7	2-methyl-5-phenylpentanol	405-890-8	25634-93-9	Xi; R36/38	Xi R: 36/38 S: (2-)26-37		
603-121-00-2	4-[4-(1,3-dihydroxyprop-2-yl)phenylamino]-1,8-dihydroxy-5-nitroanthraquinone	406-057-1	114565-66-1	Carc. Cat. 3; R40 R43 R53	Xn R: 40-43-53 S: (2-)36/37-61		
603-122-00-8	sodium 2-ethylhexanoate	406-150-7	38411-13-1	F; R11 C; R34 R52-53	F; C R: 11-34-52/53 S: (1/2-)7-26-36/37/ 39-45-61		
603-123-00-3	4-methyl-8-methylenetricyclo[3.3.1.1 <sup>3,7</sup> ]decan-2-ol	406-330-5	122760-84-3	Xi; R38 R43 N; R51-53	Xi; N R: 38-43-51/53 S: (2-)24-37-61		
603-124-00-9	1,4-bis[2-(vinylloxy)ethoxy]benzene	406-900-3	84563-49-5	N; R50-53	N R: 50/53 S: 60-61		
603-125-00-4	2-(2,4-dichlorophenyl)-1-(1H-1,2,4-triazol-1-yl)pent-4-en-2-ol	407-850-5	89544-40-1	Xn; R22 Xi; R41 N; R51-53	Xn; N R: 22-41-51/53 S: (2-)26-39-61		
603-126-00-X	2-((4-methyl-2-nitrophenyl)amino)ethanol	408-090-7	100418-33-5	Xn; R22 R43 R52-53	Xn R: 22-43-52/53 S: (2-)36/37-61		
603-127-00-5	butan-2-ol; [1] (S)-butan-2-ol; [2] (R)-butan-2-ol; [3] (±)-butan-2-ol [4]	201-158-5 [1] 224-168-1 [2] 238-967-8 [3] 240-029-8 [4]	78-92-2 [1] 4221-99-2 [2] 14898-79-4 [3] 15892-23-6 [4]	R10 Xi; R36/37 R67	Xi R: 10-36/37-67 S: (2-)7/9-13-24/25- 26-46		C
603-128-00-0	2-(phenylmethoxy)naphthalene	405-490-3	613-62-7	R53	R: 53 S: 61		
603-129-00-6	1-tert-butoxypropan-2-ol	406-180-0	57018-52-7	R10 Xi; R41	Xi R: 10-41 S: (2-)26-39		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
603-130-00-1	reaction mass of isomers of: $\alpha$ -((dimethyl)biphenyl)- $\omega$ -hydroxypoly(oxyethylene)	406-325-8	—	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)39-61		
603-131-00-7	reaction mass of: 1-deoxy-1-[methyl-(1-oxododecyl)amino]-D-glucitol; 1-deoxy-1-[methyl-(1-oxotetradecyl)amino]-D-glucitol (3:1)	407-290-1	—	Xi; R41	Xi R: 41 S: (2-)26-39		
603-132-00-2	2-hydroxymethyl-9-methyl-6-(1-methylethyl)-1,4-dioxaspiro [4.5]decane	408-200-3	63187-91-7	Xi; R38-41 R52-53	Xi R: 38-41-52/53 S: (2-)26-37/39-61		
603-133-00-8	reaction mass of: 3-[(4-amino-2-chloro-5-nitrophenyl)amino]-propane-1,2-diol; 3,3'-(2-chloro-5-nitro-1,4-phenylenediimino)bis(propan-1,2-diol)	408-240-1	—	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)22-36-61		
603-134-00-3	reaction mass of substituted dodecyl and/or tetradecyl, diphenyl ethers. The substance is produced by the Friedel Crafts reaction. The catalyst is removed from the reaction product. Diphenyl ether is substituted by C <sub>1</sub> -C <sub>10</sub> alkyl groups. The alkyl groups are bonded randomly between C <sub>1</sub> and C <sub>6</sub> . Linear C <sub>12</sub> and C <sub>14</sub> , 50/50 used.	410-450-3	—	R53	R: 53 S: 61		
603-135-00-9	bis[[2,2',2''-nitrilotris-[ethanolato]]-1-N,O]-bis[2-(2-methoxyethoxy)ethoxy]-titanium	410-500-4	—	Xi; R41 N; R51-53	Xi; N R: 41-51/53 S: (2-)26-39-61		
603-136-00-4	3-((4-(bis(2-hydroxyethyl)amino)-2-nitrophenyl)amino)-1-propanol	410-910-3	104226-19-9	R43 R52-53	Xi R: 43-52/53 S: (2-)24-37-61		
603-137-00-X	reaction mass of: 1-deoxy-1-[methyl-(1-oxohexadecyl)amino]-D-glucitol; 1-deoxy-1-[methyl-(1-oxooctadecyl)amino]-D-glucitol	411-130-6	—	Xi; R41	Xi R: 41 S: (2-)26-39		
603-138-00-5	3-(2,2-dimethyl-3-hydroxypropyl)toluene; (alt.): 2,2-dimethyl-3-(3-methylphenyl)propanol	403-140-4	103694-68-4	R52-53	R: 52/53 S: 61		
603-139-00-0	bis(2-methoxyethyl) ether	203-924-4	111-96-6	R10 R19 Repr. Cat. 2; R60-61	T R: 60-61-10-19 S: 53-45		



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
603-140-00-6	2,2' -oxybisethanol; diethylene glycol	203-872-2	111-46-6	Xn; R22	Xn R: 22 S: (2-)46		
603-141-00-1	reaction mass of: dodecyloxy-1-methyl-1-[oxy-poly-(2-hydroxymethylethanoxy)]pentadecane; dodecyloxy-1-methyl-1-[oxy-poly-(2-hydroxymethylethanoxy)]heptadecane	413-780-6	—	R52-53	R: 52/53 S: 61		
603-142-00-7	2-(2-(2-hydroxyethoxy)ethyl)-2-aza-bicyclo[2.2.1]heptane	407-360-1	116230-20-7	Xn; R21/22-48/20 Xi; R38-41	Xn R: 21/22-38-41-48/20 S: (2-)26-36/37/39		
603-143-00-2	R-2,3-epoxy-1-propanol	404-660-4	57044-25-4	E; R2 Carc. Cat. 2; R45 Muta. Cat. 3; R68 Repr. Cat. 2; R60 T; R23 Xn; R21/22 C; R34	E; T R: 45-60-2-21/22-23-34-68 S: 53-45		E
603-144-00-8	reaction mass of: 2,6,9-trimethyl-2,5,9-cyclododecatrien-1-ol; 6,9-dimethyl-2-methylen-5,9-cyclododecadien-1-ol	413-530-6	111850-00-1	N; R51-53	N R: 51/53 S: 61		
603-145-00-3	2-isopropyl-2-(1-methylbutyl)-1,3-dimethoxypropane	406-970-5	129228-11-1	Xi; R38 N; R51-53	Xi; N R: 38-51/53 S: (2-)36/37-61		
603-146-00-9	2-[(2-[2-(dimethylamino)ethoxy]ethyl)methylamino]ethanol	406-080-7	83016-70-0	Xn; R22 C; R34 R52-53	C R: 22-34-52/53 S: (1/2-)23-26-36/37/39-45-61		
603-147-00-4	(-)-trans-4-(4'-fluorophenyl)-3-hydroxymethyl-N-methylpiperidine	406-030-4	105812-81-5	Xn; R22 Xi; R41 N; R51-53	Xn; N R: 22-41-51/53 S: (2-)22-24-26-37/39-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
603-148-00-X	1,4-bis[(vinyloxy)methyl]cyclohexane	413-370-7	17351-75-6	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
603-149-00-5	reaction mass of diastereoisomers of 1-(1-hydroxyethyl)-4-(1-methylethyl)cyclohexane	407-640-3	63767-86-2	Xi; R36/38 N; R51-53	Xi; N R: 36/38-51/53 S: (2-)26-37-61		
603-150-00-0	(±) <i>trans</i> -3,3-dimethyl-5-(2,2,3-trimethyl-cyclopent-3-en-1-yl)-pent-4-en-2-ol	411-580-3	107898-54-4	Xi; R38 N; R50-53	Xi; N R: 38-50/53 S: (2-)24/25-37-60-61		
603-151-00-6	(±)-2-(2,4-dichlorophenyl)-3-(1 <i>H</i> -1,2,4-triazol-1-yl)propan-1-ol	413-570-4	—	R52-53	R: 52/53 S: 61		
603-152-00-1	2-(4- <i>tert</i> -butylphenyl)ethanol	410-020-5	5406-86-0	Repr. Cat. 3; R62 Xn; R48/22 Xi; R41 N; R51-53	Xn; N R: 41-48/22-62-51/ 53 S: (2-)26-36/37/39-61		
603-153-00-7	3-((2-nitro-4-(trifluoromethyl)phenyl)amino)propane-1,2-diol	410-010-0	104333-00-8	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)22-61		
603-154-00-2	1-[(2- <i>tert</i> -butyl)cyclohexyloxy]-2-butanol	412-300-2	139504-68-0	N; R51-53	N R: 51/53 S: 61		
603-155-00-8	Reaction products of 2-(4,6-bis(2,4-dimethylphenyl)-1,3,5-triazin-2-yl)-5-hydroxyphenol with ((C <sub>10-16</sub> , rich in C <sub>12-13</sub> alkyloxy)methyl)oxyrane	410-560-1	—	N; R50-53	N R: 50/53 S: 60-61		
603-156-00-3	2-(2,4-dichlorophenyl)-2-(2-propenyl)oxirane	411-210-0	89544-48-9	Xi; R38 R43 N; R50-53	Xi; N R: 38-43-50/53 S: (2-)24-37-60-61		
603-157-00-9	6,9-bis(hexadecyloxymethyl)-4,7-dioxanonane-1,2,9-triol	411-450-6	143747-72-2	R53	R: 53 S: 61		
603-158-00-4	reaction mass of 4 diastereoisomers of 2,7-dimethyl-10-(1-methylethyl)-1-oxaspiro[4.5]deca-3,6-diene	412-460-3	—	Xi; R38 N; R51-53	Xi; N R: 38-51/53 S: (2-)37-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
603-159-00-X	2-cyclododecylpropan-1-ol	411-410-8	118562-73-5	N; R50-53	N R: 50/53 S: 60-61		
603-160-00-5	1,2-diethoxypropane	412-180-1	10221-57-5	F; R11 R19	F R: 11-19 S: (2-)9-16-24-33		
603-161-00-0	1,3-diethoxypropane	413-140-6	3459-83-4	R10	R: 10 S: (2-)9-24		
603-162-00-6	$\alpha$ [2-[[[(2-hydroxyethyl)methylamino]acetyl]amino]propyl]- $\omega$ -(nonylphenoxy)poly[oxo(methyl-1,2-ethanediyl)]	413-420-8	144736-29-8	C; R34 R43 N; R51-53	C; N R: 34-43-51/53 S: (1/2-)26-28-36/37/ 39-45-61		
603-163-00-1	2-phenyl-1,3-propanediol	411-810-2	1570-95-2	Xi; R41	Xi R: 41 S: (2-)26-39		
603-164-00-7	2-butyl-4-chloro-4,5-dihydro-5-hydroxymethyl-1-[2'-(2-triphenylmethyl-1,2,3,4-2H-tetrazol-5-yl)-1,1'-biphenyl-4-methyl]-1H-imidazole	412-420-5	133909-99-6	R53	R: 53 S: 61		
603-165-00-2	reaction mass of: 4-allyl-2,6-bis(2,3-epoxypropyl)phenol; 4-allyl-6-[3-[6-[3-[3-(4-allyl-2,6-bis(2,3-epoxypropyl)phenoxy)-2-hydroxypropyl]-4-allyl-2-(2,3-epoxypropyl)phenoxy]-2-hydroxypropyl]-4-allyl-2-(2,3-epoxypropyl)phenoxy]-2-hydroxypropyl]-2-(2,3-epoxypropyl)phenol; 4-allyl-6-[3-(4-allyl-2,6-bis(2,3-epoxypropyl)phenoxy)-2-hydroxypropyl]-2-(2,3-epoxypropyl)phenol; 4-allyl-6-[3-[6-[3-(4-allyl-2,6-bis(2,3-epoxypropyl)phenoxy)-2-hydroxypropyl]-4-allyl-2-(2,3-epoxypropyl)phenoxy]-2-hydroxypropyl]-2-(2,3-epoxypropyl)phenol	417-470-1	—	Muta. Cat. 3; R68 R43	Xn R: 43-68 S: (2-)36/37		
603-166-00-8	R-1-chloro-2,3-epoxypropane	424-280-2	51594-55-9	R10 Carc. Cat. 2; R45 T; R23/24/25 C; R34 R43	T R: 45-10-23/24/25- 34-43 S: 53-45		E
603-167-00-3	3,3',5,5'-tetra- <i>tert</i> -butylbiphenyl-2,2'-diol	407-920-5	6390-69-8	R53	R: 53 S: 61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
603-168-00-9	3-(2-ethylhexyloxy)propane-1,2-diol	408-080-2	70445-33-9	Xi; R41 R52-53	Xi R: 41-52/53 S: (2-)26-39-61		
603-169-00-4	(±)-trans-4-(4-fluorophenyl)-3-hydroxymethyl-N-methylpiperidine	415-550-0	109887-53-8	Xn; R22 Xi; R41 N; R51-53	Xn; N R: 22-41-51/53 S: (2-)22-26-39-61		
603-170-00-X	reaction mass of: 2-methyl-1-(6-methylbicyclo[2.2.1]hept-5-en-2-yl)pent-1-en-3-ol; 2-methyl-1-(1-methylbicyclo[2.2.1]hept-5-en-2-yl)-pent-1-en-3-ol; 2-methyl-1-(5-methylbicyclo[2.2.1]hept-5-en-2-yl)pent-1-en-3-ol	415-990-3	67739-11-1	Xi; R36 N; R51-53	Xi; N R: 36-51/53 S: (2-)26-61		
603-171-00-5	5-thiazolylmethanol	414-780-9	38585-74-9	Xi; R41 R52-53	Xi R: 41-52/53 S: (2-)26-39-61		
603-172-00-0	mono-2-[2-(4-dibenzo[b,f][1,4]thiazepin-11-yl)piperazinium-1-yl]ethoxy)ethanol <i>trans</i> -butenedioate	415-180-1	773058-82-5	Xn; R22 Xi; R41 N; R51-53	Xn; N R: 22-41-51/53 S: (2-)22-26-39-61		
603-173-00-6	4,4-dimethyl-3,5,8-trioxabicyclo[5.1.0]octane	421-750-9	57280-22-5	Xi; R36 R43	Xi R: 36-43 S: (2-)26-36/37		
603-174-00-1	4-cyclohexyl-2-methyl-2-butanol	420-630-3	83926-73-2	Xi; R41 N; R51-53	Xi; N R: 41-51/53 S: (2-)26-39-61		
603-175-00-7	2-(2-hexyloxyethoxy)ethanol; DEGHE; diethylene glycol monohexyl ether; 3,6-dioxa-1-dodecanol; hexyl carbitol; 3,6-dioxadodecan-1-ol	203-988-3	112-59-4	Xn; R21 Xi; R41	Xn R: 21-41 S: (2-)26-36/37/39-46		
603-176-00-2	1,2-bis(2-methoxyethoxy)ethane; TEGDME; triethylene glycol dimethyl ether; triglyme	203-977-3	112-49-2	R19 Repr. Cat. 2; R61 Repr. Cat. 3; R62	T R: 61-19-62 S: 53-45		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
603-177-00-8	1-ethoxypropan-2-ol; 2PG1EE; 1-ethoxy-2-propanol; propylene glycol monoethyl ether; [1] 2-ethoxy-1-methylethyl acetate; 2PG1EEA [2]	216-374-5 [1] 259-370-9 [2]	1569-02-4 [1] 54839-24-6 [2]	R10 R67	R: 10-67 S: (2-)24		
603-178-00-3	2-hexyloxyethanol; ethylene glycol monoethyl ether; n-hexylglycol	203-951-1	112-25-4	Xn; R21/22 C; R34	C R: 21/22-34 S: (1/2-)26-36/37/39-45		
603-179-00-9	ergocalciferol (ISO); Vitamin D2	200-014-9	50-14-6	T+; R26 T; R24/25-48/25	T+ R: 24/25-26-48/25 S: (1/2-)28-36/37-45		
603-180-00-4	colecalfiferol; Vitamin D3	200-673-2	67-97-0	T+; R26 T; R24/25-48/25	T+ R: 24/25-26-48/25 S: (1/2-)28-36/37-45		
603-181-00-X	<i>tert</i> -butyl methyl ether; MTBE; 2-methoxy-2-methylpropane	216-653-1	1634-04-4	F; R11 Xi; R38	F; Xi R: 11-38 S: (2-)9-16-24		
603-183-00-0	2-[2-(2-butoxyethoxy)ethoxy]ethanol; TEGBE; triethylene glycol monobutyl ether; butoxytriethylene glycol	205-592-6	143-22-6	Xi; R41	Xi R: 41 S: (2-)26-39-46	Xi; R41: C ≥ 30 % Xi; R36: 20 % ≤ C < 30 %	
603-184-00-6	2-(hydroxymethyl)-2-[[2-hydroxy-3-(isooctadecyloxy)propoxy]methyl]-1,3-propanediol	416-380-1	146925-83-9	N; R50-53	N R: 50/53 S: 60-61		
603-185-00-1	2,4-dichloro-3-ethyl-6-nitrophenol	420-740-1	99817-36-4	T; R25 Xi; R41 R43 N; R50-53	T; N R: 25-41-43-50/53 S: (1/2-)26-36/37/39-45-60-61		
603-186-00-7	trans-(5RS,6SR)-6-amino-2,2-dimethyl-1,3-dioxepan-5-ol	419-050-3	79944-37-9	R43	Xi R: 43 S: (2-)22-24/25-26-37		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
603-187-00-2	2-((4,6-bis(4-(2-(1-methylpyridinium-4-yl)vinyl)phenylamino)-1,3,5-triazin-2-yl)(2-hydroxyethyl)amino)ethanol dichloride	419-360-9	163661-77-6	N; R50-53	N R: 50/53 S: 60-61		
603-189-00-3	reaction mass of complexes of: titanium, 2,2'-oxydiethanol, ammonium lactate, nitrilotris(2-propanol) and ethylene glycol	405-250-8	—	N; R51-53	N R: 51/53 S: 61		
603-191-00-4	2-(4,6-bis(2,4-dimethylphenyl)-1,3,5-triazin-2-yl)-5-(3-((2-ethylhexyl)oxy)-2-hydroxypropoxy)phenol	419-740-4	137658-79-8	R53	R: 53 S: 61		
603-195-00-6	2-[4-(4-methoxyphenyl)-6-phenyl-1,3,5-triazin-2-yl]-phenol	430-810-3	154825-62-4	R52-53	R: 52/53 S: 61		
603-196-00-1	2-(7-ethyl-1H-indol-3-yl)ethanol	431-020-1	41340-36-7	Xn; 22-48/22 N; R51-53	Xn; N R: 22-48/22-51/53 S: (2-)36/37/39-61		
603-197-00-7	tebuconazole (ISO); 1-(4-chlorophenyl)-4,4-dimethyl-3-(1,2,4-triazol-1-ylmethyl)pentan-3-ol	403-640-2	107534-96-3	Repr. Cat. 3; R63 Xn; R22 N; R51-53	Xn; N R: 22-51/53-63 S: (2-)22-36/37-61		
603-199-00-8	etoxazol (ISO); (RS)-5-tert-butyl-2-[2-(2,6-difluorophenyl)-4,5-dihydro-1,3-oxazol-4-yl]phenetole	—	153233-91-1	N; R50-53	N R: 50/53 S: 60-61	N; R50-53: C ≥ 0,25 % N; R51-53: 0,025 % ≤ C < 0,25 % R52-53: 0,0025 % ≤ C < 0,025 %	
604-001-00-2	phenol; carbolic acid; monohydroxybenzene; phenylalcohol	203-632-7	108-95-2	Muta. Cat. 3; R68 T; R23/24/25 Xn; R48/20/ 21/22 C; R34	T; R: 23/24/25-34-48/ 20/21/22-68 S: (1/2-)24/25-26-28- 36/37/39-45	T; R23/24/25: C ≥ 10 % Xn; R20/21/22: 3 % ≤ C < 10 % C; R34: C ≥ 3 % Xi; R36/38: 1 % ≤ C < 3 %	
604-002-00-8	pentachlorophenol	201-778-6	87-86-5	Carc. Cat. 3; R40 T+; R26 T; R24/25 Xi; R36/37/ 38 N; R50-53	T+; N R: 24/25-26-36/37/ 38-40-50/53 S: (1/2-)22-36/37-45- 52-60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
604-003-00-3	sodium pentachlorophenolate; [1] potassium pentachlorophenolate [2]	205-025-2 [1] 231-911-3 [2]	131-52-2 [1] 7778-73-6 [2]	Carc. Cat. 3; R40 T+; R26 T; R24/25 Xi; R36/37/ 38 N; R50-53	T+; N R: 24/25-26-36/37/ 38-40-50/53 S: (1/2-)22-28-36/37- 45-52-60-61		
604-004-00-9	<i>m</i> -cresol; [1] <i>o</i> -cresol; [2] <i>p</i> -cresol; [3] mix-cresol [4]	203-577-9 [1] 202-423-8 [2] 203-398-6 [3] 215-293-2 [4]	108-39-4 [1] 95-48-7 [2] 106-44-5 [3] 1319-77-3 [4]	T; R24/25 C; R34	T R: 24/25-34 S: (1/2-)36/37/39-45	T; R24/25: C ≥ 5 % Xn; R21/22: 1 % ≤ C < 5 % C; R34: C ≥ 5 % Xi; R36/38: 1 % ≤ C < 5 %	C
604-005-00-4	1,4-dihydroxybenzene; hydroquinone; quinol	204-617-8	123-31-9	Carc. Cat. 3; R40 Muta. Cat. 3; R68 Xn; R22 Xi; R41 R43 N; R50	Xn; N R: 22-40-41-43-50- 68 S: (2-)26-36/37/39-61		
604-006-00-X	3,4-xyleenol; [1] 2,5-xyleenol; [2] 2,4-xyleenol; [3] 2,3-xyleenol; [4] 2,6-xyleenol; [5] xyleenol; [6] 2,4(or 2,5)-xyleenol [7]	202-439-5 [1] 202-461-5 [2] 203-321-6 [3] 208-395-3 [4] 209-400-1 [5] 215-089-3 [6] 276-245-4 [7]	95-65-8 [1] 95-87-4 [2] 105-67-9 [3] 526-75-0 [4] 576-26-1 [5] 1300-71-6 [6] 71975-58-1 [7]	T; R24/25 C; R34 N; R51-53	T; N R: 24/25-34-51/53 S: (1/2-)26-36/37/39- 45-61		C
604-007-00-5	2-naphthol	205-182-7	135-19-3	Xn; R20/22 N; R50	Xn; N R: 20/22-50 S: (2-)24/25-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
604-008-00-0	2-chlorophenol; [1] 4-chlorophenol; [2] 3-chlorophenol; [3] chlorophenol [4]	202-433-2 [1] 203-402-6 [2] 203-582-6 [3] 246-691-4 [4]	95-57-8 [1] 106-48-9 [2] 108-43-0 [3] 25167-80-0 [4]	Xn; R20/21/22 N; R51-53	Xn; N R: 20/21/22-51/53 S: (2-)28-61		C
604-009-00-6	pyrogallol; 1,2,3-trihydroxybenzene	201-762-9	87-66-1	Muta. Cat. 3; R68 Xn; R20/21/22 R52-53	Xn R: 20/21/22-68-52/53 S: (2-)36/37-61	Xn; R20/21/22: C ≥ 10 %	
604-010-00-1	resorcinol; 1,3-benzenediol	203-585-2	108-46-3	Xn; R22 Xi; R36/38 N; R50	Xn; N R: 22-36/38-50 S: (2-)26-61	Xn; R22: C ≥ 10 %	
604-011-00-7	2,4-dichlorophenol	204-429-6	120-83-2	T; R24 Xn; R22 C; R34 N; R51-53	T; N R: 22-24-34-51/53 S: (1/2-)26-36/37/39-45-61		
604-012-00-2	4-chloro- <i>o</i> -cresol; 4-chloro-2-methyl phenol	216-381-3	1570-64-5	T; R23 C; R35 N; R50	T; C; N R: 23-35-50 S: (1/2-)26-36/37/39-45-61	C; R35: C ≥ 10 % C; R34: 5 % ≤ C < 10 % Xi; R36/37/38: 1 % ≤ C < 5 %	
604-013-00-8	2,3,4,6-tetrachlorophenol	200-402-8	58-90-2	T; R25 Xi; R36/38 N; R50-53	T; N R: 25-36/38-50/53 S: (1/2-)26-28-37-45-60-61	T; R25: C ≥ 5 % Xn; R22: 0,5 % ≤ C < 5 % Xi; R36/38: C ≥ 5 %	
604-014-00-3	chlorocresol; 4-chloro- <i>m</i> -cresol; 4-chloro-3-methylphenol	200-431-6	59-50-7	Xn; R21/22 Xi; R41 R43 N; R50	Xn; N R: 21/22-41-43-50 S: (2-)26-36/37/39-61	Xn; R21/22: C ≥ 10 %	
604-015-00-9	2,2'-methylenebis-(3,4,6-trichlorophenol); hexachlorophene	200-733-8	70-30-4	T; R24/25 N; R50-53	T; N R: 24/25-50/53 S: (1/2-)20-37-45-60-61	T; R24/25: C ≥ 2 % Xn; R21/22: 0,2 % ≤ C < 2 %	



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
604-016-00-4	1,2-dihydroxybenzene; pyrocatechol	204-427-5	120-80-9	Xn; R21/22 Xi; R36/38	Xn R: 21/22-36/38 S: (2-)22-26-37		
604-017-00-X	2,4,5-trichlorophenol	202-467-8	95-95-4	Xn; R22 Xi; R36/38 N; R50-53	Xn; N R: 22-36/38-50/53 S: (2-)26-28-60-61	Xn; R22: C ≥ 20 % Xi; R36/38: C ≥ 5 %	
604-018-00-5	2,4,6-trichlorophenol	201-795-9	88-06-2	Carc. Cat. 3; R40 Xn; R22 Xi; R36/38 N; R50-53	Xn; N R: 22-36/38-40-50/ 53 S: (2-)36/37-60-61		
604-019-00-0	dichlorophen (ISO)	202-567-1	97-23-4	Xn; R22 Xi; R36 N; R50-53	Xn; N R: 22-36-50/53 S: (2-)26-60-61		
604-020-00-6	2-phenylphenol (ISO); biphenyl-2-ol; 2-hydroxybiphenyl;	201-993-5	90-43-7	Xi; R36/37/ 38 N; R50	Xi; N R: 36/37/38-50 S: (2-)22-61		
604-021-00-1	sodium 2-biphenylate; 2-phenylphenol, sodium salt	205-055-6	132-27-4	Xn; R22 Xi; R37/38- 41 N; R50	Xn; N R: 22-37/38-41-50 S: (2-)22-26-61		
604-022-00-7	2,2-dimethyl-1,3-benzodioxol-4-ol	400-900-7	22961-82-6	Xi; R41	Xi R: 41 S: (2-)24-26-39		
604-023-00-2	2,4-dichloro-3-ethylphenol	401-060-4	—	C; R34 N; R50-53	C; N R: 34-50/53 S: (1/2-)26-36/39-45- 60-61		
604-024-00-8	4,4-isobutylethylidenediphenol	401-720-1	6807-17-6	Repr. Cat. 2; R60 Xi; R36 N; R50-53	T; N R: 60-36-50/53 S: 53-45-60-61		
604-025-00-3	2,5-bis(1,1-dimethylbutyl)hydroquinone	400-220-0	—	N; R51-53	N R: 51/53 S: 61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
604-026-00-9	2,2-spirobi(6-hydroxy-4,4,7-trimethylchromane)	400-270-3	—	N; R51-53	N R: 51/53 S: 61		
604-027-00-4	2-methyl-5-(1,1,3,3-tetramethylbutyl)hydroquinone	400-530-6	—	Xi; R41 R43 N; R51-53	Xi; N R: 41-43-51/53 S: (2-)24/25-26-37-61		
604-028-00-X	4-amino-3-fluorophenol	402-230-0	399-95-1	Carc. Cat. 2; R45 Xn; R22 R43 N; R51-53	T; N R: 45-22-43-51/53 S: 53-45-61		E
604-029-00-5	1-naphtol	201-969-4	90-15-3	Xn; R21/22 Xi; R37/38-41	Xn R: 21/22-37/38-41 S: (2-)22-26-37/39		
604-030-00-0	bisphenol A; 4,4'-isopropylidenediphenol	201-245-8	80-05-7	Repr. Cat. 3; R62 Xi; R37-41 R43	Xn R: 37-41-43-62 S: (2-)26-36/37-39-46		
604-031-00-6	guaiacol	201-964-7	90-05-1	Xn; R22 Xi; R36/38	Xn R: 22-36/38 S: (2-)26		
604-032-00-1	thymol	201-944-8	89-83-8	Xn; R22 C; R34 N; R51-53	C; N R: 22-34-51/53 S: (1/2-)26-28-36/37/39-45-61		
604-033-00-7	isobutyl but-3-enoate	401-170-2	24342-03-8	R10	R: 10 S: (2-)		
604-034-00-2	4,4'-thiodi-o-cresol	403-330-7	24197-34-0	Xi; R41 N; R50-53	Xi; N R: 41-50/53 S: (2-)26-39-60-61		
604-035-00-8	4-nonylphenol, reaction products with formaldehyde and dodecane-1-thiol	404-160-6	—	R43 R53	X R: 43-53 S: (2-)24-37-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
604-036-00-3	4,4'-oxybis(ethylenethio)diphenol	404-590-4	90884-29-0	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
604-037-00-9	3,5-xylenol; 3,5-dimethylphenol	203-606-5	108-68-9	T; R24/25 C; R34	T R: 24/25-34 S: (1/2-)26-28-36/37/ 39-45		
604-038-00-4	4-chloro-3,5-dimethylphenol; [1] chloroxylenol [2]	201-793-8 [1] 215-316-6 [2]	88-04-0 [1] 1321-23-9 [2]	Xn; R22 Xi; R36/38 R43	Xn R: 22-36/38-43 S: (2-)24-37		
604-039-00-X	ethyl 2-[4-[(6-chlorobenzoxazol-2-yl)oxy]phenoxy]propionate; fenoxaprop-ethyl	266-362-9	66441-23-4	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		
604-040-00-5	fomesafen (ISO); 5-[2-chloro-4-(trifluoromethyl)phenoxy]-N-(methylsulphonyl)-2-nitrobenzamide	276-439-9	72178-02-0	Xn; R22	Xn R: 22 S: (2-)		
604-041-00-0	acifluorfen (ISO); 5-[2-chloro-4-(trifluoromethyl)phenoxy]-2-nitrobenzoic acid [1] sodium 5-[2-chloro-4-(trifluoromethyl) phenoxy]-2-nitrobenzoate; acifluorfen-sodium [2]	256-634-5 [1] 263-560-7 [2]	50594-66-6 [1] 62476-59-9 [2]	Xn; R22 Xi; R38-41 N; R50-53	Xn; N R: 22-38-41-50/53 S: (2-)24-39-60-61		
604-042-00-6	4-nitrosophenol	203-251-6	104-91-6	Muta. Cat. 3; R68 Xn; R22 Xi; R41 N; R51-53	Xn; N R: 22-41-51/53-68 S: (2-)26-36/37/39- 47-49-61		
604-043-00-1	monobenzone; 4-hydroxyphenyl benzyl ether; hydroquinone monobenzyl ether	203-083-3	103-16-2	Xi; R36 R43	Xi R: 36-43 S: (2-)24/25-26-37		
604-044-00-7	mequinol; 4-methoxyphenol; hydroquinone monomethyl ether	205-769-8	150-76-5	Xn; R22 Xi; R36 R43	Xn R: 22-36-43 S: (2-)24/25-26-37/ 39-46		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
604-045-00-2	2,3,5-trimethylhydroquinone	211-838-3	700-13-0	Xn; R20 Xi; R37/38-41 R43 N; R50-53	Xn; N R: 20-37/38-41-43-50/53 S: (2-)24-26-37/39-60-61		
604-046-00-8	4-(4-isopropoxyphenylsulfonyl)phenol	405-520-5	95235-30-6	N; R51-53	N R: 51/53 S: 61		
604-047-00-3	4-(4-tolyloxy)biphenyl	405-730-7	51601-57-1	Xn; R48/22 R53	Xn R: 48/22-53 S: (2-)22-36-61		
604-048-00-9	4,4',4''-(ethan-1,1,1-triyl)triphenol	405-800-7	27955-94-8	N; R51-53	N R: 51/53 S: 61		
604-049-00-4	4-4'-methylenebis(oxyethylenethio)diphenol	407-480-4	93589-69-6	N; R51-53	N R: 51/53 S: 61		
604-051-00-5	3,5-bis((3,5-di- <i>tert</i> -butyl-4-hydroxy)benzyl)-2,4,6-trimethylphenol	401-110-5	87113-78-8	R52-53	R: 52/53 S: 61		
604-052-00-0	2,2'-methylenebis(6-(2 <i>H</i> -benzotriazol-2-yl)-4-(1,1,3,3-tetramethylbutyl)phenol)	403-800-1	103597-45-1	R53	R: 53 S: 61		
604-053-00-6	2-methyl-4-(1,1-dimethylethyl)-6-(1-methyl-pentadecyl)-phenol	410-760-9	157661-93-3	Xi; R38 R43 N; R50-53	Xi; N R: 38-43-50/53 S: (2-)24-37-60-61		
604-054-00-1	reaction mass of: 2-methoxy-4-(tetrahydro-4-methylene-2 <i>H</i> -pyran-2-yl)-phenol; 4-(3,6-dihydro-4-methyl-2 <i>H</i> -pyran-2-yl)-2-methoxyphenol	412-020-0	—	R43 R52-53	Xi R: 43-52/53 S: (2-)24-37-61		
604-055-00-7	2,2'-((3,3',5,5'-tetramethyl-(1,1'-biphenyl)-4,4'-diyl)-bis(oxy-methylene))-bis-oxirane	413-900-7	85954-11-6	Muta. Cat. 3; R68	Xn R: 68 S: (2-)22-36-37		
604-056-00-2	2-(2-hydroxy-3,5-dinitroanilino)ethanol	412-520-9	99610-72-7	F; R11 Repr. Cat. 3; R62 Xn; R22	F; Xn R: 11-22-62 S: (2-)22-33-36/37		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
604-057-00-8	reaction mass of: isomers of 2-(2H-benzotriazol-2-yl)-4-methyl-(n)-dodecylphenol; isomers of 2-(2H-benzotriazol-2-yl)-4-methyl-(n)-tetracosylphenol; isomers of 2-(2H-benzotriazol-2-yl)-4-methyl-5,6-didodecylphenol. n=5 or 6	401-680-5	—	N; R51-53	N R: 51/53 S: 61		
604-058-00-3	1,2-bis(3-methylphenoxy)ethane	402-730-9	54914-85-1	N; R50-53	N R: 50/53 S: 60-61		
604-059-00-9	2-n-hexadecylhydroquinone	406-400-5	—	Xn; R48/22 Xi; R38 R43 R53	Xn R: 38-43-48/22-53 S: (2-)22-36/37-61		
604-060-00-4	9,9-bis(4-hydroxyphenyl)fluorene	406-950-6	3236-71-3	Xi; R36-38 N; R50-53	Xi; N R: 36/38-50/53 S: (2-)26-37-60-61		
604-061-00-X	reaction mass of: 2-chloro-5-sec-tetradecylhydroquinones where sec-tetradecyl= 1-methyltridecyl; 1-ethyl-dodecyl; 1-propyl-dodecyl; 1-butyl-dodecyl; 1-pentyl-dodecyl; 1-hexyl-dodecyl	407-740-7	—	Xi; R38 R43 R52-53	Xi R: 38-43-52/53 S: (2-)24-37-61		
604-062-00-5	2,4-dimethyl-6-(1-methyl-pentadecyl)phenol	411-220-5	—	Xi; R38 R43 N; R50-53	Xi; N R: 38-43-50/53 S: (2-)24-37-60-61		
604-063-00-0	5,6-dihydroxyindole	412-130-9	3131-52-0	Xn; R22 Xi; R41 N; R51-53	Xn; N R: 22-41-51/53 S: (2-)22-26-36/37/ 39-61		
604-064-00-6	2-(4,6-diphenyl-1,3,5-triazin-2-yl)-5-((hexyl)oxy)-phenol	411-380-6	147315-50-2	R53	R: 53 S: 61		
604-065-00-1	4,4',4''-(1-methylpropan-1-yl-3-ylidene)tris(2-cyclohexyl-5-methylphenol)	407-460-5	111850-25-0	N; R51-53	N R: 51/53 S: 61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
604-066-00-7	reaction mass of: phenol, 6-(1,1-dimethylethyl)-4-tetrapropyl-2-[(2-hydroxy-5-tetra-propylphenyl)methyl (C <sub>41</sub> -compound) and methane, 2,2'-bis[6-(1,1-dimethyl-ethyl)-1-hydroxy-4-tetrapropyl-phenyl]]- (C <sub>45</sub> -compound); 2,6-bis(1,1-dimethylethyl)-4-tetra-propyl-phenol and 2-(1,1-dimethylethyl)-4-tetrapropyl-phenol; 2,6-bis[(6-(1,1-dimethylethyl)-1-hydroxy-4-tetrapropylphenyl)methyl]-4-(tetrapropyl)phenol and 2-[(6-(1,1-dimethylethyl)-1-hydroxy-4-tetrapropylphenylmethyl)-6-[1-hydroxy-4-tetrapropylphenyl)methyl]-4-(tetrapropyl)phenol	414-550-8	—	N; R50-53	N R: 50/53 S: 60-61		
604-067-00-2	reaction mass of: 2,2'-[[[2-hydroxyethyl]imino]bis(methylene) bis[4-dodecylphenol]; formaldehyde, oligomer with 4-dodecyl phenol and 2-aminoethanol(n = 2); formaldehyde, oligomer with 4-dodecyl phenol and 2-aminoethanol(n = 3, 4 and higher)	414-520-4	—	Xi; R38-41 N; R50-53	Xi; N R: 38-41-50/53 S: (2-)26-37/39-60-61		
604-068-00-8	(±)-4-[2-[[3-(4-hydroxyphenyl)-1-methylpropyl]amino]-1-hydroxyethyl]phenol hydrochloride	415-170-5	90274-24-1	Xn; R20/22 R43	Xn R: 20/22-43 S: (2-)24-26-37		
604-069-00-3	2-(1-methylpropyl)-4-tert-butylphenol	421-740-4	51390-14-8	C; R34 N; R51-53	C; N R: 34-51/53 S: (1/2-)26-36/37/39-45-61		
604-070-00-9	triclosan; 2,4,4'-trichloro-2'-hydroxy-diphenyl-ether; 5-chloro-2-(2,4-dichlorophenoxy)phenol	222-182-2	3380-34-5	Xi; R36/38 N; R50-53	Xi; N R: 36/38-50/53 S: 26-39-46-60-61	N; R50-53: C ≥ 0,25 % N; R51-53: 0,025 % ≤ C < 0,25 % R52-53: 0,0025 % ≤ C < 0,025 %	
605-001-00-5	formaldehyde ...%	200-001-8	50-00-0	Carc. Cat. 3; R40 T; R23/24/25 C; R34 R43	T R: 23/24/25-34-40-43 S: (1/2-)26-36/37/39-45-51	T; R23/24/25: C ≥ 25 % Xn; R20/21/22: 5 % ≤ C < 25 % C; R34: C ≥ 25 % Xi; R36/37/38: 5 % ≤ C < 25 % R43: C ≥ 0,2 %	B D
605-002-00-0	1,3,5-trioxan; trioxymethylene	203-812-5	110-88-3	F; R11 Repr. Cat. 3; R63 Xi; R37	F; Xn R: 11-37-63 S: (2-)36/37-46		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
605-003-00-6	acetaldehyde; ethanal	200-836-8	75-07-0	F+; R12 Carc. Cat. 3; R40 Xi; R36/37	F+; Xn R: 12-36/37-40 S: (2-)16-33-36/37		
605-004-00-1	2,4,6-trimethyl-1,3,5-trioxan; paraldehyde	204-639-8	123-63-7	F; R11 ⊗	F R: 11 S: (2-)9-16-29-33		
605-005-00-7	2,4,6,8-tetramethyl-1,3,5,7-tetraoxacyclooctane; metaldehyde	203-600-2	108-62-3	R10 ⊗ Xn; R22	Xn R: 10-22 S: (2-)13-25-46		
605-006-00-2	butyraldehyde	204-646-6	123-72-8	F; R11	F R: 11 S: (2-)9-29-33		
605-007-00-8	1,1-dimethoxyethane; dimethyl acetal	208-589-8	534-15-6	F; R11	F R: 11 S: (2-)9-16-33		
605-008-00-3	acrylaldehyde; acrolein; prop-2-enal	203-453-4	107-02-8	F; R11 T+; R26 T; R24/25 C; R34 N; R50	F; T+; N R: 11-24/25-26-34-50 S: 23-26-28-36/37/ 39-45-61		D
605-009-00-9	crotonaldehyde; 2-butenal; [1] (E)-2-butenal; (E)-crotonaldehyde [2]	224-030-0 [1] 204-647-1 [2]	4170-30-3 [1] 123-73-9 [2]	F; R11 Muta. Cat. 3; R68 T+; R26 T; R24/25 Xn; R48/22 Xi; R37/38-41 N; R50	F; T+; N R: 11-24/25-26-37/ 38-41-48/22-50-68 S: (1/2-)26-28-36/37/ 39-45-61		
605-010-00-4	2-furaldehyde	202-627-7	98-01-1	Carc. Cat. 3; R40 T; R23/25 Xn; R21 Xi; R36/37	T R: 21-23/25-36/37-40 S: (1/2-)26-36/37/39-45	T; R23/25: C ≥ 5 % Xn; R20/22: 1 % ≤ C < 5 %	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
605-011-00-X	2-chlorobenzaldehyde; o-chlorobenzaldehyde	201-956-3	89-98-5	C; R34	C R: 34 S: (1/2-)26-45		
605-012-00-5	benzaldehyde	202-860-4	100-52-7	Xn; R22	Xn R: 22 S: (2-)24		
605-013-00-0	chloralose (INN); (R)-1,2-O—(2,2,2-trichloroethylidene)- $\alpha$ -D-glucofuranose; glucochloralose; anhydroglucochloral	240-016-7	15879-93-3	Xn; R20/22	Xn R: 20/22 S: (2-)16-24/25-28		
605-014-00-6	chloral hydrate; 2,2,2-trichloroethane-1,1-diol	206-117-5	302-17-0	T; R25 Xi; R36/38	T R: 25-36/38 S: (1/2-)25-45		
605-015-00-1	1,1-diethoxyethane; acetal	203-310-6	105-57-7	F; R11 Xi; R36/38	F; Xi R: 11-36/38 S: (2-)9-16-33	Xi; R36/38: C $\geq$ 10 %	
605-016-00-7	glyoxal...%; ethandial...%	203-474-9	107-22-2	Muta. Cat. 3; R68 Xn; R20 Xi; R36/38 R43	Xn R: 20-36/38-43-68 S: (2-)36/37	Xn; R20: C $\geq$ 10 % Xi; R36/38: C $\geq$ 10 %	B
605-017-00-2	1,3-dioxolane	211-463-5	646-06-0	F; R11	F R: 11 S: (2-)16		
605-018-00-8	propanal; propionaldehyde	204-623-0	123-38-6	F; R11 Xi; R36/37/ 38	F; Xi R: 11-36/37/38 S: (2-)9-16-29		
605-019-00-3	citral	226-394-6	5392-40-5	Xi; R38 R43	Xi R: 38-43 S: (2-)24/25-37		
605-020-00-9	safrole; 5-allyl-1,3-benzodioxole	202-345-4	94-59-7	Carc. Cat. 2; R45 Muta. Cat. 3; R68 Xn; R22	T R: 45-22-68 S: 53-45		E



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
605-021-00-4	formaldehyde, reaction products with butylphenol	294-145-9	91673-30-2	R43	Xi R: 43 S: (2-)24-37		
605-022-00-X	glutaral; glutaraldehyde; 1,5-pentanedial	203-856-5	111-30-8	T; R23/25 C; R34 R42/43 N; R50	T; N R: 23/25-34-42/43-50 S: (1/2-)26-36/37/39-45-61	T; R25: C ≥ 50 % Xn; R22: 2 % ≤ C < 50 % T; R23: C ≥ 25 % Xn; R20: 2 % ≤ C < 25 % C; R34: C ≥ 10 % Xi; R37/38-41: 2 % ≤ C < 10 % Xi; R36/37/38: 0,5 % ≤ C < 2 % R43: C ≥ 0,5 %	
605-025-00-6	chloroacetaldehyde	203-472-8	107-20-0	Carc. Cat. 3; R40 T+; R26 T; R24/25 C; R34 N; R50	T+; N R: 24/25-26-34-40-50 S: (1/2-)26-28-36/37/39-45-61		
605-026-00-1	2,5,7,7-tetramethyloctanal	405-690-0	114119-97-0	Xi; R38 R43 N; R51-53	Xi; N R: 38-43-51/53 S: (2-)24-37-61		
605-027-00-7	reaction mass of: 3a,4,5,6,7,7a-hexahydro-4,7-methano-1H-indene-6-carboxaldehyde; 3a,4,5,6,7,7a-hexahydro-4,7-methano-1H-indene-5-carboxaldehyde	410-480-7	—	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
605-028-00-2	β-methyl-3-(1-methylethyl)-benzenepropanal	412-050-4	125109-85-5	N; R51-53	N R: 51/53 S: 61		
605-029-00-8	2-cyclohexylpropanal	412-270-0	2109-22-0	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
605-030-00-3	1-(p-methoxyphenyl)acetaldehyde oxime	411-510-1	3353-51-3	R43	Xi R: 43 S: (2-)24-37		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
605-031-00-9	reaction mass of: 2,2-dimethoxyethanal [(this component is considered to be anhydrous in terms of identity, structure and composition. However, 2,2-dimethoxyethanal will exist in a hydrated form. 60 % anhydrous is equivalent to 70.4 % hydrate; water(Including free water and water in hydrated 2,2-dimethoxyethanal)]	421-890-0	—	R43	Xi R: 43 S: (2-)24-37		
606-001-00-8	acetone; propan-2-one; propanone	200-662-2	67-64-1	F; R11 Xi; R36 R66 R67	F; Xi R: 11-36-66-67 S: (2-)9-16-26		
606-002-00-3	butanone; ethyl methyl ketone	201-159-0	78-93-3	F; R11 Xi; R36 R66 R67	F; Xi R: 11-36-66-67 S: (2-)9-16		
606-003-00-9	heptan-3-one; butyl ethyl ketone	203-388-1	106-35-4	R10 Xn; R20 Xi; R36	Xn R: 10-20-36 S: (2-)24		
606-004-00-4	4-methylpentan-2-one; isobutyl methyl ketone	203-550-1	108-10-1	F; R11 Xn; R20 Xi; R36/37 R66	F; Xn R: 11-20-36/37-66 S: (2-)9-16-29		
606-005-00-X	2,6-dimethylheptan-4-one; di-isobutyl ketone	203-620-1	108-83-8	R10 Xi; R37	Xi R: 10-37 S: (2-)24	Xi; R37: C ≥ 10 %	
606-006-00-5	pentan-3-one; diethyl ketone	202-490-3	96-22-0	F; R11 Xi; R37 R66 R67	F; Xi R: 11-37-66-67 S: (2-)9-16-25-33		
606-007-00-0	3-methylbutan-2-one; methyl isopropyl ketone	209-264-3	563-80-4	F; R11	F R: 11 S: (2-)9-16-33		
606-009-00-1	4-methylpent-3-en-2-one; mesityl oxide	205-502-5	141-79-7	R10 Xn; R20/21/ 22	Xn R: 10-20/21/22 S: (2-)25	Xn; R20/21/22: C ≥ 5 %	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
606-010-00-7	cyclohexanone	203-631-1	108-94-1	R10 Xn; R20	Xn R: 10-20 S: (2-)25		
606-011-00-2	2-methylcyclohexanone	209-513-6	583-60-8	R10 Xn; R20	Xn R: 10-20 S: (2-)25		
606-012-00-8	3,5,5-trimethylcyclohex-2-enone; isophorone	201-126-0	78-59-1	Carc. Cat. 3; R40 Xn; R21/22 Xi; R36/37	Xn R: 21/22-36/37-40 S: (2-)13-23-36/37/ 39-46	Xi; R36/37: C ≥ 10 %	
606-013-00-3	p-benzoquinone; quinone	203-405-2	106-51-4	T; R23/25 Xi; R36/37/ 38 N; R50	T; N R: 23/25-36/37/38- 50 S: (1/2-)26-28-45-61		
606-014-00-9	chlorophacinone (ISO); 2-(2-(4-chlorophenyl)phenylacetyl)indan-1,3-dione	223-003-0	3691-35-8	T+; R27/28 T; R23-48/ 24/25 N; R50-53	T+; N R: 23-27/28-48/24/ 25-50/53 S: (1/2-)36/37-45-60- 61		
606-016-00-X	pindone (ISO); 2-pivaloylindan-1,3-dione	201-462-8	83-26-1	T; R25-48/25 N; R50-53	T; N R: 25-48/25-50/53 S: (1/2-)37-45-60-61		
606-017-00-5	diketene; diketen	211-617-1	674-82-8	R10 Xn; R20	Xn R: 10-20 S: (2-)3		D
606-018-00-0	dichlone (ISO); 2,3-dichloro-1,4-naphthoquinone	204-210-5	117-80-6	Xn; R22 Xi; R36/38 N; R50-53	Xn; N R: 22-36/38-50/53 S: (2-)26-60-61		
606-019-00-6	chlordecone (ISO); perchloropentacyclo[5,3,0,0 <sup>2,6</sup> ,0 <sup>3,9</sup> ,0 <sup>4,8</sup> ]decan-5-one; decachloropentacyclo[5,2,1,0 <sup>2,6</sup> ,0 <sup>3,9</sup> ,0 <sup>5,8</sup> ]decan-4-one	205-601-3	143-50-0	Carc. Cat. 3; R40 T; R24/25 N; R50-53	T; N R: 24/25-40-50/53 S: (1/2-)22-36/37-45- 60-61		
606-020-00-1	5-methylheptan-3-one	208-793-7	541-85-5	R10 Xi; R36/37	Xi R: 10-36/37 S: (2-)23	Xi; R36/37: C ≥ 10 %	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
606-021-00-7	N-methyl-2-pyrrolidone	212-828-1	872-50-4	Xi; R36/38	Xi R: 36/38 S: (2-)41	Xi; R36/38: C ≥ 10 %	
606-022-00-2	1-phenyl-3-pyrazolidone	202-155-1	92-43-3	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)61		
606-023-00-8	4-methoxy-4-methylpentan-2-one	203-512-4	107-70-0	R10 Xn; R20	Xn R: 10-20 S: (2-)23-24/25		
606-024-00-3	heptan-2-one; methyl amyl ketone	203-767-1	110-43-0	R10 Xn; R20/22	Xn R: 10-20/22 S: (2-)24/25		
606-025-00-9	cyclopentanone	204-435-9	120-92-3	R10 Xi; R36/38	Xi R: 10-36/38 S: (2-)23		
606-026-00-4	5-methylhexan-2-one; isoamyl methyl ketone	203-737-8	110-12-3	R10 Xn; R20	Xn R: 10-20 S: (2-)23-24/25		
606-027-00-X	heptan-4-one; di-n-propyl ketone	204-608-9	123-19-3	R10 Xn; R20	Xn R: 10-20 S: (2-)24/25		
606-028-00-5	2,4-dimethylpentan-3-one; di-isopropyl ketone	209-294-7	565-80-0	F; R11 Xn; R20	F; Xn R: 11-20 S: (2-)9-16-24/25		
606-029-00-0	pentane-2,4-dione; acetylacetone	204-634-0	123-54-6	R10 Xn; R22	Xn R: 10-22 S: (2-)21-23-24/25		
606-030-00-6	hexan-2-one; methyl butyl ketone; butyl methyl ketone; methyl-n-butyl ketone	209-731-1	591-78-6	R10 Repr. Cat. 3; R62 T; R48/23 R67	T R: 10-48/23-62-67 S: (1/2-)36/37-45		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
606-031-00-1	3-propanolide; 1,3-propiolactone	200-340-1	57-57-8	Carc. Cat. 2; R45 T+; R26 Xi; R36/38	T+ R: 45-26-36/38 S: 53-45		E
606-032-00-7	hexachloroacetone	204-129-5	116-16-5	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)24/25-61		
606-033-00-2	2-(3,4-dichlorophenyl)-4-methyl-1,2,4-oxadiazolidinedione; methazole	243-761-6	20354-26-1	Xn; R21/22 Xi; R36/38 N; R51-53	Xn; N R: 21/22-36/38-51/ 53 S: (2-)36/37-61		
606-034-00-8	metribuzin (ISO); 4-amino-6- <i>tert</i> -butyl-3-methylthio-1,2,4-triazin-5(4H)-one; 4-amino-4,5-dihydro-6-(1,1-dimethylethyl)-3-methylthio- 1,2,4-triazin-5-one	244-209-7	21087-64-9	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
606-035-00-3	chloridazon (ISO); 5-amino-4-chloro-2-phenylpyridazine-3-(2H)-one; pyrazon	216-920-2	1698-60-8	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		
606-036-00-9	quinomethionate; chinomethionat (ISO); 6-methyl-1,3-dithiolo(4,5- <i>b</i> )quinoxalin-2-one	219-455-3	2439-01-2	Repr. Cat. 3; R62 Xn; R20/21/ 22-48/22 Xi; R36 R43 N; R50-53	Xn; N R: 20/21/22-36-43- 48/22-50/53-62 S: (2-)24-37-60-61		
606-037-00-4	triadimefon (ISO); 1-(4-chlorophenoxy)-3,3-dimethyl-1-(1,2,4-triazol-1-yl)buta- none	256-103-8	43121-43-3	Xn; R22 R43 N; R51-53	Xn; N R: 22-43-51/53 S: (2-)24-37-61		
606-038-00-X	diphacinone (ISO); 2-diphenylacetylidand-1,3-dione	201-434-5	82-66-6	T+; R28 T; R48/23/ 24/25	T+ R: 28-48/23/24/25 S: (1/2-)36/37-45		
606-039-00-5	5(or 6)- <i>tert</i> -butyl-2'-chloro-6'-ethylamino-3',7'-dimethylspiro (isobenzofuran-1(1H),9'-xanthene)-3-one	400-680-2	—	Xn; R20 N; R50-53	Xn; N R: 20-50/53 S: (2-)60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
606-040-00-0	( <i>N</i> -benzyl- <i>N</i> -ethyl)amino-3-hydroxyacetophenone hydrochloride	401-840-4	55845-90-4	Xi; R41 N; R51-53	Xi; N R: 41-51/53 S: (2-)26-39-61		
606-041-00-6	2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one	400-600-6	71868-10-5	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)22-61		
606-042-00-1	acetophenone	202-708-7	98-86-2	Xn; R22 Xi; R36	Xn R: 22-36 S: (2-)26		
606-043-00-7	2,4-di- <i>tert</i> -butylcyclohexanone	405-340-7	13019-04-0	Xi; R38 N; R51-53	Xi; N R: 38-51/53 S: (2-)37-61		
606-044-00-2	2,4,6-trimethylbenzophenone	403-150-9	954-16-5	Xn; R22 Xi; R36 N; R50-53	Xn; N R: 22-36-50/53 S: (2-)26-60-61		
606-045-00-8	oxadiazon (ISO); 3-[2,4-dichloro-5-(1-methylethoxy)phenyl]-5-(1,1-dimethylethyl)-1,3,4-oxadiazol-2(3 <i>H</i> )-one	243-215-7	19666-30-9	N; R50-53	N R: 50/53 S: 60-61		
606-046-00-3	reaction mass of <i>cis</i> - and <i>trans</i> -cyclohexadec-8-en-1-one	401-700-2	3100-36-5	N; R50-53	N R: 50/53 S: 60-61		
606-047-00-9	2-benzyl-2-dimethylamino-4-morpholinobutyrophenone	404-360-3	119313-12-1	N; R50-53	N R: 50/53 S: 60-61		
606-048-00-4	2'-anilino-3'-methyl-6'-dipentylaminospiro(isobenzofuran-1(1 <i>H</i> ),9'-xanthen)-3-one	406-480-1	—	R53	R: 53 S: 61		
606-049-00-X	4-( <i>trans</i> -4-propylcyclohexyl)acetophenone	406-700-6	78531-61-0	R43 R53	Xi R: 43-53 S: (2-)24-37-61		
606-050-00-5	6-anilino-1-benzoyl-4-(4- <i>tert</i> -pentylphenoxy)naphto[1,2,3- <i>de</i> ]quinoline-2,7-(3 <i>H</i> )-dione	412-480-2	72453-58-8	N; R51-53	N R: 51/53 S: 61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
606-051-00-0	4-pentylcyclohexanone	406-670-4	61203-83-6	N; R51-53	N R: 51/53 S: 61		
606-052-00-6	4-( <i>N,N</i> -dibutylamino)-2-hydroxy-2'-carboxybenzophenone	410-410-5	54574-82-2	R52-53	R: 52/53 S: 61		
606-053-00-1	flurtamone (ISO); ( <i>RS</i> )-5-methylamino-2-phenyl-4-( $\alpha$ , $\alpha$ , $\alpha$ -trifluoro- <i>m</i> -tolyl) furan-3(2 <i>H</i> )-one	—	96525-23-4	N; R50-53	N R: 50/53 S: 60-61		
606-054-00-7	isoxaflutole (ISO); 5-cyclopropyl-1,2-oxazol-4-yl $\alpha$ , $\alpha$ , $\alpha$ -trifluoro-2-mesyl- <i>p</i> -tolyl ketone	—	141112-29-0	Repr. Cat. 3; R63 N; R50-53	Xn; N R: 50/53-63 S: (2-)36/37-60-61		
606-055-00-2	1-(2,3-dihydro-1,3,3,6-tetramethyl-1-(1-methylethyl)-1 <i>H</i> - inden-5-yl)ethanone	411-180-9	92836-10-7	Xn; R22-48/ 22 N; R51-53	Xn; N R: 22-48/22-51/53 S: (2-)24-36-61		
606-056-00-8	4-chloro-3',4'-dimethoxybenzophenone	404-610-1	116412-83-0	N; R50-53	N R: 50/53 S: 60-61		
606-057-00-3	4-propylcyclohexanone	406-810-4	40649-36-3	Xi; R38 R52-53	Xi R: 38-52/53 S: (2-)25-37-61		
606-058-00-9	4'-fluoro-2,2-dimethoxyacetophenone	407-500-1	21983-80-2	R43 R52-53	Xi R: 43-52/53 S: (2-)24-37-61		
606-059-00-4	2,4-difluoro- $\alpha$ -(1 <i>H</i> -1,2,4-triazol-1-yl)acetophenone hydro- chloride	412-390-3	86386-75-6	Xn; R22 Xi; R41 R43	Xn R: 22-41-43 S: (2-)22-26-36/37/39		
606-060-00-X	reaction mass of: <i>trans</i> -2,4-dimethyl-2-(5,6,7,8-tetrahydro- 5,5,8,8-tetramethyl-naphthalene-2-yl)-1,3-dioxolane; <i>cis</i> -2,4-dimethyl-2-(5,6,7,8-tetrahydro-5,5,8,8-tetramethyl- naphthalene-2-yl)-1,3-dioxolane	412-950-7	—	N; R50-53	N R: 50/53 S: 60-61		
606-061-00-5	(3-chlorophenyl)-(4-methoxy-3-nitrophenyl)methanone	423-290-4	66938-41-8	Muta. Cat. 3; R68 N; R50-53	Xn; N R: 68-50/53 S: (2-)22-36/37-60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
606-062-00-0	tetrahydrothiopyran-3-carboxaldehyde	407-330-8	61571-06-0	Repr. Cat. 2; R61 Xi; R41 R52-53	T R: 61-41-52/53 S: 53-45-61		
606-063-00-6	(E)-3-(2-chlorophenyl)-2-(4-fluorophenyl)propenal	410-980-5	112704-51-5	Xi; R36 R43	Xi R: 36-43 S: (2-)24-26-37		
606-064-00-1	pregn-5-ene-3,20-dione bis(ethylene ketal)	407-450-0	7093-55-2	R53	R: 53 S: 61		
606-065-00-7	1-(4-morpholinophenyl)butan-1-one	413-790-0	—	N; R51-53	N R: 51/53 S: 61		
606-066-00-2	(E)-5[(4-chlorophenyl)methylene]-2,2-dimethylcyclopentanone	410-440-9	164058-20-2	N; R51-53	N R: 51/53 S: 61		
606-067-00-8	reaction mass of: 1-(2,3,6,7,8,9-hexahydro-1,1-dimethyl-1H-benz(g)inden-4-yl)ethanone; 1-(2,3,5,6,7,8-hexahydro-1,1-dimethyl-1H-benz(f)inden-4-yl)ethanone; 1-(2,3,6,7,8,9-hexahydro-1,1-dimethyl-1H-benz(g)inden-5-yl)ethanone; 1-(2,3,6,7,8,9-hexahydro-3,3-dimethyl-1H-benz(g)inden-5-yl)ethanone	414-870-8	96792-67-5	N; R50-53	N R: 50/53 S: 60-61		
606-068-00-3	2,7,11-trimethyl-13-(2,6,6-trimethylcyclohex-1-en-1-yl)tridecahexaen-2,4,6,8,10,12-al	415-770-7	1638-05-7	Xn; R48/22 R43 R52-53	Xn R: 43-48/22-52/53 S: (2-)22-36/37-61		
606-069-00-9	spiro[1,3-dioxolane-2,5'-(4',4',8',8'-tetramethyl-hexahydro-3',9'-methanonaphthalene)]	415-460-1	154171-76-3	N; R51-53	N R: 51/53 S: 24-61		
606-070-00-4	butoxydim (ISO); 5-(3-butyryl-2,4,6-trimethylphenyl)-2-[1-(ethoxyimino)propyl]-3-hydroxycyclohex-2-en-1-one	414-790-3	138164-12-2	Repr. Cat. 3; R62-63 Xn; R22 Xi; R38 N; R50-53	Xn; N R: 22-38-62-63-50/ 53 S: (2-)22-36/37-60-61		



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
606-071-00-X	17-spiro(5,5-dimethyl-1,3-dioxan-2-yl)androsta-1,4-diene-3-one	421-050-3	13258-43-0	N; R50-53	N R: 50/53 S: 22-60-61		
606-072-00-5	3-acetyl-1-phenyl-pyrrolidine-2,4-dione	421-600-2	719-86-8	Xn; R48/22 N; R51-53	Xn; N R: 48/22-51/53 S: (2-)22-36/37-61		
606-073-00-0	4,4'-bis(dimethylamino)benzophenone; Michler's ketone	202-027-5	90-94-8	Carc. Cat. 2; R45 Muta. Cat. 3; R68 Xi; R41	T R: 45-41-68 S: 53-45		
606-075-00-1	1-benzyl-5-ethoxyimidazolidine-2,4-dione	417-340-4	65855-02-9	Xn; R22	Xn R: 22 S: (2-)22		
606-076-00-7	1-((2-quinolinyl-carbonyl)oxy)-2,5-pyrrolidinedione	418-630-3	136465-99-1	Xi; R41 R43	Xi R: 41-43 S: (2-)24-26-37/39		
606-077-00-2	(3S,4S)-3-hexyl-4-[(R)-2-hydroxytridecyl]-2-oxetanone	418-650-2	104872-06-2	N; R50-53	N R: 50/53 S: 60-61		
606-078-00-8	1-octylazepin-2-one	420-040-6	59227-88-2	C; R34 R43 N; R51-53	C; N R: 34-43-51/53 S: (1/2-)26-36/37/39-45-61		
606-079-00-3	2-n-butyl-benzo[d]isothiazol-3-one	420-590-7	4299-07-4	C; R34 R43 N; R50-53	C; N R: 34-43-50/53 S: (1/2-)26-36/37/39-45-60-61		
606-080-00-9	Reaction product of: 3-hydroxy-5,7-di-tert-butylbenzofuran-2-one with o-xylene	417-100-9	—	R53	R: 53 S: 61		
606-081-00-4	(3β, 5α, 6β)-3-(acetyloxy)-5-bromo-6-hydroxy-androstan-17-one	419-790-7	4229-69-0	R43 R52-53	Xi R: 43-52/53 S: (2-)22-36/37-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
606-082-00-X	reaction mass of: butan-2-one oxime; syn-O,O'-di(butan-2-one oxime)diethoxysilane	406-930-7		T; R48/25 R43 R52-53	T R: 43-48/25-52/53 S: (1/2-)25-36/37-45-61		
606-083-00-5	2-chloro-5-sec-hexadecylhydroquinone	407-750-1	137193-60-3	Xi; R36/38 R43 R52-53	Xi R: 36/38-43-52/53 S: (2-)24-26-37-61		
606-084-00-0	1-(4-methoxy-5-benzofuranyl)-3-phenyl-1,3-propanedione	414-540-3	484-33-3	N; R50-53	N R: 50/53 S: 60-61		
606-085-00-6	(1R,4S)-2-azabicyclo[2.2.1]hept-5-en-3-one	418-530-1	79200-56-9	Xn; R22 Xi; R41 R43	Xn R: 22-41-43 S: (2-)24-26-37/39		
606-086-00-1	1-(3,3-dimethylcyclohexyl)pent-4-en-1-one	422-330-8	56973-87-6	N; R51-53	N R: 51/53 S: 61		
606-087-00-7	6-ethyl-5-fluoro-4(3H)-pyrimidone	422-460-5	137234-87-8	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
606-088-00-2	2,4,4,7-tetramethyl-6-octen-3-one	422-520-0	74338-72-0	Xi; R38 N; R51-53	Xi; N R: 38-51/53 S: (2-)37-61		
606-089-00-8	reaction mass of: 1,4-diamino-2-chloro-3-phenoxyanthraquinone; 1,4-diamino-2,3-bis-phenoxyanthraquinone	423-220-2	12223-77-7	R53	R: 53 S: 61		
606-091-00-9	6-chloro-5-(2-chloroethyl)-1,3-dihydroindol-2-one	421-320-0	118289-55-7	N; R50-53	N R: 50/53 S: 60-61		
606-092-00-4	reaction mass of: (E)-oxacyclohexadec-12-en-2-one; (E)-oxacyclohexadec-13-en-2-one; a)(Z)-oxacyclohexadec-(12)-en-2-one and b) (Z)-oxacyclohexadec-(13)-en-2-one	422-320-3		N; R50-53	N R: 50/53 S: 60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-001-00-0	formic acid ... %	200-579-1	64-18-6	C; R35	C R: 35 S: (1/2-)23-26-45	C; R35: C ≥ 90 % C; R34: 10 % ≤ C < 90 % Xi; R36/38: 2 % ≤ C < 10 %	B
607-002-00-6	acetic acid ... %	200-580-7	64-19-7	R10 C; R35	C R: 10-35 S: (1/2-)23-26-45	C; R35: C ≥ 90 % C; R34: 25 % ≤ C < 90 % Xi; R36/38: 10 % ≤ C < 25 %	B
607-003-00-1	chloroacetic acid	201-178-4	79-11-8	T; R25 C; R34 N; R50	T; N R: 25-34-50 S: (1/2-)23-37-45-61		
607-004-00-7	TCA (ISO); trichloroacetic acid	200-927-2	76-03-9	C; R35 N; R50-53	C; N R: 35-50/53 S: (1/2-)26-36/37/39-45-60-61	C; R35: C ≥ 10 % C; R34: 5 % ≤ C < 10 % Xi; R36/37/38: 1 % ≤ C < 5 %	
607-005-00-2	TCA-sodium (ISO); sodium trichloroacetate	211-479-2	650-51-1	Xi; R37 N; R50-53	Xi; N R: 37-50/53 S: (2-)46-60-61		
607-006-00-8	oxalic acid	205-634-3	144-62-7	Xn; R21/22	Xn R: 21/22 S: (2-)24/25	Xn; R21/22: C ≥ 5 %	
607-007-00-3	salts of oxalic acid	—	—	Xn; R21/22	Xn R: 21/22 S: (2-)24/25	Xn; R21/22: C ≥ 5 %	A
607-008-00-9	acetic anhydride	203-564-8	108-24-7	R10 Xn; R20/22 C; R34	C R: 10-20/22-34 S: (1/2-)26-36/37/39-45	C; R34: C ≥ 25 % Xi; R37/38-41: 5 % ≤ C < 25 % Xi; R36: 1 % ≤ C < 5 %	
607-009-00-4	phthalic anhydride	201-607-5	85-44-9	Xn; R22 Xi; R37/38-41 R42/43	Xn R: 22-37/38-41-42/43 S: (2-)23-24/25-26-37/39-46		
607-010-00-X	propionic anhydride	204-638-2	123-62-6	C; R34	C R: 34 S: (1/2-)26-45	C; R34: C ≥ 25 % Xi; R36/38: 10 % ≤ C < 25 %	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-011-00-5	acetyl chloride	200-865-6	75-36-5	F; R11 R14 C; R34	F; C R: 11-14-34 S: (1/2-)9-16-26-45		
607-012-00-0	benzoyl chloride	202-710-8	98-88-4	C; R34	C R: 34 S: (1/2-)26-45		
607-013-00-6	dimethyl carbonate	210-478-4	616-38-6	F; R11	F R: 11 S: (2-)9-16		
607-014-00-1	methyl formate	203-481-7	107-31-3	F+; R12 Xn; R20/22 Xi; R36/37	F+; Xn R: 12-20/22-36/37 S: (2-)9-16-24-26-33		
607-015-00-7	ethyl formate	203-721-0	109-94-4	F; R11 Xn; R20/22 Xi; R36/37	F; Xn R: 11-20/22-36/37 S: (2-)9-16-24-26-33		
607-016-00-2	propyl formate; [1] isopropyl formate [2]	203-798-0 [1] 210-901-2 [2]	110-74-7 [1] 625-55-8 [2]	F; R11 Xi; R36/37 R67	F; Xi R: 11-36/37-67 S: (2-)9-16-24-33		C
607-017-00-8	butyl formate; [1] tert-butyl formate; [2] isobutyl formate [3]	209-772-5 [1] 212-105-0 [2] 208-818-1 [3]	592-84-7 [1] 762-75-4 [2] 542-55-2 [3]	F; R11 Xi; R36/37	F; Xi R: 11-36/37 S: (2-)9-16-24-33		C
607-018-00-3	isopentyl formate; [1] pentyl formate; [2] 2-methylbutyl formate [3]	203-769-2 [1] 211-340-6 [2] 252-343-2 [3]	110-45-2 [1] 638-49-3 [2] 35073-27-9 [3]	R10 Xi; R36/37	Xi R: 10-36/37 S: (2-)24		C
607-019-00-9	methyl chloroformate	201-187-3	79-22-1	F; R11 T+; R26 Xn; R21/22 C; R34	F; T+ R: 11-21/22-26-34 S: (1/2-)14-26-28-36/ 37/39-45-46-63		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-020-00-4	ethyl chloroformate	208-778-5	541-41-3	F; R11 T+; R26 Xn; R22 C; R34	F; T+ R: 11-22-26-34 S: (1/2-)9-16-26-28-33-36/37/39-45		
607-021-00-X	methyl acetate	201-185-2	79-20-9	F; R11 Xi; R36 R66 R67	F; Xi R: 11-36-66-67 S: (2-)16-26-29-33		
607-022-00-5	ethyl acetate	205-500-4	141-78-6	F; R11 Xi; R36 R66 R67	F; Xi R: 11-36-66-67 S: (2-)16-26-33		
607-023-00-0	vinyl acetate	203-545-4	108-05-4	F; R11	F R: 11 S: (2-)16-23-29-33		D
607-024-00-6	propyl acetate; [1] isopropyl acetate [2]	203-686-1 [1] 203-561-1 [2]	109-60-4 [1] 108-21-4 [2]	F; R11 Xi; R36 R66 R67	F; Xi R: 11-36-66-67 S: (2-)16-26-29-33		C
607-025-00-1	<i>n</i> -butyl acetate	204-658-1	123-86-4	R10 R66 R67	R: 10-66-67 S: (2-)25		
607-026-00-7	<i>sec</i> -butyl acetate; [1] isobutyl acetate; [2] <i>tert</i> -butyl acetate [3]	203-300-1 [1] 203-745-1 [2] 208-760-7 [3]	105-46-4 [1] 110-19-0 [2] 540-88-5 [3]	F; R11 R66	F R: 11-66 S: (2-)16-23-25-29-33		C
607-027-00-2	methyl propionate	209-060-4	554-12-1	F; R11 Xn; R20	F; Xn R: 11-20 S: (2-)16-24-29-33		
607-028-00-8	ethyl propionate	203-291-4	105-37-3	F; R11	F R: 11 S: (2-)16-23-24-29-33		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-029-00-3	<i>n</i> -butyl propionate; [1] <i>sec</i> -butyl propionate; [2] <i>tert</i> -butyl propionate; [3] iso-butyl propionate [4]	209-669-5 [1] - [2] - [3] 208-746-0 [4]	590-01-2 [1] 591-34-4 [2] 20487-40-5 [3] 540-42-1 [4]	R10	R: 10 S: (2-)		C
607-030-00-9	propyl propionate	203-389-7	106-36-5	R10 Xn; R20	Xn R: 10-20 S: (2-)24		
607-031-00-4	butyl butyrate	203-656-8	109-21-7	R10	R: 10 S: (2-)		C
607-032-00-X	ethyl acrylate	205-438-8	140-88-5	F; R11 Xn; R20/21/ 22 Xi; R36/37/ 38 R43	F; Xn R: 11-20/21/22-36/ 37/38-43 S: (2-)9-16-33-36/37	Xi; 36/37/38: C ≥ 5 %	D
607-033-00-5	<i>n</i> -butyl methacrylate	202-615-1	97-88-1	R10 Xi; R36/37/ 38 R43	Xi R: 10-36/37/38-43 S: (2-)		D
607-034-00-0	methyl acrylate; methyl propenoate	202-500-6	96-33-3	F; R11 Xn; R20/21/ 22 Xi; R36/37/ 38 R43	F; Xn R: 11-20/21/22-36/ 37/38-43 S: (2-)9-25-26-33-36/ 37-43		D
607-035-00-6	methyl methacrylate; methyl 2-methylprop-2-enoate; methyl 2-methylpropenoate	201-297-1	80-62-6	F; R11 Xi; R37/38 R43	F; Xi R: 11-37/38-43 S: (2-)24-37-46		D
607-036-00-1	2-methoxyethyl acetate; methylglycol acetate	203-772-9	110-49-6	Repr. Cat. 2; R60-61 Xn; R20/21/ 22	T R: 60-61-20/21/22 S: 53-45		E
607-037-00-7	2-ethoxyethyl acetate; ethylglycol acetate	203-839-2	111-15-9	⊗ Repr. Cat. 2; R60-61 Xn; R20/21/ 22	T R: 60-61-20/21/22 S: 53-45		E

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-038-00-2	2-butoxyethyl acetate; butylglycol acetate	203-933-3	112-07-2	Xn; R20/21	Xn R: 20/21 S: (2-)24		
607-039-00-8	2,4-D (ISO); 2,4-dichlorophenoxyacetic acid	202-361-1	94-75-7	Xn; R22 Xi; R37-41 R43 R52-53	Xn R: 22-37-41-43-52/ 53 S: (2-)24/25-26-36/ 37/39-46-61		
607-040-00-3	salts of 2,4-D	—	—	Xn; R22 Xi; R41 R43 N; R51-53	Xn; N R: 22-41-43-51/53 S: (2-)24/25-26-36/ 37/39-46-61		A
607-041-00-9	2,4,5-T (ISO); 2,4,5-trichlorophenoxy acetic acid	202-273-3	93-76-5	Xn; R22 Xi; R36/37/ 38 N; R50-53	Xn; N R: 22-36/37/38-50/ 53 S: (2-)24-60-61		
607-042-00-4	salts and esters of 2,4,5-T; salts and esters of 2,4,5-trichlorophenoxy acetic acid	—	—	Xn; R22 Xi; R36/37/ 38 N; R50-53	Xn; N R: 22-36/37/38-50/ 53 S: (2-)24-60-61		A
607-043-00-X	dicamba (ISO); 2,5-dichloro-6-methoxybenzoic acid; 3,6-dichloro-2-methoxybenzoic acid	217-635-6	1918-00-9	Xn; R22 Xi; R41 R52-53	Xn R: 22-41-52/53 S: (2-)26-61		
607-044-00-5	3,6-dichloro- <i>o</i> -anisic acid, compound with dimethylamine (1:1); [1] potassium 3,6-dichloro- <i>o</i> -anisate [2]	218-951-7 [1] 233-002-7 [2]	2300-66-5 [1] 10007-85-9 [2]	Xi; R36 R52-53	Xi R: 36-52/53 S: (2-)26-61		
607-045-00-0	dichlorprop (ISO); 2-(2,4-dichlorophenoxy) propionic acid	204-390-5	120-36-5	Xn; R21/22 Xi; R38-41	Xn R: 21/22-38-41 S: (2-)26-36/37		
607-046-00-6	salts of dichlorprop	—	—	Xn; R20/21/ 22	Xn R: 20/21/22 S: (2-)13		A
607-047-00-1	fenoprop (ISO); 2-(2,4,5-trichlorophenoxy)propionic acid	202-271-2	93-72-1	Xn; R22 Xi; R38 N; R50-53	Xn; N R: 22-38-50/53 S: (2-)37-60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-048-00-7	salts of fenoprop; salts of 2-(2,4,5-trichlorophenoxy)propionic acid	—	—	Xn; R20/21/ 22 N; R50-53	Xn; N R: 20/21/22-50/53 S: (2-)13-60-61		A
607-049-00-2	mecoprop (ISO); 2-(4-chloro- <i>o</i> -tolylxy) propionic acid; ( <i>RS</i> )-2-(4-chloro- <i>o</i> -tolylxy)propionic acid; [1] 2-(4-chloro-2-methylphenoxy)propionic acid [2]	230-386-8 [1] 202-264-4 [2]	7085-19-0 [1] 7085-19-0 [2]	Xn; R22 Xi; R38-41 N; R50-53	Xn; N R: 22-38-41-50/53 S: (2-)13-26-37/39- 60-61	N; R50-53: C ≥ 0,25 % N; R51-53: 0,025 % ≤ C < 0,25 % R52-53: 0,0025 % ≤ C < 0,025 %	
607-050-00-8	salts of mecoprop	—	—	Xn; R22 Xi; R38-41 N; R50-53	Xn; N R: 22-38-41-50/53 S: (2-)13-26-37/39- 60-61	N; R50-53: C ≥ 0,25 % N; R51-53: 0,025 % ≤ C < 0,25 % R52-53: 0,0025 % ≤ C < 0,025 %	A
607-051-00-3	MCPA (ISO); 4-chloro- <i>o</i> -tolylxyacetic acid	202-360-6	94-74-6	Xn; R22 Xi; R38-41	Xn R: 22-38-41 S: (2-)26-37-39		
607-052-00-9	salts and esters of MCPA	—	—	Xn; R20/21/ 22	Xn R: 20/21/22 S: (2-)13		A
607-053-00-4	MCPB (ISO); 4-(4-chloro- <i>o</i> -tolylxy) butyric acid	202-365-3	94-81-5	N; R50-53	N R: 50/53 S: 60-61		
607-054-00-X	salts and esters of MCPB	—	—	Xn; R22	Xn R: 22 S: (2-)24/25		A
607-055-00-5	endothal-sodium (ISO); disodium 7-oxabicyclo(2,2,1)heptane-2,3-dicarboxylate	204-959-8	129-67-9	T; R25 Xn; R21 Xi; R36/37/ 38	T R: 21-25-36/37/38 S: (1/2-)36/37/39-45		
607-056-00-0	warfarin (ISO); [1] ( <i>S</i> )-4-hydroxy-3-(3-oxo-1-phenylbutyl)-2-benzopyrone; [2] ( <i>R</i> )-4-hydroxy-3-(3-oxo-1-phenylbutyl)-2-benzopyrone [3]	201-377-6 [1] 226-907-3 [2] 226-908-9 [3]	81-81-2 [1] 5543-57-7 [2] 5543-58-8 [3]	Repr. Cat. 1; R61 T; R48/25 R52-53	T R: 61-48/25-52/53 S: 53-45-61		E



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-057-00-6	coumachlor (ISO); 3-[1-(4-chlorophenyl)-3-oxobutyl]-4-hydroxycoumarin	201-378-1	81-82-3	Xn; R48/22 R52-53	Xn R: 48/22-52/53 S: (2-)37-61		
607-058-00-1	coumafuryl (ISO); fumarin; (RS)-3-(1-(2-furyl)-3-oxobutyl)4-hydroxycoumarin; 4-hydroxy-3-[3-oxo-1-(2-furyl) butyl]coumarin	204-195-5	117-52-2	T; R25-48/25 R52-53	T R: 25-48/25-52/53 S: (1/2-)37-45-61		
607-059-00-7	coumatetraalyl; 4-hydroxy-3-(1,2,3,4-tetrahydro-1-naphthyl)coumarin	227-424-0	5836-29-3	T+; R27/28 T; R48/24/25 R52-53	T+ R: 27/28-48/24/25- 52/53 S: (1/2-)28-36/37-45- 61		
607-060-00-2	dicoumarol; 4,4'-dihydroxy-3,3'-methylenebis(2H-chromen-2-one)	200-632-9	66-76-2	T; R48/25 Xn; R22 N; R51-53	T; N R: 22-48/25-51/53 S: (1/2-)37-45-61		
607-061-00-8	acrylic acid; prop-2-enoic acid	201-177-9	79-10-7	R10 Xn; R20/21/ 22 C; R35 N; R50	C; N R: 10-20/21/22-35- 50 S: (1/2-)26-36/37/39- 45-61	C; R35: C ≥ 10 % C; R34: 5 % ≤ C < 10 % Xi; R36/37/38: 1 % ≤ C < 5 %	D
607-062-00-3	n-butyl acrylate	205-480-7	141-32-2	R10 Xi; R36/37/ 38 R43	Xi R: 10-36/37/38-43 S: (2-)9		D
607-063-00-9	isobutyric acid	201-195-7	79-31-2	Xn; R21/22	Xn R: 21/22 S: (2-)		
607-064-00-4	benzyl chloroformate	207-925-0	501-53-1	C; R34 N; R50-53	C; N R: 34-50/53 S: (1/2-)26-45-60-61	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	
607-065-00-X	bromoacetic acid	201-175-8	79-08-3	T; R23/24/25 C; R35 N; R50	T; C; N R: 23/24/25-35-50 S: (1/2-)26-36/37/39- 45-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-066-00-5	dichloroacetic acid	201-207-0	79-43-6	C; R35 N; R50	C; N R: 35-50 S: (1/2-)26-45-61		
607-067-00-0	dichloroacetyl chloride	201-199-9	79-36-7	C; R35 N; R50	C; N R: 35-50 S: (1/2-)9-26-45-61		
607-068-00-6	iodoacetic acid	200-590-1	64-69-7	T; R25 C; R35	T; C R: 25-35 S: (1/2-)22-36/37/39-45		
607-069-00-1	ethyl bromoacetate	203-290-9	105-36-2	T+; R26/27/ 28	T+ R: 26/27/28 S: (1/2-)7/9-26-45		
607-070-00-7	ethyl chloroacetate	203-294-0	105-39-5	T; R23/24/25 N; R50	T; N R: 23/24/25-50 S: (1/2-)7/9-45-61		
607-071-00-2	ethyl methacrylate	202-597-5	97-63-2	F; R11 Xi; R36/37/ 38 R43	F; Xi R: 11-36/37/38-43 S: (2-)9-16-29-33		D
607-072-00-8	2-hydroxyethyl acrylate	212-454-9	818-61-1	T; R24 C; R34 R43 N; R50	T; N R: 24-34-43-50 S: (1/2-)26-36/39-45-61	T; R24: C ≥ 2 % Xn; R21: 0,2 % ≤ C < 2 % R43: C ≥ 0,2 %	D
607-073-00-3	4-CPA (ISO); 4-chlorophenoxyacetic acid	204-581-3	122-88-3	Xn; R22	Xn R: 22 S: (2-)		
607-074-00-9	chlorfenac (ISO); 2,3,6-trichlorophenylacetic acid	201-599-3	85-34-7	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)36-61		
607-075-00-4	chlorfenprop-methyl; methyl 2-chloro-3-(4-chlorophenyl)propionate	238-413-5	14437-17-3	Xn; R21/22 N; R50-53	Xn; N R: 21/22-50/53 S: (2-)36/37-60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-076-00-X	dodine (ISO); dodecylguanidinium acetate	219-459-5	2439-10-3	Xn; R22 Xi; R36/38 N; R50-53	Xn; N R: 22-36/38-50/53 S: (2-)26-60-61		
607-077-00-5	erbon (ISO); 2-(2,4,5-trichlorophenoxy)ethyl 2,2-dichloropropionate	—	136-25-4	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)61		
607-078-00-0	fluenetil (ISO); 2-fluoroethyl biphenyl-4-ylacetate	—	4301-50-2	T+; R27/28	T+ R: 27/28 S: (1/2-)28-36/ 37-45		
607-079-00-6	kelevan (ISO); ethyl 5-(perchloro-5-hydroxypentacyclo[5,3,0,0 <sup>2,6</sup> ,0 <sup>3,9</sup> ,0 <sup>4,8</sup> ] decan-5-yl)-4-oxopentanoate; ethyl 5-(1,2,3,5,6,7,8,9,10,10-decachloro-4-hydroxypentacyclo[5,2,1,0 <sup>2,6</sup> ,0 <sup>3,9</sup> ,0 <sup>3,8</sup> ]dec-4-yl)-4-oxovalerate	—	4234-79-1	T; R24 Xn; R22 N; R51-53	T; N R: 22-24-51/53 S: (1/2-)36/37-45-61		
607-080-00-1	chloroacetyl chloride	201-171-6	79-04-9	R14 R29 T; R23/24/ 25-48/23 C; R35 N; R50	T; C; N R: 14-23/24/25-29- 35-48/23-50 S: (1/2-)7/8-9-26-36/ 37/39-45-61		
607-081-00-7	fluoroacetic acid	205-631-7	144-49-0	T+; R28 N; R50	T+; N R: 28-50 S: (1/2-)20-22-26-45- 61		
607-082-00-2	fluoroacetates, soluble	—	—	T+; R28 N; R50	T+; N R: 28-50 S: (1/2-)20-22-26-45- 61		A
607-083-00-8	2,4-DB (ISO); 4-(2,4-dichlorophenoxy)butyric acid	202-366-9	94-82-6	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)25-29-46-61		
607-084-00-3	salts of 2,4-DB	—	—	Xn; R22 Xi; R41 N; R51-53	Xn; N R: 22-41-51/53 S: (2-)26-29-39-46- 61		A

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-085-00-9	benzyl benzoate	204-402-9	120-51-4	Xn; R22	Xn R: 22 S: (2-)25		
607-086-00-4	diallyl phthalate	205-016-3	131-17-9	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)24/25-60-61		
607-088-00-5	methacrylic acid; 2-methylpropenoic acid	201-204-4	79-41-4	Xn; R21/22 C; R35	C R: 21/22-35 S: (1/2-)26-36/37/39-45	C; R35: C ≥ 10 % C; R34: 5 % ≤ C < 10 % Xi; R36/37/38: 1 % ≤ C < 5 %	D
607-089-00-0	propionic acid ... %	201-176-3	79-09-4	C; R34	C R: 34 S: (1/2-)23-36-45	C; R34: C ≥ 25 % Xi; R36/37/38: 10 % ≤ C < 25 %	B
607-090-00-6	thioglycolic acid	200-677-4	68-11-1	T; R23/24/25 C; R34	T R: 23/24/25-34 S: (1/2-)25-27-28-45	T; R23/24/25: C ≥ 2 % Xn; R20/21/22: 0,2 % ≤ C < 2 %	
607-091-00-1	trifluoroacetic acid . . . %	200-929-3	76-05-1	Xn; R20 C; R35 R52-53	C R: 20-35-52/53 S: (1/2-)9-26-27-28-45-61	Xn; R20: C ≥ 10 %	B
607-092-00-7	methyl lactate; [1] methyl (±)-lactate; [2] methyl (R)-lactate; [3] methyl (S)-(-)-lactate [4]	208-930-0 [1] 218-449-8 [2] 241-420-6 [3] 248-704-9 [4]	547-64-8 [1] 2155-30-8 [2] 17392-83-5 [3] 27871-49-4 [4]	R10 Xi; R36/37	Xi R: 10-36/37 S: (2-)24		C
607-093-00-2	propionyl chloride	201-170-0	79-03-8	F; R11 R14 C; R34	F; C R: 11-14-34 S: (1/2-)9-16-26-45		B D
607-094-00-8	peracetic acid . . . %	201-186-8	79-21-0	R10 O; R7 Xn; R20/21/ 22 C; R35 N; R50	O; C; N R: 7-10-20/21/22-35-50 S: (1/2-)3/7-14-36/37/39-45-61	Xn; R20/21/22: C ≥ 10 % C; R35: C ≥ 10 % C; R34: 5 % ≤ C < 10 % Xi; R36/37/38: 1 % ≤ C < 5 %	B D

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-095-00-3	maleic acid	203-742-5	110-16-7	Xn; R22 Xi; R36/37/ 38	Xn R: 22-36/37/38 S: (2-)26-28-37		
607-096-00-9	maleic anhydride	203-571-6	108-31-6	Xn; R22 C; R34 R42/43	C R: 22-34-42/43 S: (2-)22-26-36/37/ 39-45		
607-097-00-4	benzene-1,2,4-tricarboxylic acid 1,2-anhydride; trimellitic anhydride	209-008-0	552-30-7	Xi; R37-41 R42/43	Xn R: 37-41-42/43 S: (2-)22-26-36/37/39		
607-098-00-X	benzene-1,2:4,5-tetracarboxylic dianhydride; benzene-1,2:4,5-tetracarboxylic dianhydride; pyromellitic dianhydride	201-898-9	89-32-7	Xi; R41 R42/43	Xn R: 41-42/43 S: (2-)22-24-26-37/39		
607-099-00-5	1,2,3,6-tetrahydrophthalic anhydride; [1] cis-1,2,3,6-tetrahydrophthalic anhydride; [2] 3,4,5,6-tetrahydrophthalic anhydride; [3] tetrahydrophthalic anhydride [4]	201-605-4 [1] 213-308-7 [2] 219-374-3 [3] 247-570-9 [4]	85-43-8 [1] 935-79-5 [2] 2426-02-0 [3] 26266-63-7 [4]	Xi; R41 R42/43 R52-53	Xn R: 41-42/43-52/53 S: (2-)22-24-26-37/ 39-61		C
607-100-00-9	benzophenone-3,3',4,4'-tetracarboxylic dianhydride; 4,4'-carbonyldi(phthalic anhydride)	219-348-1	2421-28-5	Xi; R36/37	Xi R: 36/37 S: (2-)25	Xi; R36/37: C ≥ 1 %	
607-101-00-4	1,4,5,6,7,7-hexachlorobicyclo [2,2,1]hept-5-ene-2,3-dicarboxylic anhydride chlorendic anhydride	204-077-3	115-27-5	Xi; R36/37/ 38	Xi R: 36/37/38 S: (2-)25	Xi; R36/37/38: C ≥ 1 %	
607-102-00-X	cyclohexane-1,2-dicarboxylic anhydride; [1] cis-cyclohexane-1,2-dicarboxylic anhydride; [2] trans-cyclohexane-1,2-dicarboxylic anhydride [3]	201-604-9 [1] 236-086-3 [2] 238-009-9 [3]	85-42-7 [1] 13149-00-3 [2] 14166-21-3 [3]	Xi; R41 R42/43	Xn R: 41-42/43 S: (2-)23-24-26-37/39		C
607-103-00-5	succinic anhydride	203-570-0	108-30-5	Xi; R36/37	Xi R: 36/37 S: (2-)25	Xi; R36/37: C ≥ 1 %	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-104-00-0	cyclopentane-1,2,3,4-tetracarboxylic dianhydride	227-964-7	6053-68-5	Xi; R36/37	Xi R: 36/37 S: (2-)25	Xi; R36/37: C ≥ 1 %	
607-105-00-6	8,9,10-trinorborn-5-ene-2,3-dicarboxylic anhydride; [1] 1,2,3,6-tetrahydro-3,6-methanophthalic anhydride; [2] (1 $\alpha$ ,2 $\alpha$ ,3 $\beta$ ,6 $\beta$ )-1,2,3,6-tetrahydro-3,6-methanophthalic anhydride [3]	204-957-7 [1] 212-557-9 [2] 220-384-5 [3]	129-64-6 [1] 826-62-0 [2] 2746-19-2 [3]	Xi; R41 R42/43	Xn R: 41-42/43 S: (2-)22-24-26-37/39		C
607-106-00-1	8,9-dinorborn-5-ene-2,3-dicarboxylic anhydride	—	123748-85-6	Xn; R22 Xi; R36/37/38 R42	Xn R: 22-36/37/38-42 S: (2-)39	Xi; R36/37/38: C ≥ 10 %	C
607-107-00-7	2-ethylhexyl acrylate	203-080-7	103-11-7	Xi; R37/38 R43	Xi R: 37/38-43 S: (2-)36/37-46		D
607-108-00-2	2-hydroxy-1-methylethylacrylate; [1] 2-hydroxypropylacrylate; [2] acrylic acid, monoester with propane-1,2-diol [3]	220-852-9 [1] 213-663-8 [2] 247-118-0 [3]	2918-23-2 [1] 999-61-1 [2] 25584-83-2 [3]	T; R23/24/25 C; R34 R43	T R: 23/24/25-34-43 S: (1/2-)26-36/37/39-45	T; R23/24/25: C ≥ 2 % Xn; R20/21/22: 0,2 % ≤ C < 2 % R43: C ≥ 0,2 %	C D
607-109-00-8	hexamethylene diacrylate; hexane-1,6-diol diacrylate	235-921-9	13048-33-4	Xi; R36/38 R43	Xi R: 36/38-43 S: (2-)39		D
607-110-00-3	pentaerythritol triacrylate	222-540-8	3524-68-3	Xi; R36/38 R43	Xi R: 36/38-43 S: (2-)39		D
607-111-00-9	2,2-bis(acryloyloxymethyl)butyl acrylate; trimethylolpropane triacrylate	239-701-3	15625-89-5	Xi; R36/38 R43	Xi R: 36/38-43 S: (2-)39		D
607-112-00-4	2,2-dimethyltrimethylene diacrylate; neopentyl glycol diacrylate	218-741-5	2223-82-7	T; R24 Xi; R36/38 R43	T R: 24-36/38-43 S: (1/2-)28-39-45	T; R24: C ≥ 5 % Xn; R21: 0,2 % ≤ C < 5 %	D

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-113-00-X	isobutyl methacrylate	202-613-0	97-86-9	R10 Xi; R36/37/38 R43 N; R50	Xi; N R: 10-36/37/38-43-50 S: (2-)24-37-61		D
607-114-00-5	ethylene dimethacrylate	202-617-2	97-90-5	Xi; R37 R43	Xi R: 37-43 S: (2-)24-37	Xi; R37: C ≥ 10 %	D
607-115-00-0	isobutyl acrylate	203-417-8	106-63-8	R10 Xn; R20/21 Xi; R38 R43	Xn R: 10-20/21-38-43 S: (2-)9-24-37	Xi; R38: C ≥ 10 %	D
607-116-00-6	cyclohexyl acrylate	221-319-3	3066-71-5	Xi; R37/38 N; R51-53	Xi; N R: 37/38-51/53 S: (2-)61	Xi; R37/38: C ≥ 10 %	D
607-117-00-1	2,3-epoxypropyl acrylate; glycidyl acrylate	203-440-3	106-90-1	T; R23/24/25 C; R34 R43	T R: 23/24/25-34-43 S: (1/2-)26-36/37/39-45	T; R23/24/25: C ≥ 2 % Xn; R20/21/22: 0,2 % ≤ C < 2 % R43: C ≥ 0,2 %	D
607-118-00-7	1-methyltrimethylene diacrylate; 1,3-butylene glycol diacrylate	243-105-9	19485-03-1	Xn; R21 C; R34 R43	C R: 21-34-43 S: (1/2-)26-36/37/39-45		D
607-119-00-2	tetramethylene diacrylate; 1,4-butyleneglycol diacrylate	213-979-6	1070-70-8	Xn; R21 C; R34 R43	C R: 21-34-43 S: (1/2-)26-36/37/39-45		D
607-120-00-8	2,2'-oxydiethyl diacrylate; diethylene glycol diacrylate	223-791-6	4074-88-8	T; R24 Xi; R36/38 R43	T R: 24-36/38-43 S: (1/2-)28-39-45	T; R24: C ≥ 2 % Xn; R21: 0,2 % ≤ C < 2 % R43: C ≥ 0,2 %	D
607-121-00-3	8,9,10-trinorborn-2-yl acrylate	—	10027-06-2	Xn; R21 Xi; R38 R43	Xn R: 21-38-43 S: (2-)28	Xi; R38: C ≥ 10 %	D

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-122-00-9	pentaerythritol tetraacrylate	225-644-1	4986-89-4	Xi; R36/38 R43	Xi R: 36/38-43 S: (2-)26-39		D
607-123-00-4	2,3-epoxypropyl methacrylate; glycidyl methacrylate	203-441-9	106-91-2	Xn; R20/21/ 22 Xi; R36/38 R43	Xn R: 20/21/22-36/38- 43 S: (2-)26-28	Xi; R36/38: C ≥ 10 %	D
607-124-00-X	2-hydroxyethyl methacrylate	212-782-2	868-77-9	Xi; R36/38 R43	Xi R: 36/38-43 S: (2-)26-28		D
607-125-00-5	2-hydroxypropyl methacrylate; [1] 3-hydroxypropyl methacrylate [2]	213-090-3 [1] 220-426-2 [2]	923-26-2 [1] 2761-09-3 [2]	Xi; R36 R43	Xi R: 36-43 S: (2-)24/25-26-37/39		C D
607-126-00-0	2,2'-(ethylenedioxy)diethyl diacrylate; triethylene glycol diacrylate	216-853-9	1680-21-3	Xi; R36/38 R43	Xi R: 36/38-43 S: (2-)26-28		D
607-127-00-6	2-diethylaminoethyl methacrylate	203-275-7	105-16-8	Xn; R20 Xi; R36/38 R43	Xn R: 20-36/38-43 S: (2-)26	Xi; R36/38: C ≥ 10 %	D
607-128-00-1	2-tert-butylaminoethyl methacrylate	223-228-4	3775-90-4	Xi; R36/38 R43	Xi R: 36/38-43 S: (2-)26		D
607-129-00-7	ethyl lactate; ethyl DL-lactate; [1] ethyl (S)-2-hydroxypropionate; ethyl L-lactate; ethyl-(S)-lactate [2]	202-598-0 [1] 211-694-1 [2]	97-64-3 [1] 687-47-8 [2]	R10 Xi; R37-41	Xi R: 10-37-41 S: (2-)24-26-39		C



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-130-00-2	pentyl acetate; [1] isopentyl acetate; [2] 1-methylbutyl acetate; [3] 2-methylbutyl acetat; [4] 2(or 3)-methylbutyl acetate [5]	211-047-3 [1] 204-662-3 [2] 210-946-8 [3] 210-843-8 [4] 282-263-3 [5]	628-63-7 [1] 123-92-2 [2] 626-38-0 [3] 624-41-9 [4] 84145-37-9 [5]	R10 R66	R: 10-66 S: (2-)23-25		C
607-131-00-8	isopentyl propionate; [1] pentyl propionate; [2] 2-methylbutyl propionate [3]	203-322-1 [1] 210-852-7 [2] 219-449-0 [3]	105-68-0 [1] 624-54-4 [2] 2438-20-2 [3]	R10	R: 10 S: (2-)23-24		C
607-132-00-3	2-dimethylaminoethyl methacrylate	220-688-8	2867-47-2	Xn; R21/22 Xi; R36/38 R43	Xn R: 21/22-36/38-43 S: (2-)26-28	Xi; R36/38: C ≥ 10 %	D
607-133-00-9	monoalkyl or monoaryl or monoalkylaryl esters of acrylic acid with the exception of those specified elsewhere in this Annex	—	—	Xi; R36/37/38 N; R51-53	Xi; N R: 36/37/38-51/53 S: (2-)26-28-61	Xi; R36/37/38: C ≥ 10 %	A
607-134-00-4	monoalkyl or monoaryl or monoalkylaryl esters of methacrylic acid with the exception of those specified elsewhere in this Annex	—	—	Xi; R36/37/38	Xi R: 36/37/38 S: (2-)26-28	Xi; R36/37/38: C ≥ 10 %	A
607-135-00-X	butyric acid	203-532-3	107-92-6	C; R34	C R: 34 S: (1/2-)26-36-45		
607-136-00-5	butyryl chloride	205-498-5	141-75-3	F; R11 C; R34	F; C R: 11-34 S: (1/2-)16-23-26-36-45		
607-137-00-0	methyl acetoacetate	203-299-8	105-45-3	Xi; R36	Xi R: 36 S: (2-)26		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-138-00-6	butyl chloroformate; chloroformic acid butyl ester	209-750-5	592-34-7	R10 T; R23 C; R34	T R: 10-23-34 S: (1/2-)26-36-45		
607-139-00-1	2-chloropropionic acid	209-952-3	598-78-7	Xn; R22 C; R35	C R: 22-35 S: (1/2-)23-26-28-36-45		
607-140-00-7	isobutryl chloride	201-194-1	79-30-1	F; R11 C; R35	F; C R: 11-35 S: (1/2-)16-23-26-36-45		
607-141-00-2	oxydiethylene bis(chloroformate)	203-430-9	106-75-2	Xn; R22 Xi; R38-41 N; R51-53	Xn; N R: 22-38-41-51/53 S: (2-)23-26-61		
607-142-00-8	propyl chloroformate; chloroformic acid propylester; <i>n</i> -propyl chloroformate	203-687-7	109-61-5	R10 ⊗ T; R23 C; R34	T R: 10-23-34 S: (1/2-)26-36-45		
607-143-00-3	valeric acid	203-677-2	109-52-4	C; R34 R52-53	C R: 34-52/53 S: (1/2-)26-36-45-61		
607-144-00-9	adipic acid	204-673-3	124-04-9	Xi; R36	Xi R: 36 S: (2-)		
607-145-00-4	methanesulphonic acid	200-898-6	75-75-2	C; R34	C R: 34 S: (1/2-)26-36-45		
607-146-00-X	fumaric acid	203-743-0	110-17-8	Xi; R36	Xi R: 36 S: (2-)26		
607-147-00-5	oxalic acid diethylester; diethyl oxalate	202-464-1	95-92-1	Xn; R22 Xi; R36	Xn R: 22-36 S: (2-)23		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-148-00-0	guanidinium chloride; guanadine hydrochloride	200-002-3	50-01-1	Xn; R22 Xi; R36/38	Xn R: 22-36/38 S: (2-)22		
607-149-00-6	urethane (INN); ethyl carbamate	200-123-1	51-79-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		
607-150-00-1	endothal (ISO); 7-oxabicyclo(2,2,1)heptane-2,3-dicarboxylic acid	205-660-5	145-73-3	T; R25 Xn; R21 Xi; R36/37/ 38	T R: 21-25-36/37/38 S: (1/2-)36/37/39-45		
607-151-00-7	propargite (ISO); 2-(4- <i>tert</i> -butylphenoxy) cyclohexyl prop-2-ynyl sulphite	219-006-1	2312-35-8	Carc. Cat. 3; R40 T; R23 Xi; R38-41 N; R50-53	T; N R: 23-38-40-41-50/ 53 S: (1/2-)26-36/37/39- 45-60-61	N; R50-53: C ≥ 2,5 % N; R51-53: 0,25 % ≤ C < 2,5 % R52-53: 0,025 % ≤ C < 0,25 %	
607-152-00-2	2,3,6-TBA (ISO); 2,3,6-trichlorobenzoic acid	200-026-4	50-31-7	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)61		
607-153-00-8	benazolin (ISO); 4-chloro-2,3-dihydro-2-oxo-1,3-benzothiazol-3-ylacetic acid	223-297-0	3813-05-6	Xi; R36/38 R52-53	Xi R: 36/38-52/53 S: (2-)22-61		
607-154-00-3	ethyl N-benzoyl-N—(3,4-dichlorophenyl)-DL-alaninate; benzoylprop-ethyl (ISO)	244-845-5	22212-55-1	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)24-60-61		
607-155-00-9	3-(3-amino-5-(1-methylguanidino)-1-oxopentylamino-6-(4-amino-2-oxo-2,3-dihydro-pyrimidin-1-yl)-2,3-dihydro-(6H)-pyran-2-carboxylic acid; blasticidin-s	—	2079-00-7	T+; R28	T+ R: 28 S: (1/2-)24/25-36/37- 45		
607-156-00-4	chlorfenson (ISO); 4-chlorophenyl 4-chlorobenzenesulfonate	201-270-4	80-33-1	Xn; R22 Xi; R38 N; R50-53	Xn; N R: 22-38-50/53 S: (2-)37-60-61		
607-157-00-X	3-(3-biphenyl-4-yl-1,2,3,4-tetrahydro-1-naphthyl)-4-hydroxy-coumarin; difenacoum	259-978-4	56073-07-5	T+; R28 T; R48/25 N; R50-53	T+; N R: 28-48/25-50/53 S: (1/2-)36/37-45-60- 61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-158-00-5	sodium salt of chloroacetic acid; sodium chloroacetate	223-498-3	3926-62-3	T; R25 Xi; R38 N; R50	T; N R: 25-38-50 S: (1/2-)22-37-45-61		
607-159-00-0	chlorobenzilate (ISO); ethyl 2,2-di(4-chlorophenyl)-2-hydroxyacetate; ethyl 4,4'-dichlorobenzilate	208-110-2	510-15-6	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
607-160-00-6	isobutyl 2-(4-(4-chlorophenoxy)phenoxy)propionate; clofop-isobutyl (ISO)	—	51337-71-4	Xn; R22	Xn R: 22 S: (2-)		
607-161-00-1	diethanolamine salt of 4-CPA	—	—	Xn; R22	Xn R: 22 S: (2-)		
607-162-00-7	2,2-dichloropropionic acid; dalapon	200-923-0	75-99-0	Xn; R22 Xi; R38-41 R52-53	Xn R: 22-38-41-52/53 S: (2-)26-39-61		
607-163-00-2	3-acetyl-6-methyl-2H-pyran-2,4(3H)-dione; dehydracetic acid	208-293-9	520-45-6	Xn; R22	Xn R: 22 S: (2-)		
607-164-00-8	sodium 1-(3,4-dihydro-6-methyl-2,4-dioxo-2H-pyran-3-ylidene)ethonolate; sodium dehydracetate	224-580-1	4418-26-2	Xn; R22	Xn R: 22 S: (2-)		
607-165-00-3	diclofop-methyl (ISO); methyl 2-(4-(2,4-dichlorophenoxy)phenoxy)propionate; methyl (RS)-2-[4-(2,4-dichlorophenoxy)phenoxy]propionate;	257-141-8	51338-27-3	Xn; R22 R43 N; R50-53	Xn; N R: 22-43-50/53 S: (2-)24-37-60-61		
607-166-00-9	medinoterb acetate (ISO); 6-tert-butyl-3-methyl-2,4-dinitrophenyl acetate	219-634-6	2487-01-6	T; R25 Xn; R21	T R: 21-25 S: (1/2-)36/37-45		
607-167-00-4	sodium 3-chloroacrylate	—	4312-97-4	Xn; R21/22	Xn R: 21/22 S: (2-)36/37		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-168-00-X	dipropyl 6,7-methylenedioxy-1,2,3,4-tetrahydro-3-methylnaphthalene-1,2-dicarboxylate; propylisome	—	83-59-0	T; R24 Xn; R22 N; R50-53	T; N R: 22-24-50/53 S: (1/2-)36/37-45-60-61		
607-169-00-5	sodium fluoroacetate	200-548-2	62-74-8	T+; R26/27/28 N; R50	T+; N R: 26/27/28-50 S: (1/2-)13-22-36/37-45-61		
607-170-00-0	bis(1,2,3-trithiacyclohexyldimethylammonium) oxalate; thiocyclam-oxalate	250-859-2	31895-22-4	Xn; R21/22 N; R50-53	Xn; N R: 21/22-50/53 S: (2-)36/37-46-60-61		
607-172-00-1	4-hydroxy-3-(3-(4'-bromo-4-biphenyl)-1,2,3,4-tetrahydro-1-naphthyl)coumarin; brodifacoum	259-980-5	56073-10-0	T+; R27/28 T; R48/24/25 N; R50-53	T+; N R: 27/28-48/24/25-50/53 S: (1/2-)36/37-45-60-61		
607-173-00-7	dimethyl (3-methyl-4-(5-nitro-3-ethoxycarbonyl-2-thienyl)azo)phenylnitrilodipropionate	400-460-6	—	R43 R52-53	Xi R: 43-52/53 S: (2-)24-37-61		
607-174-00-2	reaction mass of dodecyl 3-(2,2,4,4-tetramethyl-21-oxo-7-oxa-3,20-diazadispiro(5,1,11,2)henicosan-20-yl)propionate and tetradecyl 3-(2,2,4,4-tetramethyl-21-oxo-7-oxa-3,20-diazadispiro(5,1,11,2)henicosan-20-yl)propionate	400-580-9	—	Xi; R38 N; R51-53	Xi; N R: 38-51/53 S: (2-)28-61		
607-175-00-8	methyl 2-(2-nitrobenzylidene)acetoacetate	400-650-9	39562-27-1	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
607-176-00-3	reaction mass of $\alpha$ -3-(3-(2H-benzotriazol-2-yl)-5-tert-butyl-4-hydroxyphenyl)propionyl- $\omega$ -hydroxypoly(oxyethylene) and $\alpha$ -3-(3-(2H-benzotriazol-2-yl)-5-tert-butyl-4-hydroxyphenyl)propionyl- $\omega$ -3-(3-(2H-benzotriazol-2-yl)-5-tert-butyl-4-hydroxyphenyl)propionyloxypoly(oxyethylene)	400-830-7	—	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)36/37-61		
607-177-00-9	methyl 2-(3-(4-methoxy-6-methyl-1,3,5-triazin-2-yl)3-methylureidosulphonyl)benzoate	401-190-1	101200-48-0	R43	Xi R: 43 S: (2-)22-24-37		
607-178-00-4	methyl $\alpha$ -((4,6-dimethoxypyrimidin-2-yl)ureidosulphonyl)-o-toluate	401-340-6	83055-99-6	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-179-00-X	(benzothiazol-2-ylthio)succinic acid	401-450-4	95154-01-1	R43	Xi R: 43 S: (2-)24-37		
607-180-00-5	potassium 2-hydroxycarbazole-1-carboxylate	401-630-2	96566-70-0	Xn; R22 Xi; R36/37 R52-53	Xn R: 22-36/37-52/53 S: (2-)22-26-61		
607-181-00-0	3,5-dichloro-2,4-difluorobenzoyl fluoride	401-800-6	101513-70-6	T; R23 C; R34 Xn; R22 R29 R43 R52-53	T; C R: 22-23-29-34-43-52/53 S: (1/2-)26-36/37/39-45-61		
607-182-00-6	methyl 3-sulphamoyl-2-thenoate	402-050-2	—	R43	Xi R: 43 S: (2-)24-37		
607-183-00-1	zinc 2-hydroxy-5-C <sub>13-18</sub> alkylbenzoate	402-280-3	—	Xi; R36/38 N; R51-53	Xi; N R: 36/38-51/53 S: (2-)26-61		
607-184-00-7	S-(3-trimethoxysilyl)propyl 19-isocyanato-11-(6-isocyanato-hexyl)-10,12-dioxo-2,9,11,13-tetraazonadecanethioate	402-290-8	85702-90-5	R10 R42/43	Xn R: 10-42/43 S: (2-)23-24-37		
607-185-00-2	ethyl <i>trans</i> -3-dimethylaminoacrylate	402-650-4	1117-37-9	R43	Xi R: 43 S: (2-)24-37		
607-186-00-8	quinclorac (ISO); 3,7-dichloroquinoline-8-carboxylic acid	402-780-1	84087-01-4	R43	Xi R: 43 S: (2-)24-37		
607-187-00-3	bis(2,2,6,6-tetramethyl-4-piperidyl) succinate	402-940-0	62782-03-0	Xi; R36 R52-53	Xi R: 36-52/53 S: (2-)26-61		
607-188-00-9	hydrogen sodium N-carboxylatoethyl-N-octadec-9-enylmaleamate	402-970-4	—	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-189-00-4	trimethylenediaminetetraacetic acid	400-400-9	1939-36-2	Xn; R22 Xi; R41 N; R50-53	Xn; N R: 22-41-50/53 S: (2-)22-26-39-60-61		
607-190-00-X	methyl acrylamidomethoxyacetate (containing $\geq$ 0,1 % acrylamid)	401-890-7	77402-03-0	Carc. Cat. 2; R45 Muta. Cat. 2; R46 Xn; R22 Xi; R36	T R: 45-46-22-36 S: 53-45		E
607-191-00-5	isobutyl 3,4-epoxybutyrate	401-920-9	100181-71-3	Xi; R38 R43 N; R50-53	Xi; N R: 38-43-50/53 S: (2-)24-28-36/37-60-61		
607-192-00-0	disodium N-carboxymethyl-N-(2-(2-hydroxyethoxy)ethyl)glycinate	402-360-8	92511-22-3	Xi; R41	Xi R: 41 S: (2-)26-39		
607-194-00-1	propylene carbonate	203-572-1	108-32-7	Xi; R36	Xi R: 36 S: (2-)		
607-195-00-7	2-methoxy-1-methylethyl acetate	203-603-9	108-65-6	R10 Xi; R36	Xi R: 10-36 S: (2-)25		
607-196-00-2	heptanoic acid	203-838-7	111-14-8	C; R34	C R: 34 S: (1/2-)26-28-36/37/39-45		
607-197-00-8	nonanoic acid	203-931-2	112-05-0	C; R34	C R: 34 S: (1/2-)26-28-36/37/39-45		
607-198-00-3	propyl 3,4,5-trihydroxybenzoate	204-498-2	121-79-9	Xn; R22 R43	Xn R: 22-43 S: (2-)24-37		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-199-00-9	octyl 3,4,5-trihydroxybenzoate	213-853-0	1034-01-1	Xn; R22 R43	Xn R: 22-43 S: (2-)24-37		
607-200-00-2	dodecyl 3,4,5-trihydroxybenzoate	214-620-6	1166-52-5	R43	Xi R: 43 S: (2-)24-37		
607-201-00-8	thiocarbonyl chloride	207-341-6	463-71-8	T; R23 Xn; R22 Xi; R36/37/ 38	T R: 22-23-36/37/38 S: (1/2-)7-9-36/37-45		
607-203-00-9	2-ethylhexyl[[[3,5-bis(1,1-dimethylethyl)-4-hydroxyphenyl]methyl]thio]acetate	279-452-8	80387-97-9	Repr. Cat. 2; R61 R43 R52-53	T R: 61-43-52/53 S: 53-45-61		
607-204-00-4	(chlorophenyl)(chlorotolyl)methane, mixed isomers	400-140-6	—	N; R50-53	N R: 50/53 S: 60-61		
607-205-00-X	methyl chloroacetate	202-501-1	96-34-4	R10 T; R23/25 Xi; R37/38- 41	T R: 10-23/25-37/38- 41 S: (1/2-)26-37/39-45		
607-206-00-5	isopropyl chloroacetate	203-301-7	105-48-6	R10 T; R25 Xi; R36/37/ 38	T R: 10-25-36/37/38 S: (1/2-)26-37/39-45		
607-207-00-0	haloxyfop-etotyl (ISO) 2-ethoxyethyl 2-(4-(3-chloro-5-trifluoromethyl-2-pyridyloxy)phenoxy)propionate; haloxyfop-(2-ethoxyethyl)	402-560-5	87237-48-7	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)22-36-60-61		
607-208-00-6	4,8,12-trimethyltrideca-3,7,11-trienoic acid, mixed isomers	403-000-2	91853-67-7	Xi; R38 N; R50-53	Xi; N R: 38-50/53 S: (2-)37/39-60-61		
607-209-00-1	reaction mass of O,O'-diisopropyl (pentathio)dithioformate and O,O'-diisopropyl (trithio)dithioformate and O,O'-diisopropyl (tetrathio)dithioformate	403-030-6	—	Xn; R22 R43 N; R50-53	Xn; N R: 22-43-50/53 S: (2-)36/37-60-61		



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-210-00-7	methyl acrylamidoglycolate (containing $\geq 0,1$ % acrylamide)	403-230-3	77402-05-2	Carc. Cat. 2; R45 Muta. Cat. 2; R46 C; R34 R43	T R: 45-46-34-43 S: 53-45		
607-211-00-2	methyl 3-(3- <i>tert</i> -butyl-4-hydroxy-5-methylphenyl)propionate	403-270-1	6386-39-6	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)36-61		
607-212-00-8	poly(oxypropylenecarbonyl-co-oxy(ethylethylene)carbonyl), containing 27 % hydroxyvalerate	403-300-3	—	R43	Xi R: 43 S: (2-)24-37		
607-213-00-3	ethyl 3,3-bis( <i>tert</i> -pentylperoxy)butyrate	403-320-2	67567-23-1	E; R2 $\otimes$ O; R7 R10 N; R51-53	E; N R: 2-7-10-51/53 S: (2-)3/7-14-33-36/ 37/39-61		
607-214-00-9	N,N-hydrazinodiacetic acid	403-510-5	19247-05-3	T; R25 Xn; R48/22 R43 R52-53	T R: 25-43-48/22-52/ 53 S: (1/2-)26-36/37/39- 45-61		
607-215-00-4	3-(3- <i>tert</i> -butyl-4-hydroxyphenyl)propionic acid	403-920-4	107551-67-7	Xn; R22 Xi; R36	Xn R: 22-36 S: (2-)25-26-36		
607-216-00-X	glutamic acid, reaction products with N-(C <sub>12-14</sub> alkyl)propyle- nediamine	403-950-8	—	T+; R26 Xn; R22 C; R34 N; R50-53	T+; N R: 22-26-34-50/53 S: (1/2-)26-36/37/39- 38-45-60-61		
607-217-00-5	2-ethoxyethyl 2-(4-(2,6-dihydro-2,6-dioxo-7-phenyl-1,5-dio- xaindacen-3-yl)phenoxy)acetate	403-960-2	—	R43 R53	Xi R: 43-53 S: (2-)24-37-61		
607-218-00-0	dichlorprop-P (ISO); (+)-R-2-(2,4-dichlorophenoxy)propionic acid	403-980-1	15165-67-0	Xn; R22 Xi; R38-41 R43	Xn R: 22-38-41-43 S: (2-)24-26-37/39		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-219-00-6	bis(2-ethylhexyl) dithiodiacetate	404-510-8	62268-47-7	Xn; R22 R43 N; R51-53	Xn; N R: 22-43-51/53 S: (2-)24/25-37-61		
607-221-00-7	6-docosyloxy-1-hydroxy-4-(1-(4-hydroxy-3-methylphenanthren-1-yl)-3-oxo-2-oxaphenalen-1-yl)naphthalene-2-carboxylic acid	404-550-6	—	R43 R53	Xi R: 43-53 S: (2-)24-37-61		
607-222-00-2	6-(2,3-dimethylmaleimido)hexyl methacrylate	404-870-6	63740-41-0	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
607-223-00-8	transfluthrin (ISO); 2,3,5,6-tetrafluorobenzyl <i>trans</i> -2-(2,2-dichlorovinyl)-3,3-dimethylcyclopropanecarboxylate	405-060-5	118712-89-3	Xi; R38 N; R50-53	Xi; N R: 38-50/53 S: (2-)36/37-60-61		
607-224-00-3	methyl 2-(3-nitrobenzylidene)acetoacetate	405-270-7	39562-17-9	Xi; R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		
607-225-00-9	3-azidosulfonylbenzoic acid	405-310-3	15980-11-7	E; R2 Xn; R48/22 Xi; R41 R43	E; Xn R: 2-41-43-48/22 S: (2-)22-26-35-36/ 37/39		
607-226-00-4	reaction mass of 2-acryloyloxyethyl hydrogen cyclohexane-1,2-dicarboxylate and 2-methacryloyloxyethyl hydrogen cyclohexane-1,2-dicarboxylate	405-360-6	—	Xi; R38-41 R43 R52-53	Xi R: 38-41-43-52/53 S: (2-)24-26-37/39-61		
607-227-00-X	potassium 2-amino-2-methylpropionate octahydrate	405-560-3	120447-91-8	Xn; R22 C; R35	C R: 22-35 S: (1/2-)26-28-36/37/ 39-45		
607-228-00-5	bis(2-methoxyethyl) phthalate	204-212-6	117-82-8	Repr. Cat. 2; R61 Repr. Cat. 3; R62	T R: 61-62 S: 53-45		
607-229-00-0	diethylcarbamoyl chloride	201-798-5	88-10-8	Carc. Cat. 3; R40 Xn; R20/22 Xi; R36/37/ 38	Xn R: 20/22-36/37/38- 40 S: (2-)26-36/37		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-230-00-6	2-ethylhexanoic acid	205-743-6	149-57-5	Repr. Cat. 3; R63	Xn R: 63 S: (2-)36/37		
607-231-00-1	3,6-dichloropyridine-2-carboxylic acid; cloprialid	216-935-4	1702-17-6	Xi; R41 N; R51-53	X; N R: 41-51/53 S: (2-)26-39-61		
607-232-00-7	pyridate (ISO); O-(6-chloro-3-phenylpyridazin-4-yl) S-octyl thiocarbonate	259-686-7	55512-33-9	Xi; R38 R43 N; R50-53	Xi; N R: 38-43-50/53 S: (2-)24-37-60-61		
607-233-00-2	hexyl acrylate	219-698-5	2499-95-8	Xi; R36/37/ 38 R43 N; R51-53	Xi; N R: 36/37/38-43-51/ 53 S: (2-)24-26-37-61		
607-234-00-8	flurenol (ISO); 9-hydroxy-9H-fluorene-9-carboxylic acid	207-397-1	467-69-6	N; R51-53	N R: 51/53 S: 61		
607-235-00-3	mecrilate; methyl 2-cyanoacrylate	205-275-2	137-05-3	Xi; R36/37/ 38	Xi R: 36/37/38 S: (2-)23-24/25-26	Xi; R36/37/38: C ≥ 10 %	
607-236-00-9	ethyl 2-cyanoacrylate	230-391-5	7085-85-0	Xi; R36/37/ 38	Xi R: 36/37/38 S: (2-)23-24/25-26	Xi; R36/37/38: C ≥ 10 %	
607-237-00-4	benzyl 2-chloro-4-(trifluoromethyl)thiazole-5-carboxylate; flurazole	276-942-3	72850-64-7	N; R51-53	N R: 51/53 S: 61		
607-238-00-X	tau-fluvalinate (ISO); cyano-(3-phenoxyphenyl)methyl N-[2-chloro-4-(trifluoromethyl)phenyl]-D-valinate	—	102851-06-9	Xn; R22 Xi; R38 N; R50-53	Xn; N R: 22-38-50/53 S: (2-)24-59-61		
607-239-00-5	fenpropathrin (ISO); α-cyano-3-phenoxybenzyl 2,2,3,3-tetramethylcyclopropane-carboxylate;	254-485-0	39515-41-8	T+; R26 T; R25 Xn; R21 N; R50-53	T+; N R: 21-25-26-50/53 S: (1/2-)28-36/37-38- 45-60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-240-00-0	<i>cis</i> -1,2,3,6-tetrahydro-4-methylphthalic anhydride; [1] 1,2,3,6-tetrahydro-4-methylphthalic anhydride; [2] 1,2,3,6-tetrahydro-3-methylphthalic anhydride; [3] tetrahydromethylphthalic anhydride; [4] 1,2,3,6-tetrahydromethylphthalic anhydride; [5] tetrahydro-4-methylphthalic anhydride; [6] 2,3,5,6-tetrahydro-2-methylphthalic anhydride [7]	216-906-6 [1] 222-323-8 [2] 226-247-6 [3] 234-290-7 [4] 247-830-1 [5] 251-823-9 [6] 255-853-3 [7]	1694-82-2 [1] 3425-89-6 [2] 5333-84-6 [3] 11070-44-3 [4] 26590-20-5 [5] 34090-76-1 [6] 42498-58-8 [7]	Xi; R41 R42/43	Xn R: 41-42/43 S: (2-)22-24-26-37/39		C
607-241-00-6	hexahydro-4-methylphthalic anhydride; [1] hexahydromethylphthalic anhydride; [2] hexahydro-1-methylphthalic anhydride; [3] hexahydro-3-methylphthalic anhydride [4]	243-072-0 [1] 247-094-1 [2] 256-356-4 [3] 260-566-1 [4]	19438-60-9 [1] 25550-51-0 [2] 48122-14-1 [3] 57110-29-9 [4]	Xi; R41 R42/43	Xn R: 41-42/43 S: (2-)22-24-26-37/39		C
607-242-00-1	tetrachlorophthalic anhydride	204-171-4	117-08-8	Xi; R41 R42/43 N; R50-53	Xn; N R: 41-42/43-50/53 S: (2-)22-24-26-37/ 39-60-61		
607-243-00-7	sodium 3,6-dichloro- <i>o</i> -anisate; [1] 3,6-dichloro- <i>o</i> -anisic acid, compound with 2,2'-iminodiethanol (1:1); [2] 3,6-dichloro- <i>o</i> -anisic acid, compound with 2-aminoethanol (1:1) [3]	217-846-3 [1] 246-590-5 [2] 258-527-9 [3]	1982-69-0 [1] 25059-78-3 [2] 53404-28-7 [3]	R52-53	R: 52/53 S: 61		
607-244-00-2	isooctyl acrylate	249-707-8	29590-42-9	Xi; R36/37/ 38 N; R50-53	Xi; N R: 36/37/38-50/53 S: (2-)26-28-60-61	Xi; R36/37/38: C ≥ 10 %	
607-245-00-8	<i>tert</i> -butyl acrylate	216-768-7	1663-39-4	F; R11 Xn; R20/21/ 22 Xi; R37/38 R43 N; R52-53	F; Xn R: 11-20/21/22-37/ 38-43-52/53 S: (2-)16-25-37-61		D

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-246-00-3	allyl methacrylate; 2-methyl-2-propenoic acid 2-propenyl ester	202-473-0	96-05-9	R10 T; R23 Xn; R21/22 N; R50	T; N R: 10-21/22-23-50 S: (1/2-)36/37-45-61		
607-247-00-9	dodecyl methacrylate	205-570-6	142-90-5	Xi; 36/37/38 N; R50-53	Xi; N R: 36/37/38-50/53 S: (2-)26-28-60-61	Xi; R36/37/38: C ≥ 10 %	
607-248-00-4	naptalam-sodium (ISO); sodium N-naphth-1-ylphthalamate	205-073-4	132-67-2	Xn; R22	Xn R: 22 S: (2-)		
607-249-00-X	(1-methyl-1,2-ethanediyl)bis[oxy(methyl-2,1-ethanediyl)] diacrylate	256-032-2	42978-66-5	Xi; R36/37/38 R43 N; R51-53	Xi; N R: 36/37/38-43-51/53 S: (2-)24-37-61	Xi; R36/37/38: C ≥ 10 %	
607-250-00-5	4H-3,1-benzoxazine-2,4(1H)-dione	204-255-0	118-48-9	Xi; R36 R43	Xi R: 36-43 S: (2-)24-26-37		
607-251-00-0	2-methoxypropyl acetate	274-724-2	70657-70-4	R10 Repr. Cat. 2; R61 Xi; R37	T R: 61-10-37 S: 53-45		
607-252-00-6	lambda-cyhalothrin (ISO); reaction mass of (S)-α-cyano-3-phenoxybenzyl(Z)-(1R)-cis-3-(2-chloro-3,3,3-trifluoropropenyl)-2,2-dimethylcyclopropanecarboxylate and (R)-α-cyano-3-phenoxybenzyl (Z)-(1S)-cis-3-(2-chloro-3,3,3-trifluoropropenyl)-2,2-dimethylcyclopropanecarboxylate (1:1)	415-130-7	91465-08-6	T+; R26 T; R25 Xn; R21 N; R50-53	T+; N R: 21-25-26-50/53 S: (1/2-)28-36/37/39-38-45-60-61		
607-253-00-1	α-cyano-4-fluoro-3-phenoxybenzyl-3-(2,2-dichlorovinyl)-2,2-dimethylcyclopropanecarboxylate; cyfluthrin	269-855-7	68359-37-5	T+; R28 T; R23 N; R50-53	T+; N R: 23-28-50/53 S: (1/2-)36/37/39-45-60-61		
607-254-00-7	α-cyano-4-fluoro-3-phenoxybenzyl-3-(2,2-dichlorovinyl)-2,2-dimethylcyclopropanecarboxylate; beta-cyfluthrin	269-855-7	68359-37-5	T+; R26/28 N; R50-53	T+; N R: 26/28-50/53 S: (1/2-)36/37/39-45-60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-255-00-2	fluroxypyr (ISO); 4-amino-3,5-dichloro-6-fluoro-2-pyridyloxyacetic acid	—	69377-81-7	R52-53	R: 52/53 S: 61		
607-256-00-8	azoxystrobin (ISO); methyl (E)-2-[2-[6-(2-cyanophenoxy)pyrimidin-4-yloxy]phenyl]-3-methoxyacrylate	—	131860-33-8	T; R23 N; 50-53	T; N R: 23-50/53 S: (1/2-)22-45-60-61		
607-257-00-3	isopropyl propionate	211-300-8	637-78-5	F; R11	F R: 11 S: (2-)16-23-24-29-33		
607-258-00-9	dodecyl 3-(2-(3-benzyl-4-ethoxy-2,5-dioxoimidazolidin-1-yl)-3-(4-methoxybenzoyl)acetamido)-4-chlorobenzoate	403-990-6	70950-45-7	R53	R: 53 S: 61		
607-259-00-4	methyl 2R,3S-(-)-3-(4-methoxyphenyl)oxiranecarboxylate	404-130-2	105560-93-8	Xi; R41 R43 R52-53	Xi R: 41-43-52/53 S: (2-)24-26-37/39-61		
607-260-00-X	ethyl 2-(3-nitrobenzylidene)acetoacetate	404-490-0	39562-16-8	Xi; R41 R43 R52-53	Xi R: 41-43-52/53 S: (2-)24-26-37/39-61		
607-261-00-5	iso(C <sub>10</sub> -C <sub>14</sub> )alkyl (3,5-di- <i>tert</i> -butyl-4-hydroxyphenyl)methylthioacetate	404-800-4	118832-72-7	N; R50-53	N R: 50/53 S: 60-61		
607-262-00-0	7-chloro-1-cyclopropyl-6-fluoro-1,4-dihydro-4-oxoquinoline-3-carboxylic acid	405-050-0	86393-33-1	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)22-61		
607-263-00-6	potassium iron(III) 1,3-propanediamine- <i>N,N,N',N'</i> -tetraacetate hemihydrate	405-680-6	—	E; R2 N; R51-53	E; N R: 2-51/53 S: (2-)35-61		
607-264-00-1	2-chloro-4-(methylsulfonyl)benzoic acid	406-520-8	53250-83-2	Xi; R41	Xi R: 41 S: (2-)26-39		
607-265-00-7	ethyl-2-chloro-2,2-diphenylacetate	406-580-5	52460-86-3	Xi; R38 R52-53	Xi R: 38-52/53 S: (2-)37-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-266-00-2	reaction mass of: hydroxyaluminium bis[2-hydroxy-3,5-di- <i>tert</i> -butylbenzoate]; 3,5-di- <i>tert</i> -butyl-salicylic acid	406-890-0	130296-87-6	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)22-60-61		
607-267-00-8	<i>tert</i> -butyl (5 <i>S</i> ,6 <i>R</i> ,7 <i>R</i> )-3-bromomethyl-5,8-dioxo-7-(2-(2-phenylacetamido)-5-thia-1-azabicyclo[4.2.0] oct-2-ene-2-carboxylate	407-620-4	33610-13-8	R42/43 R52-53	Xn R: 42/43-52/53 S: (2-)22-24-37-61		
607-268-00-3	2-methylpropyl ( <i>R</i> )-2-hydroxypropanoate	407-770-0	61597-96-4	Xi; R36	Xi R: 36 S: (2-)26		
607-269-00-9	( <i>R</i> )-2-(4-hydroxyphenoxy)propanoic acid	407-960-3	94050-90-5	Xi; R41	Xi R: 41 S: (2-)26-39		
607-270-00-4	3,9-bis(2-(3-(3- <i>tert</i> -butyl-4-hydroxy-5-methylphenyl)propionyloxy-1,1-dimethylethyl)-2,4,8,10-tetraoxaspiro[5.5]undecane	410-730-5	90498-90-1	Xn; R21	Xn R: 21 S: (2-)36/37		
607-271-00-X	2-isopropyl-5-methylcyclohexyloxycarbonyloxy-2-hydroxypropane	417-420-9	156324-82-2	Xi; R36 N; R51-53	Xi; N R: 36-51/53 S: (2-)26-61		
607-272-00-5	fluroxypyr-meptyl (ISO); methylheptyl, <i>O</i> -(4-amino-3,5-dichloro-6-fluoro-2-pyridyloxy) acetate; [1] fluroxypyr-butometyl (ISO); 2-butoxy-1-methylethyl, <i>O</i> -(4-amino-3,5-dichloro-6-fluoro-2-pyridyloxy) acetate [2]	279-752-9 [1] - [2]	81406-37-3 [1] 154486-27-8 [2]	N; R50-53	N R: 50/53 S: 60-61		
607-273-00-0	ammonium 7-(2,6-dimethyl-8-(2,2-dimethylbutyryloxy)-1,2,6,7,8,8a-hexahydro-1-naphthyl)-3,5-dihydroxyheptanoate	404-520-2	—	R52-53	R: 52/53 S: 61		
607-274-00-6	2-( <i>N</i> -benzyl- <i>N</i> -methylamino)ethyl 3-amino-2-butenate	405-350-1	54527-73-0	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
607-275-00-1	sodium benzoyloxybenzene-4-sulfonate	405-450-5	66531-87-1	R43	Xi R: 43 S: (2-)24-37		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-276-00-7	bis[(1-methylimidazol)-(2-ethyl-hexanoate)], zinc complex	405-635-0	—	Xi; R38-41 N; R50-53	Xi; N R: 38-41-50/53 S: (2-)26-37/39-60-61		
607-277-00-2	reaction mass of: 2-(hexylthio)ethylamine hydrochloride; sodium propionate	405-720-2	—	Xn; R22 Xi; R41 R43 N; R51-53	Xn; N R: 22-41-43-51/53 S: (2-)24-26-37/39-61		
607-278-00-8	reaction mass of isomers of: sodium phenethylnaphthalene-sulfonate; sodium naphthylethylbenzenesulfonate	405-760-0	—	Xi; R41 R43 R52-53	Xi R: 41-43-52/53 S: (2-)24-26-37/39-61		
607-279-00-3	reaction mass of <i>n</i> -octadecylaminodiethyl bis(hydrogen maleate); <i>n</i> -octadecylaminodiethyl hydrogen maleate hydrogenphthalate	405-960-8	—	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
607-280-00-9	sodium 4-chloro-1-hydroxybutane-1-sulfonate	406-190-5	54322-20-2	Xn; R22 Xi; R36 R43	Xn R: 22-36-43 S: (2-)22-26-36/37		
607-281-00-4	reaction mass of branched and linear C <sub>7</sub> -C <sub>9</sub> alkyl 3-[3-(2H-benzotriazol-2-yl)-5-(1,1-dimethylethyl)-4-hydroxyphenyl] propionates	407-000-3	127519-17-9	N; R51-53	N R: 51/53 S: 61		
607-282-00-X	2-acetoxymethyl-4-benzoyloxybut-1-yl acetate	407-140-5	131266-10-9	R52-53	R: 52/53 S: 61		
607-283-00-5	<i>E</i> -ethyl-4-oxo-4-phenylcrotonate	408-040-4	15121-89-8	Xn; R21/22 Xi; R38-41 R43 N; R50-53	Xn; N R: 21/22-38-41-43-50/53 S: (2-)26-36/37/39-60-61		
607-284-00-0	reaction mass of: sodium 3,3'-(1,4-phenylenebis(carbonylimino-3,1-propanediylimino))bis(10-amino-6,13-dichloro-4,11-triphenodioxazinedisulfonate); lithium 3,3'-(1,4-phenylenebis-(carbonylimino-3,1-propanediyl-imino))bis(10-amino-6,13-dichloro)-4,11-triphenodioxazinedisulfonate (9:1)	410-040-4	136213-76-8	N; R51-53	N R: 51/53 S: 61		



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-285-00-6	reaction mass of: 7-(((3-aminophenyl)sulfonyl)amino)-naphthalene-1,3-disulfonic acid; sodium 7-(((3-aminophenyl)sulfonyl)amino)-naphthalene-1,3-disulfonate; potassium 7-(((3-aminophenyl)sulfonyl)amino)-naphthalene-1,3-disulfonate	410-065-0	—	R43	Xi R: 43 S: (2-)22-24-37		
607-286-00-1	reaction mass of: sodium/potassium 7-[[[3-[[4-((2-hydroxynaphthyl)azo)phenyl]azo]phenyl]sulfonyl]amino]-naphthalene-1,3-disulfonate	410-070-8	141880-36-6	R43 R52-53	Xi R: 43-52/53 S: (2-)22-24-37-61		
607-287-00-7	O'-methyl O-(1-methyl-2-methacryloyloxy-ethyl)-1,2,3,6-tetrahydrophthalate	410-140-8	—	R52-53	R: 52/53 S: 61		
607-288-00-2	Tetrasodium (c-(3-(1-(3-(ε-6-dichloro-5-cyanopyrimidin-f-yl(methyl)amino)propyl)-1,6-dihydro-2-hydroxy-4-methyl-6-oxo-3-pyridylazo)-4-sulfonatophenylsulfamoyl)phthalocyanine-a,b,d-trisulfonato(6-))nickelato II, where a is 1 or 2 or 3 or 4, b is 8 or 9 or 10 or 11, c is 15 or 16 or 17 or 18, d is 22 or 23 or 24 or 25 and where ε and f together are 2 and 4 or 4 and 2 respectively	410-160-7	148732-74-5	Xi; R36 R43 R52-53	Xi R: 36-43-52/53 S: (2-)22-26-36/37-61		
607-289-00-8	3-(3-(4-(2,4-bis(1,1-dimethylpropyl)phenoxy)butylaminocarbonyl-4-hydroxy-1-naphthalenyl)thio)propanoic acid	410-370-9	105488-33-3	R53	R: 53 S: 61		
607-290-00-3	reaction mass (ratio not known) of: ammonium 1-C <sub>14</sub> -C <sub>18</sub> -alkyloxycarbonyl-2-(3-allyloxy-2-hydroxypropoxycarbonyl)ethane-1-sulfonate; ammonium 2-C <sub>14</sub> -C <sub>18</sub> -alkyloxycarbonyl-1-(3-allyloxy-2-hydroxypropoxycarbonyl)ethane-1-sulfonate	410-540-2	—	Xi; R38 R43 N; R50-53	Xi; N R: 38-43-50/53 S: (2-)24-37-60-61		
607-291-00-9	dodecyl-ω-(C <sub>5</sub> /C <sub>6</sub> -cycloalkyl)alkyl carboxylate	410-630-1	104051-92-5	R53	R: 53 S: 61		
607-292-00-4	reaction mass of: [1-(methoxymethyl)-2-(C <sub>12</sub> -alkoxy)-ethoxy]acetic acid; [1-(methoxymethyl)-2-(C <sub>14</sub> -alkoxy)-ethoxy]acetic acid	410-640-6	—	Xi; R38-41 N; R50-53	Xi; N R: 38-41-50/53 S: (2-)26-37/39-60-61		
607-293-00-X	reaction mass of: N-aminoethylpiperazonium mono-2,4,6-trimethylnonyldiphenyl ether di-sulfonate; N-aminoethylpiperazonium di-2,4,6-trimethylnonyldiphenyl ether di-sulfonate	410-650-0	—	Xi; R41 R43 N; R51-53	Xi; N R: 41-43-51/53 S: (2-)26-36/37/39-61		
607-294-00-5	sodium 2-benzoyloxy-1-hydroxyethane-sulfonate	410-680-4	—	R43	Xi R: 43 S: (2-)24-37		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-295-00-0	reaction mass of: tetrasodium phosphonoethane-1,2-dicarboxylate; hexasodium phosphonobutane-1,2,3,4-tetracarboxylate	410-800-5	—	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
607-296-00-6	reaction mass of: pentaerythriol tetraesters with heptanoic acid and 2-ethylhexanoic acid	410-830-9	—	R53	R: 53 S: 61		
607-297-00-1	( <i>E—E</i> )-3,3'—(1,4-phenylenedimethylidene)bis(2-oxobornane-10-sulfonic acid)	410-960-6	92761-26-7	Xi; R41	Xi R: 41 S: (2-)26-39		
607-298-00-7	2-(trimethylammonium)ethoxycarboxybenzene-4-sulfonate	411-010-3	—	R43	Xi R: 43 S: (2-)22-36/37		
607-299-00-2	methyl 3-(acetylthio)-2-methyl-propanoate	411-040-7	97101-46-7	Xn; R22 R43 N; R50-53	Xn; N R: 22-43-50/53 S: (2-)24-37-60-61		
607-300-00-6	trisodium [2-(5-chloro-2,6-difluoropyrimidin-4-ylamino)-5-( <i>b</i> -sulfamoyl- <i>c</i> , <i>d</i> -sulfonatophthalocyanin- <i>a</i> -yl-K4,N29,N30,N31,N32-sulfonylamino)benzoato(5-)]cuprate(II) where <i>a</i> =1,2,3,4 <i>b</i> =8,9,10,11 <i>c</i> =15,16,17,18 <i>d</i> =22,23,24,25	411-430-7	—	Xi; R41 R43	Xi R: 41-43 S: (2-)26-36/37/39		
607-301-00-1	reaction mass of: dodecanoic acid; poly(1-7)lactate esters of dodecanoic acid	411-860-5	—	R43 N; R51-53	Xi; N R: 38-41-43-51/53 S: (2-)24-26-37/39-61		
607-302-00-7	reaction mass of: tetradecanoic acid; poly(1-7)lactate esters of tetradecanoic acid	411-910-6	—	Xi; R38-41 R43 N; R51-53	Xi; N R: 38-41-43-51/53 S: (2-)24-26-37/39-61		
607-303-00-2	1-cyclopropyl-6,7-difluoro-1,4-dihydro-4-oxoquinoline-3-carboxylic acid	413-760-7	93107-30-3	Repr. Cat. 3; R62 R52-53	Xn R: 62-52/53 S: (2-)22-36/37-61		
607-304-00-8	fluazifop-butyl (ISO); butyl (RS)-2-[4-(5-trifluoromethyl-2-pyridyloxy)phenoxy]propionate	274-125-6	69806-50-4	Repr. Cat. 2; R61 N; R50-53	T; N R: 61-50/53 S: 53-45-60-61		
607-305-00-3	fluazifop-P-butyl (ISO); butyl (R)-2-[4-(5-trifluoromethyl-2-pyridyloxy)phenoxy]propionate	—	79241-46-6	Repr. Cat. 3; R63 N; R50-53	Xn; N R: 50/53-63 S: (2-)29-36/37-46-60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-306-00-9	chlazolinate (ISO); ethyl (RS)-3-(3,5-dichlorophenyl)-5-methyl-2,4-dioxo-oxazolidine-5-carboxylate	282-714-4	84332-86-5	Carc. Cat. 3; R40 N; R51-53	Xn; N R: 40-51/53 S: (2-)36/37-61		
607-307-00-4	vinclozolin (ISO); N-3,5-dichlorophenyl-5-methyl-5-vinyl-1,3-oxazolidine-2,4-dione	256-599-6	50471-44-8	Carc. Cat. 3; R40 Repr. Cat. 2; R60-61 R43 N; R51-53	T; N R: 60-61-40-43-51/ 53 S: 53-45-61		
607-308-00-X	esters of 2,4-D	—	—	Xn; R22 R43 N; R50-53	Xn; N R: 22-43-50/53 S: (2-)26-29-36/37- 46-60-61		A
607-309-00-5	carfentrazone-ethyl (ISO); ethyl (RS)-2-chloro-3-[2-chloro-4-fluoro-5-[4-difluoromethyl-4,5-dihydro-3-methyl-5-oxo-1H-1,2,4-triazol-1-yl]phenyl]propionate	—	128639-02-1	N; R50-53	N R: 50/53 S: 60-61		
607-310-00-0	kresoxim-methyl (ISO); methyl (E)-2-methoxyimino-[2-(o-tolyloxymethyl)phenyl]acetate	—	143390-89-0	Carc. Cat. 3; R40 N; R50-53	Xn; N R: 40-50/53 S: (2-)36/37-60-61		
607-311-00-6	benazolin-ethyl; ethyl 4-chloro-2-oxo-2H-benzothiazole-3-acetate	246-591-0	25059-80-7	N; R51-53	N R: 51/53 S: 61		
607-312-00-1	methoxyacetic acid	210-894-6	625-45-6	Repr. Cat. 2; R60-61 Xn; R22 C; R34	T R: 60-61-22-34 S: 53-45	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	E
607-313-00-7	neodecanoyl chloride	254-875-0	40292-82-8	T+; R26 Xn; R22 C; R34	T+ R: 22-26-34 S: (1/2-)26-28-36/37/ 39-45	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	
607-314-00-2	ethofumesate (ISO); (±)-2-ethoxy-2,3-dihydro-3,3-dimethylbenzofuran-5-yl methanesulfonate	247-525-3	26225-79-6	N; R51-53	N R: 51/53 S: 61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-315-00-8	glyphosate (ISO); N-(phosphonomethyl)glycine	213-997-4	1071-83-6	Xi; R41 N; R51-53	Xi; N R: 41-51/53 S: (2-)26-39-61		
607-316-00-3	glyphosate-trimesium; glyphosate-trimethylsulfonium	—	81591-81-3	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)36/37-46-61		
607-317-00-9	bis(2-ethylhexyl) phthalate; di-(2-ethylhexyl) phthalate; DEHP	204-211-0	117-81-7	Repr. Cat. 2; R60-61	T R: 60-61 S: 53-45		
607-318-00-4	dibutyl phthalate; DBP	201-557-4	84-74-2	Repr. Cat. 2; R61 Repr. Cat. 3; R62 N; R50	T; N R: 61-50-62 S: 53-45-61		
607-319-00-X	deltamethrin (ISO); (S)- $\alpha$ -cyano-3-phenoxybenzyl (1R, 3R)-3-(2,2-dibromovinyl)- 2,2-dimethylcyclopropanecarboxylate	258-256-6	52918-63-5	T; R23/25 N; R50-53	T; N R: 23/25-50/53 S: (1/2-)24-28-36/37/ 39-38-45-60-61		
607-320-00-5	bis[4-(ethenoxy)butyl] 1,3-benzenedicarboxylate	413-930-0	130066-57-8	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		
607-321-00-0	(S)-methyl-2-chloropropionate	412-470-8	73246-45-4	R10 Xn; R48/22 Xi; R36	Xn R: 10-36-48/22 S: (2-)23-26-36		
607-322-00-6	4-(4,4-dimethyl-3-oxo-pyrazolidin-1-yl)-benzoic acid	413-120-7	107144-30-9	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)22-61		
607-323-00-1	2-(1-(2-hydroxy-3,5-di- <i>tert</i> -pentyl-phenyl)ethyl)-4,6-di- <i>tert</i> - pentylphenyl acrylate	413-850-6	123968-25-2	R53	R: 53 S: 61		
607-324-00-7	reaction mass of: N,N-di(hydrogenated alkyl C <sub>14</sub> -C <sub>18</sub> )phtala- mic acid; dihydrogenated alkyl (C <sub>14</sub> -C <sub>18</sub> )amine	413-800-3	—	R53	R: 53 S: 61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-325-00-2	(S)-2-chloropropionic acid	411-150-5	29617-66-1	Xn; R21/22 C; R35	C R: 21/22-35 S: (1/2-)23-26-28-36/ 37/39-45		
607-326-00-8	reaction mass of: isobutyl hydrogen 2-( $\alpha$ -2,4,6-trimethylnon-2-enyl)succinate; isobutyl hydrogen 2-( $\beta$ -2,4,6-trimethylnon-2-enyl)succinate	410-720-0	141847-13-4	Xi; R41 N; R51-53	Xi; N R: 41-51/53 S: (2-)26-39-61		
607-327-00-3	2-(2-iodoethyl)-1,3-propanediol diacetate	411-780-0	127047-77-2	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)36-61		
607-328-00-9	methyl 4-bromomethyl-3-methoxybenzoate	410-310-1	70264-94-7	Xi; R38-41 R43 N; R50-53	Xi; N R: 38-41-43-50/53 S: (2-)26-36/37/39- 60-61		
607-329-00-4	reaction mass of: sodium 2-(C <sub>12-18</sub> - <i>n</i> -alkyl)amino-1,4-butandioate; sodium 2-octadecenyl-amino-1,4-butandioate	411-250-9	—	R43	Xi R: 43 S: (2-)24-26-37/39		
607-330-00-X	(S)-2,3-dihydro-1H-indole-2-carboxylic acid	410-860-2	79815-20-6	Repr. Cat. 3; R62 Xn; R48/22 R43	Xn R: 43-48/22-62 S: (2-)22-25-26-36/37		
607-331-00-5	reaction mass of: bis(2,2,6,6-tetramethyl-1-octyloxypiperidin-4-yl)-1,10-decanedioate; 1,8-bis[(2,2,6,6-tetramethyl-4-((2,2,6,6-tetramethyl-1-octyloxypiperidin-4-yl)-decan-1,10-dioyl)piperidin-1-yl)oxy]octane	406-750-9	—	R53	R: 53 S: 23-61		
607-332-00-0	cyclopentyl chloroformate	411-460-0	50715-28-1	R10 T; R23 Xn; R22-48/ 22 Xi; R41 R43	T R: 10-22-23-41-43- 48/22 S: (1/2-)26-36/37/39- 45		
607-333-00-6	reaction mass of: dodecyl N-(2,2,6,6-tetramethylpiperidin-4-yl)- $\beta$ -alaninate; tetradecyl N-(2,2,6,6-tetramethylpiperidin-4-yl)- $\beta$ -alaninate	405-670-1	—	Xn; R22-48/ 22 C; R34 N; R50-53	C; N R: 22-34-48/22-50/ 53 S: (1/2-)26-36/37/39- 45-60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-334-00-1	ethyl 1-ethyl-6,7,8-trifluoro-1,4-dihydro-4-oxoquinoline-3-carboxylate	405-880-3	100501-62-0	R43 R52-53	Xi R: 43-52/53 S: (2-)24-37-61		
607-335-00-7	methyl (R)-2-(4-(3-chloro-5-trifluoromethyl-2-pyridyloxy)phenoxy)propionate	406-250-0	72619-32-0	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
607-336-00-2	4-methyl-8-methylenetricyclo[3.3.1.1 <sup>3,7</sup> ]dec-2-yl acetate	406-560-6	122760-85-4	Xi; R38 R43 N; R51-53	Xi; N R: 38-43-51/53 S: (2-)36/37-61		
607-337-00-8	di-tert-(C <sub>12-14</sub> )-alkylammonium 2-benzothiazolylthiosuccinate	406-052-4	125078-60-6	R10 Xn; R22 Xi; R38-41 N; R51-53	Xn; N R: 10-22-38-41-51/ 53 S: (2-)26-37/39-61		
607-338-00-3	2-methylpropyl 2-hydroxy-2-methylbut-3-enoate	406-235-9	72531-53-4	Xi; R36/38	Xi R: 36/38 S: (2-)26-37		
607-339-00-9	2,3,4,5-tetrachlorobenzoylchloride	406-760-3	42221-52-3	Xn; R22 C; R34 R43	C R: 22-34-43 S: (1/2-)26-36/37/39-45		
607-340-00-4	1,3-bis(4-benzoyl-3-hydroxyphenoxy)prop-2-yl acetate	406-990-4	—	N; R51-53	N R: 51/53 S: 61		
607-341-00-X	(9S)-9-amino-9-deoxyerythromycin	406-790-7	26116-56-3	Xi; R41 N; R50-53	Xi; N R: 41-50/53 S: (2-)26-39-60-61		
607-342-00-5	4-chlorobutyl veratrate	410-950-1	69788-75-6	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
607-343-00-0	4,7-methanooctahydro-1H-indene-diyldimethyl bis(2-carboxybenzoate)	407-410-2	—	R53	R: 53 S: 61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-344-00-6	reaction mass of: 3-(N-(3-dimethylaminopropyl)-(C <sub>4-8</sub> )perfluoroalkylsulfonamido)propionic acid; N-[dimethyl-3-(C <sub>4-8</sub> -perfluoroalkylsulfonamido)propylammonium propionate; 3-(N-(3-dimethyl-propylammonium)-(C <sub>4-8</sub> )perfluoroalkylsulfonamido)propionic acid propionate	407-810-7	—	Xn; R48/22	Xn R: 48/22 S: (2-)21-22-36/37		
607-345-00-1	potassium 2-(2,4-dichlorophenoxy)-(R)-propionate	413-580-9	113963-87-4	Xn; R22 Xi; R38-41 R43	Xn R: 22-38-41-43 S: (2-)24-26-37/39		
607-346-00-7	3-icosyl-4-henicosylidene-2-oxetanone	401-210-9	83708-14-9	R53	R: 53 S: 61		
607-347-00-2	sodium (R)-2-(2,4-dichlorophenoxy)propionate	413-340-3	119299-10-4	Xn; R22 Xi; R38-41 R43	Xn R: 22-38-41-43 S: (2-)22-26-36/37/39		
607-348-00-8	magnesium bis((R)-2-(2,4-dichlorophenoxy)propionate)	413-360-2	—	Xn; R22 Xi; R38-41 R43	Xn R: 22-38-41-43 S: (2-)22-26-36/37/39		
607-349-00-3	mono-(tetrapropylammonium) hydrogen 2,2'-dithiobisbenzoate	411-270-8	—	R52-53	R: 52/53 S: 61		
607-350-00-9	bis(4-(1,2-bis(ethoxycarbonyl)ethylamino)-3-methylcyclohexyl)methane	412-060-9	136210-32-7	R43 R52-53	Xi R: 43-52/53 S: (2-)36/37-61		
607-351-00-4	methyl O-(4-amino-3,5-dichloro-6-fluoropyridin-2-yloxy)acetate	407-550-4	69184-17-4	N; R51-53	N R: 51/53 S: 20/21-61		
607-352-00-X	4,4'-oxydiphthalic anhydride	412-830-4	1823-59-2	R52-53	R: 52/53 S: 61		
607-353-00-5	reaction mass of: ethyl <i>exo</i> -tricyclo[5.2.1.0 <sup>2,6</sup> ]decane- <i>endo</i> -2-carboxylate; ethyl <i>endo</i> -tricyclo[5.2.1.0 <sup>2,6</sup> ]decane- <i>exo</i> -2-carboxylate	407-520-0	80657-64-3	Xi; R38 N; R51-53	Xi; N R: 38-51/53 S: (2-)37-61		
607-354-00-0	ethyl 2-cyclohexylpropionate	412-280-5	2511-00-4	N; R51-53	N R: 51/53 S: 61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-355-00-6	<i>p</i> -tolyl 4-chlorobenzoate	411-530-0	15024-10-9	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		
607-356-00-1	ethyl <i>trans</i> -2,2,6-trimethylcyclohexanecarboxylate	412-540-8	—	Xi; R38 N; R51-53	Xi; N R: 38-51/53 S: (2-)37-61		
607-357-00-7	reaction mass of: <i>trans</i> -4-acetoxy-4-methyl-2-propyl-tetrahydro-2 <i>H</i> -pyran; <i>cis</i> -4-acetoxy-4-methyl-2-propyl-tetrahydro-2 <i>H</i> -pyran	412-450-9	131766-73-9	R43	Xi R: 43 S: (2-)24-37		
607-358-00-2	(1 <i>S</i> ,3 <i>S</i> ,5 <i>R</i> ,6 <i>R</i> )-(4-nitrophenylmethyl)-1-dioxo-6-phenylacetamido-penam-3-carboxylate	412-670-5	54275-93-3	R42	Xn R: 42 S: (2-)22		
607-359-00-8	(1 <i>S</i> ,4 <i>R</i> ,6 <i>R</i> ,7 <i>R</i> )-(4-nitrophenylmethyl)3-methylene-1-oxo-7-phenylacetamido-cepham-4-carboxylateido-penam-3-carboxylate	412-800-0	76109-32-5	R42	Xn R: 42 S: (2-)22		
607-360-00-3	sodium 3-acetoacetyl-amino-4-methoxytolyl-6-sulfonate	411-680-7	133167-77-8	R43	Xi R: 43 S: (2-)24-37		
607-361-00-9	methyl ( <i>R</i> )-2-(4-hydroxyphenoxy)propionate	411-950-4	96562-58-2	Xi; R41 R52-53	Xi R: 41-52/53 S: (2-)26-39-61		
607-362-00-4	reaction mass of: (3-methoxy)propylammonium/[tris-(2-hydroxyethyl)]ammonium 2-(2-(bis(2-hydroxyethyl)amino)ethoxycarbonylmethyl)hexadec-4-enoate; (3-methoxy)propylammonium/[tris-(2-hydroxyethyl)]ammonium 2-(2-(bis(2-hydroxyethyl)amino)ethoxycarbonylmethyl)tetradec-4-enoate; (3-methoxy)propylammonium/[tris-(2-hydroxyethyl)]ammonium 2-(3-methoxypropylcarbamoylmethyl)hexadec-4-enoate; (3-methoxy)propylammonium/[tris-(2-hydroxyethyl)]ammonium 2-(3-methoxypropylcarbamoylmethyl)tetradec-4-enoate	413-500-2	—	Xi; R38-41 N; R51-53	Xi; N R: 38-41-51/53 S: (2-)26-37/39-61		
607-363-00-X	methyl-3-methoxyacrylate	412-900-4	5788-17-0	R43	Xi R: 43 S: (2-)24-37		



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-364-00-5	3-phenyl-7-[4-(tetrahydrofurfuryloxy)phenyl]-1,5-dioxas-indacen-2,6-dione	413-330-9	134724-55-3	R53	R: 53 S: 61		
607-365-00-0	2-(2-amino-1,3-thiazol-4-yl)-(Z)-2-methoxyiminoacetyl chloride hydrochloride	410-620-7	119154-86-8	Xn; R22 C; R34 R43	C R: 22-34-43 S: (1/2-)22-26-36/37/ 39-45		
607-366-00-6	3,5-dimethylbenzoyl chloride	413-010-9	6613-44-1	C; R34 R43	C R: 34-43 S: (1/2-)26-36/37/39- 45		
607-367-00-1	potassium bis(N-carboxymethyl)-N-methyl-glycinato-(2-)N,O,O,N-ferrate-(1-) monohydrate	411-640-9	153352-59-1	Xn; R22	Xn R: 22 S: (2-)37		
607-368-00-7	1-(N,N-dimethylcarbamoyl)-3-tert-butyl-5-carbomethoxyethylthio-1H-1,2,4-triazole	411-650-3	110895-43-7	T; R23/25 N; R50-53	T; N R: 23/25-50/53 S: (1/2-)37-38-45-60- 61		
607-369-00-2	reaction mass of: <i>trans</i> -(2R)-5-acetoxy-1,3-oxathiolane-2-carboxylic acid; <i>cis</i> -(2R)-5-acetoxy-1,3-oxathiolane-2-carboxylic acid	411-660-8	147027-04-1	Xn; R22 Xi; R38-41 R43	Xn R: 22-38-41-43 S: (2-)22-24-26-37/39		
607-370-00-8	2-[[2-(acetyloxy)-3-(1,1-dimethyl-ethyl)-5-methylphenyl]methyl]-6-(1,1-dimethylethyl)-4-methylphenol	412-210-3	41620-33-1	N; R50-53	N R: 50/53 S: 60-61		
607-371-00-3	3-ethyl 5-methyl 4-(2-chlorophenyl)-1,4-dihydro-2-[2-(1,3-dihydro-1,3-dioxo-(2H)isindol-2-yl)-ethoxymethyl]-6-methyl-3,5-pyridinedicarboxylate	413-410-3	88150-62-3	R53	R: 53 S: 61		
607-372-00-9	ethoxylated bis phenol A di-(norbornene carboxylate)	412-410-0	—	R52-53	R: 52/53 S: 61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-373-00-4	(±) tetrahydrofurfuryl (R)-2-[4-(6-chloroquinoxalin-2-yloxy)phenyloxy]propionate	414-200-4	119738-06-6	Muta. Cat. 3; R68 Repr. Cat. 2; R61 Repr. Cat. 3; R62 Xn; R22-48/ 22 N; R50-53	T; N R: 61-22-48/22-62- 68-50/53 S: 53-45-60-61		E
607-374-00-X	5-amino-2,4,6-triiodo-1,3-benzenedicarbonyldichloride	417-220-1	37441-29-5	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)22-36/37-61		
607-375-00-5	reaction mass of: <i>cis</i> -4-hydroxy-3-(1,2,3,4-tetrahydro-3-(4-(4-trifluoromethylbenzyloxy)phenyl)-1-naphthyl)coumarin; <i>trans</i> -4-hydroxy-3-(1,2,3,4-tetrahydro-3-(4-(4-trifluoromethylbenzyloxy)phenyl)-1-naphthyl)coumarin	421-960-0	90035-08-8	T+; R26/27/ 28 T; R48/23/ 24/25 N; R50-53	T+; N R: 26/27/28-48/23/ 24/25-50/53 S: (1/2-)28-36/37/39- 45-60-61		
607-376-00-0	benzyl 2,4-dibromobutanoate	420-710-8	23085-60-1	Repr. Cat. 3; R62 Xi; R38 R43 N; R50-53	Xn; N R: 38-43-62-50/53 S: (2-)23-36/37-41- 60-61		
607-377-00-6	<i>trans</i> -4-cyclohexyl-L-proline monohydrochloride	419-160-1	90657-55-9	Repr. Cat. 3; R62 Xn; R22 Xi; R38-41 R43	Xn R: 22-38-41-43-62 S: (2-)22-26-36/37/39		
607-378-00-1	ammonium ( <i>Z</i> )- $\alpha$ -methoxyimino-2-furylacetate	405-990-1	97148-39-5	F; R11	F R: 11 S: (2-)22-43		
607-379-00-7	reaction mass of: 2-[N-(2-hydroxyethyl)stearamido]ethyl stearate; sodium [bis[2-(stearoyloxy)ethyl]amino]methylsulfonate; sodium [bis(2-hydroxyethyl)amino]methylsulfonate; N,N-bis(2-hydroxyethyl)stearamide	401-230-8		R52-53	R: 52/53 S: 61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-380-00-2	reaction mass of: ammonium-1,2-bis(hexyloxycarbonyl)ethanesulfonate; ammonium-1-hexyloxycarbonyl-2-octyloxycarbonylethanesulfonate; ammonium-2-hexyloxycarbonyl-1-octyloxycarbonylethanesulfonate	407-320-3	—	Xi; R38-41 R52-53	Xi R: 38-41-52/53 S: (2-)26-37/39-61		
607-381-00-8	reaction mass of triesters of 2,2-bis(hydroxymethyl)butanol with C <sub>7</sub> -alkanoic acids and 2-ethylhexanoic acid	413-710-4	—	R53	R: 53 S: 61		
607-382-00-3	2-((4-amino-2-nitrophenyl)amino)benzoic acid	411-260-3	117907-43-4	Xi; R41 R43 R52-53	Xi R: 41-43-52/53 S: (2-)24-26-37/39-61		
607-383-00-9	reaction mass of: 2,2,6,6-tetramethylpiperidin-4-yl-hexadecanoate; 2,2,6,6-tetramethylpiperidin-4-yl-octadecanoate	415-430-8	86403-32-9	Xi; R41 R43 N; R50-53	Xi; N R: 41-43-50/53 S: (2-)24-26-37/39-60-61		
607-384-00-4	reaction mass of: esters of C <sub>14</sub> -C <sub>15</sub> branched alcohols with 3,5-di-t-butyl-4-hydroxyphenyl propionic acid; C <sub>15</sub> branched and linear alkyl 3,5-bis(1,1-dimethylethyl)-4-hydroxybenzenepropanoate; C <sub>13</sub> branched and linear alkyl 3,5-bis(1,1-dimethylethyl)-4-hydroxybenzenepropanoate	413-750-2	171090-93-0	R53	R: 53 S: 61		
607-385-00-X	Copolymer of vinyl-alcohol and vinyl acetate partially acetylated with 4-(2-(4-formylphenyl)ethenyl)-1-methylpyridinium methylsulfate	414-590-6	125229-74-5	N; R51-53	N R: 51/53 S: 61		
607-386-00-5	reaction mass of: tetradecanoic acid (42.5-47.5 %); poly(1-7)lactate esters of tetradecanoic acid (52.5-57.5 %)	412-580-6	174591-51-6	Xi; R38-41 R43 N; R50-53	Xi; N R: 38-41-43-50/53 S: (2-)24-26-37/39-60-61		
607-387-00-0	reaction mass of: dodecanoic acid (35-40 %); poly(1-7)lactate esters of dodecanoic acid (60-65 %)	412-590-0	58856-63-6	Xi; R38-41 R43 N; R50-53	Xi; N R: 38-41-43-50/53 S: (2-)24-26-37/39-60-61		
607-388-00-6	4-ethylamino-3-nitrobenzoic acid	412-090-2	2788-74-1	Xn; R22 R43 R52-53	Xn R: 22-43-52/53 S: (2-)22-24-37-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-389-00-1	trisodium N,N-bis(carboxymethyl)-3-amino-2-hydroxypropionate	414-130-4	119710-96-2	Xn; R22	Xn R: 22 S: (2-)22		
607-390-00-7	1,2,3,4-tetrahydro-6-nitro-quinoxaline	414-270-6	41959-35-7	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)22-61		
607-391-00-2	dimethylcyclopropane-1,1-dicarboxylate	414-240-2	6914-71-2	R52-53	R: 52/53 S: 61		
607-392-00-8	2-phenoxyethyl 4-((5-cyano-1,6-dihydro-2-hydroxy-1,4-dimethyl-6-oxo-3-pyridinyl)azo)benzoate	414-260-1	88938-37-8	R53	R: 53 S: 61		
607-393-00-3	3-(cis-1-propenyl)-7-amino-8-oxo-5-thia-1-azabicyclo[4.2.0]oct-2-ene-2-carboxylic acid	415-750-8	106447-44-3	R43	Xi R: 43 S: (2-)22-24-37		
607-394-00-9	5-methylpyrazine-2-carboxylic acid	413-260-9	5521-55-1	Xi; R41	Xi R: 41 S: (2-)26-39		
607-395-00-4	reaction mass of: sodium 1-tridecyl-4-allyl-(2 or 3)-sulfobutanoate; sodium 1-dodecyl-4-allyl-(2 or 3)-sulfobutanoate	410-230-7	—	C; R34 R43 N; R51-53	C; N R: 34-43-51/53 S: (1/2-)26-36/37/39-45-61		
607-396-00-X	bis(1,2,2,6,6-pentamethyl-4-piperidiny) 2-(4-methoxybenzylidene)malonate	414-840-4	147783-69-5	N; R50-53	N R: 50/53 S: 22-60-61		
607-397-00-5	reaction mass of: Ca salicylates (branched C <sub>10-14</sub> and C <sub>18-30</sub> alkylated); Ca phenates (branched C <sub>10-14</sub> and C <sub>18-30</sub> alkylated); Ca sulfurized phenates (branched C <sub>10-14</sub> and C <sub>18-30</sub> alkylated)	415-930-6	—	R43	Xi R: 43 S: (2-)36/37		
607-398-00-0	ethyl N-(5-chloro-3-(4-(diethylamino)-2-methylphenylimino)-4-methyl-6-oxo-1,4-cyclohexadienyl)carbamate	414-820-5	125630-94-6	N; R50-53	N R: 50/53 S: 60-61		
607-399-00-6	2,2-dimethyl 3-methyl-3-butenyl propanoate	415-610-6	104468-21-5	Xi; R38 R52-53	Xi R: 38-52/53 S: (2-)37-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-400-00-X	methyl 3-[[[dibutylamino]thioxomethyl]thio]propanoate	414-400-1	32750-89-3	N; R50-53	N R: 50/53 S: 60-61		
607-401-00-5	ethyl 3-hydroxy-5-oxo-3-cyclohexene-1-carboxylate	414-450-4	88805-65-6	Xi; R38-41 R43	Xi R: 38-41-43 S: (2-)24-26-37/39		
607-402-00-0	methyl N-(phenoxy-carbonyl)-L-valinate	414-500-5	153441-77-1	R52-53	R: 52/53 S: 61		
607-403-00-6	reaction mass of: bis(1S,2S,4S)-(1-benzyl-4-tert-butoxycarbonylamido-2-hydroxy-5-phenyl)pentylammonium succinate; isopropyl alcohol	414-810-0	—	Xn; R48/22 Xi; R41 N; R50-53	Xn; N R: 41-48/22-50/53 S: (2-)22-26-36/39-60-61		
607-404-00-1	reaction mass of: ((Z)-3,7-dimethyl-2,6-octadienyl)oxycarbonylpropanoic acid; di-((E)-3,7-dimethyl-2,6-octadienyl) butandioate; di-((Z)-3,7-dimethyl-2,6-octadienyl) butandioate; (Z)-3,7-dimethyl-2,6-octadienyl butandioate; ((E)-3,7-dimethyl-2,6-octadienyl)oxycarbonylpropanoic acid	415-190-4	—	R43	Xi R: 43 S: (2-)24-37		
607-405-00-7	2-hexyldecyl-p-hydroxybenzoate	415-380-7	148348-12-3	N; R51-53	N R: 51/53 S: 61		
607-406-00-2	potassium 2,5-dichlorobenzoate	415-700-5	184637-62-5	Xn; R22 Xi; R41	Xn R: 22-41 S: (2-)26-39		
607-407-00-8	ethyl 2-carboxy-3-(2-thienyl)propionate	415-680-8	143468-96-6	Xi; R38-41 R43	Xi R: 38-41-43 S: (2-)24-26-37/39		
607-408-00-3	potassium N-(4-fluorophenyl)glycinate	415-710-1	184637-63-6	Xn; R48/22 Xi; R41 R43 R52-53	Xn R: 41-43-48/22-52/53 S: (2-)22-26-36/37/39-61		
607-409-00-9	reaction mass of: (3R)-[1S-(1 $\alpha$ , 2 $\alpha$ , 6 $\beta$ -((2S)-2-methyl-1-oxobutoxy)-8 $\alpha$ )]hexahydro-2,6-dimethyl-1-naphthalene]-3,5-dihydroxyheptanoic acid; inert biomass from <i>Aspergillus terreus</i>	415-840-7	—	R43 R52-53	Xi R: 43-52/53 S: (2-)36/37-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-410-00-4	mono[2-(dimethylamino)ethyl]monohydrogen-2-(hexadec-2-enyl)butanedioate and/or mono[2-(dimethylamino)ethyl]monohydrogen-3-(hexadec-2-enyl)butanedioate	415-880-5	779343-34-9	Xi; R38-41 R43 N; R50-53	Xi; N R: 38-41-43-50/53 S: (2-)24-26-37/39-60-61		
607-411-00-X	oxiranemethanol, 4-methylbenzene-sulfonate, (S)-	417-210-7	70987-78-9	Carc. Cat. 2; R45 Muta. Cat. 3; R68 Xi; R41 R43 N; R51-53	T; N R: 45-41-43-68-51/ 53 S: 53-45-61		
607-412-00-5	ethyl 2-(1-cyanocyclohexyl)acetate	415-970-4	133481-10-4	Xn; R22-48/ 22 R52-53	Xn R: 22-48/22-52/53 S: (2-)36/37-61		
607-413-00-0	trans-4-phenyl-L-proline	416-020-1	96314-26-0	Repr. Cat. 3; R62 R43	Xn R: 43-62 S: (2-)22-36/37		
607-414-00-6	tris(2-ethylhexyl)-4,4',4''-(1,3,5-triazine-2,4,6-triyltriimino)tribenzoate	402-070-1	88122-99-0	R53	R: 53 S: 61		
607-415-00-1	poly-(methyl methacrylate)-co-(butylmethacrylate)-co-(4-acryloxybutyl-isopropenyl- $\alpha$ , $\alpha$ -dimethylbenzyl carbamate)-co-(maleicanhydride)	419-590-1	—	F; R11 R43	F; Xi R: 11-43 S: (2-)24-37-43		
607-416-00-7	4-(2-carboxymethylthio)ethoxy-1-hydroxy-5-isobutyloxycarbonylamino-N-(3-dodecyloxypropyl)-2-naphthamide	420-730-7	—	N; R50-53	N R: 50/53 S: 60-61		
607-418-00-8	2-ethylhexyl 4-aminobenzoate	420-170-3	26218-04-2	N; R50-53	N R: 50/53 S: 60-61		
607-419-00-3	(3'-carboxymethyl-5-(2-(3-ethyl-3H-benzothiazol-2-ylidene)-1-methyl-ethylidene)-4,4'-dioxo-2'-thioxo-(2,5')bithiazolidinyliden-3-yl)-acetic acid	422-240-9	166596-68-5	Xi; R41 R43	Xi R: 41-43 S: (2-)26-36/37/39		
607-420-00-9	2,2-bis(hydroxymethyl)butanoic acid	424-090-1	10097-02-6	Xi; R41 R52-53	Xi R: 41-52/53 S: (2-)26-39-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-421-00-4	cypermethrin <i>cis/trans</i> +/- 40/60; ( <i>RS</i> )- $\alpha$ -cyano-3-phenoxybenzyl (1 <i>RS</i> ,3 <i>RS</i> ;1 <i>RS</i> ,3 <i>SR</i> )-3-(2,2-dichlorovinyl)-2,2-dimethylcyclopropanecarboxylate	257-842-9	52315-07-8	Xn; R20/22 Xi; R37 N; R50-53	Xn; N R: 20/22-37-50/53 S: (2-)24-36/37/39-60-61		
607-422-00-X	$\alpha$ -cypermethrin	257-842-9	67375-30-8	T; R25 Xn; R48/22 Xi; R37 N; R50-53	T; N R: 25-37-48/22-50/53 S: (2-)36/37/39-45-60-61		
607-423-00-5	esters of mecoprop and of mecoprop-P	—	—	Xn; R22 R43 N; R50-53	Xn; N R: 22-43-50/53 S: (2-)13-36/37-60-61		A
607-424-00-0	trifloxystrobin (ISO); ( <i>E,E</i> )- $\alpha$ -methoxyimino-[2-[[[1-[3-(trifluoromethyl)phenyl]ethylidene]amino]oxy]methyl]benzeneacetic acid methyl ester	—	141517-21-7	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-46-60-61		
607-425-00-6	metalaxyl (ISO); methyl- <i>N</i> -(2,6-dimethylphenyl)- <i>N</i> -(methoxyacetyl)-DL-alaninate	260-979-7	57837-19-1	Xn; R22 R43 R52-53	Xn R: 22-43-52/53 S: (2-)13-24-37-46-61		
607-426-00-1	1,2-benzenedicarboxylic acid, dipentylester, branched and linear; [1] n-pentyl-isopentylphthalate; [2] di-n-pentyl phthalate; [3] diisopentylphthalate [4]	284-032-2 [1] - [2] 205-017-9 [3] 210-088-4 [4]	84777-06-0 [1] - [2] 131-18-0 [3] 605-50-5 [4]	Repr. Cat. 2; R60-61 N; R50	T; N R: 60-61-50 S: 53-45-61		
607-427-00-7	bromoxynil heptanoate (ISO); 2,6-dibromo-4-cyanophenyl heptanoate	260-300-4	56634-95-8	Repr. Cat. 3; R63 Xn; R20/22 R43 N; R50-53	Xn; N R: 20/22-43-63-50/53 S: (2-)36/37-46-60-61		
607-430-00-3	BBP; benzyl butyl phthalate	201-622-7	85-68-7	Repr. Cat. 2; R61 Repr. Cat. 3; R62 N; R50-53	T; N R: 61-62-50/53 S: 53-45-60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-431-00-9	prallethrin (ISO); ETOC; 2-methyl-4-oxo-3-(prop-2-ynyl)cyclopent-2-en-1-yl 2,2-dimethyl-3-(2-methylprop-1-enyl)cyclopropanecarboxylate	245-387-9	23031-36-9	T; R23 Xn; R22 N; R50-53	T; N R: 22-23-50/53 S: (1/2-)45-60-61		
607-432-00-4	S-metolachlor; reaction mass of (S)-2-chloro-N-(2-ethyl-6-methyl-phenyl)-N-(2-methoxy-1-methyl-ethyl)-acetamide (80-100 %); [1] (R)-2-chloro-N-(2-ethyl-6-methyl-phenyl)-N-(2-methoxy-1-methyl-ethyl)-acetamide (0-20 %) [2]	- [1] - [2]	87392-12-9 [1] 178961-20-1 [2]	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		
607-433-00-X	cypermethrin <i>cis/trans</i> +/- 80/20; (RS)- $\alpha$ -cyano-3-phenoxybenzyl (1RS; 3RS; 1RS, 3SR)-3-(2,2-dichlorovinyl)-2,2-dimethylcyclopropanecarboxylate	257-842-9	52315-07-8	Xn; R22 Xi; R37/38 R43 N; R50-53	Xn; N R: 22-37/38-43-50/ 53 S: (2-)36/37/39-60-61		
607-434-00-5	mecoprop-P [1] and its salts; (R)-2-(4-chloro-2-methylphenoxy)propionic acid	240-539-0	16484-77-8	Xn; R22 Xi; R41 N; R51-53	Xn; N R: 22-41-51/53 S: (2-)13-26-37/39- 46-61		
607-435-00-0	2S-isopropyl-5R-methyl-1R-cyclohexyl 2,2-dihydroxyacetate	416-810-6	111969-64-3	Xn; R48/22 Xi; R41 N; R51-53	Xn; N R: 41-48/22-51/53 S: (2-)22-26-36/39-61		
607-436-00-6	2-hydroxy-3-(2-ethyl-4-methylimidazolyl)propyl neodecanoate	417-350-9	—	Xi; R38-41 N; R50-53	Xi; N R: 38-41-50/53 S: (2-)26-28-37/39- 60-61		
607-437-00-1	3-(4-aminophenyl)-2-cyano-2-propenoic acid	417-480-6	252977-62-1	R43	Xi R: 43 S: (2-)22-24-37		
607-438-00-7	methyl-2-[(aminosulfonyl)methyl]benzoate	419-010-5	112941-26-1	Xn; R22 Xi; R36	Xn R: 22-36 S: (2-)22-26		
607-439-00-2	methyl tetrahydro-2-furancarboxylate	420-670-1	37443-42-8	Xi; R41	Xi R: 41 S: (2-)26-39		



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-440-00-8	methyl 2-aminosulfonyl-6-(trifluoromethyl)pyridine-3-carboxylate	421-220-7	144740-59-0	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)22-24-37-61		
607-441-00-3	3-[3-(2-dodecyloxy-5-methylphenylcarbamoyl)-4-hydroxy-1-naphthylthio]propionic acid	421-490-6	167684-63-1	R53	R: 53 S: 57-61		
607-442-00-9	benzyl [hydroxy-(4-phenylbutyl)phosphinyl] acetate	416-050-5	87460-09-1	Xi; R41	Xi R: 41 S: (2-)26-36/39		
607-443-00-4	bis(2,4-di-tert-butyl-6-methylphenyl)ethyl phosphate	416-140-4	145650-60-8	R53	R: 53 S: 61		
607-444-00-X	reaction mass of: <i>cis</i> -1,4-dimethylcyclohexyl dibenzoate; <i>trans</i> -1,4-dimethylcyclohexyl dibenzoate	416-230-3	35541-81-2	R53	R: 53 S: 61		
607-445-00-5	Iron (III) tris(4-methylbenzenesulfonate)	420-960-8	77214-82-5	Xi; R41	Xi R: 41 S: (2-)24-26-39		
607-446-00-0	methyl 2-[4-(2-chloro-4-nitrophenylazo)-3-(1-oxopropyl)amino]phenylaminopropionate	416-240-8	155522-12-6	R43 R53	Xi R: 43-53 S: (2-)22-24-37-61		
607-447-00-6	sodium 4-[4-(4-hydroxyphenylazo)phenylamino]-3-nitrobenzenesulfonate	416-370-5	156738-27-1	R43 R52-53	Xi R: 43-52/53 S: (2-)22-24-37-61		
607-448-00-1	2,3,5,6-tetrafluorobenzoic acid	416-800-1	652-18-6	Xi; R38-41	Xi R: 38-41 S: (2-)22-26-37/39		
607-449-00-7	reaction mass of: 4,4',4''-[(2,4,6-trioxo-1,3,5(2 <i>H</i> ,4 <i>H</i> ,6 <i>H</i> )-triazine-1,3,5-triyl)tris[methylene(3,5,5-trimethyl-3,1-cyclohexanediy)iminocarbonyloxy-2,1-ethanediy(ethyl)amino]]trisbenzenediazoniumtri[bis(2-methylpropyl)naphthalenesulfonate]; 4,4',4''-4'''-[[5,5'-[carbonylbis[imino(1,5,5-trimethyl-3,1-cyclohexanediy)methylene]]-2,4,6-trioxo-1,3,5(2 <i>H</i> ,4 <i>H</i> ,6 <i>H</i> )-triazine-1,1',3,3'-tetrayl]tetrakis[methylene(3,5,5-trimethyl-3,1-cyclohexanediy)iminocarbonyloxy-2,1-ethanediy(ethyl)amino]]tetrakisbenzenediazoniumtetra[bis(2-methylpropyl)naphthalenesulfonate]	417-080-1	—	E; R2 R43 N; R50-53	E; Xi; N R: 2-43-50/53 S: (2-)24-37-60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-450-00-2	2-mercaptobenzothiazolyl-(Z)-(2-aminothiazol-4-yl)-2-(tert-butoxycarbonyl) isopropoxyiminoacetate	419-040-9	89604-92-2	R53	R: 53 S: 61		
607-451-00-8	4-[4-amino-5-hydroxy-3-(4-(2-sulfoxyethylsulfonyl)phenylazo)-2,7-disulfonaphth-6-ylazo]-6-[3-(4-amino-5-hydroxy-3-(4-(2-sulfoxyethylsulfonyl)phenylazo)-2,7-disulfonaphth-6-ylazo)phenylcarbonylamino]benzenesulfonic acid, sodium salt	417-640-5	161935-19-9	Xi; R41 R43	Xi R: 41-43 S: (2-)22-24-26-37/39		
607-453-00-9	4-benzyl-2,6-dihydroxy-4-aza-heptylene bis(2,2-dimethyloctanoate)	418-100-1	172964-15-7	R43 R53	Xi R: 43-53 S: (2-)24-37-61		
607-454-00-4	reaction mass of: <i>trans</i> -2-(1-methylethyl)-1,3-dioxane-5-carboxylic acid; <i>cis</i> -2-(1-methylethyl)-1,3-dioxane-5-carboxylic acid	418-170-3	116193-72-7	Xi; R41 R52-53	Xi R: 41-52/53 S: (2-)25-26-39-61		
607-455-00-X	1-amino-4-(3-[4-chloro-6-(2,5-di-sulfophenylamino)-1,3,5-triazin-2-ylamino]-2,2-dimethyl-propylamino)-anthraquinone-2-sulfonic acid, sodium/lithiumsalt	419-520-8	172890-93-6	R43	Xi R: 43 S: (2-)22-24-37		
607-456-00-5	3-amino-4-chlorobenzoic acid, hexadecyl ester	419-700-6	143269-74-3	N; R51-53	N R: 51/53 S: 61		
607-457-00-0	tetrasodium dihydrogen 1,1"-dihydroxy-8,8"-[p-phenylbis(imino-{6-[4-(2-aminoethyl)piperazin-1-yl]}-1,3,5-triazine-4,2-diyl-imino))bis(2,2'-azonaphthalene-1',3,6-trisulfonate)	420-350-1	172277-97-3	Xi; R41 N; R51-53	Xi; N R: 41-51/53 S: (2-)26-39-61		
607-458-00-6	reaction mass of: 2-ethyl-[2,6-dibromo-4-[1-[3,5-dibromo-4-(2-hydroxyethoxy)phenyl]-1-methylethyl]phenoxy]propenoate; 2,2'-diethyl-[4,4'-bis(2,6-dibromophenoxy)-1-methylethylidene] dipropenoate; 2,2'-[(1-methylethylidene)bis[[2,6-dibromo-4,1-phenyleneoxy]ethanol]]	420-850-1	—	N; R51-53	N R: 51/53 S: 61		
607-459-00-1	isopentyl 4-{2-[5-cyano-1,2,3,6-tetrahydro-1-(2-isopropoxyethoxy-carbonylmethyl)-4-methyl-2,6-dioxo-3-pyridylidene]hydrazino}benzoate	418-930-4	—	R53	R: 53 S: 61		
607-460-00-7	3-tridecyloxy-propyl-ammonium 9-octadecenoate	418-990-1	778577-53-0	Xn; R48/22 Xi; R36/38 N; R50-53	Xn; N R: 36/38-48/22-50/53 S: (2-)23-26-37/39-60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-461-00-2	reaction mass of: pentasodium 2-{4-[3-methyl-4-[6-sulfonato-4-(2-sulfonato-phenylazo)-naphthalen-1-ylazo]-phenylamino]-6-[3-(2-sulfato-ethanesulfonyl)-phenylamino]-1,3,5-triazin-2-ylamino}-benzene-1,4-disulfonate; pentasodium 2-{4-[3-methyl-4-[7-sulfonato-4-(2-sulfonato-phenylazo)-naphthalen-1-ylazo]-phenylamino]-6-[3-(2-sulfato-ethanesulfonyl)-phenylamino]-1,3,5-triazin-2-ylamino}-benzene-1,4-disulfonate	421-160-1	—	R52-53	R: 52/53 S: 61		
607-462-00-8	reaction mass of: 1-hexyl acetate; 2-methyl-1-pentyl acetate; 3-methyl-1-pentyl acetate; 4-methyl-1-pentyl acetate; other mixed linear and branched C <sub>6</sub> -alkyl acetates	421-230-1	88230-35-7	N; R51-53	N R: 51/53 S: 61		
607-463-00-3	3-(phenothiazin-10-yl)propionic acid	421-260-5	362-03-8	N; R51-53	N R: 51/53 S: 24/25-61		
607-464-00-9	reaction mass of: 7-chloro-1-ethyl-6-fluoro-1,4-dihydro-4-oxo-quinoline-3-carboxylic acid; 5-chloro-1-ethyl-6-fluoro-1,4-dihydro-4-oxo-quinoline-3-carboxylic acid	421-280-4		R52-53	R: 52/53 S: 61		
607-465-00-4	tris(2-hydroxyethyl)ammonium 7-{4-[4-(2-cyanoamino-4-hydroxy-6-oxidopyrimidin-5-ylazo)benzamido]-2-ethoxy-phenylazo)naphthalene-1,3-disulfonate	421-440-3	778583-04-3	R52-53	R: 52/53 S: 61		
607-466-00-X	reaction mass of: phenyl 1-(1-[2-chloro-5-(hexadecyloxycarbonyl)phenylcarbamoyl]-3,3-dimethyl-2-oxobutyl)-1H-2,3,3a,7a-tetrahydrobenzotriazole-5-carboxylate; phenyl 2-(1-(2-chloro-5-(hexadecyloxycarbonyl)phenylcarbamoyl)-3,3-dimethyl-2-oxobutyl)-1H-2,3,3a,7a-tetrahydrobenzotriazole-5-carboxylate; phenyl 3-(1-(2-chloro-5-(hexadecyloxycarbonyl)phenylcarbamoyl)-3,3-dimethyl-2-oxobutyl)-1H-2,3,3a,7a-tetrahydrobenzotriazole-5-carboxylate	421-480-1	—	N; R51-53	N R: 51/53 S: 37/39-61		
607-467-00-5	1,1,3,3-tetrabutyl-1,3-ditinoxidicaprlylate	419-430-9	56533-00-7	Xn; R21/22-48/22 C; R34 N; R50-53	C; N R: 21/22-34-48/22-50/53 S: (1/2-)26-36/37/39-45-60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-468-00-0	reaction mass of: monosodium 4-((4-(5-sulfonato-2-methoxyphenylamino)-6-chloro-1,3,5-triazine-2-yl)amino)-2-((1,4-dimethyl-6-oxido-2-oxo-5-sulfonatomethyl-1,2-dihydropyridine-3-yl)azo)benzenesulfonate; disodium 4-((4-(5-sulfonato-2-methoxyphenylamino)-6-chloro-1,3,5-triazine-2-yl)amino)-2-((1,4-dimethyl-6-oxido-2-oxo-5-sulfonatomethyl-1,2-dihydropyridine-3-yl)azo)benzenesulfonate; trisodium 4-((4-(5-sulfonato-2-methoxyphenylamino)-6-chloro-1,3,5-triazine-2-yl)amino)-2-((1,4-dimethyl-6-oxido-2-oxo-5-sulfonatomethyl-1,2-dihydropyridine-3-yl)azo)benzenesulfonate; tetrasodium 4-((4-(5-sulfonato-2-methoxyphenylamino)-6-chloro-1,3,5-triazine-2-yl)amino)-2-((1,4-dimethyl-6-oxido-2-oxo-5-sulfonatomethyl-1,2-dihydropyridine-3-yl)azo)benzenesulfonate	419-450-8	—	R43	Xi R: 43 S: (2-)22-24-37		
607-469-00-6	disodium 7-((4,6-bis(3-diethylaminopropylamino)-1,3,5-triazine-2-yl)amino)-4-hydroxy-3-(4-(4-sulfonatophenylazo)phenylazo)-2-naphthalene sulfonate	419-460-2	120029-06-3	R52-53	R: 52/53 S: 61		
607-470-00-1	potassium sodium 6,13-dichloro-3,10-bis{2-[4-[3-(2-hydroxysulphonyloxyethanesulfonyl)phenylamino]-6-(2,5-disulfonatophenylamino)-1,3,5-triazin-2-ylamino]ethylamino}benzo[5,6][1,4]oxazino[2,3-b]phenoxazine-4,11-disulfonate	414-100-0	154336-20-6	Xi; R41 R52-53	Xi R: 41-52/53 S: (2-)39-22-26-61		
607-472-00-2	ammonium iron(III) trimethylenediaminetetraacetate hemihydrate	400-660-3	111687-36-6	N; R51-53	N R: 51/53 S: 61		
607-474-00-3	(4-(4-(4-dimethylaminobenzyliden-1-yl)-3-methyl-5-oxo-2-pyrazolin-1-yl)benzoic acid	410-430-4	117573-89-4	R53	R: 53 S: 61		
607-475-00-9	reaction mass of: tetrasodium 7-(4-[4-chloro-6-[methyl-(3-sulfonatophenyl)amino]-1,3,5-triazin-2-ylamino]-2-ureidophenylazo)naphthalene-1,3,6-trisulfonate; tetrasodium 7-(4-[4-chloro-6-[methyl-(4-sulfonatophenyl)amino]-1,3,5-triazin-2-ylamino]-2-ureidophenylazo)naphthalene-1,3,6-trisulfonate (1:1)	412-940-2	148878-18-6	R43	Xi R: 43 S: (2-)22-24-37		
607-476-00-4	trisodium N,N-bis(carboxymethyl)-β-alanine	414-070-9	129050-62-0	C; R34 R52-53	C R: 34-52/53 S: (1/2-)26-36/37/39-45-61		
607-478-00-5	tetramethylammonium hydrogen phthalate	416-900-5	79723-02-7	T; R25 Xn; R48/22 N; R50	T; N R: 25-48/22-50 S: (1/2-)25-36-45-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-479-00-0	hexadecyl 4-chloro-3-[2-(5,5-dimethyl-2,4-dioxo-1,3-oxazolidin-3-yl)-4,4-dimethyl-3-oxopentamido]benzoate	418-550-9	168689-49-4	R53	R: 53 S: 61		
607-480-00-6	1,2-benzenedicarboxylic acid; di-C <sub>7-11</sub> -branched and linear alkylesters	271-084-6	68515-42-4	Repr. Cat. 2; R61 Repr. Cat. 3; R62	T R: 61-62 S: 53-45		
607-487-00-4	reaction mass of: disodium 4-(3-ethoxycarbonyl-4-(5-(3-ethoxycarbonyl-5-hydroxy-1-(4-sulfonatophenyl)pyrazol-4-yl)penta-2,4-dienylidene)-4,5-dihydro-5-oxopyrazol-1-yl)benzenesulfonate; trisodium 4-(3-ethoxycarbonyl-4-(5-(3-ethoxycarbonyl-5-oxido-1-(4-sulfonatophenyl)pyrazol-4-yl)penta-2,4-dienylidene)-4,5-dihydro-5-oxopyrazol-1-yl)benzenesulfonate	402-660-9	—	Repr. Cat. 2; R61 R52-53	T R: 61-52/53 S: 53-45-61		
607-488-00-X	ethyl (2-acetylamino-5-fluoro-4-isothiocyanatophenoxy)acetate	414-210-9	147379-38-2	N; R50-53	N R: 50/53 S: 60-61		
607-489-00-5	reaction mass of: 2-ethylhexyl linolenate, linoleate and oleate; 2-ethylhexyl epoxyoleate; 2-ethylhexyl diepoxylinoleate; 2-ethylhexyl triepoxylinolenate	414-890-7	71302-79-9	R43	Xi R: 43 S: (2-)24-37		
607-490-00-0	N-[2-hydroxy-3-(C <sub>12-16</sub> -alkyloxy)propyl]-N-methyl glycinate	415-060-7	—	Xi; R41 R43	Xi R: 41-43 S: (2-)24-26-37/39		
607-492-00-1	2-(1-(3',3'-dimethyl-1'-cyclohexyl)ethoxy)-2-methyl propyl propanoate	415-490-5	141773-73-1	N; R51-53	N R: 51/53 S: 61		
607-493-00-7	methyl (3aR,4R,7aR)-2-methyl-4-(1S,2R,3-triacetoxypropyl)-3a,7a-dihydro-4H-pyrano[3,4-d]oxazole-6-carboxylate	415-670-3	78850-37-0	Xi; R41	Xi R: 41 S: (2-)26-39		
607-494-00-2	bis(2-ethylhexyl)octylphosphonate	417-170-0	52894-02-7	N; R50-53	N R: 50/53 S: 60-61		
607-495-00-8	sodium 4-sulfophenyl-6-((1-oxononyl)amino)hexanoate	417-550-6	168151-92-6	R43	Xi R: 43 S: (2-)24-37		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-496-00-3	2,2'-methylenebis(4,6-di- <i>tert</i> -butyl-phenyl)-2-ethylhexyl phosphite	418-310-3	126050-54-2	R53	R: 53 S: 61		
607-497-00-9	cerium oxide isostearate	419-760-3	—	R53	R: 53 S: 61		
607-498-00-4	( <i>E</i> )-3,7-dimethyl-2,6-octadienylhexadecanoate	421-370-3	3681-73-0	Xi; R38 R53	Xi R: 38-53 S: (2-)37-61		
607-499-00-X	bis(dimethyl-(2-hydroxyethyl)ammonium) 1,2-ethanediyl-bis(2-hexadecenylsuccinate)	421-660-1	—	Xi; R41 R43 N; R51-53	Xi; N R: 41-43-51/53 S: (2-)24-26-37/39-61		
607-500-00-3	calcium 2,2-bis[(5-tetrapropylene-2-hydroxy)phenyl]ethanoate	421-670-4	—	Xi; R38 N; R50-53	Xi; N R: 38-50/53 S: (2-)37-60-61		
607-501-00-9	reaction mass of: triphenylthiophosphate and tertiary butylated phenyl derivatives	421-820-9	192268-65-8	R53	R: 53 S: 61		
607-502-00-4	( <i>N</i> -benzyl- <i>N,N,N</i> -tributyl)ammonium 4-dodecylbenzenesulfonate	422-200-0	178277-55-9	C; R34 Xn; R22 N; R51-53	C; N R: 22-34-51/53 S: (1/2-)26-36/37/39-45-61		
607-503-00-X	2,4,6-tri- <i>n</i> -propyl-2,4,6-trioxo-1,3,5,2,4,6-trioxatriphosphorinane	422-210-5	68957-94-8	C; R34	C R: 34 S: (1/2-)26-36/37/39-45		
607-505-00-0	pentasodium 7-(4-(4-(5-amino-4-sulfonato-2-(4-((2-(sulfonato-ethoxy)sulfonyl)phenylazo)phenylamino)-6-chloro-1,3,5-triazin-2-yl)amino-2-ureidophenylazo)naphthalene-1,3,6-trisulfonate	422-930-1		R52-53	R: 52/53 S: 22-61		
607-506-00-6	reaction mass of: strontium (4-chloro-2-((4,5-dihydro-3-methyl-5-oxo-1-(3-sulfonatophenyl)-1 <i>H</i> -pyrazol-4-yl)azo)-5-methyl)benzenesulfonate; disodium (4-chloro-2-((4,5-dihydro-3-methyl-5-oxo-1-(3-sulfonatophenyl)-1 <i>H</i> -pyrazol-4-yl)azo)-5-methyl)benzenesulfonate	422-970-8		N; R51-53	N R: 51/53 S: 22-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-507-00-1	potassium,sodium 2,4-diamino-3-[4-(2-sulfonatoethoxysulfonyl)phenylazo]-5-[4-(2-sulfonatoethoxysulfonyl)-2-sulfonato-phenylazo]-benzenesulfonate	422-980-2	187026-95-5	Xi; R41	Xi R: 41 S: (2-)22-26-39		
607-508-00-7	disodium 3,3'-[iminobis(sulfonyl-4,1-phenylene-(5-hydroxy-3-methylpyrazole-1,4-diyl)azo-4,1-phenylenesulfonylimino-(4-amino-6-hydroxypyrimidine-2,5-diyl)azo-4,1-phenylene-sulfonylimino(4-amino-6-hydroxypyrimidine-2,5-diyl)azo]bis(benzenesulfonate)]	423-110-4	—	Xi; R41	Xi R: 41 S: (2-)22-26-39		
607-512-00-9	trisodium 2,4-diamino-3,5-bis-[4-(2-sulfonatoethoxy)sulfonyl]phenylazo]benzenesulfonate	423-970-0	182926-43-8	R52-53	R: 52/53 S: 22-61		
607-513-00-4	reaction mass of: Trisodium 4-benzoylamino-6-(6-ethenesulfonyl-1-sulfato-naphthalen-2-ylazo)-5-hydroxynaphthalene-2,7-disulfonate; 5-(benzoylamino)-4-hydroxy-3-((1-sulfo-6-((2-(sulfooxy)ethyl)sulfonyl)-2-naphthyl)azo)naphthalene-2,7-disulfonic acid sodium salt; 5-(benzoylamino)-4-hydroxy-3-((1-sulfo-6-((2-(sulfooxy)ethyl)sulfonyl)-2-naphthyl)azo)naphthalene-2,7-disulfonic acid	423-200-3	—	Xi; R41 R43 R52-53	Xi R: 41-43-52/53 S: (2-)22-26-36/37/ 39-61		
607-515-00-5	reaction mass of: disodium hexyldiphenyl ether disulphonate; disodium dihexyldiphenyl ether disulphonate	429-650-7	147732-60-3	Xi; R36 N; R51-53	Xi; N R: 36-51/53 S: (2-)26-61		
607-516-00-0	N,N'-bis(trifluoroacetyl)-S,S'-bis-L-homocysteine	429-670-6	105996-54-1	Xi; R41 R43	Xi R: 41-43 S: (2-)24-26-37/39		
607-517-00-6	(S)- $\alpha$ -(acetylthio)benzenepropanoic acid	430-300-0	76932-17-7	Xn; R22 Xi; R41 R43	Xn R: 22-41-43 S: (2-)22-26-36/37/39		
607-526-00-5	cartap (ISO); 1,3-bis(carbamoylthio)-2-(dimethylamino)propane	—	15263-53-3	N; R50-53	N R: 50/53 S: 60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
607-527-00-0	reaction mass of: 1-(1'H,1'H,2'H,2'H-tridecafluorooctyl)-12-(1''H,1''H,2''H,2''H-tridecafluorooctyl)dodecanedioate; 1-(1'H,1'H,2'H,2'H-tridecafluorooctyl)-12-(1''H,1''H,2''H,2''H-heptdecafluorodecyl)dodecanedioate; 1-(1'H,1'H,2'H,2'H-tridecafluorooctyl)-12-(1''H,1''H,2''H,2''H-heneicosafuorododecyl)dodecanedioate; 1-(1'H,1'H,2'H,2'H-tridecafluorooctyl)-12-(1''H,1''H,2''H,2''H-pentacosafuorotetradecyl)dodecanedioate; 1-(1'H,1'H,2'H,2'H-heptadecafluorodecyl)-12-(1''H,1''H,2''H,2''H-heptadecafluorodecyl)dodecanedioate; 1-(1'H,1'H,2'H,2'H-heptadecafluorodecyl)-12-(1''H,1''H,2''H,2''H-heneicosafuorododecyl)dodecanedioate	423-180-6	—	Xn; R48/22	Xn R: 48/22 S: (2-)36		
608-001-00-3	acetonitrile; cyanomethane	200-835-2	75-05-8	F; R11 Xn; R20/21/ 22 Xi; R36	F; Xn R: 11-20/21/22-36 S: (2-)16-36/37		
608-002-00-9	trichloroacetonitrile	208-885-7	545-06-2	T; R23/24/25 N; R51-53	T; N R: 23/24/25-51/53 S: (1/2-)45-61		
608-003-00-4	acrylonitrile	203-466-5	107-13-1	F; R11 Carc. Cat. 2; R45 T; R23/24/25 Xi; R37/38- 41 R43 N; R51-53	F; T; N R: 45-11-23/24/25- 37/38-41-43-51/53 S: - 53-45-61	T; R23/24/25: C ≥ 1 % Xn; R20/21/22: 0,2 % ≤ C < 1 %	D E
608-004-00-X	2-hydroxy-2-methylpropionitrile; 2-cyanopropan-2-ol; acetone cyanohydrin	200-909-4	75-86-5	T+; R26/27/ 28 N; R50-53	T+; N R: 26/27/28-50/53 S: (1/2-)7/9-27-45- 60-61		
608-005-00-5	n-butyronitrile	203-700-6	109-74-0	R10 ⊗ T; R23/24/25	T R: 10-23/24/25 S: (1/2-)45		



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
608-006-00-0	bromoxynil (ISO) 3,5-dibromo-4-hydroxybenzonitrile; bromoxynil phenol	216-882-7	1689-84-5	Repr. Cat. 3; R63 T+; R26 T; R25 R43 N; R50-53	T+; N R: 25-26-43-63-50/ 53 S: (1/2-)27/28-36/37- 45-63-60-61	N; R50-53: C ≥ 2,5 % N; R51-53: 0,25 % ≤ C < 2,5 % R52-53: 0,025 % ≤ C < 0,25 %	
608-007-00-6	ioxynil (ISO) 4-hydroxy-3,5-diiodobenzonitrile	216-881-1	1689-83-4	Repr. Cat. 3; R63 T; R23/25 Xn; R21-48/ 22 Xi; R36 N; R50-53	T; N R: 21-23/25-36-48/ 22-63-50/53 S: (1/2-)36/37-45-60- 61-63	N; R50-53: C ≥ 2,5 % N; R51-53: 0,25 % ≤ C < 2,5 % R52-53: 0,025 % ≤ C < 0,25 %	
608-008-00-1	chloroacetonitrile	203-467-0	107-14-2	T; R23/24/25 N; R51-53	T; N R: 23/24/25-51/53 S: (1/2-)45-61		
608-009-00-7	malononitrile	203-703-2	109-77-3	T; R23/24/25 N; R50-53	T; N R: 23/24/25-50/53 S: (1/2-)23-27-45-60- 61		
608-010-00-2	methacrylonitrile; 2-methyl-2-propene nitrile	204-817-5	126-98-7	F; R11 T; R23/24/25 R43	F; T R: 11-23/24/25-43 S: (1/2-)9-16-18-29- 45	T; R23/24/25: C ≥ 1 % Xn; R20/21/22: 0,2 % ≤ C < 1 % R43: C ≥ 0,2 %	D
608-011-00-8	oxalonitrile; cyanogen	207-306-5	460-19-5	F; R11 ⊗ T; R23 N; R50-53	F; T; N R: 11-23-50/53 S: (1/2-)23-45-60-61		
608-012-00-3	benzonitrile	202-855-7	100-47-0	Xn; R21/22	Xn R: 21/22 S: (2-)23		
608-013-00-9	2-chlorobenzonitrile	212-836-5	873-32-5	Xn; R21/22 Xi; R36	Xn R: 21/22-36 S: (2-)23		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
608-014-00-4	chlorothalonil (ISO); tetrachloroisophthalonitrile	217-588-1	1897-45-6	Carc. Cat. 3; R40 T+; R26 Xi; R41 Xi; R37 R43 N; R50-53	T+; N R: 26-37-40-41-43-50/53 S: (2-)28-36/37/39-45-60-61	N; R50-53: C ≥ 2,5 % N; R51-53: 0,25 % ≤ C < 2,5 % R52-53: 0,025 % ≤ C < 0,25 %	
608-015-00-X	dichlobenil (ISO); 2,6-dichlorobenzonitrile	214-787-5	1194-65-6	Xn; R21 N; R51-53	Xn; N R: 21-51/53 S: (2-)36/37-61		
608-016-00-5	1,4-Dicyano-2,3,5,6-tetra-chloro-benzene	401-550-8	1897-41-2	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		
608-017-00-0	bromoxynil octanoate (ISO); 2,6-dibromo-4-cyanophenyl octanoate	216-885-3	1689-99-2	Repr. Cat. 3; R63 T; R23 Xn; R22 R43 N; R50-53	T; N R: 22-23-43-63-50/53 S: (1/2-)36/37-45-63-60-61	N; R50-53: C ≥ 2,5 % N; R51-53: 0,25 % ≤ C < 2,5 % R52-53: 0,025 % ≤ C < 0,25 %	
608-018-00-6	ioxynil octanoate (ISO); 4-cyano-2,6-diiodophenyl octanoate	223-375-4	3861-47-0	Repr. Cat. 3; R63 T; R25 Xi; R36 R43 N; R50-53	T; N R: 25-36-43-63-50/53 S: (1/2-)26-36/37-45-60-61	N; R50-53: C ≥ 2,5 % N; R51-53: 0,25 % ≤ C < 2,5 % R52-53: 0,025 % ≤ C < 0,25 %	
608-019-00-1	2,2'-dimethyl-2,2'-azodipropiononitrile; ADZN	201-132-3	78-67-1	E; R2 F; R11 Xn; R20/22 R52-53	E; Xn R: 2-11-20/22-52/53 S: (2-)39-41-47-61		
608-021-00-2	3-(2-(diaminomethyleneamino)thiazol-4-ylmethylthio)propionitrile	403-710-2	76823-93-3	Xn; R22 R43	Xn R: 22-43 S: (2-)22-24-37		
608-022-00-8	3,7-dimethyloctanenitrile	403-620-3	40188-41-8	Xi; R38 R43 N; R51-53	Xi; N R: 38-43-51/53 S: (2-)36/37-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
608-023-00-3	fenbuconazole (ISO) 4-(4-chlorophenyl)-2-phenyl-2-[(1H-1,2,4-triazol-1-yl)methyl]butanenitrile	406-140-2	114369-43-6	N; R50-53	N R: 50/53 S: 60-61		
608-024-00-9	2-(4-(N-butyl-N-phenethylamino)phenyl)ethylene-1,1,2-tricarbonitrile	407-650-8	97460-76-9	R53	R: 53 S: 61		
608-025-00-4	2-nitro-4,5-bis(benzyloxy)phenylacetonitrile	410-970-0	117568-27-1	R53	R: 53 S: 61		
608-026-00-X	3-cyano-3,5,5-trimethylcyclohexanone	411-490-4	7027-11-4	Xn; R22-48/22 R43 R52-53	Xn R: 22-43-48/22-52/53 S: (2-)36/37-61		
608-027-00-5	reaction mass of: 3-(4-ethylphenyl)-2,2-dimethylpropanenitrile; 3-(2-ethylphenyl)-2,2-dimethylpropanenitrile; 3-(3-ethylphenyl)-2,2-dimethylpropanenitrile	412-660-0	—	N; R51-53	N R: 51/53 S: 61		
608-028-00-0	4-(2-cyano-3-phenylamino-acryloyloxymethyl)-cyclohexylmethyl 2-cyano-3-phenylamino)-acrylate	413-510-7	147374-67-2	Xn; R48/20/21 R43 N; R51-53	Xn; N R: 43-48/20/21-51/53 S: (2-)36/37-61		
608-029-00-6	1,2-dihydro-6-hydroxy-4-methyl-1-[3-(1-methylethoxy)propyl]-2-oxo-3-pyridinecarbonitrile	411-990-2	68612-94-2	R43	Xi R: 43 S: (2-)24-37		
608-030-00-1	N-acetyl-N-[5-cyano-3-(2-dibutylamino-4-phenylthiazol-5-yl-methylene)-4-methyl-2,6-dioxo-1,2,3,6-tetrahydropyridin-1-yl]benzamide	412-340-0	147741-93-3	N; R50-53	N R: 50/53 S: 60-61		
608-031-00-7	2-benzyl-2-methyl-3-butenitrile	407-870-4	97384-48-0	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)61		
608-033-00-8	N-butyl-3-(2-chloro-4-nitrophenylhydrazono)-1-cyano-2-methylprop-1-ene-1,3-dicarboximide	407-970-8	75511-91-0	R43 R52-53	Xi R: 43-52/53 S: (2-)24-37-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
608-034-00-3	chlorfenapyr; 4-bromo-2-(4-chlorophenyl)-1-ethoxymethyl-5-trifluoromethylpyrrole-3-carbonitrile	—	122453-73-0	T; R23 Xn; R22 N; R50-53	T; N R: 22-23-50/53 S: (1/2-)13-36/37-45-60-61		
608-035-00-9	(±)-α-[(2-acetyl-5-methylphenyl)-amino]-2,6-dichlorobenzene-aceto-nitrile	419-290-9	—	R43 R53	Xi R: 43-53 S: (2-)24-37-61		
608-036-00-4	3-(2-{4-[2-(4-cyanophenyl)vinyl]phenyl}vinyl)benzotrile	419-060-8	79026-02-1	R53	R: 53 S: 61		
608-037-00-X	reaction mass of: (E)-2,12-tridecadiennitrile; (E)-3,12-tridecadiennitrile; (Z)-3,12-tridecadiennitrile	422-190-8		N; R50-53	N R: 50/53 S: 60-61		
608-038-00-5	2,2,4-trimethyl-4-phenyl-butane-nitrile	422-580-8	75490-39-0	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)61		
608-039-00-0	2-phenylhexanenitrile	423-460-8	3508-98-3	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)23-60-61		
608-040-00-6	4,4'-dithiobis(5-amino-1-(2,6-dichloro-4-(trifluoromethyl)phenyl)-1H-pyrazole-3-carbonitrile)	423-490-1	130755-46-3	N; R50-53	N R: 50/53 S: 60-61		
608-041-00-1	4'-((2-butyl-4-oxo-1,3-diazaspiro[4.4]non-1-ene-3-yl)methyl)(1,1'-biphenyl)-2-carbonitrile	423-500-4	138401-24-8	N; R50-53	N R: 50/53 S: 60-61		
608-043-00-2	3-(cis-3-hexenyloxy)propanenitril	415-220-6	142653-61-0	T; R23 Xn; R22 N; R50-53	T; N R: 22-23-50/53 S: (1/2-)13-36/37-45-60-61		
608-065-00-2	salts of bromoxynil with the exception of those specified elsewhere in this Annex	—	—	Repr. Cat. 3; R63 T+; R26 T; R25 R43 N; R50-53	T+; N R: 25-26-43-50/53 S: (1/2-)27/28-36/37-45-63-60-61	N; R50-53: C ≥ 2,5 % N; R51-53: 0,25 % ≤ C < 2,5 % R52-53: 0,025 % ≤ C < 0,25 %	A

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
608-066-00-8	salts of ioxynil with the exception of those specified elsewhere in this Annex	—	—	Repr. Cat. 3; R63 T; R23/25 Xn; R21-48/ 22 Xi; R36 N; R50-53	T; N R: 21-23/25-36-48/ 22-63-50/53 S: (1/2-)36/37-45-63- 60-61	N; R50-53: C ≥ 2,5 % N; R51-53: 0,25 % ≤ C < 2,5 % R52-53: 0,025 % ≤ C < 0,25 %	A
609-001-00-6	1-nitropropane	203-544-9	108-03-2	R10 Xn; R20/21/ 22	Xn R: 10-20/21/22 S: (2-)9	Xn; R20/21/22: C ≥ 5 %	
609-002-00-1	2-nitropropane	201-209-1	79-46-9	R10 Carc. Cat. 2; R45 Xn; R20/22	T R: 45-10-20/22 S: 53-45		E
609-003-00-7	nitrobenzene	202-716-0	98-95-3	Carc. Cat. 3; R40 Repr. Cat. 3; R62 T; R23/24/ 25-48/23/24 N; R51-53	T; N R: 23/24/25-40-48/ 23/24-51/53-62 S: (1/2-)28-36/37-45- 61		
609-004-00-2	dinitrobenzene; [1] 1,4-dinitrobenzene; [2] 1,3-dinitrobenzene; [3] 1,2-dinitrobenzene [4]	246-673-6 [1] 202-833-7 [2] 202-776-8 [3] 208-431-8 [4]	25154-54-5 [1] 100-25-4 [2] 99-65-0 [3] 528-29-0 [4]	T+; R26/27/ 28 R33 N; R50-53	T+; N R: 26/27/28-33-50/ 53 S: (1/2-)28-36/37-45- 60-61		
609-005-00-8	1,3,5-trinitrobenzene	202-752-7	99-35-4	E; R2 ⊗ T+; R26/27/ 28 R33 N; R50-53	E; T+; N R: 2-26/27/28-33-50/ 53 S: (1/2-)35-45-60-61		
609-006-00-3	4-nitrotoluene	202-808-0	99-99-0	T; R23/24/25 R33 N; R51-53	T; N R: 23/24/25-33-51/ 53 S: (1/2-)28-37-45-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
609-007-00-9	2,4-dinitrotoluene; dinitrotoluene, technical grade; [1] dinitrotoluene [2]	204-450-0 [1] 246-836-1 [2]	121-14-2 [1] 25321-14-6 [2]	Carc. Cat. 2; R45 Muta. Cat. 3; R68 Repr. Cat. 3; R62 T; R23/24/25 Xn; R48/22 N; R51-53	T; N R: 45-23/24/25-48/ 22-62-68-51/53 S: 53-45-61		E
609-008-00-4	2,4,6-trinitrotoluene; TNT	204-289-6	118-96-7	E; R2 T; R23/24/25 R33 N; R51-53	E; T; N R: 2-23/24/25-33-51/ 53 S: (1/2-)35-45-61		
609-009-00-X	2,4,6-trinitrophenol; picric acid	201-865-9	88-89-1	E; R2 ⊗ R4 T; R23/24/25	E; T R: 2-4-23/24/25 S: (1/2-)28-35-37-45		
609-010-00-5	salts of picric acid	—	—	E; R3 T; R23/24/25	E; T R: 3-23/24/25 S: (1/2-)28-35-37-45		A
609-011-00-0	2,4,6-trinitroanisole	—	606-35-9	E; R2 Xn; R20/21/ 22 N; R51-53	E; Xn; N R: 2-20/21/22-51/53 S: (2-)35-61		
609-012-00-6	2,4,6-trinitro- <i>m</i> -cresol	210-027-1	602-99-3	E; R2 R4 Xn; R20/21/ 22	E; Xn R: 2-4-20/21/22 S: (2-)35		
609-013-00-1	2,4,6-trinitro- <i>m</i> -xylene	211-187-5	632-92-8	E; R2 Xn; R20/21/ 22 R33	E; Xn R: 2-20/21/22-33 S: (2-)35		
609-015-00-2	4-nitrophenol; <i>p</i> -nitrophenol	202-811-7	100-02-7	Xn; R20/21/ 22 R33	Xn R: 20/21/22-33 S: (2-)28		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
609-016-00-8	dinitrophenol (reaction mass of isomers); [1] 2,4(or 2,6)-dinitrophenol [2]	247-096-2 [1] 275-732-9 [2]	25550-58-7 [1] 71629-74-8 [2]	T; R23/24/25 R33 N; R50-53	T; N R: 23/24/25-33-50/ 53 S: (1/2-)28-37-45-60- 61		
609-018-00-9	2,4,6-trinitroresorcinol; styphnic acid	201-436-6	82-71-3	E; R2 ⊗ R4 Xn; R20/21/ 22	E; Xn R: 2-4-20/21/22 S: (2-)35		
609-019-00-4	lead 2,4,6-trinitro- <i>m</i> -phenylene dioxide; lead 2,4,6-trinitroresorcinoxide; lead styphnate	239-290-0	15245-44-0	E; R3 Repr. Cat. 1; R61 Repr. Cat. 3; R62 Xn; R20/22 R33 N; R50-53	E; T; N R: 61-3-20/22-33-50/ 53-62 S: 53-45-60-61	E 1	
609-020-00-X	DNOC (ISO); 4,6-dinitro- <i>o</i> -cresol	208-601-1	534-52-1	Muta. Cat. 3; R68 T+; R26/27/ 28 Xi; R38-41 R43 R44 N; R50-53	T+; N R: 26/27/28-38-41- 43-44-50/53-68 S: (1/2-)36/37-45-60- 61		
609-021-00-5	sodium salt of DNOC; sodium 4,6-dinitro- <i>o</i> -cresolate; [1] potassium salt of DNOC; potassium 4,6-dinitro- <i>o</i> -cresolate [2]	219-007-7 [1] [2]	2312-76-7 [1] 5787-96-2 [2]	T; R23/24/25 R33 N; R50-53	T; N R: 23/24/25-33-50/ 53 S: (1/2-)13-45-60-61		
609-022-00-0	ammonium salt of DNOC; ammonium 4,6-dinitro- <i>o</i> -tolyl oxide	221-037-0	2980-64-5	T+; R26/27/ 28 R33 N; R50-53	T+; N R: 26/27/28-33-50/ 53 S: (1/2-)13-28-45-60- 61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
609-023-00-6	dinocap (ISO)	254-408-0	39300-45-3	Repr. Cat. 2; R61 Xn; R20-48/ 22 Xi; R38 R43 N; R50-53	T; N R: 61-20-22-38-43- 48/22-50/53 S: 53-45-60-61		E
609-024-00-1	binapacryl (ISO); 2-sec-butyl-4,6-dinitrophenyl-3-methylcrotonate	207-612-9	485-31-4	Repr. Cat. 2; R61 Xn; R21/22 N; R50-53	T; N R: 61-21/22-50/53 S: 53-45-60-61		E
609-025-00-7	dinoseb (ISO); 6-sec-butyl-2,4-dinitrophenol	201-861-7	88-85-7	R44 T; R24/25 Repr. Cat. 2; R61 Repr. Cat. 3; R62 Xi; R36 N; R50-53	T; N R: 61-62-24/25-36- 44-50/53 S: 53-45-60-61		E
609-026-00-2	salts and esters of dinoseb, with the exception of those specified elsewhere in this Annex	—	—	R44 Repr. Cat. 2; R61 Repr. Cat. 3; R62 T; R24/25 Xi; R36 N; R50-53	T; N R: 61-62-24/25-36- 44-50/53 S: 53-45-60-61		AE
609-027-00-8	dinocton; reaction mass of isomers: methyl 2-octyl-4,6-dinitrophenyl carbonate, methyl 4-octyl-2,6-dinitrophenyl carbonate	—	63919-26-6	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
609-028-00-3	dinex (ISO); 2-cyclohexyl-4,6-dinitrophenol	205-042-5	131-89-5	T; R23/24/25 N; R50-53	T; N R: 23/24/25-50/53 S: (1/2-)13-45-60-61		
609-029-00-9	salts and esters of dinex	—	—	T; R23/24/25 N; R50-53	T; N R: 23/24/25-50/53 S: (1/2-)13-45-60-61		A



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
609-030-00-4	dinoterb (ISO); 2-tert-butyl-4,6-dinitrophenol	215-813-8	1420-07-1	Repr. Cat. 2; R61 T+; R28 T; R24 R44 N; R50-53	T+; N R: 61-24-28-44-50/ 53 S: 53-45-60-61		E
609-031-00-X	salts and esters of dinoterb	—	—	Repr. Cat. 2; R61 T+; R28 T; R24 N; R50-53	T+; N R: 61-24-28-50/53 S: 45-53-60-61		AE
609-032-00-5	bromofenoxim (ISO); 3,5-dibromo-4-hydroxybenzaldehyde-O-(2,4-dinitrophenyl)- oxime	236-129-6	13181-17-4	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)25-60-61		
609-033-00-0	dinosam (ISO); 2-(1-methylbutyl)-4,6-dinitrophenol	—	4097-36-3	T; R23/24/25 N; R50-53	T; N R: 23/24/25-50/53 S: (1/2-)13-45-60-61		
609-034-00-6	salts and esters of dinosam	—	—	T; R23/24/25 N; R50-53	T; N R: 23/24/25-50/53 S: (1/2-)13-45-60-61		A
609-035-00-1	nitroethane	201-188-9	79-24-3	R10 Xn; R20/22	Xn R: 10-20/22 S: (2-)9-25-41	Xn; R20/22: C ≥ 12,5 %	
609-036-00-7	nitromethane	200-876-6	75-52-5	R5-10 Xn; R22	Xn R: 5-10-22 S: (2-)41	Xn; R22: C ≥ 12,5 %	
609-037-00-2	5-nitroacenaphthene	210-025-0	602-87-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		
609-038-00-8	2-nitronaphthalene	209-474-5	581-89-5	Carc. Cat. 2; R45 N; R51-53	T; N R: 45-51/53 S: 53-45-61		
609-039-00-3	4-nitrobiphenyl	202-204-7	92-93-3	Carc. Cat. 2; R45 N; R51-53	T; N R: 45-51/53 S: 53-45-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
609-040-00-9	nitrofen (ISO); 2,4-dichlorophenyl 4-nitrophenyl ether	217-406-0	1836-75-5	Carc. Cat. 2; R45 Repr. Cat. 2; R61 Xn; R22 N; R50-53	T; N R: 45-61-22-50/53 S: 53-45-60-61		E
609-041-00-4	2,4-dinitrophenol	200-087-7	51-28-5	T; R23/24/25 R33 N; R50	T; N R: 23/24/25-33-50 S: (1/2-)28-37-45-61		
609-042-00-X	pendimethalin (ISO); N-(1-ethylpropyl)-2,6-dinitro-3,4-xylydine	254-938-2	40487-42-1	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-29-37-60-61		
609-043-00-5	quintozene (ISO); pentachloronitrobenzene	201-435-0	82-68-8	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)13-24-37-60-61		
609-044-00-0	tecnazene (ISO); 1,2,4,5-tetrachloro-3-nitrobenzene	204-178-2	117-18-0	Xn; R22 R43 N; R50-53	Xn; N R: 22-43-50/53 S: (2-)24-37-60-61		
609-045-00-6	reaction mass of: 4,6-dinitro-2-(3-octyl)phenyl methyl carbonate and 4,6-dinitro-2-(4-octyl)phenyl methyl carbonate; dinocron-6	—	8069-76-9	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
609-046-00-1	trifluralin (ISO) (containing < 0.5 ppm NPDA); $\alpha,\alpha,\alpha$ -trifluoro-2,6-dinitro-N,N-dipropyl-p-toluidine (containing < 0.5 ppm NPDA); 2,6-dinitro-N,N-dipropyl-4-trifluoromethylaniline (containing < 0.5 ppm NPDA); N,N-dipropyl-2,6-dinitro-4-trifluoromethylaniline (containing < 0.5 ppm NPDA)	216-428-8	1582-09-8	Xi; R36 R43 N; R50-53	Xi; N R: 36-43-50/53 S: (2-)24-37-60-61		
609-047-00-7	2-nitroanisole	202-052-1	91-23-6	Carc. Cat. 2; R45 Xn; R22	T R: 45-22 S: 53-45		E
609-048-00-2	sodium 3-nitrobenzenesulphonate	204-857-3	127-68-4	Xi; R36 R43	Xi R: 36-43 S: (2-)24-26-37		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
609-049-00-8	2,6-dinitrotoluene	210-106-0	606-20-2	Carc. Cat. 2; R45 Muta. Cat. 3; R68 Repr. Cat. 3; R62 T; R23/24/25 Xn; R48/22 R52-53	T R: 45-23/24/25-48/ 22-62-68-52/53 S: 53-45-61		E
609-050-00-3	2,3-dinitrotoluene	210-013-5	602-01-7	Carc. Cat. 2; R45 Muta. Cat. 3; R68 Repr. Cat. 3; R62 T; R23/24/25 Xn; R48/22 N; R50-53	T; N R: 45-23/24/25-48/ 22-62-68-50/53 S: 53-45-60-61		E
609-051-00-9	3,4-dinitrotoluene	210-222-1	610-39-9	Carc. Cat. 2; R45 Muta. Cat. 3; R68 Repr. Cat. 3; R62 T; R23/24/25 Xn; R48/22 N; R51-53	T; N R: 45-23/24/25-48/ 22-62-68-51/53 S: 53-45-61		E
609-052-00-4	3,5-dinitrotoluene	210-566-2	618-85-9	Carc. Cat. 2; R45 Muta. Cat. 3; R68 Repr. Cat. 3; R62 T; R23/24/25 Xn; R48/22 R52-53	T R: 45-23/24/25-48/ 22-62-68-52/53 S: 53-45-61		E
609-053-00-X	hydrazine-trinitromethane	414-850-9	—	E; R3 O; R8 Carc. Cat. 2; R45 T; R23/25 R43	E; T R: 45-3-8-23/25-43 S: 53-45		E

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
609-054-00-5	2,3-dinitrophenol; [1] 2,5-dinitrophenol; [2] 2,6-dinitrophenol; [3] 3,4-dinitrophenol; [4] salts of dinitrophenol [5]	200-628-7 [1] 206-348-1 [2] 209-357-9 [3] 209-415-3 [4] [5]	66-56-8 [1] 329-71-5 [2] 573-56-8 [3] 577-71-9 [4] [5]	T; R23/24/25 R33 N; R51-53	T; N R: 23/24/25-33-51 S: (1/2-)28-37-45-61		
609-055-00-0	2,5-dinitrotoluene	210-581-4	619-15-8	Carc. Cat. 2; R45 Muta. Cat. 3; R68 Repr. Cat. 3; R62 T; R23/24/25 Xn; R48/22 N; R51-53	T; N R: 45-23/24/25-48/ 22-62-68-51/53 S: 53-45-61		E
609-056-00-6	2,2-dibromo-2-nitroethanol	412-380-9	69094-18-4	E; R2 Carc. Cat. 3; R40 Xn; R22-48/ 22 C; R35 R43 N; R50-53	E; C; N R: 2-22-35-40-43-48/ 22-50/53 S: (1/2-)23-26-36/37/ 39-45-60-61	Xn; R22: C ≥ 10 % C; R35: C ≥ 10 % C; R34: 5 % ≤ C < 10 % Xi; R36/37/38: 1 % ≤ C < 5 %	
609-057-00-1	3-chloro-2,4-difluoronitrobenzene	411-980-8	3847-58-3	Xn; R22 C; R34 R43 N; R50-53	C; N R: 22-34-43-50/53 S: (1/2-)22-26-28-36/ 37/39-45-60-61		
609-058-00-7	2-nitro-2-phenyl-1,3-propanediol	410-360-4	5428-02-4	T; R39-48/25 Xn; R21/22 Xi; R41 R43 N; R51-53	T; N R: 21/22-39-41-43- 48/25-51/53 S: 53-45-61		
609-059-00-2	2-chloro-6-(ethylamino)-4-nitrophenol	411-440-1	131657-78-8	Xn; R22 R43 N; R51-53	Xn; N R: 22-43-51/53 S: (2-)22-24-37/39-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
609-060-00-8	4-[(3-hydroxypropyl)amino]-3-nitrophenol	406-305-9	92952-81-3	Xi; R38 N; R51-53	Xi; N R: 38-51/53 S: (2-)37-61		
609-061-00-3	(E,Z)-4-chlorophenyl(cyclopropyl)ketone O-(4-nitrophenyl-methyl)oxime	406-100-4	94097-88-8	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		
609-062-00-9	2-bromo-2-nitropropanol	407-030-7	24403-04-1	T; R24 Xn; R22-48/ 22 C; R34 R43 N; R50-53	T; N R: 22-24-34-43-48/ 22-50/53 S: (1/2-)26-36/37/39- 45-60-61		
609-063-00-4	2-[(4-chloro-2-nitrophenyl)amino]ethanol	413-280-8	59320-13-7	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)22-61		
609-064-00-X	mesotrione (ISO); 2-[4-(methylsulfonyl)-2-nitrobenzoyl]-1,3-cyclohexanedione	—	104206-82-8	N; R50-53	N R: 50/53 S: 60-61		
609-065-00-5	2-nitrotoluene	201-853-3	88-72-2	Carc. Cat. 2; R45 Muta. Cat. 2; R46 Repr. Cat. 3; R62 Xn; R22 N; R51-53	T; N R: 45-46-22-62-51/ 53 S: 53-45-61	E	
609-066-00-0	lithium sodium 3-amino-10-{4-(10-amino-6,13-dichloro-4,11-disulfonatobenzo[5,6][1,4]oxazino[2,3-b]phenoxazine-3-ylamino)-6-[methyl(2-sulfonato-ethyl)amino]-1,3,5-triazin-2-ylamino)-6,13-dichlorobenzo[5,6][1,4]oxazino[2,3-b]phenoxazine-4,11-disulfonate	418-870-9	154212-58-5	Xn; R20/21/ 22-68/20/ 21/22	Xn R: 20/21/22-68/20/ 21/22 S: (2-)36/37		
609-067-00-6	sodium and potassium 4-(3-aminopropylamino)-2,6-bis[3-(4-methoxy-2-sulfofenylazo)-4-hydroxy-2-sulfo-7-naphthylamino]-1,3,5-triazine	416-280-6	156769-97-0	R43	Xi R: 43 S: (2-)22-24-37		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
609-068-00-1	musk xylene; 5- <i>tert</i> -butyl-2,4,6-trinitro- <i>m</i> -xylene	201-329-4	81-15-2	E; R2 Carc. Cat. 3; R40 N; R50-53	E; Xn; N R: 2-40-50/53 S: (2-)36/37-46-60-61		
609-070-00-2	1,4-dichloro-2-(1,1,2,3,3,3-hexafluoropropoxy)-5-nitrobenzene	415-580-4	130841-23-5	Xn; R22 R43 N; R50-53	Xn; N R: 22-43-50/53 S: (2-)36/37/39-60-61		
609-071-00-8	reaction mass of: 2-methylsulfanyl-4,6-bis-(2-hydroxy-4-methoxy-phenyl)-1,3,5-triazine; 2-(4,6-bis-methylsulfanyl-1,3,5-triazin-2-yl)-5-methoxy-phenol	423-520-3	156137-33-6	R43	Xi R: 43 S: (2-)22-24-37		
610-001-00-3	trichloronitromethane; chloropicrin	200-930-9	76-06-2	Xn; R22 T+; R26 Xi; R36/37/38	T+ R: 22-26-36/37/38 S: (1/2-)36/37-38-45		
610-002-00-9	1,1-dichloro-1-nitroethane	209-854-0	594-72-9	T; R23/24/25	T R: 23/24/25 S: (1/2-)26-45		
610-003-00-4	chlorodinitrobenzene	—	—	T; R23/24/25 R33 N; R50-53	T; N R: 23/24/25-33-50/53 S: (1/2-)28-36/37-45-60-61		C
610-004-00-X	2-chloro-1,3,5-trinitrobenzene	201-864-3	88-88-0	E; R2 T+; R26/27/28 N; R50-53	E; T+; N R: 2-26/27/28-50/53 S: (1/2-)28-36/37-45-60-61		
610-005-00-5	1-chloro-4-nitrobenzene	202-809-6	100-00-5	Carc. Cat. 3; R40 Muta. Cat. 3; R68 T; R23/24/25 Xn; R48/20/21/22 N; R51-53	T; N R: 23/24/25-40-48/20/21/22-68-51/53 S: (1/2-)28-36/37-45-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
610-006-00-0	chloronitroanilines with the exception of those specified elsewhere in this Annex	—	—	T+; R26/27/28 R33 N; R51-53	T+; N R: 26/27/28-33-51/53 S: (1/2-)28-36/37-45-61		A C
610-007-00-6	1-chloro-1-nitropropane	209-990-0	600-25-9	Xn; R20/22	Xn R: 20/22 S: (2-)	Xn; R20/22: C ≥ 5 %	
610-008-00-1	2,6-dichloro-4-nitroanisole	403-350-6	17742-69-7	T; R25 N; R51-53	T; N R: 25-51/53 S: (1/2-)36/37-45-61		
610-009-00-7	2-chloro-4-nitroaniline	204-502-2	121-87-9	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)22-24-61		
610-010-00-2	2-bromo-1-(2-furyl)-2-nitroethylene	406-110-9	35950-52-8	Xn; R22-48/22 C; R34 R43 N; R50-53	C; N R: 22-34-43-48/22-50/53 S: (1/2-)22-26-36/37/39-45-60-61		
611-001-00-6	azobenzene	203-102-5	103-33-3	Carc. Cat. 2; R45 Muta. Cat. 3; R68 Xn; R20/22-48/22 N; R50-53	T; N R: 45-20/22-48/22-68-50/53 S: 53-45-60-61		E
611-002-00-1	azoxybenzene	207-802-1	495-48-7	Xn; R20/22	Xn R: 20/22 S: (2-)28		
611-003-00-7	fenaminsulf (ISO); sodium 4-dimethylaminobenzenediazosulphonate	205-419-4	140-56-7	T; R25 Xn; R21 R52-53	T R: 21-25-52/53 S: (1/2-)36/37-45-61		
611-004-00-2	methyl-ONN-azoxymethyl acetate; methyl azoxy methyl acetate	209-765-7	592-62-1	Carc. Cat. 2; R45 Repr. Cat. 2; R61	T R: 45-61 S: 53-45		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
611-005-00-8	disodium {5-[(4'-((2,6-hydroxy-3-((2-hydroxy-5-sulphophenyl)azo)phenyl)azo)(1,1'-biphenyl)-4-yl)azo]salicylato(4-)} cuprate(2-); CI Direct Brown 95	240-221-1	16071-86-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		
611-006-00-3	4- <i>o</i> -tolylazo- <i>o</i> -toluidine; 4-amino-2',3-dimethylazobenzene; fast garnet GBC base; AAT; <i>o</i> -aminoazotoluene	202-591-2	97-56-3	Carc. Cat. 2; R45 R43	T R: 45-43 S: 53-45		
611-007-00-9	tricyclazole (ISO); 5-methyl-1,2,4-triazolo(3,4- <i>b</i> )benzo-1,3-thiazole	255-559-5	41814-78-2	Xn; R22	Xn R: 22 S: (2-)		
611-008-00-4	4-aminoazobenzene; 4-phenylazoaniline	200-453-6	60-09-3	Carc. Cat. 2; R45 N; R50-53	T; N R: 45-50/53 S: 53-45-60-61		
611-009-00-X	sodium (1-(5-(4-(4-anilino-3-sulphophenylazo)-2-methyl-5-methylsulphonamidophenylazo)-4-hydroxy-2-oxido-3-(phenylazo)phenylazo)-5-nitro-4-sulphonato-2-naphtholato)iron (II)	401-220-3	—	Xn; R20 R52-53	Xn R: 20-52/53 S: (2-)61		
611-010-00-5	2'-(2-cyano-4,6-dinitrophenylazo)-5'-( <i>N,N</i> -dipropylamino) propionanilide	403-010-7	106359-94-8	R43 R52-53	Xi R: 43-52/53 S: (2-)22-24-37-61		
611-011-00-0	<i>N,N,N',N'</i> -tetramethyl-3,3'-(propylenebis(iminocarbonyl-4,1-phenylenazo(1,6-dihydro-2-hydroxy-4-methyl-6-oxopyridine-3,1-diyli)))di(propylammonium) dilactate	403-340-1	—	Xi; R41 N; R51-53	Xi; N R: 41-51/53 S: (2-)26-39-61		
611-012-00-6	reaction mass of 2,2-iminodiethanol 6-methyl-2-(4-(2,4,6-triaminopyrimidin-5-ylazo)phenyl)benzothiazole-7-sulfonate and 2-methylaminoethanol 6-methyl-2-(4-(2,4,6-triaminopyrimidin-5-ylazo)phenyl)benzothiazole-7-sulfonate and <i>N,N</i> -diethylpropane-1,3-diamine 6-methyl-2-(4-(2,4,6-triaminopyrimidin-5-ylazo)phenyl)benzothiazole-7-sulfonate	403-410-1	114565-65-0	R43	Xi R: 43 S: (2-)22-24-26-37		
611-013-00-1	trilithium-1-hydroxy-7-(3-sulfonatoanilino)-2-(3-methyl-4-(2-methoxy-4-(3-sulfonatophenylazo)phenylazo)phenylazo)naphthalene-3-sulfonate	403-650-7	117409-78-6	E; R2 N; R51-53	E; N R: 2-51/53 S: (2-)35-61		
611-014-00-7	(tetrasodium 1-(4-(3-acetamido-4-(4'-nitro-2,2'-disulfonato-stilben-4-ylazo)anilino)-6-(2,5-disulfonatoanilino)-1,3,5-triazin-2-yl)-3-carboxypyridinium) hydroxide	404-250-5	115099-55-3	R43	Xi R: 43 S: (2-)22-24-37		



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
611-015-00-2	tetrasodium 4-amino-5-hydroxy-6-(4-(2-(2-sulfonatooxy)ethylsulfonyl)ethylcarbamoyl)phenylazo)-3-(4-(2-(sulfonatooxy)ethylsulfonyl)phenylazo)naphthalene-2,7-disulfonate	404-320-5	116889-78-2	R43	Xi R: 43 S: (2-)22-24-37		
611-016-00-8	reaction mass of 1,1'-((dihydroxyphenylene)bis(azo-3,1-phenylenazo(1-(3-dimethylaminopropyl)-1,2-dihydro-6-hydroxy-4-methyl-2-oxopyridine-5,3-diy)))dipyridinium dichloride dihydrochloride, mixed isomers and 1-(1-(3-dimethylaminopropyl)-5-(3-((4-(1-(3-dimethylaminopropyl)-1,6-dihydro-2-hydroxy-4-methyl-6-oxo-5-pyridinio-3-pyridylazo)phenylazo)-2,4(or2,6 or3,5)-dihydroxyphenylazo)phenylazo)-1,2-dihydro-6-hydroxy-4-methyl-2-oxo-3-pyridyl)pyridinium dichloride	404-540-1	—	R43	Xi R: 43 S: (2-)22-24-37		
611-017-00-3	2-(4-(diethylaminopropylcarbamoyl)phenylazo)-3-oxo-N-(2,3-dihydro-2-oxobenzimidazol-5-yl)butyramide	404-910-2	—	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
611-018-00-9	tetraammonium 5-(4-(7-amino-1-hydroxy-3-sulfonato-2-naphthylazo)-6-sulfonato-1-naphthylazo)isophthalate	405-130-5	—	R43	Xi R: 43 S: (2-)24-37		
611-019-00-4	tetralithium 6-amino-4-hydroxy-3-(7-sulfonato-4-(4-sulfonatophenylazo)-1-naphthylazo)naphthalene-2,7-disulfonate	405-150-4	106028-58-4	R43	Xi R: 43 S: (2-)24-37		
611-020-00-X	tetrakis(tetramethylammonium) 6-amino-4-hydroxy-3-(7-sulfonato-4-(4-sulfonatophenylazo)-1-naphthylazo)naphthalene-2,7-disulfonate	405-170-3	116340-05-7	T; R25 R43 R52-53	T R: 25-43-52/53 S: (1/2-)22-24-37-45-61		
611-021-00-5	2-(4-(4-cyano-3-methylisothiazol-5-ylazo)-N-ethyl-3-methylanilino)ethyl acetate	405-480-9	—	Xn; R22-48/22 Xi; R38 R53	Xn R: 22-38-48/22-53 S: (2-)22-36/37-61		
611-022-00-0	4-dimethylaminobenzenediazonium 3-carboxy-4-hydroxybenzenesulfonate	404-980-4	—	E; R2 T; R23/25 Xn; R21-48/22 Xi; R41 R43 N; R50/53	E; T; N R: 2-21-23/25-41-43-48/22-50/53 S: (1/2-)3-12-26-35-36/37/39-45-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
611-023-00-6	disodium 7-(4,6-dichloro-1,3,5-triazin-2-ylamino)-4-hydroxy-3-(4-(2-(sulfonyloxy)ethylsulfonyl)phenylazo) naphthalene-2-sulfonate	404-600-7	—	R43	X R: 43 S: (2-)22-24-37		
611-024-00-1	Benzidine based azo dyes; 4,4'-diarylazobiphenyl dyes, with the exception of those specified elsewhere in this Annex	—	—	Carc. Cat. 2; R45	T R: 45 S: 53-45		A
611-025-00-7	disodium 4-amino-3-[[4'-[(2,4-diaminophenyl)azo][1,1'-biphenyl]-4-yl]azo]-5-hydroxy-6-(phenylazo)naphthalene-2,7-disulphonate; C.I. Direct Black 38	217-710-3	1937-37-7	Carc. Cat. 2; R45 Repr. Cat. 3; R63	T R: 45-63 S: 53-45		
611-026-00-2	tetrasodium 3,3'-[[1,1'-biphenyl]-4,4'-diylbis(azo)]bis[5-amino-4-hydroxynaphthalene-2,7-disulphonate]; C.I. Direct Blue 6	220-012-1	2602-46-2	Carc. Cat. 2; R45 Repr. Cat. 3; R63	T R: 45-63 S: 53-45		
611-027-00-8	disodium 3,3'-[[1,1'-biphenyl]-4,4'-diylbis(azo)]bis(4-amino-naphthalene-1-sulphonate); C.I. Direct Red 28	209-358-4	573-58-0	Carc. Cat. 2; R45 Repr. Cat. 3; R63	T R: 45-63 S: 53-45		
611-028-00-3	C,C'-azodi(formamide)	204-650-8	123-77-3	R42 R44 ⊗	Xn R: 42-44 S: (2-)22-24-37		
611-029-00-9	<i>o</i> -dianisidine based azo dyes; 4,4'-diarylazo-3,3'-dimethoxybiphenyl dyes with the exception of those mentioned elsewhere in this Annex	—	—	Carc. Cat. 2; R45	T R: 45 S: 53-45		A H
611-030-00-4	<i>o</i> -tolidine based dyes; 4,4'-diarylazo-3,3'-dimethylbiphenyl dyes, with the exception of those mentioned elsewhere in this Annex	—	—	Carc. Cat. 2; R45	T R: 45 S: 53-45		A H
611-031-00-X	4,4'-(4-iminocyclohexa-2,5-dienylidenemethylene)dianiline hydrochloride; C.I. Basic Red 9	209-321-2	569-61-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		
611-032-00-5	1,4,5,8-tetraaminoanthraquinone; C.I. Disperse Blue 1	219-603-7	2475-45-8	Carc. Cat. 2; R45 Xi; R38-41 R43	T R: 45-38-41-43 S: 53-45		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
611-033-00-0	hexasodium [4,4'-azoxybis(2,2'-disulfonatostilbene-4,4'-diy-lazo)]-bis[5'-sulfonatobenzene-2,2'- diolato-O(2),O(2),N(1)]-copper(II)	400-020-3	82027-60-9	N; R51-53	N R: 51/53 S: 61		
611-034-00-6	N-(5-(bis(2-methoxyethyl)amino)-2-((5-nitro-2,1-benzisothiazol-3-yl)azo)phenylacetamide	402-430-8	105076-77-5	R53	R: 53 S: 61		
611-035-00-1	tetralithium 6-amino-4-hydroxy-3-[7-sulfonato-4-(5-sulfonato-2-naphthylazo)-1-naphthylazo]naphthalene-2,7-disulfonate	403-660-1	107246-80-0	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
611-036-00-7	2-(4-(5,6(or 6,7)-dichloro-1,3-benzothiazol-2-ylazo)-N-methyl-m-toluidino)ethyl acetate	405-440-0	—	R43	Xi R: 43 S: (2-)22-24-37		
611-037-00-2	3(or 5)-(4-(N-benzyl-N-ethylamino)-2-methylphenylazo)-1,4-dimethyl-1,2,4-triazolium methylsulphate	406-055-0	124584-00-5	Xn; R22 Xi; R41 R43 N; R51-53	Xn; N R: 22-41-43-51/53 S: (2-)22-24-26-37/ 39-61		
611-038-00-8	trisodium 1-hydroxynaphthalene-2-azo-4'(5',5''-dimethylbiphenyl)-4''-azo(4''-phenylsulfonyloxybenzene)- 2',2'',4-trisulfonate	406-820-9	—	Xi; R36	Xi R: 36 S: (2-)25-26		
611-039-00-3	7-(((4,6-dichloro-1,3,5-triazin-2-yl)amino)-4-hydroxy-3-(4-((2-sulfoxy)ethyl)sulfonyl)phenylazo)naphthalene-2-sulfonic acid	407-050-6	117715-57-8	R43	Xi R: 43 S: (2-)22-24-37		
611-040-00-9	3-(5-acetylamino-4-(4-[4,6-bis(3-diethylaminopropylamino)-1,3,5-triazin-2-ylamino]phenylazo)-2-(2-methoxyethoxy)phenylazo)-6-amino-4-hydroxy-2-naphthalenesulfonic acid	407-670-7	115099-58-6	N; R50-53	N R: 50/53 S: 60-61		
611-041-00-4	2-[[[4[[4,6-bis[[3-(diethylamino)propyl]amino]-1,3,5-triazine-2-yl]amino]phenyl]azo]-N-(2,3-dihydro-2-oxo-1H-benzimidazol-5-yl)-3-oxobutanamide	407-680-1	98809-11-1	Xi; R41 R43 N; R51-53	Xi; N R: 41-43-51/53 S: (2-)24-26-37/39-61		
611-042-00-X	trisodium 5-amino-3-[5-(2-bromoacryloylamino)-2-sulfonatophenylazo]-4-hydroxy-6-(4-vinylsulfonylphenylazo)naphthalene-2,7-disulfonate	411-770-6	136213-71-3	R52-53	R: 52/53 S: 61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
611-043-00-5	reaction mass of: trisodium N(1')-N(2):N(1'')-N(2'')-η-6-[2-amino-4-(or 6)-hydroxy-(or 4-amino-2-hydroxy)phenylazo]-6''-(1-carbaniloyl-2-hydroxyprop-1-enylazo)-5',5'''-disulfamoyl-3,3''-disulfonatobis(naphthalene-2,1'-azobenzene-1,2'-diolato-O(1),O(2'))-chromate; trisodium N(1')-N(2):N(1'')-N(2'')-η-6,6''-bis(1-carbaniloyl-2-hydroxyprop-1-enylazo)-5',5'''-disulfamoyl-3,3''-disulfonatobis(naphthalene-2,1'-azobenzene-1,2'-diolato-O(1),O(2'))-chromate; trisodium N(1')-N(2):N(1'')-N(2'')-η-6,6''-bis[2-amino-4-(or 6)-hydroxy-(or 4-amino-2-hydroxy)phenylazo]5',5'''-disulfamoyl-3,3''-disulfonatobis(naphthalene-2,1'-azobenzene-1,2'-diolato-O(1),O(2'))-chromate (2:1:1)	402-850-1	—	Xi; R41 R52-53	Xi R: 41-52/53 S: (2-)26-39-61		
611-044-00-0	reaction mass of: <i>tert</i> -alkyl(C <sub>12</sub> -C <sub>14</sub> )ammonium bis[1-[(2-hydroxy-5-nitrophenyl)azo]-2-naphthalenolato(2-)]-chromate (1-); <i>tert</i> -alkyl(C <sub>12</sub> -C <sub>14</sub> )ammonium bis[1-[(2-hydroxy-4-nitrophenyl)azo]-2-naphthalenolato(2-)]-chromate(1-); <i>tert</i> -alkyl(C <sub>12</sub> -C <sub>14</sub> )ammonium bis[1-[[5-(1,1-dimethylpropyl)-2-hydroxy-3-nitrophenyl]azo]-2-naphthalenolato(2-)]-chromate(1-); <i>tert</i> -alkyl(C <sub>12</sub> -C <sub>14</sub> )ammonium [[1-[(2-hydroxy-5-nitrophenyl)azo]-2-naphthalenolato(2-)]-[1-[(2-hydroxy-5-nitrophenyl)azo]-2-naphthalenolato(2-)]]-chromate(1-); <i>tert</i> -alkyl(C <sub>12</sub> -C <sub>14</sub> )ammonium [[1-[[5-(1,1-dimethylpropyl)-2-hydroxy-3-nitrophenyl]azo]-2-naphthalenolato(2-)]-[1-[(2-hydroxy-5-nitrophenyl)azo]-2-naphthalenolato(2-)]]-chromate(1-); <i>tert</i> -alkyl(C <sub>12</sub> -C <sub>14</sub> )ammonium ((1-(4(or 5)-nitro-2-oxidophenylazo)-2-naphtholato)(1-(3-nitro-2-oxido-5-pentylphenylazo)-2-naphtholato))chromate(1-)	403-720-7	117527-94-3	N; R51-53	N R: 51/53 S: 61		
611-045-00-6	2-[4-[N-(4-acetoxybutyl)-N-ethyl]amino-2-methylphenylazo]-3-acetyl-5-nitrothiophene	404-830-8	—	R53	R: 53 S: 61		
611-046-00-1	4,4'-diamino-2-methylazobenzene	407-590-2	43151-99-1	T; R25 Xn; R48/22 R43 N; R50-53	T; N R: 25-43-48/22-50/53 S: (1/2-)22-28-36/37-45-60-61		
611-047-00-7	reaction mass of: 2-[[4-[N-ethyl-N-(2-acetoxyethyl)amino]phenyl]azo]-5,6-dichlorobenzothiazole; 2-[[4-[N-ethyl-N-(2-acetoxyethyl)amino]phenyl]azo]-6,7-dichlorobenzothiazole (1:1)	407-890-3	111381-11-4	R53	R: 53 S: 61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
611-048-00-2	reaction mass of: 2-[[4-[bis(2-acetoxyethyl)amino]phenyl]azo]-5,6-dichlorobenzothiazole; 2-[[4-[bis(2-acetoxyethyl)amino]phenyl]azo]-6,7-dichlorobenzothiazole (1:1)	407-900-6	111381-12-5	R53	R: 53 S: 61		
611-049-00-8	reaction mass of 7-[4-(3-diethylaminopropylamino)-6-(3-diethylammoniopropylamino)-1,3,5-triazin-2-ylamino]-4-hydroxy-3-(4-phenylazophenylazo)-naphthalene-2-sulfonate, acetic acid, lactic acid (2:1:1)	408-000-6	118658-98-3	Xn; R48/22 R43 R52-53	Xn R: 43-48/22-52/53 S: (2-)22-36/37-61		
611-051-00-9	2-(4-(N-ethyl-N-(2-hydroxy)ethyl)amino-2-methylphenyl)azo-6-methoxy-3-methyl-benzothiazolium chloride	411-110-7	136213-74-6	N; R50-53	N R: 50/53 S: 60-61		
611-052-00-4	monosodium aqua-[5-[[2,4-dihydroxy-5-[(2-hydroxy-3,5-dinitrophenyl)azo]phenyl]azo]-2-naphthalensulfonate], iron complex	400-720-9	—	R52-53	R: 52/53 S: 61		
611-053-00-X	2,2'-azobis[2-methylpropionamide] dihydrochloride	221-070-0	2997-92-4	Xn; R22 R43	Xn R: 22-43 S: (2-)24-37		
611-055-00-0	C.I. Disperse Yellow 3; N-[4-[(2-hydroxy-5-methylphenyl)azo]phenyl]acetamide	220-600-8	2832-40-8	Carc. Cat. 3; R40 R43	Xn R: 40-43 S: (2-)22-36/37-46		
611-056-00-6	C.I. Solvent Yellow 14; 1-phenylazo-2-naphthol	212-668-2	842-07-9	Carc. Cat. 3; R40 Muta. Cat. 3; R68 R43 R53	Xn R: 40-43-53-68 S: (2-)22-36/37-46-61		
611-057-00-1	6-hydroxy-1-(3-isopropoxypropyl)-4-methyl-2-oxo-5-[4-(phenylazo)phenylazo]-1,2-dihydro-3-pyridinecarbonitrile	400-340-3	85136-74-9	Carc. Cat. 2; R45 R53	T R: 45-53 S: 53-45-61		
611-058-00-7	(6-(4-hydroxy-3-(2-methoxyphenylazo)-2-sulfonato-7-naphthylamino)-1,3,5-triazin-2,4-diyl)bis[(amino-1-methylethyl) ammonium] formate	402-060-7	108225-03-2	Carc. Cat. 2; R45 Xi; R41 N; R51-53	T; N R: 45-41-51/53 S: 53-45-61		
611-059-00-2	octasodium 2-(6-(4-chloro-6-(3-(N-methyl-N-(4-chloro-6-(3,5-disulfonato-2-naphthylazo)-1-hydroxy-6-naphthylamino)-1,3,5-triazin-2-yl)aminomethyl)phenylamino)-1,3,5-triazin-2-ylamino)-3,5-disulfonato-1-hydroxy-2-naphthylazo) naphthalene-1,5-disulfonate	412-960-1	148878-21-1	Xi; R41 R43 R52-53	Xi R: 41-43-52/53 S: (2-)22-24-26-37/ 39-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
611-060-00-8	reaction mass of: sodium 5-[8-[4-[4-[4-[7-(3,5-dicarboxylatophenylazo)-8-hydroxy-3,6-disulfonatonaphthalen-1-ylamino]-6-hydroxy-1,3,5-triazin-2-yl]-2,5-dimethylpiperazin-1-yl]-6-hydroxy-1,3,5-triazin-2-ylamino]-1-hydroxy-3,6-disulfonatonaphthalen-2-ylazo]-isophthalate; ammonium 5-[8-[4-[4-[4-[7-(3,5-dicarboxylatophenylazo)-8-hydroxy-3,6-disulfonatonaphthalen-1-ylamino]-6-hydroxy-1,3,5-triazin-2-yl]-2,5-dimethylpiperazin-1-yl]-6-hydroxy-1,3,5-triazin-2-ylamino]-1-hydroxy-3,6-disulfonatonaphthalen-2-ylazo]-isophthalate; 5-[8-[4-[4-[4-[7-(3,5-dicarboxylatophenylazo)-8-hydroxy-3,6-disulfonatonaphthalen-1-ylamino]-6-hydroxy-1,3,5-triazin-2-yl]-2,5-dimethylpiperazin-1-yl]-6-hydroxy-1,3,5-triazin-2-ylamino]-1-hydroxy-3,6-disulfonatonaphthalen-2-ylazo]-isophthalic acid	413-180-4	187285-15-0	Xi; R41	Xi R: 41 S: (2-)22-26-39		
611-061-00-3	disodium 5-[5-[4-(5-chloro-2,6-difluoropyrimidin-4-ylamino)benzamido]-2-sulfonatophenylazo]-1-ethyl-6-hydroxy-4-methyl-2-oxo-3-pyridylmethylsulfonate	412-530-3	—	Xi; R41 R43	Xi R: 41-43 S: (2-)22-24-26-37/39		
611-062-00-9	octasodium 2-(8-(4-chloro-6-(3-((4-chloro-6-(3,6-disulfonato-2-(1,5-disulfonatonaphthalen-2-ylazo)-1-hydroxynaphthalen-8-ylamino)-1,3,5-triazin-2-yl)aminomethyl)phenylamino)-1,3,5-triazin-2-ylamino)-3,6-disulfonato-1-hydroxynaphthalen-2-ylazo)naphthalene-1,5-disulfonate	413-550-5	—	Xi; R38-41	Xi R: 38-41 S: (2-)22-26-37/39		
611-063-00-4	trisodium [4'-(8-acetylamino-3,6-disulfonato-2-naphthylazo)-4''-(6-benzoylamino-3-sulfonato-2-naphthylazo)-biphenyl-1,3',3'',1'''-tetraolato-O,O',O'',O''']copper(II)	413-590-3	164058-22-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		
611-064-00-X	4-(3,4-dichlorophenylazo)-2,6-di- <i>sec</i> -butyl-phenol	410-600-8	124719-26-2	Xn; R48/22 Xi; R38 N; R50-53	Xn; N R: 38-48/22-50/53 S: (2-)23-25-36/37-60-61		
611-065-00-5	4-(4-nitrophenylazo)-2,6-di- <i>sec</i> -butyl-phenol	410-610-2	111850-24-9	Xn; R48/22 Xi; R36/38 R43 N; R50-53	Xn; N R: 36/38-43-48/22-50/53 S: (2-)23-26-36/37-60-61		
611-066-00-0	tetrasodium 5-[4-chloro-6-( <i>N</i> -ethyl-anilino)-1,3,5-triazin-2-ylamino]-4-hydroxy-3-(1,5-disulfonatonaphthalen-2-ylazo)-naphthalene-2,7-disulfonate	411-540-5	130201-57-9	Xi; R41 R43 N; R51-53	Xi; N R: 41-43-51/53 S: (2-)22-24-26-37/39-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
611-067-00-6	reaction mass of: bis(tris(2-(2-hydroxy(1-methyl)ethoxy)ethyl) ammonium) 7-anilino-4-hydroxy-3-(2-methoxy-5-methyl-4-(4-sulfonatophenylazo)phenylazo)naphthalene-2-sulfonate; bis(tris(2-(2-hydroxy(2-methyl)ethoxy)ethyl)ammonium) 7-anilino-4-hydroxy-3-(2-methoxy-5-methyl-4-(4-sulfonatophenylazo)phenylazo)naphthalene-2-sulfonate	406-910-8	—	Xn; R22 Xi; R41 R52-53	Xn R: 22-41-52/53 S: (2-)26-36/39-61		
611-068-00-1	tetrasodium 4-amino-3,6-bis(5-[4-chloro-6-(2-hydroxyethylamino)-1,3,5-triazin-2-ylamino]-2-sulfonatophenylazo)-5-hydroxynaphthalene-2,7-disulfonate	400-690-7	85665-98-1	N; R51-53	N R: 51/53 S: 61		
611-069-00-7	N,N-di-[poly(oxyethylene)-co-poly(oxypropylene)]-4-[(3,5-dicyano-4-methyl-2-thienyl)azo]-3-methylaniline	413-380-1	—	N; R51-53	N R: 51/53 S: 61		
611-070-00-2	reaction mass of: disodium (6-(4-anisidino)-3-sulfonato-2-(3,5-dinitro-2-oxidophenylazo)-1-naphtholato)(1-(5-chloro-2-oxidophenylazo)-2-naphtholato)chromate(1-); trisodium bis(5-(4-anisidino)-3-sulfonato-2-(3,5-dinitro-2-oxidophenylazo)-1-naphtholato)chromate(1-)	405-665-4	—	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		
611-071-00-8	tris(tetramethylammonium) 5-hydroxy-1-(4-sulphonatophenyl)-4-(4-sulphonatophenylazo)pyrazole-3-carboxylate	406-073-9	131013-81-5	T; R25 R52-53	T R: 25-52/53 S: (1/2-)37-45-61		
611-072-00-3	2,4-bis[2,2'-[2-(N,N-dimethylamino)ethyloxycarbonyl]phenylazo]-1,3-dihydroxybenzene, dihydrochloride	407-010-8	118208-02-9	Xn; R22 Xi; R41 N; R51-53	Xn; N R: 22-41-51/53 S: (2-)26-39-61		
611-073-00-9	dimethyl 3,3'-(N-(4-(4-bromo-2,6-dicyanophenylazo)-3-hydroxyphenyl)imino)dipropionate	407-310-9	122630-55-1	R53	R: 53 S: 61		
611-074-00-4	reaction mass of: sodium/potassium (3-(4-(5-(5-chloro-2,6-difluoropyrimidin-4-ylamino)-2-methoxy-3-sulfonatophenylazo)-2-oxidophenylazo)-2,5,7-trisulfonato-4-naphtholato) copper(II); sodium/potassium (3-(4-(5-(5-chloro-4,6-difluoropyrimidin-2-ylamino)-2-methoxy-3-sulfonatophenylazo)-2-oxidophenylazo)-2,5,7-trisulfonato-4-naphtholato)copper(II)	407-100-7	—	R43	Xi R: 43 S: (2-)22-24-37		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
611-075-00-X	reaction mass of: tris(3,5,5-trimethylhexylammonium) 4-amino-3-(4-(4-(2-amino-4-hydroxyphenylazo)anilino)-3-sulfonatophenylazo)-5,6-dihydro-5-oxo-6-phenylhydrazononaphthalene-2,7-disulfonate; tris(3,5,5-trimethylhexylammonium) 4-amino-3-(4-(4-(4-amino-2-hydroxyphenylazo)anilino)-3-sulfonatophenylazo)-5,6-dihydro-5-oxo-6-phenylhydrazononaphthalene-2,7-disulfonate (2:1)	406-000-0	—	Xi; R41 N; R51-53	Xi; N R: 41-51/53 S: (2-)26-39-61		
611-076-00-5	3-(2,6-dichloro-4-nitrophenylazo)-1-methyl-2-phenylindole	406-280-4	117584-16-4	N; R50-53	N R: 50/53 S: 60-61		
611-077-00-0	dilithium disodium (5,5'-diamino-(μ-4,4'-dihydroxy-1:2-κ-2, O4, O4',-3,3'-[3,3'-dihydroxy-1:2-κ-2-O3, O3'-biphenyl-4,4'-ylenebisazo-1:2-(N3,N4-η:N3',N4'-η)]-dinaphthalene-2,7-disulfonato(8)))dicuprate(2-)	407-230-4	126637-70-5	Xn; R22 R43	Xn R: 22-43 S: (2-)22-24-37		
611-078-00-6	(2,2'-(3,3'-dioxidobiphenyl-4,4'-diyldiazo)bis(6-(4-(3-(diethylamino)propylamino)-6-(3-(diethylammonio)propylamino)-1,3,5-triazin-2-ylamino)-3-sulfonato-1-naphtholato))dicopper (II) acetate lactate	407-240-9	159604-94-1	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)22-24-37-61		
611-079-00-1	disodium 7-[4-chloro-6-(N-ethyl-o-toluidino)-1,3,5-triazin-2-ylamino]-4-hydroxy-3-(4-methoxy-2-sulfonatophenylazo)-2-naphthalenesulfonate	410-390-8	147703-64-8	Xi; R41	Xi R: 41 S: (2-)22-26-39		
611-080-00-7	sodium 3-(2-acetamido-4-(4-(2-hydroxybutoxy)phenylazo)phenylazo)benzenesulfonate	410-150-2	147703-65-9	R43	Xi R: 43 S: (2-)22-24-37		
611-081-00-2	tetrasodium [7-(2,5-dihydroxy-KO2-7-sulfonato-6-[4-(2,5,6-trichloro-pyrimidin-4-ylamino)phenylazo]-(N1,N7-N)-1-naphthylazo)-8-hydroxy-KO8-naphthalene-1,3,5-trisulfonato(6-)]cuprate(II)	411-470-5	141048-13-7	R43 R52-53	Xi R: 43-52/53 S: (2-)22-24-37-61		
611-082-00-8	reaction mass of: pentasodium bis(1-(3(or 5)-(4-anilino-3-sulfonatophenylazo)-4-hydroxy-2-oxidophenylazo)-6-nitro-4-sulfonato-2-naphtholato)ferrate(1-); pentasodium [(1-(3-(4-anilino-3-sulfonatophenylazo)-4-hydroxy-2-oxidophenylazo)-6-nitro-4-sulfonato-2-naphtholato)-(5-(4-anilino-3-sulfonatophenylazo)-4-hydroxy-2-oxidophenylazo)-6-nitro-4-sulfonato-2-naphtholato]ferrate(1-)	407-570-3	—	N; R51-53	N R: 51/53 S: 61		
611-083-00-3	reaction mass of: 2-[N-ethyl-4-[(5,6-dichlorobenzothiazol-2-yl)azo]-m-toluidino]ethyl acetate; 2-[N-ethyl-4-[(6,7-dichlorobenzothiazol-2-yl)azo]-m-toluidino]ethyl acetate (1:1)	411-560-4	—	T; R48/25 R43 N; R51-53	T; N R: 43-48/25-51/53 S: (1/2-)22-36/37-45-61		



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
611-084-00-9	reaction mass of: N-(4-chlorophenyl)-4-(2,5-dichloro-4-(dimethylsulfamoyl)phenylazo)-3-hydroxy-2-naphthalenecarboxamide; N-(4-chlorophenyl)-4-(2,5-dichloro-4-(methylsulfamoyl)phenylazo)-3-hydroxy-2-naphthalenecarboxamide	412-550-2	—	R53	R: 53 S: 61		
611-085-00-4	reaction mass of: 3-cyano-5-(2-cyano-4-nitro-phenylazo)-2-(2-hydroxy-ethylamino)-4-methyl-6-[3-(2-phenoxyethoxy)propylamino]pyridine; 3-cyano-5-(2-cyano-4-nitro-phenylazo)-6-(2-hydroxy-ethylamino)-4-methyl-2-[3-(2-phenoxyethoxy)propylamino]pyridine; 3-cyano-5-(2-cyano-4-nitro-phenylazo)-2-amino-4-methyl-6-[3-(3-hydroxypropoxy)propylamino]pyridine; 3-cyano-5-(2-cyano-4-nitro-phenylazo)-6-amino-4-methyl-2-[3-(3-methoxypropoxy)propylamino]pyridine	411-880-4	—	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
611-086-00-X	monolithium 5-[[2,4-dihydroxy-5-[(2-hydroxy-3,5-dinitrophenyl)azo]phenyl]azo]-2-naphthalenesulfonate], iron complex, monohydrate	411-360-7	—	R52-53	R: 52/53 S: 61		
611-087-00-5	reaction mass of: 3-((5-cyano-1,6-dihydro-1,4-dimethyl-2-hydroxyl-6-oxo-3-pyridinyl)azo)-benzoyloxy-2-phenoxyethane; 3-((5-cyano-1,6-dihydro-1,4-dimethyl-2-hydroxy-6-oxo-3-pyridinyl)azo)-benzoyloxy-2-ethoxy-2-(ethylphenol)	411-710-9	—	R53	R: 53 S: 61		
611-088-00-0	reaction mass of: trilithium 4-amino-3-((4-((4-((2-amino-4-hydroxyphenyl)azo)phenyl)amino)-3-sulfofenyl)azo)-5-hydroxy-6-(phenylazo)naphthalene-2,7-disulfonate; trilithium 4-amino-3-((4-((4-((4-amino-2-hydroxyphenyl)azo)phenyl)amino)-3-sulfofenyl)azo)-5-hydroxy-6-(phenylazo)naphthalene-2,7-disulfonate	411-890-9	—	Xn; R22 Xi; R41 R52-53	Xn R: 22-41-52/53 S: (2-)22-26-39-61		
611-089-00-6	2-((4-(ethyl-(2-hydroxyethyl)amino)-2-methylphenyl)azo)-6-methoxy-3-methyl-benzothiazolium methylsulfate	411-100-2	136213-73-5	Xn; R48/22 R43 N; R50-53	Xn; N R: 43-48/22-50/53 S: (2-)22-36/37-60-61		
611-090-00-1	2,5-dibutoxy-4-(morpholin-4-yl)benzenediazonium 4-methylbenzenesulfonate	413-290-2	93672-52-7	F; R11 Xn; R22 Xi; R41 R43 R52-53	F; Xn R: 11-22-41-43-52/53 S: (2-)12-22-24-26-37/39-47-61		
611-091-00-7	sodium (1.0-1.95)/lithium (0.05-1) 5-((5-((5-chloro-6-fluoropyrimidin-4-yl)amino)-2-sulfonatophenyl)azo)-1,2-dihydro-6-hydroxy-1,4-dimethyl-2-oxo-3-pyridinemethylsulfonate	413-470-0	134595-59-8	R43	Xi R: 43 S: (2-)22-24/25-37		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
611-092-00-2	<i>tert</i> -(dodecyl/tetradecyl)-ammonium bis(3-(4-((5-(1,1-dimethyl-propyl)-2-hydroxy-3-nitrophenyl)azo)-3-methyl-5-hydroxy-(1 <i>H</i> )pyrazol-1-yl)benzenesulfonamido)chromate	413-210-6	—	N; R51-53	N R: 51/53 S: 61		
611-093-00-8	sodium 2-(4-(4-fluoro-6-(2-sulfo-ethylamino)-[1,3,5]triazin-2-ylamino)-2-ureido-phenylazo)-5-(4-sulfophenylazo)benzene-1-sulfonate	410-770-3	146177-84-6	R43	Xi R: 43 S: (2-)22-24-37		
611-094-00-3	reaction mass of: 2-[2-acetylamino-4-[ <i>N,N</i> -bis[2-ethoxy-carbonyloxy]ethyl]amino]phenylazo]-5,6-dichloro-1,3-benzothiazole; 2-[2-acetylamino-4-[ <i>N,N</i> -bis[2-ethoxy-carbonyloxy]ethyl]amino]phenylazo]-6,7-dichloro-1,3-benzotriazole (1:1)	411-600-0	143145-93-1	R53	R: 53 S: 61		
611-095-00-9	hexasodium 1,1'-[(1-amino-8-hydroxy-3,6-disulfonate-2,7-naphthalenediyl)bis(azo(4-sulfonate-1,3-phenyl)imino[6-[(4-chloro-3-sulfonatophenyl)amino]-1,3,5-triazin-2,4-diyl]]]bis[3-carboxypyridinium] dihydroxide	412-240-7	89797-03-5	N; R51-53	N R: 51/53 S: 22-61		
611-096-00-4	methyl <i>N</i> -[3-acetylamino)-4-(2-cyano-4-nitrophenylazo)phenyl]- <i>N</i> -[(1-methoxy)acetyl]glycinate	413-040-2	149850-30-6	R43	Xi R: 43 S: (2-)22-24-37		
611-097-00-X	reaction mass of iron complexes of: 1,3-dihydroxy-4-[(5-phenylaminosulfonyl)-2-hydroxyphenylazo]- <i>n</i> -(5-amino-sulfonyl-2-hydroxyphenylazo)benzene and: 1,3-dihydroxy-4-[(5-phenylaminosulfonyl)-2-hydroxyphenylazo]- <i>n</i> -[4-(4-nitro-2-sulfophenylamino)phenylazo]benzene ( <i>n</i> =2,5,6)	414-150-3	—	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)22-24-37-61		
611-098-00-5	tetrakis(tetramethylammonium) 3,3'-(6-(2-hydroxyethylamino) 1,3,5-triazine-2,4-diyl)bisimino(2-methyl-4,1-phenyleneazo) bisnaphthalene-1,5-disulfonate	405-950-3	131013-83-7	T; R25 R52-53	T R: 25-52/53 S: (1/2-)37-45-61		
611-099-00-0	(methylenebis(4,1-phenylenazo(1-(3-(dimethylamino)propyl)-1,2-dihydro-6-hydroxy-4-methyl-2-oxopyridine-5,3-diyl)))-1,1'-dipyridinium dichloride dihydrochloride	401-500-5	118658-99-4	Carc. Cat. 2; R45 N; R51-53	T; N R: 45-51/53 S: 53-45-61		
611-100-00-4	potassium sodium 3,3'-(3(or4)-methyl-1,2-phenylenebis(imino(6-chloro)-1,3,5-triazine-4,2-diylimino(2-acetamido-5-methoxy)-4,1-phenylenazo)dinaphthalene-1,5-disulfonate	403-810-6	140876-13-7	Xi; R41	Xi R: 41 S: (2-)26-39		
611-101-00-X	2'-(4-chloro-3-cyano-5-formyl-2-thienyl)azo-5'-diethylaminoacetanilide	405-200-5	104366-25-8	R43	Xi R: 43 S: (2-)22-24-37		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
611-103-00-0	trisodium (1-(3-carboxylato-2-oxido-5-sulfonatophenylazo)-5-hydroxy-7-sulfonatophthalen-2-amido)nickel(II)	407-110-1	—	Xi; R41 R43 N; R51-53	Xi; N R: 41-43-51/53 S: (2-)24-26-37/39-61		
611-104-00-6	reaction mass of: trisodium (2,4(or 2,6 or 4,6)-bis(3,5-dinitro-2-oxidophenylazo)-5-hydroxyphenolato)(2(or 4or 6)-(3,5-dinitro-2-oxidophenylazo)-5-hydroxy-4(or 2or 6)-(4-(4-nitro-2-sulfonatoanilino)phenylazo)phenolato)ferrate(1-); trisodium bis(2,4(or 2,6 or 4,6)-bis(3,5-dinitro-2-oxidophenylazo)-5-hydroxyphenolato)ferrate(1-); trisodium (2,4(or 2,6 or 4,6)-bis(3,5-dinitro-2-oxidophenylazo)-5-hydroxyphenolato)(2(or 4 or 6)-(3,5-dinitro-2-oxidophenylazo)-5-hydroxy-4(or 2 or 6)-(4-nitro-2-sulfonatophenylazo)phenolato)ferrate(1-); trisodium (2,4(or 2,6 or 4,6)-bis(3,5-dinitro-2-oxidophenylazo)-5-hydroxyphenolato)(2(or 4 or 6)-(3,5-dinitro-2-oxidophenylazo)-5-hydroxy-4(or 2 or 6)-(3-sulfonatophenylazo)phenolato)ferrate(1-); disodium 3,3'-(2,4-dihydroxy-1,3(or 1,5 or 3,5)-phenylenedi-azo)dibenzenesulfonate	406-870-1	—	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
611-105-00-1	sodium 4-(4-chloro-6-(N-ethylanilino)-1,3,5-triazin-2-ylamino)-2-(1-(2-chlorophenyl)-5-hydroxy-3-methyl-1H-pyrazol-4-ylazo)benzenesulfonate	407-800-2	136213-75-7	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)22-24-37-61		
611-106-00-7	hexasodium 4,4'-dihydroxy-3,3'-bis[2-sulfonato-4-(4-sulfonatophenylazo)phenylazo]-7,7'[p-phenylenebis(imino(6-chloro-1,3,5-triazine-4,2-diy)imino)]dinaphthalene-2-sulfonate	410-180-6	157627-99-1	Xi; R41	Xi R: 41 S: (2-)26-39		
611-107-00-2	potassium sodium 4-(4-chloro-6-(3,6-disulfonato-7-(5,8-disulfonato-naphthalen-2-ylazo)-8-hydroxy-naphthalen-1-ylamino)-1,3,5-triazin-2-ylamino)-5-hydroxy-6-(4-(2-sulfatoethanesulfonyl)-phenylazo)-naphthalene-1,7-disulfonate	412-490-7	—	R43	Xi R: 43 S: (2-)22-24-37		
611-108-00-8	disodium 5-((4-((4-chloro-3-sulfonatophenyl)azo)-1-naphthyl)azo)-8-(phenylamino)-1-naphthalenesulfonate	413-600-6	6527-62-4	R52-53	R: 52/53 S: 61		
611-109-00-3	Reaction products of: copper(II) sulfate and tetrasodium 2,4-bis[6-(2-methoxy-5-sulfonatophenylazo)-5-hydroxy-7-sulfonato-2-naphthylamino]-6-(2-hydroxyethylamino)-1,3,5-triazine (2:1)	407-710-3	—	N; R51-53	N R: 51/53 S: 61		
611-110-00-9	tetra-sodium/lithium 4,4'-bis-(8-amino-3,6-disulfonato-1-naphthol-2-ylazo)-3-methylazobenzene	408-210-8	124605-82-9	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-28-37-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
611-111-00-4	disodium 2-[[4-(2-chloroethylsulfonyl)phenyl]-[(2-hydroxy-5-sulfo-3-[3-[2-(2-(sulfooxy)ethylsulfonyl)ethylazo]-4-sulfobenoato(3-)cuprate(1-)	414-230-8	—	R43	Xi R: 43 S: (2-)22-24-37		
611-112-00-X	tetrasodium 4-hydroxy-5-[4-[3-(2-sulfatoethanesulfonyl)phenylamino]-6-morpholin-4-yl-1,3,5-triazin-2-ylamino]-3-(1-sulfonatonaphthalen-2-ylazo)naphthalene-2,7-disulfonate	413-070-6	—	R43	Xi R: 43 S: (2-)22-24-37		
611-113-00-5	lithium sodium (2-(((5-((2,5-dichlorophenyl)azo)-2-hydroxyphenyl)methylene)amino)benzoato(2-)))(2-(((4,5-dihydro-3-methyl-5-oxo-1-phenyl-1H-pyrazol-4-yl)azo)-5-sulfobenzoato(3-)) chromate(2-)	414-280-0	149626-00-6	N; R51-53	N R: 51/53 S: 24/25-61		
611-114-00-0	lithium sodium (4-((5-chloro-2-hydroxyphenyl)azo)-2,4-dihydro-5-methyl-3H-pyrazol-3-onato(2-))(3-(((4,5-dihydro-3-methyl-1-(4-methylphenyl)-5-oxo-1H-pyrazol-4-yl)azo)-4-hydroxy-5-nitrobenzenesulfonato(3-)) chromate(2-)	414-250-7	149564-66-9	Xn; R22 Xi; R41 R52-53	Xn R: 22-41-52/53 S: (2-)22-26-39-61		
611-115-00-6	trilithium bis(4-((4-(diethylamino)-2-hydroxyphenyl)azo)-3-hydroxy-1-naphthalenesulfonato(3-))chromate(3-)	414-290-5	149564-65-8	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)22-61		
611-116-00-1	reaction mass of: trisodium 5-{4-chloro-6-[2-(2,6-dichloro-5-cyanopyrimidin-4-ylamino)-propylamino]-1,3,5-triazin-2-ylamino}-4-hydroxy-3-(1-sulfonatonaphthalene-2-ylazo)-naphthalene-2,7-disulfonate; trisodium 5-{4-chloro-6-[2-(2,6-dichloro-5-cyanopyrimidin-4-ylamino)-1-methyl-ethylamino]-1,3,5-triazin-2-ylamino}-4-hydroxy-3-(1-sulfonatonaphthalene-2-ylazo)-naphthalene-2,7-disulfonate; trisodium 5-{4-chloro-6-[2-(4,6-dichloro-5-cyanopyrimidin-2-ylamino)-propylamino]-1,3,5-triazin-2-ylamino}-4-hydroxy-3-(1-sulfonatonaphthalen-2-ylazo)-naphthalene-2,7-disulfonate; trisodium 5-{4-chloro-6-[2-(4,6-dichloro-5-cyanopyrimidin-2-ylamino)-1-methyl-ethylamino]-1,3,5-triazin-2-ylamino}-4-hydroxy-3-(1-sulfonatonaphthalen-2-ylazo)-naphthalene-2,7-disulfonate	414-620-8	—	Xi; R41 R43	Xi R: 41-43 S: (2-)22-24-26-37/39		
611-117-00-7	1,3-bis{6-fluoro-4-[1,5-disulfo-4-(3-aminocarbonyl-1-ethyl-6-hydroxy-4-methyl-pyrid-2-on-5-ylazo)-phenyl-2-ylamino]-1,3,5-triazin-2-ylamino}propane lithium-, sodium salt	415-100-3	149850-29-3	R43	Xi R: 43 S: (2-)22-24-37		
611-118-00-2	sodium 1,2-bis[4-[4-(4-sulfophenylazo)-2-sulfophenylazo]-2-ureido-phenyl-amino]-6-fluoro-1,3,5-triazin-2-ylamino]-propane, sodium salt	413-990-8		R43	Xi R: 43 S: (2-)22-24-37		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
611-119-00-8	tetrasodium 4-[4-chloro-6-(4-methyl-2-sulfophenylamino)-1,3,5-triazin-2-ylamino]-6-(4,5-dimethyl-2-sulfophenylazo)-5-hydroxynaphthalene-2,7-disulfonate	415-400-4	148878-22-2	Xi; R41 R43	Xi R: 41-43 S: (2-)22-24-26-37/39		
611-120-00-3	5-{4-[5-amino-2-[4-(2-sulfoxyethylsulfonyl)phenylazo]-4-sulfo-phenylamino]-6-chloro-1,3,5-triazin-2-ylamino}-4-hydroxy-3-(1-sulfo-naphthalen-2-ylazo)-naphthalene-2,7-disulfonicacid sodium salt	418-340-7	157707-94-3	Xi; R41 R52-53	Xi R: 41-52/53 S: (2-)22-26-39-61		
611-121-00-9	Main component 6 (isomer): asym. 1:2 Cr(III)-complex of: A: 3-hydroxy-4-(2-hydroxy-naphthalene-1-ylazo)naphthalene-1-sulfonic acid, Na-salt and B: 1-[2-hydroxy-5-(4-methoxy-phenylazo)phenylazo]naphthalene-2-ol; Main component 8 (isomer): asym. 1:2 Cr-complex of: A: 3-hydroxy-4-(2-hydroxy-naphthalene-1-ylazo)-naphthalene-1-sulfonic acid, Na-salt and B: 1-[2-hydroxy-5-(4-methoxy-phenylazo)-phenylazo]-naphthalene-2-ol	417-280-9	30785-74-1	Xi; R41 N; R50-53	Xi; N R: 41-50/53 S: (2-)26-39-60-61		
611-122-00-4	hexasodium (di[N-(3-(4-[5-(5-amino-3-methyl-1-phenylpyrazol-4-yl-azo)-2,4-disulfo-anilino]-6-chloro-1,3,5-triazin-2-ylamino)phenyl)-sulfamoyl](di-sulfo)-phthalocyaninato)nickel	417-250-5	151436-99-6	Xi; R41 R43	Xi R: 41-43 S: (2-)22-24-26-37/39		
611-123-00-X	3-(2,4-bis(4-((5-(4,6-bis(2-aminopropylamino)-1,3,5-triazin-2-ylamino)-4-hydroxy-2,7-disulfonaphthalen-3-yl)azo)phenylamino)-1,3,5-triazin-6-ylamino)propyldiethylammonium lactate	424-310-4	178452-66-9	Xi; R41	Xi R: 41 S: (2-)26-39		
611-124-00-5	reaction mass of: pentasodium 5-amino-3-(5-{4-chloro-6-[4-(2-sulfoxyethoxysulfonato)phenylamino]-1,3,5-triazin-2-ylamino}-2-sulfonatophenylazo)-6-[5-(2,3-dibromopropionylamino)-2-sulfonatophenylazo]-4-hydroxynaphthalene-2,7-disulfonate; pentasodium 5-amino-6-[5-(2-bromoacryloylamino)-2-sulfonatophenylazo]-3-(5-{4-chloro-6-[4-(2-sulfoxyethoxysulfonato)phenylamino]-1,3,5-triazin-2-ylamino}-2-sulfonatophenylazo)-4-hydroxynaphthalene-2,7-disulfonate; tetrasodium 5-amino-3-[5-{4-chloro-6-[4-(vinylsulfonyl)phenylamino]-1,3,5-triazin-2-ylamino}-2-sulfonatophenylazo]-6-[5-(2,3-dibromopropionylamino)-2-sulfonatophenylazo]-4-hydroxynaphthalene-2,7-disulfonate	424-320-9		Xi; R41 N; R51-53	Xi; N R: 41-51/53 S: (2-)26-39-61		
611-125-00-0	reaction mass of: Disodium 6-[3-carboxy-4,5-dihydro-5-oxo-4-sulfonatophenyl]pyrazolin-4-yl-azo]-3-[2-oxido-4-(ethen-sulfonyl)-5-methoxyphenylazo]-4-oxidonaphthalene-2-sulfonate copper (II) complex; Disodium 6-[3-carboxy-4,5-dihydro-5-oxo-4-sulfonatophenyl]pyrazolin-4-yl-azo]-3-[2-oxido-4-(2-hydroxyethylsulfonyl)-5-methoxyphenylazo]-4-oxidonaphthalene-2-sulfonate copper (II) complex	423-940-7	—	Xi; R41 N; R51-53	Xi; N R: 41-51/53 S: (2-)26-39-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
611-126-00-6	2,6-bis-(2-(4-(4-amino-phenylamino)-phenylazo)-1,3-dimethyl-3H-imidazolium)-4-dimethylamino-1,3,5-triazine, dichloride	424-120-1	174514-06-8	Xi; R41 N; R50-53	Xi; N R: 41-50/53 S: (2-)26-39-60-61		
611-127-00-1	pentasodium 4-amino-6-(5-(4-(2-ethyl-phenylamino)-6-(2-sulfatoethanesulfonyl)-1,3,5-triazin-2-ylamino)-2-sulfonato-phenylazo)-5-hydroxy-3-(4-(2-sulfatoethanesulfonyl)phenylazo)naphthalene-2,7-disulfonate	423-790-2	—	R5 Xi; R41 R43 R52-53	Xi R: 5-41-43-52/53 S: (2-)22-26-36/37/ 39-41-61		
611-128-00-7	N,N'-bis{6-chloro-4-[6-(4-vinylsulfonylphenylazo)-2,7-disulfonicacid-5-hydroxynapht-4-ylamino]-1,3,5-triazin-2-yl}-N-(2-hydroxyethyl)ethane-1,2-diamine, sodium salt	419-500-9	171599-85-2	Xi; R41 R43	Xi R: 41-43 S: (2-)22-24-26-37/39		
611-129-00-2	reaction mass of: 5-[(4-[(7-amino-1-hydroxy-3-sulfo-2-naphthyl)azo]-2,5-diethoxyphenyl)azo]-2-[(3-phosphonophenyl)azo]benzoic acid; 5-[(4-[(7-amino-1-hydroxy-3-sulfo-2-naphthyl)azo]-2,5-dietoxyphenyl)azo]-3-[(3-phosphonophenyl)azo]benzoic acid	418-230-9	163879-69-4	E; R2 Repr. Cat. 3; R62 Xn; R48/22 R43 N; R51-53	E; Xn; N R: 2-43-48/22-62-51/ 53 S: (2-)26-35-36/37-61		
611-130-00-8	tetra-ammonium 2-[6-[7-(2-carboxylato-phenylazo)-8-hydroxy-3,6-disulfonato-1-naphthylamino]-4-hydroxy-1,3,5-triazin-2-ylamino]benzoate	418-520-5	183130-96-3	Xi; R36 N; R50-53	Xi; N R: 36-50/53 S: (2-)26-39-60-61		
611-131-00-3	2-[2-hydroxy-3-(2-chlorophenyl)carbamoyl-1-naphthylazo]-7-[2-hydroxy-3-(3-methylphenyl)carbamoyl-1-naphthylazo]fluoren-9-one	420-580-2	151798-26-4	Repr. Cat. 2; R61 R53	T R: 61-53 S: 53-45-61		
611-132-00-9	pentasodium bis{7-[4-(1-butyl-5-cyano-1,2-dihydro-2-hydroxy-4-methyl-6-oxo-3-pyridylazo)phenylsulfonylamino]-5'-nitro-3,3'-disulfonatophthalene-2-azobenzene-1,2'-diolato} chromate (III)	419-210-2	178452-71-6	Xi; R41 R52-53	Xi R: 41-52/53 S: (2-)26-39-61		
611-133-00-4	Product by process iron complex of azo dyestuffs obtained by coupling a mixture of diazotized 2-amino-1-hydroxybenzene-4-sulfanilide and 2-amino-1-hydroxybenzene-4-sulfonamide with resorcin, the obtained mixture being subsequently submitted to a second coupling reaction with a mixture of diazotized 3-aminobenzene-1-sulfonic acid (metanilic acid) and 4'-amino-4-nitro-1,1'-diphenylamine-2-sulfonic acid and metallization with ferric chloride, sodium salt	419-260-5	—	Xi; R41 N; R51-53	Xi; N R: 41-51/53 S: (2-)26-39-61		
611-134-00-X	trisodium 2-{α[2-hydroxy-3-[4-chloro-6-[4-(2,3-dibromopropionylamino)-2-sulfonatophenylamino]-1,3,5-triazin-2-ylamino]-5-sulfonatophenylazo]-benzylidenehydrazino}-4-sulfonatobenzoate, copper complex	423-770-3	—	Xi; R41 N; R51-53	Xi; N R: 41-51/53 S: (2-)22-26-39-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
611-135-00-5	Reaction product of: 2-[[4-amino-2-ureidophenylazo]-5-[(2-(sulfooxy)ethyl)sulfonyl]]benzenesulfonic acid with 2,4,6-trifluoropyrimidine and partial hydrolysis to the corresponding vinylsulfonyl derivative, mixed potassium/sodium salt	424-250-9	—	Xi; R41 R52-53	Xi R: 41-52/53 S: (2-)26-39-61		
611-136-00-0	2-{4-(2-ammoniopropylamino)-6-[4-hydroxy-3-(5-methyl-2-methoxy-4-sulfamoylphenylazo)-2-sulfonatonaphth-7-ylamino]-1,3,5-triazin-2-ylamino}-2-aminopropyl formate	424-260-3	—	Repr. Cat. 3; R62 Xi; R41 N; R51-53	Xn; N R: 41-62-51/53 S: (2-)22-26-36/37/ 39-61		
611-137-00-6	6-tert-butyl-7-chloro-3-tridecyl-7,7a-dihydro-1H-pyrazolo [5,1-c]-1,2,4-triazole	419-870-1	159038-16-1	R53	R: 53 S: 61		
611-138-00-1	2-(4-aminophenyl)-6-tert-butyl-1H-pyrazolo[1,5-b][1,2,4]triazole	415-910-7	152828-25-6	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)22-24-37-61		
611-140-00-2	azafenidin (ISO) 2-(2,4-dichloro-5-prop-2-ynyloxyphenyl)-5,6,7,8-tetrahydro-1,2,4-triazolo[4,3-a]pyridin-3(2H)-one	—	68049-83-2	Repr. Cat. 2; R61 Repr. Cat. 3; R62 Xn; R48/22 N; R50-53	T; N R: 61-48/22-62-50/ 53 S: 53-45-60-61	N; R50-53: C ≥ 0,025 % N; R51-53: 0,0025 % ≤ C < 0,025 % R52-53: 0,00025 % ≤ C < 0,0025 %	E
612-001-00-9	mono-methylamine; [1] di-methylamine; [2] tri-methylamine [3]	200-820-0 [1] 204-697-4 [2] 200-875-0 [3]	74-89-5 [1] 124-40-3 [2] 75-50-3 [3]	F+; R12 Xn; R20 Xi; R37/38-41	F+; Xn R: 12-20-37/38-41 S: (2-)16-26-39	Xn; R20: C ≥ 5 % Xi; R37/38-41: C ≥ 5 % Xi; R36: 0,5 % ≤ C < 5 %	5
612-001-01-6	mono-methylamine ... %; [1] di-methylamine ... %; [2] tri-methylamine ... % [3]	200-820-0 [1] 204-697-4 [2] 200-875-0 [3]	74-89-5 [1] 124-40-3 [2] 75-50-3 [3]	F+; R12 Xn; R20/22 C; R34	F+; C R: 12-20/22-34 S: (1/2-)3-16-26-29-36/37/39-45	Xn; R20/22: C ≥ 15 % C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	B
612-002-00-4	ethylamine	200-834-7	75-04-7	F+; R12 Xi; R36/37	F+; Xi R: 12-36/37 S: (2-)16-26-29		
612-003-00-X	diethylamine	203-716-3	109-89-7	F; R11 Xn; R20/21/ 22 C; R35	F; C R: 11-20/21/22-35 S: (1/2-)3-16-26-29-36/37/39-45	C; R35: C ≥ 10 % C; R34: 5 % ≤ C < 10 % Xi; R36/37/38: 1 % ≤ C < 5 %	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
612-004-00-5	triethylamine	204-469-4	121-44-8	F; R11 Xn; R20/21/ 22 C; R35	F; C R: 11-20/21/22-35 S: (1/2-)3-16-26-29- 36/37/39-45	C; R35: C ≥ 10 % C; R34: 5 % ≤ C < 10 % Xi; R36/37/38: 1 % ≤ C < 5 %	
612-005-00-0	butylamine	203-699-2	109-73-9	F; R11 Xn; R20/21/ 22 C; R35	F; C R: 11-20/21/22-35 S: (1/2-)3-16-26-29- 36/37/39-45	C; R35: C ≥ 10 % C; R34: 5 % ≤ C < 10 % Xi; R36/37/38: 1 % ≤ C < 5 %	
612-006-00-6	ethylenediamine; 1,2-diaminoethane	203-468-6	107-15-3	R10 Xn; R21/22 C; R34 R42/43	C R: 10-21/22-34-42/ 43 S: (1/2-)23-26-36/37/ 39-45	C; R34: C ≥ 10 % Xi; R36/38: 2 % ≤ C < 10 %	
612-007-00-1	2-aminopropane; isopropylamine	200-860-9	75-31-0	F+; R12 Xi; R36/37/ 38	F+; Xi R: 12-36/37/38 S: (2-)16-26-29		
612-008-00-7	aniline	200-539-3	62-53-3	Carc. Cat. 3; R40 Muta. Cat. 3; R68 T; R23/24/ 25-48/23/ 24/25 Xi; R41 R43 N; R50	T; N R: 23/24/25-40-41- 43-48/23/24/25-68- 50 S: (1/2-)26-27-36/37/ 39-45-46-61-63	T; R23/24/25: C ≥ 25 % Xn; R20/21/22: 1 % ≤ C < 25 % T; R48/23/24/25: C ≥ 1 % Xn; R48/20/21/22: 0,2 % ≤ C < 1 %	
612-009-00-2	salts of aniline	—	—	Carc. Cat. 3; R40 Muta. Cat. 3; R68 T; R23/24/ 25-48/23/ 24/25 Xi; R41 R43 N; R50	T; N R: 23/24/25-40-41- 43-48/23/24/25-68- 50 S: (1/2-)26-27-36/37/ 39-45-61-63	T; R23/24/25: C ≥ 25 % Xn; R20/21/22: 1 % ≤ C < 25 % T; R48/23/24/25: C ≥ 1 % Xn; R48/20/21/22: 0,2 % ≤ C < 1 %	A



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
612-010-00-8	chloroanilines, with exception of those specified elsewhere in this Annex	—	—	T; R23/24/25 R33 N; R50-53	T; N R: 23/24/25-33-50/ 53 S: (1/2-)28-36/37-45- 60-61		C
612-011-00-3	4-nitrosoaniline	211-535-6	659-49-4	Xn; R20/21/ 22	Xn R: 20/21/22 S: (2-)25-28		
612-012-00-9	<i>o</i> -nitroaniline; [1] <i>m</i> -nitroaniline; [2] <i>p</i> -nitroaniline [3]	201-855-4 [1] 202-729-1 [2] 202-810-1 [3]	88-74-4 [1] 99-09-2 [2] 100-01-6 [3]	T; R23/24/25 R33 R52-53	T R: 23/24/25-33-52/ 53 S: (1/2-)28-36/37-45- 61		C
612-013-00-4	3-aminobenzene sulphonic acid; metanilic acid	204-473-6	121-47-1	Xn; R20/21/ 22	Xn R: 20/21/22 S: (2-)25-28		
612-014-00-X	sulphanilic acid; 4-aminobenzenesulphonic acid	204-482-5	121-57-3	Xi; R36/38 R43	Xi R: 36/38-43 S: (2-)24-37		
612-015-00-5	<i>N</i> -methylaniline	202-870-9	100-61-8	T; R23/24/25 R33 N; R50-53	T; N R: 23/24/25-33-50/ 53 S: (1/2-)28-36/37-45- 60-61		
612-016-00-0	<i>N,N</i> -dimethylaniline	204-493-5	121-69-7	Carc. Cat. 3; R40 T; R23/24/25 N; R51-53	T; N R: 23/24/25-40-51/ 53 S: (1/2-)28-36/37-45- 61		
612-017-00-6	<i>N</i> -methyl- <i>N</i> ,2,4,6-tetranitroaniline; tetryl	207-531-9	479-45-8	E; R2 ⊗ T; R23/24/25 R33	E; T R: 2-23/24/25-33 S: (1/2-)35-45		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
612-018-00-1	bis(2,4,6-trinitrophenyl)amine; hexyl	205-037-8	131-73-7	E; R2 ⊗ T+; R26/27/ 28 R33 N; R51-53	E; T+; N R: 2-26/27/28-33-51/ 53 S: (1/2-)35-36-45-61		
612-019-00-7	dipicrylamine, ammonium salt	220-639-0	2844-92-0	E ⊗ R1 T+; R26/27/ 28 R33 N; R51-53	E; T+; N R: 1-26/27/28-33-51/ 53 S: (1/2-)28-36/37-45- 61		
612-020-00-2	1-naphthylamine	205-138-7	134-32-7	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)24-61		
612-022-00-3	2-naphthylamine	202-080-4	91-59-8	Carc. Cat. 1; R45 Xn; R22 N; R51-53	T; N R: 45-22-51/53 S: 53-45-61	Carc. Cat. 1; R45: C ≥ 0,01 %	E
612-023-00-9	phenylhydrazine; [1] phenylhydrazinium chloride; [2] phenylhydrazine hydrochloride; [3] phenylhydrazinium sulphate (2:1) [4]	202-873-5 [1] 200-444-7 [2] 248-259-0 [3] 257-622-2 [4]	100-63-0 [1] 59-88-1 [2] 27140-08-5 [3] 52033-74-6 [4]	Carc. Cat. 2; R45 Muta. Cat. 3; R68 T; R23/24/ 25-48/23/ 24/25 Xi; R36/38 R43 N; R50	T; N R: 45-23/24/25-36/ 38-43-48/23/24/25- 68-50 S: 53-45-61		E
612-024-00-4	<i>m</i> -toluidine; 3-aminotoluene	203-583-1	108-44-1	T; R23/24/25 R33 N; R50	T; N R: 23/24/25-33-50 S: (1/2-)28-36/37-45- 61		
612-025-00-X	nitrotoluidines, with the exception of those specified elsewhere in this Annex	—	—	T; R23/24/25 R33 N; R51-53	T; N R: 23/24/25-33-51/ 53 S: (1/2-)28-36/37-45- 61		C

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
612-026-00-5	diphenylamine	204-539-4	122-39-4	T; R23/24/25 R33 N; R50-53	T; N R: 23/24/25-33-50/ 53 S: (1/2-)28-36/37-45- 60-61		
612-027-00-0	xylidines with the exception of those specified elsewhere in this Annex; dimethyl anilines with the exception of those specified elsewhere in this Annex	—	—	T; R23/24/25 R33 N; R51-53	T; N R: 23/24/25-33-51/ 53 S: (1/2-)28-36/37-45- 61		C
612-028-00-6	<i>p</i> -phenylenediamine	203-404-7	106-50-3	T; R23/24/25 Xi; R36 R43 N; R50-53	T+; N R: 23/24/25-36-43- 50/53 S: (1/2-)28-36/37-45- 60-61		
612-029-00-1	benzene-1,4-diamine dihydrochloride; <i>p</i> -phenylenediamine dihydrochloride	210-834-9	624-18-0	T; R23/24/25 Xi; R36 R43 N; R50-53	T; N R: 23/24/25-36-43- 50/53 S: (1/2-)28-36/37-45- 60-61		
612-030-00-7	2-methyl- <i>p</i> -phenylenediamine sulphate [1]	210-431-8 [1] 228-871-4 [2]	615-50-9 [1] 6369-59-1 [2]	T; R25 Xn; R20/21 R43 N; R51-53	T; N R: 20/21-25-43-51/ 53 S: (1/2-)24-37-45-61		
612-031-00-2	<i>N,N</i> -dimethylbenzene-1,3-diamine; [1] 4-amino- <i>N,N</i> -dimethylaniline; 3-amino- <i>N,N'</i> -dimethylaniline [2]	220-623-3 [1] 202-807-5 [2]	2836-04-6 [1] 99-98-9 [2]	T; R23/24/25	T R: 23/24/25 S: (1/2-)28-45		C
612-032-00-8	<i>N,N,N',N'</i> -tetramethyl- <i>p</i> -phenylenediamine	202-831-6	100-22-1	Xn; R20/21/ 22	Xn R: 20/21/22 S: (2-)28		
612-033-00-3	2-aminophenol	202-431-1	95-55-6	Xn; R20/22 Muta. Cat. 3; R68	Xn R: 20/22-68 S: (2-)28-36/37		
612-034-00-9	2-amino-4,6-dinitrophenol; picramic acid	202-544-6	96-91-3	E; R1 ⊗ Xn; R20/21/ 22 R52-53	E; Xn R: 1-20/21/22-52/53 S: (2-)35-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
612-035-00-4	2-methoxyaniline; <i>o</i> -anisidine	201-963-1	90-04-0	Carc. Cat. 2; R45 Muta. Cat. 3; R68 T; R23/24/25	T R: 45-23/24/25-68 S: 53-45		E
612-036-00-X	3,3'-dimethoxybenzidine; <i>o</i> -dianisidine	204-355-4	119-90-4	Carc. Cat. 2; R45 Xn; R22	T R: 45-22 S: 53-45		E
612-037-00-5	salts of 3,3'-dimethoxybenzidine; salts of <i>o</i> -dianisidine	—	—	Carc. Cat. 2; R45 Xn; R22	T R: 45-22 S: 53-45		AE
612-038-00-0	2-nitro- <i>p</i> -anisidine; 4-methoxy-2-nitroaniline	202-547-2	96-96-8	T+; R26/27/ 28 R33 R52-53	T+ R: 26/27/28-33-52/ 53 S: (1/2-)28-36/37-45- 61		
612-039-00-6	2-ethoxyaniline; <i>o</i> -phenetidine	202-356-4	94-70-2	T; R23/24/25 R33	T R: 23/24/25-33 S: (1/2-)28-36/37-45		
612-040-00-1	2,4-dinitroaniline	202-553-5	97-02-9	T+; R26/27/ 28 R33 N; R51-53	T+; N R: 26/27/28-33-51/ 53 S: (1/2-)28-36/37-45- 61		
612-041-00-7	4,4'-bi- <i>o</i> -toluidine	204-358-0	119-93-7	Carc. Cat. 2; R45 Xn; R22 N; R51-53	T; N R: 45-22-51/53 S: 53-45-61		E
612-042-00-2	benzidine; 1,1'-biphenyl-4,4'-diamine; 4,4'-diaminobiphenyl; biphenyl-4,4'-ylenediamine	202-199-1	92-87-5	Carc. Cat. 1; R45 Xn; R22 N; R50-53	T; N R: 45-22-50/53 S: 53-45-60-61	Carc. Cat. 1; R45: C ≥ 0,01 %	E
612-043-00-8	<i>N,N'</i> -dimethylbenzidine	—	2810-74-4	Xn; R20/21/ 22	Xn R: 20/21/22 S: (2-)22-36		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
612-044-00-3	N,N'-diacetylbenzidine	210-338-2	613-35-4	Xn; R20/21/22	Xn R: 20/21/22 S: (2-)22-36		
612-046-00-4	allylamine	203-463-9	107-11-9	F; R11 T; R23/24/25 N; R51-53	F; T; N R: 11-23/24/25-51/53 S: (1/2-)9-16-24/25-45-61		
612-047-00-X	benzylamine	202-854-1	100-46-9	Xn; R21/22 C; R34	C R: 21/22-34 S: (1/2-)26-36/37/39-45		
612-048-00-5	dipropylamine	205-565-9	142-84-7	F; R11 Xn; R20/21/22 C; R35	F; C R: 11-20/21/22-35 S: (1/2-)16-26-36/37/39-45	C; R35: C ≥ 10 % C; R34: 5 % ≤ C < 10 % Xi; R36/37/38: 1 % ≤ C < 5 %	
612-049-00-0	di-n-butylamine; [1] di-sec-butylamine [2]	203-921-8 [1] 210-937-9 [2]	111-92-2 [1] 626-23-3 [2]	R10 Xn; R20/21/22	Xn R: 10-20/21/22 S: (2-)		
612-050-00-6	cyclohexylamine	203-629-0	108-91-8	R10 Xn; R21/22 C; R34	C R: 10-21/22-34 S: (1/2-)36/37/39-45	C; R34: C ≥ 10 % Xi; R36/38: 2 % ≤ C < 10 %	
612-051-00-1	4,4'-diaminodiphenylmethane; 4,4'-methylenedianiline	202-974-4	101-77-9	Carc. Cat. 2; R45 Muta. Cat. 3; R68 T; R39/23/24/25 Xn; R48/20/21/22 R43 N; R51-53	T; N R: 45-39/23/24/25-43-48/20/21/22-68-51/53 S: 53-45-61	E	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
612-052-00-7	(S)- <i>sec</i> -butylamine; (S)-2-aminobutane; [1] (R)- <i>sec</i> -butylamine; (R)-2-aminobutane; [2] <i>sec</i> -butylamine; 2-aminobutane [3]	208-164-7 [1] 236-232-6 [2] 237-732-7 [3]	513-49-5 [1] 13250-12-9 [2] 13952-84-6 [3]	F; R11 Xn; R20/22 C; R35 N; R50	F; C; N R: 11-20/22-35-50 S: (1/2-)9-16-26-28- 36/37/39-45-61		C
612-053-00-2	N-ethylaniline	203-135-5	103-69-5	T; R23/24/25 R33	T R: 23/24/25-33 S: (1/2-)28-37-45		
612-054-00-8	N,N-diethylaniline	202-088-8	91-66-7	T; R23/24/25 R33 N; R51-53	T; N R: 23/24/25-33-51/ 53 S: (1/2-)28-37-45-61	T; R23/24/25: C ≥ 5 % Xn; R20/21/22: 1 % ≤ C < 5 %	
612-055-00-3	N-methyl- <i>o</i> -toluidine; [1] N-methyl- <i>m</i> -toluidine; [2] N-methyl- <i>p</i> -toluidine [3]	210-260-9 [1] 211-795-0 [2] 210-769-6 [3]	611-21-2 [1] 696-44-6 [2] 623-08-5 [3]	T; R23/24/25 R33 R52-53	T R: 23/24/25-33-52/ 53 S: (1/2-)28-36/37-45- 61		C
612-056-00-9	N,N-dimethyl- <i>p</i> -toluidine; [1] N,N-dimethyl- <i>m</i> -toluidine; [2] N,N-dimethyl- <i>o</i> -toluidine [3]	202-805-4 [1] 204-495-6 [2] 210-199-8 [3]	99-97-8 [1] 121-72-2 [2] 609-72-3 [3]	T; R23/24/25 R33 R52-53	T R: 23/24/25-33-52/ 53 S: (1/2-)28-36/37-45- 61	T; R23/24/25: C ≥ 5 % Xn; R20/21/22: 1 % ≤ C < 5 %	C
612-057-00-4	piperazine	203-808-3	110-85-0	C; R34 R42/43 R52-53	C R: 34-42/43-52/53 S: (1/2-)22-26-36/37/ 39-45-61		
612-058-00-X	2,2'-iminodiethylamine; diethylenetriamine	203-865-4	111-40-0	Xn; R21/22 C; R34 R43	C R: 21/22-34-43 S: (1/2-)26-36/37/39- 45		
612-059-00-5	3,6-diazaoctanethylenediamin; triethylenetetramine	203-950-6	112-24-3	Xn; R21 C; R34 R43 R52-53	C R: 21-34-43-52/53 S: (1/2-)26-36/37/39- 45-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
612-060-00-0	3,6,9-triazaundecamethylenediamine; tetraethylenepentamine	203-986-2	112-57-2	Xn; R21/22 C; R34 R43 N; R51-53	C; N R: 21/22-34-43-51/ 53 S: (1/2-)26-36/37/39- 45-61		
612-061-00-6	3-aminopropyldimethylamine; N,N-dimethyl-1,3-diaminopropane	203-680-9	109-55-7	R10 Xn; R22 C; R34 R43	C R: 10-22-34-43 S: (1/2-)26-36/37/39- 45		
612-062-00-1	3-aminopropyldiethylamine; N,N-diethyl-1,3-diaminopropane	203-236-4	104-78-9	R10 Xn; R21/22 C; R34 R43	C R: 10-21/22-34-43 S: (1/2-)26-36/37/39- 45		
612-063-00-7	3,3'-iminodi(propylamine); dipropylenetriamine	200-261-2	56-18-8	T+; R26 T; R24 Xn; R22 C; R35 R43	T+; C R: 22-24-26-35-43 S: (1/2-)26-28-36/37/ 39-45		
612-064-00-2	3,6,9,12-tetra-azatetradecamethylenediamine; pentactylenhexamine	223-775-9	4067-16-7	C; R34 R43 N; R50-53	C; N R: 34-43-50/53 S: (1/2-)26-36/37/39- 45-60-61		
612-065-00-8	polyethylenepolyamines with the exception of those specified elsewhere in this Annex	—	—	Xn; R21/22 C; R34 R43 N; R50-53	C; N R: 21/22-34-43-50/ 53 S: (1/2-)26-36/37/39- 45-60-61		
612-066-00-3	dicyclohexylamine	202-980-7	101-83-7	Xn; R22 C; R34 N; R50-53	C; N R: 22-34-50/53 S: (1/2-)26-36/37/39- 45-60-61	C; R34: C ≥ 10 % Xi; R36/38: 2 % ≤ C < 10 %	
612-067-00-9	3-aminomethyl-3,5,5-trimethylcyclohexylamine	220-666-8	2855-13-2	Xn; R21/22 C; R34 R43 R52-53	C R: 21/22-34-43-52/ 53 S: (1/2-)26-36/37/39- 45-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
612-068-00-4	3,3'-dichlorobenzidine; 3,3'-dichlorobiphenyl-4,4'-ylenediamine	202-109-0	91-94-1	Carc. Cat. 2; R45 Xn; R21 R43 N; R50-53	T; N R: 45-21-43-50/53 S: 53-45-60-61		E
612-069-00-X	salts of 3,3'-dichlorobenzidine; salts of 3,3'-dichlorobiphenyl-4,4'-ylenediamine	— — —	— — —	Carc. Cat. 2; R45 Xn; R21 R43 N; R50-53	T; N R: 45-21-43-50/53 S: 53-45-60-61		AE
612-070-00-5	salts of benzidine [	208-519-6 208-520-1 244-236-4 252-984-8	531-85-1 531-86-2 21136-70-9 36341-27-2	Carc. Cat. 1; R45 Xn; R22 N; R50-53	T; N R: 45-22-50/53 S: 53-45-60-61		AE
612-071-00-0	salts of 2-naphthylamine	209-030-0 210-313-6	553-00-4 612-52-2	Carc. Cat. 1; R45 Xn; R22 N; R51-53	T; N R: 45-22-51/53 S: 53-45-61		AE
612-072-00-6	biphenyl-4-ylamine; xenylamine; 4-aminobiphenyl	202-177-1	92-67-1	Carc. Cat. 1; R45 Xn; R22	T R: 45-22 S: 53-45		E
612-073-00-1	salts of biphenyl-4-ylamine; salts of xenylamine; salts of 4-aminobiphenyl	—	—	Carc. Cat. 1; R45 Xn; R22	T R: 45-22 S: 53-45		AE
612-074-00-7	benzyl dimethylamine	203-149-1	103-83-3	R10 Xn; R20/21/ 22 C; R34 R52-53	C R: 10-20/21/22-34- 52/53 S: (1/2-)26-36-45-61		
612-075-00-2	2-aminoethyldimethylamine; 2-dimethylaminoethylamine	203-541-2	108-00-9	F; R11 Xn; R21/22 C; R35	F; C R: 11-21/22-35 S: (1/2-)16-23-26-28- 36-45		



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
612-076-00-8	ethyldimethylamine	209-940-8	598-56-1	F+; R12 ☉ Xn; R20/22 C; R34	F+; C R: 12-20/22-34 S: (1/2-)3-16-26-36-45		
612-077-00-3	dimethylnitrosoamine; N-nitrosodimethylamine	200-549-8	62-75-9	Carc. Cat. 2; R45 T+; R26 T; R25-48/25 N; R51-53	T+; N R: 45-25-26-48/25-51/53 S: 53-45-61	Carc. Cat. 2; R45: C ≥ 0,001 %	E
612-078-00-9	2,2'-dichloro-4,4'-methylenedianiline; 4,4'-methylene bis(2-chloroaniline)	202-918-9	101-14-4	Carc. Cat. 2; R45 Xn; R22 N; R50-53	T; N R: 45-22-50/53 S: 53-45-60-61		E
612-079-00-4	salts of 2,2'-dichloro-4,4'-methylenedianiline; salts of 4,4'-methylenebis(2-chloroaniline)	—	—	Carc. Cat. 2; R45 Xn; R22 N; R50-53	T; N R: 45-22-50/53 S: 53-45-60-61		AE
612-080-00-X	4-amino-N,N-diethylaniline; N,N-diethyl-p-phenylenediamine	202-214-1	93-05-0	T; R25 C; R34	T R: 25-34 S: (1/2-)26-36-45		
612-081-00-5	salts of 4,4'-bi-o-tolidine; salts of 3,3'-dimethylbenzidine; salts of o-tolidine	210-322-5 265-294-7 277-985-0	612-82-8 64969-36-4 74753-18-7	Carc. Cat. 2; R45 Xn; R22 N; R51-53	T; N R: 45-22-51/53 S: 53-45-61		AE
612-082-00-0	thiourea; thiocarbamide	200-543-5	62-56-6	Carc. Cat. 3; R40 Repr. Cat. 3; R63 Xn; R22 N; R51-53	Xn; N R: 22-40-51/53-63 S: (2-)36/37-61		
612-083-00-6	1-methyl-3-nitro-1-nitrosoguanidine	200-730-1	70-25-7	Carc. Cat. 2; R45 Xn; R20 Xi; R36/38 N; R51-53	T; N R: 45-20-36/38-51/53 S: 53-45-61	Carc. Cat. 2; R45: C ≥ 0,01 %	E

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
612-084-00-1	dapsone; 4,4'-diamino diphenyl sulfone	201-248-4	80-08-0	Xn; R22	Xn R: 22 S: (2-)22		
612-085-00-7	4,4'-methylenedi-o-toluidine	212-658-8	838-88-0	Carc. Cat. 2; R45 Xn; R22 R43 N; R50-53	T; N R: 45-22-43-50/53 S: 53-45-60-61		E
612-086-00-2	amitraz (ISO); N,N-bis(2,4-xylyliminomethyl) methylamine	251-375-4	33089-61-1	Xn; R22-48/ 22 R43 N; R50-53	Xn; N R: 22-43-48/22-50/ 53 S: (2-)22-24-60-36/ 37-61	N; R50-53: C ≥ 2,5 % N; R51-53: 0,25 % ≤ C < 2,5 % R52-53: 0,025 % ≤ C < 0,25 %	
612-087-00-8	guazatine (ISO)		108173-90-6	T+; R26 Xn; R21/22 Xi; R37/38- 41 N; R50-53	T+; N R: 21/22-26-37/38- 41-50/53 S: (1/2-)26-28-36/37/ 39-38-45-46-60-61- 63		
612-088-00-3	simazine (ISO); 6-chloro-N,N'-diethyl-1,3,5-triazine-2,4-diamine	204-535-2	122-34-9	Carc. Cat. 3; R40 N; R50-53	Xn; N R: 40-50/53 S: (2-)36/37-46-60-61		
612-089-00-9	1,5-naphthylenediamine	218-817-8	2243-62-1	Carc. Cat. 3; R40 N; R50-53	Xn; N R: 40-50/53 S: (2-)36/37-60-61		
612-090-00-4	2,2'-(nitrosoimino)bisethanol	214-237-4	1116-54-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		
612-091-00-X	o-toluidine; 2-aminotoluene	202-429-0	95-53-4	Carc. Cat. 2; R45 T; R23/25 Xi; R36 N; R50	T; N R: 45-23/25-36-50 S: 53-45-61		E
612-092-00-5	N,N'-(2,2-dimethylpropylidene)hexamethylenediamine	401-660-6	1000-78-8	Xi; R38 R43	Xi R: 38-43 S: (2-)24-37		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
612-093-00-0	3,5-dichloro-4-(1,1,2,2-tetrafluoroethoxy)aniline	401-790-3	104147-32-2	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)24/25-26-57-60-61		
612-094-00-6	4-(2-chloro-4-trifluoromethyl)phenoxy-2-fluoroaniline hydrochloride	402-190-4	—	T; R48/25 Xn; R22-48/20 Xi; R41 R43 N; R50-53	T; N R: 22-41-43-48/20-48/25-50/53 S: (1/2-)26-36/37/39-45-60-61		
612-095-00-1	benzyl-2-hydroxydodecyldimethylammonium benzoate	402-610-6	113694-52-3	C; R34 Xn; R22 N; R50-53	C; N R: 22-34-50/53 S: (1/2-)26-28-36/37/39-45-60-61		
612-096-00-7	4,4'-carbonimidoylbis[N,N-dimethylaniline]	207-762-5	492-80-8	Carc. Cat. 3; R40 Xn; R22 Xi; R36 N; R51-53	Xn; N R: 22-36-40-51/53 S: (2-)36/37-61		
612-097-00-2	salts of 4,4'-carbonimidoylbis[N,N-dimethylaniline]	—	—	Carc. Cat. 3; R40 Xn; R22 Xi; R36 N; R51-53	Xn; N R: 22-36-40-51/53 S: (2-)36/37-61		A
612-098-00-8	nitrosodipropylamine	210-698-0	621-64-7	Carc. Cat. 2; R45 Xn; R22 N; R51-53	T; N R: 45-22-51/53 S: 53-45-61	Carc. Cat. 2; R45: C ≥ 0,001 %	E
612-099-00-3	4-methyl- <i>m</i> -phenylenediamine; 2,4-toluenediamine	202-453-1	95-80-7	Carc. Cat. 2; R45 T; R25 Xn; R21 Xi; R36 R43 N; R51-53	T; N R: 45-21-25-36-43-51/53 S: 53-45-61		E

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
612-100-00-7	propylenediamine	201-155-9	78-90-0	R10 Xn; R21/22 C; R35	C R: 10-21/22-35 S: (1/2-)26-37/39-45		
612-101-00-2	methenamine; hexamethylenetetramine	202-905-8	100-97-0	F; R11 R42/43	F; Xn R: 11-42/43 S: (2-)16-22-24-37		
612-102-00-8	N,N-bis(3-aminopropyl)methylamine	203-336-8	105-83-9	T; R23/24 Xn; R22 C; R34	T R: 22-23/24-34 S: (1/2-)26-36/37/39-45		
612-103-00-3	N,N,N',N'-tetramethylethylenediamine	203-744-6	110-18-9	F; R11 Xn; R20/22 C; R34	F; C R: 11-20/22-34 S: (1/2-)16-26-36/37/39-45		
612-104-00-9	hexamethylenediamine	204-679-6	124-09-4	Xn; R21/22 Xi; R37 C; R34	C R: 21/22-34-37 S: (1/2-)22-26-36/37/39-45		
612-105-00-4	2-piperazin-1-ylethylamine	205-411-0	140-31-8	Xn; R21/22 C; R34 R43 R52-53	C R: 21/22-34-43-52/53 S: (1/2-)26-36/37/39-45-61		
612-106-00-X	2,6-diethylaniline	209-445-7	579-66-8	Xn; R22	Xn R: 22 S: (2-)23-24		
612-107-00-5	1-phenylethylamine; [1] DL- $\alpha$ -methylbenzylamine [2]	202-706-6 [1] 210-545-8 [2]	98-84-0 [1] 618-36-0 [2]	Xn; R21/22 C; R34	C R: 21/22-34 S: (1/2-)26-28-36/37/39-45		
612-108-00-0	3-aminopropyltriethoxysilane	213-048-4	919-30-2	Xn; R22 C; R34	C R: 22-34 S: (1/2-)26-36/37/39-45		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
612-109-00-6	bis(2-dimethylaminoethyl)(methyl)amine	221-201-1	3030-47-5	T; R24 Xn; R22 C; R34	T R: 22-24-34 S: (1/2-)26-36/37/39-45		
612-110-00-1	2,2'-dimethyl-4,4'-methylenebis(cyclohexylamine)	229-962-1	6864-37-5	T; R23/24 Xn; R22 C; R35 N; R51-53	T; C; N R: 22-23/24-35-51/53 S: (1/2-)26-36/37/39-45-61		
612-111-00-7	2-methyl- <i>m</i> -phenylenediamine; 2,6-toluenediamine	212-513-9	823-40-5	Muta. Cat. 3; R68 Xn; R21/22 R43 N; R51-53	Xn; N R: 21/22-43-51/53-68 S: (2-)24-36/37-61		
612-112-00-2	<i>p</i> -anisidine; 4-methoxyaniline	203-254-2	104-94-9	T+; R26/27/ 28 R33 N; R50	T+; N R: 26/27/28-33-50 S: (1/2-)28-36/37-45-61		
612-113-00-8	6-methyl-2,4-bis(methylthio)phenylene-1,3-diamine	403-240-8	106264-79-3	Xn; R22 R43 N; R50-53	Xn; N R: 22-43-50/53 S: (2-)24-37-60-61		
612-114-00-3	<i>R,R</i> -2-hydroxy-5-(1-hydroxy-2-(4-phenylbut-2-ylamino)ethyl)benzamide hydrogen 2,3-bis(benzoyloxy)succinate	404-390-7	—	F; R11 R43 R52-53	F; Xi R: 11-43-52/53 S: (2-)24-37-61		
612-115-00-9	dimethyldioctadecylammonium hydrogen sulfate	404-050-8	123312-54-9	Xi; R36 R53	Xi R: 36-53 S: (2-)26-39-61		
612-116-00-4	C <sub>8-18</sub> alkylbis(2-hydroxyethyl)ammonium bis(2-ethylhexyl)phosphate	404-690-8	68132-19-4	T; R23 C; R34 R43 N; R50-53	T; N R: 23-34-43-50/53 S: (1/2-)26-36/37/39-45-60-61		
612-117-00-X	C <sub>12-14</sub> - <i>tert</i> -alkylamine, methylphosphonic acid salt	404-750-3	119415-07-5	Xn; R22 C; R34 N; R51-53	C; N R: 22-34-51/53 S: (1/2-)26-28-36/37/39-45-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
612-118-00-5	A reaction mass of: (1,3-dioxo-2H-benz(de)isoquinolin-2-ylpropyl)hexadecyldimethylammonium 4-toluenesulfonate; (1,3-dioxo-2H-benz(de)isoquinolin-2-ylpropyl)hexadecyldimethylammonium bromide	405-080-4	—	Xi; R41 N; R50-53	X; N R: 41-50/53 S: (2-)22-26-39-60-61		
612-119-00-0	benzyldimethyloctadecylammonium 3-nitrobenzenesulfonate	405-330-2	—	Xi; R38-41 N; R50-53	Xi; N R: 38-41-50/53 S: (2-)26-37/39-60-61		
612-120-00-6	acлонifen (ISO); 2-chloro-6-nitro-3-phenoxyaniline	277-704-1	74070-46-5	N; R50-53	N R: 50/53 S: 60-61		
612-121-00-1	amines, polyethylenepoly-; HEPA	268-626-9	68131-73-7	Xn; R21/22 C; R34 R43 N; R50-53	C; N R: 21/22-34-43-50/ 53 S: (1/2-)26-36/37/39- 45-60-61		
612-122-00-7	hydroxylamine	232-259-2	7803-49-8	R5 ⊗ Xn; R22-48/ 22 Xi; R37/38- 41 R43 N; R50	Xn; N R: 5-22-37/38-41-43- 48/22-50 S: (2-)22-26-36/37/ 39-61		
612-123-00-2	hydroxylammonium chloride; hydroxylamine hydrochloride; [1] bis(hydroxylammonium) sulphate; hydroxylamine sulphate (2:1); [2] hydroxylammonium hydrogensulphate; hydroxylamine sulphate (1:1) [3]	226-798-2 [1] 233-118-8 [2] 233-154-4 [3]	5470-11-1 [1] 10039-54-0 [2] 10046-00-1 [3]	⊗ Xn; R22- 48/22 Xi; R36/38 R43 N; R50	Xn; N R: 22-36/38-43-48/ 22-50 S: (2-)22-24-37-61		
612-124-00-8	N,N,N-trimethylanilinium chloride	205-319-0	138-24-9	T; R24/25	T R: 24/25 S: (1/2-)25-39-45-53		
612-125-00-3	2-methyl-p-phenylenediamine; 2,5-toluenediamine	202-442-1	95-70-5	T; R25 Xn; R20/21 R43 N; R51-53	T; N R: 20/21-25-43-51/ 53 S: (1/2-)24-37-45-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
612-126-00-9	toluene-2,4-diammonium sulphate; 4-methyl-m-phenylenediamine sulfate	265-697-8	65321-67-7	Carc. Cat. 2; R45 T; R25 Xn; R21 Xi; R36 R43 N; R51-53	T; N R: 45-21-25-36-43-51/53 S: 53-45-61		E
612-127-00-4	3-aminophenol	209-711-2	591-27-5	Xn; R20/22 N; R51-53	Xn; N R: 20/22-51/53 S: (2-)28-61		
612-128-00-X	4-aminophenol	204-616-2	123-30-8	Muta. Cat. 3; R68 Xn; R20/22 N; R50-53	Xn; N R: 20/22-50/53-68 S: (2-)28-36/37-60-61		
612-129-00-5	diisopropylamine	203-558-5	108-18-9	F; R11 Xn; R20/22 C; R34	F; C R: 11-20/22-34 S: (1/2-)16-26-36/37/39-45	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	
612-130-00-0	2,6-diamino-3,5-diethyltoluene; 4,6-diethyl-2-methyl-1,3-benzenediamine; [1] 2,4-diamino-3,5-diethyltoluene; 2,4-diethyl-6-methyl-1,3-benzenediamine; [2] diethylmethylbenzenediamine [3]	218-255-3 [1] 218-256-9 [2] 270-877-4 [3]	2095-01-4 [1] 2095-02-5 [2] 68479-98-1 [3]	Xn; R21/22-48/22 Xi; R36 N; R50-53	Xn; N R: 21/22-36-48/22-50/53 S: (2-)26-28-36/37/39-60-61		C
612-131-00-6	didecyldimethylammonium chloride	230-525-2	7173-51-5	Xn; R22 C; R34	C R: 22-34 S: (2-)26-36/37/39-45		
612-132-00-1	N,N'-diphenyl-p-phenylenediamine; N,N'-diphenyl-1,4-benzenediamine	200-806-4	74-31-7	R43 R52-53	Xi R: 43-52/53 S: (2-)24-37-61		
612-133-00-7	(4-ammonio- <i>m</i> -tolyl)ethyl(2-hydroxyethyl)ammonium sulphate; 4-(N-ethyl-N-2-hydroxyethyl)-2-methylphenylenediamine sulphate	247-162-0	25646-77-9	T; R25 Xn; R48/22 R43 N; R50-53	T; N R: 25-43-48/22-50/53 S: (1/2-)24-37-45-60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
612-134-00-2	N-(2-(4-amino-N-ethyl-m-toluidino)ethyl)methanesulphona- mide sesquisulphate; 4-(N-ethyl-N-2-methanesulphonylaminoethyl)-2-methylphe- nylenediamine sesquisulphate monohydrate	247-161-5	25646-71-3	Xn; R22 R43 N; R50-53	Xn; N R: 22-43-50/53 S: (2-)24-37-60-61		
612-135-00-8	N-2-naphthylaniline; N-phenyl-2-naphthylamine	205-223-9	135-88-6	Carc. Cat. 3; R40 Xi; R36/38 R43 N; R51-53	Xn; N R: 36/38-40-43-51/ 53 S: (2-)26-36/37-61		
612-136-00-3	N-isopropyl-N'-phenyl-p-phenylenediamine	202-969-7	101-72-4	Xn; R22 R43 N; R50-53	Xn; N R: 22-43-50/53 S: (2-)24-37-60-61	R43: C ≥ 0,1 %	
612-137-00-9	4-chloroaniline	203-401-0	106-47-8	Carc. Cat. 2; R45 T; R23/24/25 R43 N; R50-53	T; N R: 45-23/24/25-43- 50/53 S: 53-45-60-61		E
612-138-00-4	furalaxyl (ISO); methyl N-(2,6-dimethylphenyl)-N-(2-furylcarbonyl)-DL-alani- nate	260-875-1	57646-30-7	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)36/37/39-61		
612-139-00-X	mefenacet (ISO); 2-(benzothiazol-2-yloxy)-N-methyl-N-phenylacetamide	277-328-8	73250-68-7	N; R51-53	N R: 51/53 S: 61		
612-140-00-5	quaternary ammonium compounds, benzyl-C <sub>8-18</sub> -alkyldime- thyl, chlorides	264-151-6	63449-41-2	Xn; R21/22 C; R34 N; R50	C; N R: 21/22-34-50 S: (2-)36/37/39-45-61		
612-141-00-0	4,4'-methylenebis(2-ethylaniline); 4,4'-methylenebis(2-ethylbenzeneamine)	243-420-1	19900-65-3	Carc. Cat. 3; R40 Xn; R22 N; R50-53	Xn; N R: 22-40-50/53 S: (2-)36/37-60-61		
612-142-00-6	biphenyl-2-ylamine	201-990-9	90-41-5	Carc. Cat. 3; R40 Xn; R22 R52-53	Xn R: 22-40-52/53 S: (2-)36/37-61		



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
612-143-00-1	N <sup>5</sup> ,N <sup>5</sup> -diethyltoluene-2,5-diamine monohydrochloride; 4-diethylamino-2-methylaniline monohydrochloride	218-130-3	2051-79-8	T; R25 Xi; R36 R43 N; R50-53	T; N R: 25-36-43-50/53 S: (1/2-)24-26-37-45-60-61		
612-144-00-7	flumetralin (ISO); N-(2-chloro-6-fluorobenzyl)-N-ethyl- $\alpha,\alpha,\alpha$ -trifluoro-2,6-dinitro- <i>p</i> -toluidine	—	62924-70-3	Xi; R36/38 R43 N; R50-53	Xi; N R: 36/38-43-50/53 S: (2-)36/37-60-61		
612-145-00-2	<i>o</i> -phenylenediamine	202-430-6	95-54-5	Carc. Cat. 3; R40 Muta. Cat. 3; R68 T; R25 Xn; R20/21 Xi; R36 R43 N; R50-53	T; N R: 20/21-25-36-40-43-50/53-68 S: (1/2-)28-36/37-45-60-61		
612-146-00-8	<i>o</i> -phenylenediamine dihydrochloride	210-418-7	615-28-1	Carc. Cat. 3; R40 Muta. Cat. 3; R68 T; R25 Xn; R20/21 Xi; R36 R43 N; R50-53	T; N R: 20/21-25-36-40-43-50/53-68 S: (1/2-)28-36/37-45-60-61		
612-147-00-3	<i>m</i> -phenylenediamine	203-584-7	108-45-2	Muta. Cat. 3; R68 T; R23/24/25 Xi; R36 R43 N; R50-53	T; N R: 23/24/25-36-43-50/53-68 S: (1/2-)28-36/37-45-60-61		
612-148-00-9	<i>m</i> -phenylenediamine dihydrochloride	208-790-0	541-69-5	Muta. Cat. 3; R68 T; R23/24/25 Xi; R36 R43 N; R50-53	T; N R: 23/24/25-36-43-50/53-68 S: (1/2-)28-36/37-45-60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
612-149-00-4	1,3-diphenylguanidine	203-002-1	102-06-7	Repr. Cat. 3; R62 Xn; R22 Xi; R36/37/ 38 N; R51-53	Xn; N R: 22-36/37/38-51/ 53-62 S: (2-)26-36/37/39-61		
612-150-00-X	spiroxamine (ISO); 8- <i>tert</i> -butyl-1,4-dioxaspiro[4.5]decan-2-ylmethyl(ethyl)(propyl)amine	—	118134-30-8	Xn; R20/21/ 22 Xi; R38 R43 N; R50-53	Xn; N R: 20/21/22-38-43- 50/53 S: (2-)36/37/39-46- 60-61		
612-151-00-5	diaminotoluene, technical product - reaction mass of [2] and [3]; methyl-phenylenediamine; [1] 4-methyl- <i>m</i> -phenylene diamine; [2] 2-methyl- <i>m</i> -phenylene diamine [3]	246-910-3 [1] 202-453-1 [2] 212-513-9 [3]	25376-45-8 [1] 95-80-7 [2] 823-40-5 [3]	Carc. Cat. 2; R45 T; R25 Xn; R20/21 Xi; R36 R43 N; R51-53	T; N R: 45-20/21-25-36- 43-51/53 S: 53-45-61		E
612-152-00-0	<i>N,N</i> -diethyl- <i>N',N'</i> -dimethylpropan-1,3-diyl-diamine	406-610-7	62478-82-4	R10 Xn; R20/22- 48/20 C; R35 R52-53	C R: 10-20/22-35-48/ 20-52/53 S: (1/2-)26-28-36/37/ 39-45-61		
612-153-00-6	4-[ <i>N</i> -ethyl- <i>N</i> -(2-hydroxyethyl)amino]-1-(2-hydroxyethyl)amino-2-nitrobenzene, monohydrochloride	407-020-2	132885-85-9	Xn; R22 R43 R52-53	Xn R: 22-43-52/53 S: (2-)22-24-37-61		
612-154-00-1	6'-(isobutylethylamino)-3'-methyl-2'-phenylamino-spiro[isobenzo-2-oxofuran-7,9'-(9 <i>H</i> )-xanthene]	410-890-6	95235-29-3	R53	R: 53 S: 61		
612-155-00-7	2'-anilino-6'-((3-ethoxypropyl)ethylamino)-3'-methylspiro(isobenzo-3-oxofuran)-1-(1 <i>H</i> )-9'-xanthene	411-730-8	93071-94-4	R53	R: 53 S: 61		
612-156-00-2	reaction mass of: trihexadecylmethylammonium chloride; dihexadecyldimethylammonium chloride	405-620-9	—	Xi; R41 N; R50-53	Xi; N R: 41-50/53 S: (2-)26-39-60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
612-157-00-8	(Z)-1-benzo[b]thien-2-ylethanone oxime hydrochloride	410-780-8	—	Xn; R22-48/22 Xi; R41 R43 N; R51-53	Xn; N R: 22-41-43-48/22-51/53 S: (2-)22-26-36/37/39-61		
612-158-00-3	reaction mass of: bis(5-dodecyl-2-hydroxybenzald-oximate) copper (II) C <sub>12</sub> -alkyl group is branched; 4-dodecylsalicylaldoxime	410-820-4	—	R53	R: 53 S: 61		
612-159-00-9	Reaction products of: trimethylhexamethylene diamine (a mixture of 2,2,4-trimethyl-1,6-hexanediamine and 2,4,4-trimethyl-1,6-hexanediamine, EINECS listed), Epoxide 8 (mono[(C <sub>10</sub> -C <sub>16</sub> -alkyloxy)methyl]oxirane derivatives) and p-toluene-sulfonic acid	410-880-1	—	Xn; R22 C; R34 N; R50-53	C; N R: 22-34-50/53 S: (1/2-)23-26-36/37/39-45-60-61		
612-160-00-4	p-toluidine; 4-aminotoluene; [1] toluidinium chloride; [2] toluidine sulphate (1:1) [3]	203-403-1 [1] 208-740-8 [2] 208-741-3 [3]	106-49-0 [1] 540-23-8 [2] 540-25-0 [3]	Carc. Cat. 3; R40 T; R23/24/25 Xi; R36 R43 N; R50	T; N R: 23/24/25-36-40-43-50 S: (1/2-)28-36/37-45-61		
612-161-00-X	2,6-xylidine; 2,6-dimethylaniline	201-758-7	87-62-7	Carc. Cat. 3; R40 Xn; R20/21/22 Xi; R37/38 N; R51-53	Xn; N R: 20/21/22-37/38-40-51/53 S: (2-)23-25-36/37-61		
612-162-00-5	dimethyldioctadecylammonium chloride; DODMAC	203-508-2	107-64-2	Xi; R41 N; R50-53	Xi; N R: 41-50/53 S: (2-)24-26-39-46-60-61		
612-163-00-0	metalaxyl-M (ISO); mefenoxam; (R)-2-[(2,6-dimethylphenyl)-methoxyacetylamino]propionic acid methyl ester	—	70630-17-0	Xn; R22 Xi; R41	Xn R: 22-41 S: (2-)26-39-46		
612-164-00-6	2-butyl-2-ethyl-1,5-diaminopentane	412-700-7	137605-95-9	Xn; R21/22-48/22 C; R34 R43 R52-53	C R: 21/22-34-43-48/22-52/53 S: (1/2-)26-36/37/39-45-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
612-165-00-1	<i>N,N'</i> -diphenyl- <i>N,N'</i> -bis(3-methylphenyl)-(1,1'-diphenyl)-4,4'-diamine	413-810-8	65181-78-4	N; R51-53	N R: 51/53 S: 61		
612-166-00-7	reaction mass of: <i>cis</i> -(5-ammonium-1,3,3-trimethyl)-cyclohexanemethylammonium phosphate (1:1); <i>trans</i> -(5-ammonium-1,3,3-trimethyl)-cyclohexanemethylammonium phosphate (1:1)	411-830-1	114765-88-7	Xi; R41 R43 R52-53	Xi R: 41-43-52/53 S: (2-)24-26-37/39-61		
612-167-00-2	5-acetyl-3-amino-10,11-dihydro-5 <i>H</i> -dibenz[ <i>b,f</i> ]azepine-hydrochloride	410-490-1	—	Xn; R22-48/22 Xi; R41 R43 N; R51-53	Xn; N R: 22-41-43-48/22-51/53 S: (2-)22-26-36/37/39-61		
612-168-00-8	3,5-dichloro-2,6-difluoropyridine-4-amine	220-630-1	2840-00-8	Xn; R21/22 N; R51-53	Xn; N R: 21/22-51/53 S: (2-)36/37-61		
612-170-00-9	4-chlorophenyl cyclopropyl ketone <i>O</i> -(4-aminobenzyl)oxime	405-260-2	—	Xn; R22 R43 N; R50-53	Xn; N R: 22-43-50/53 S: (2-)24-37-60-61		
612-171-00-4	<i>N,N,N',N'</i> -tetraglycidyl-4,4'-diamino-3,3'-diethyldiphenylmethane	410-060-3	130728-76-6	Muta. Cat. 3; R68 R43 N; R51-53	Xn; N R: 43-68-51/53 S: (2-)36/37-61		
612-172-00-X	4,4'-methylenebis( <i>N,N'</i> -dimethylcyclohexanamine	412-840-9	13474-64-1	Xn; R22-48/22 C; R35 R52-53	C R: 22-35-48/22-52/53 S: (1/2-)26-36/37/39-45-61		
612-173-00-5	lithium 1-amino-4-(4- <i>tert</i> -butylanilino)anthraquinone-2-sulfonate	411-140-0	125328-86-1	Xi; R41 R43 N; R51-53	Xi; N R: 41-43-51/53 S: (2-)22-26-36/37/39-61		
612-174-00-0	4,4-dimethoxybutylamine	407-690-6	19060-15-2	Xn; R22 C; R34 R43 R52-53	C R: 22-34-43-52/53 S: (1/2-)26-36/37/39-45-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
612-175-00-6	2-(O-aminooxy)ethylamine dihydrochloride	412-310-7	37866-45-8	R43 R52-53	Xi R: 43-52/53 S: (2-)24-37-61		
612-176-00-1	Polymer of 1,3-dibromopropane and N,N-diethyl-N',N'-dimethyl-1,3-propanediamine	410-570-6	143747-73-3	N; R50-53	N R: 50/53 S: 60-61		
612-177-00-7	2-naphthylamino-6-sulfomethylamide	412-120-4	104295-55-8	Xn; R48/22 R43 N; R51-53	Xn; N R: 43-48/22-51/53 S: (2-)22-36/37-61		
612-178-00-2	1,4,7,10-tetraazacyclododecane disulfate	412-080-8	112193-77-8	Xn; R22 Xi; R37-41 R52-53	Xn R: 22-37-41-52/53 S: (2-)26-36/37/39-61		
612-179-00-8	1-(2-propenyl)pyridinium chloride	412-740-5	25965-81-5	Xn; R22 R43	Xn R: 22-43 S: (2-)24-37		
612-180-00-3	3-aminobenzylamine	412-230-2	4403-70-7	Xn; R22 C; R34 N; R51-53	C; N R: 22-34-51/53 S: (1/2-)22-26-36/37/ 39-45-61		
612-181-00-9	2-phenylthioaniline	413-030-8	1134-94-7	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
612-182-00-4	1-ethyl-1-methylmorpholinium bromide	418-210-1	65756-41-4	Muta. Cat. 3; R68	Xn R: 68 S: (2-)36/37		
612-183-00-X	1-ethyl-1-methylpyrrolidinium bromide	418-200-5	69227-51-6	Muta. Cat. 3; R68	Xn R: 68 S: (2-)36/37		
612-184-00-5	6'-(dibutylamino)-3'-methyl-2'-(phenylamino)spiro[isobenzofuran-1(3H),9-(9H)-xanthen]-3-one	403-830-5	89331-94-2	R52-53	R: 52/53 S: 61		
612-185-00-0	1-[3-[4-((heptadecafluorononyl)oxy)-benzamido]propyl]-N,N,N-trimethylammonium iodide	407-400-8	59493-72-0	Xi; R41 N; R50-53	Xi; N R: 41-50/53 S: (2-)26-39-60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
612-186-00-6	bis(N-(7-hydroxy-8-methyl-5-phenylphenazin-3-ylidene)dimethylammonium) sulfate	406-770-8	149057-64-7	Xn; R48/22 Xi; R41 R43 N; R50-53	Xn; N R: 41-43-48/22-50/53 S: (2-)22-26-36/37/39-60-61		
612-187-00-1	2,3,4-trifluoroaniline	407-170-9	3862-73-5	Xn; R21/22-48/22 Xi; R38-41 N; R51-53	Xn; N R: 21/22-38-41-48/22-51/53 S: (2-)23-26-36/37/39-61		
612-188-00-7	4,4'-(9H-fluoren-9-ylidene)bis(2-chloroaniline)	407-560-9	107934-68-9	N; R51-53	N R: 51/53 S: 61		
612-189-00-2	4-amino-2-(aminomethyl)phenol dihydrochloride	412-510-4	135043-64-0	Xn; R22 R43 N; R50-53	Xn; N R: 22-43-50/53 S: (2-)22-24-37-60-61		
612-190-00-8	4,4'-methylenebis(2-isopropyl-6-methylaniline)	415-150-6	16298-38-7	Xn; R48/22 N; R51-53	Xn; N R: 48/22-51/53 S: (2-)36-61		
612-191-00-3	Polymer of allylamine hydrochloride	415-050-2	71550-12-4	Xn; R22 R43	Xn R: 22-43 S: (2-)36/37		
612-192-00-9	2-isopropyl-4-(N-methyl)aminomethylthiazole	414-800-6	154212-60-9	Xn; R21/22 Xi; R38-41 N; R51-53	Xn; N R: 21/22-38-41-51/53 S: (2-)26-36/37/39-61		
612-193-00-4	3-methylaminomethylphenylamine	414-570-7	18759-96-1	Xn; R21/22 C; R34 R43 N; R50-53	C; N R: 21/22-34-43-50/53 S: (1/2-)26-36/37/39-45-60-61		
612-194-00-X	2-hydroxy-3-[(2-hydroxyethyl)-[2-(1-oxotetradecyl)amino]ethyl]amino]-N,N,N-trimethyl-1-propanammonium chloride	414-670-0	141890-30-4	Xn; R22 Xi; R41 N; R50-53	Xn; N R: 22-41-50/53 S: (2-)26-39-60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
612-195-00-5	bis[tributyl 4-(methylbenzyl)ammonium] 1,5-naphthalenedisulfonate	415-210-1	160236-81-7	Xn; R20/22 Xi; R41 N; R50-53	Xn; N R: 20/22-41-50/53 S: (2-)26-36/39-60-61		
612-196-00-0	4-chloro- <i>o</i> -toluidine; [1] 4-chloro- <i>o</i> -toluidine hydrochloride [2]	202-441-6 [1] 221-627-8 [2]	95-69-2 [1] 3165-93-3 [2]	Carc. Cat. 2; R45 Muta. Cat. 3; R68 T; R23/24/25 N; R50-53	T; N R: 45-23/24/25-68-50/53 S: 53-45-60-61		E
612-197-00-6	2,4,5-trimethylaniline; [1] 2,4,5-trimethylaniline hydrochloride [2]	205-282-0 [1] [2]	137-17-7 [1] 21436-97-5 [2]	Carc. Cat. 2; R45 T; R23/24/25 N; R51-53	T; N R: 45-23/24/25-51/53 S: 53-45-61		E
612-198-00-1	4,4'-thiodianiline and its salts	205-370-9	139-65-1	Carc. Cat. 2; R45 Xn; R22 N; R51-53	T; N R: 45-22-51/53 S: 53-45-61		E
612-199-00-7	4,4'-oxydianiline and its salts; <i>p</i> -aminophenyl ether	202-977-0	101-80-4	Carc. Cat. 2; R45 Muta. Cat. 2; R46 Repr. Cat. 3; R62 T; R23/24/25 N; R51-53	T; N R: 45-46-23/24/25-62-51/53 S: 53-45-61		E
612-200-00-0	2,4-diaminoanisole; 4-methoxy- <i>m</i> -phenylenediamine; [1] 2,4-diaminoanisole sulphate [2]	210-406-1 [1] 254-323-9 [2]	615-05-4 [1] 39156-41-7 [2]	Carc. Cat. 2; R45 Muta. Cat. 3; R68 Xn; R22 N; R51-53	T; N R: 45-22-68-51/53 S: 53-45-61		E
612-201-00-6	<i>N,N,N',N'</i> -tetramethyl-4,4'-methylenedianiline	202-959-2	101-61-1	Carc. Cat. 2; R45 N; R50-53	T; N R: 45-50/53 S: 53-45-60-61		
612-202-00-1	3,4-dichloroaniline	202-448-4	95-76-1	T; R23/24/25 Xi; R41 R43 N; R50-53	T; N R: 23/24/25-41-43-50/53 S: (1/2-)26-36/37/39-45-60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
612-204-00-2	C.I. Basic Violet 3; 4-[4,4'-bis(dimethylamino) benzhydrylidene]cyclohexa-2,5-dien-1-ylidene]dimethylammonium chloride	208-953-6	548-62-9	Carc. Cat. 3; R40 Xn; R22 Xi; R41 N; R50-53	Xn; N R: 22-40-41-50/53 S: (2-)26-36/37/39-46-60-61		
612-205-00-8	C.I. Basic Violet 3 with $\geq$ 0.1 % of Michler's ketone (EC no. 202-027-5)	208-953-6	548-62-9	Carc. Cat. 2; R45 Xn; R22 Xi; R41 N; R50-53	T; N R: 45-22-41-50/53 S: 53-45-60-61		E
612-206-00-3	famoxadone (ISO); 3-anilino-5-methyl-5-(4-phenoxyphenyl)-1,3-oxazolidine-2,4-dione	—	131807-57-3	Xn; R48/22 N; R50-53	Xn; N R: 48/22-50/53 S: (2-)46-60-61		
612-207-00-9	4-ethoxyaniline; <i>p</i> -phenetidine	205-855-5	156-43-4	Muta. Cat. 3; R68 Xn; R20/21/ 22 Xi; R36 R43	Xn R: 20/21/22-36-43-68 S: (2-)36/37-46		
612-209-00-X	6-methoxy- <i>m</i> -toluidine; <i>p</i> -cresidine	204-419-1	120-71-8	Carc. Cat. 2; R45 Xn; R22	T R: 45-22 S: 53-45		E
612-210-00-5	5-nitro- <i>o</i> -toluidine; [1] 5-nitro- <i>o</i> -toluidine hydrochloride [2]	202-765-8 [1] 256-960-8 [2]	99-55-8 [1] 51085-52-0 [2]	Carc. Cat. 3; R40 T; R23/24/25 R52-53	T R: 23/24/25-40-52/53 S: (1/2-)36/37-45-61		
612-211-00-0	N-[(benzotriazole-1-yl)methyl]-4-carboxybenzenesulfonamide	416-470-9	170292-97-4	Xi; R36 N; R51-53	Xi; N R: 36-51/53 S: (2-)26-61		
612-212-00-6	2,6-dichloro-4-trifluoromethylaniline	416-430-0	24279-39-8	Xn; R20/22 Xi; R38 R43 N; R50-53	Xn; N R: 20/22-38-43-50/53 S: (2-)24-37-60-61		



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
612-213-00-1	isobutylidene-(2-(2-isopropyl-4,4-dimethyloxazolidine-3-yl)-1,1-dimethylethyl)amine	419-850-2	148348-13-4	C; R34 R52-53	C R: 34-52/53 S: (1/2-)23-26-36/37/ 39-45-61		
612-214-00-7	4-(2,2-diphenylethenyl)-N,N-di-phenylbenzenamine	421-390-2	89114-90-9	R53	R: 53 S: 61		
612-215-00-2	3-chloro-2-(isopropylthio)aniline	421-700-6	179104-32-6	Xi; R38 N; R51-53	Xi; N R: 38-51/53 S: (2-)37-61		
612-217-00-3	1-methoxy-2-propylamine	422-550-4	37143-54-7	F; R11 C; R34 Xn; R22 R52-53	F; C R: 11-22-34-52/53 S: (1/2-)9-26-36/37/ 39-45-61		
613-001-00-1	ethyleneimine; aziridine	205-793-9	151-56-4	F; R11 Carc. Cat. 2; R45 Muta. Cat. 2; R46 T+; R26/27/ 28 C; R34 N; R51-53	F; T+; N R: 45-46-11-26/27/ 28-34-51/53 S: 53-45-61		D E
613-002-00-7	pyridine	203-809-9	110-86-1	F; R11 Xn; R20/21/ 22	F; Xn R: 11-20/21/22 S: (2-)26-28	Xn; R20/21/22: C ≥ 5 %	
613-003-00-2	1,2,3,4-tetranitrocarbazole	—	6202-15-9	E ⊗ R1 Xn; R20/21/ 22	E; Xn R: 1-20/21/22 S: (2-)35		
613-004-00-8	crimidine (ISO); 2-chloro-6-methylpyrimidin-4-yl-dimethylamine	208-622-6	535-89-7	T+; R28	T+ R: 28 S: (1/2-)36/37-45		
613-007-00-4	desmetryne (ISO); 6-isopropylamino-2-methylamino-4-methylthio-1,3,5-triazine	213-800-1	1014-69-3	Xn; R21/22 N; R50-53	Xn; N R: 21/22-50/53 S: (2-)36/37-60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
613-008-00-X	dazomet (ISO); tetrahydro-3,5-dimethyl-1,3,5-thiadiazine-2-thione	208-576-7	533-74-4	Xn; R22 Xi; R36 N; R50-53	Xn; N R: 22-36-50/53 S: (2-)15-22-24-60-61		
613-009-00-5	2,4,6-trichloro-1,3,5-triazine; cyanuric chloride	203-614-9	108-77-0	R14 T+; R26 Xn; R22 C; R34 R43	T+; R: 14-22-26-34-43 S: (1/2-)26-28-36/37/ 39-45-46-63	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	
613-010-00-0	ametryn (ISO); 2-ethylamino-4-isopropylamino-6-methylthio-1,3,5-triazine	212-634-7	834-12-8	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)36-60-61		
613-011-00-6	amitrole (ISO); 1,2,4-triazol-3-ylamine	200-521-5	61-82-5	Repr. Cat. 3; R63 Xn; R48/22 N; R51-53	Xn; N R: 48/22-63-51/53 S: (2-)13-36/37-61		
613-012-00-1	bentazone (ISO); 3-isopropyl-2,1,3-benzothiadiazine-4-one-2,2-dioxide	246-585-8	25057-89-0	Xn; R22 Xi; R36 R43 R52-53	Xn R: 22-36-43-52/53 S: (2-)24-37-61		
613-013-00-7	cyanazine (ISO); 2-(4-chloro-6-ethylamino-1,3,5-triazine-2-ylamino)-2-methylpropionitrile	244-544-9	21725-46-2	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)37-60-61		
613-014-00-2	ethoxyquin (ISO); 6-ethoxy-1,2-dihydro-2,2,4-trimethylquinoline	202-075-7	91-53-2	Xn; R22	Xn R: 22 S: (2-)24		
613-015-00-8	fenazaflor (ISO); phenyl 5,6-dichloro-2-trifluoromethylbenzimidazole-1-carboxylate	238-134-9	14255-88-0	Xn; R21/22 N; R50-53	Xn; N R: 21/22-50/53 S: (2-)36/37-60-61		
613-016-00-3	fuberidazole (ISO); 2-(2-furyl)benzimidazole	223-404-0	3878-19-1	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)22-60-61		
613-017-00-9	bis (8-hydroxyquinolinium) sulphate	205-137-1	134-31-6	Xn; R22	Xn R: 22 S: (2-)36		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
613-018-00-4	morfamquat (ISO); 1,1'-bis(3,5-dimethylmorpholinocarbonylmethyl)-4,4'-bipyridilium ion	—	7411-47-4	Xn; R22 Xi; R36/37/38 R52-53	Xn R: 22-36/37/38-52/53 S: (2-)22-36-61		
613-019-00-X	thioquinox (ISO); 2-thio-1,3-dithiolo(4,5,b)quinoxaline	202-272-8	93-75-4	Xn; R22	Xn R: 22 S: (2-)24		
613-020-00-5	tridemorph (ISO); 2,6-dimethyl-4-tridecylmorpholine	246-347-3	24602-86-6	Repr. Cat. 2; R61 Xn; R20/22 Xi; R38 N; R50-53	T; N R: 61-20/22-38-50/53 S: 53-45-60-61		E
613-021-00-0	dithianon (ISO); 5,10-dihydro-5,10-dioxonaphtho(2,3-b)(1,4)dithiazine-2,3-dicarbonitrile	222-098-6	3347-22-6	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)24-60-61		
613-022-00-6	pyrethrins including cinerins, with the exception of those specified elsewhere in this Annex	—	—	Xn; R20/21/22 N; R50-53	Xn; N R: 20/21/22-50/53 S: (2-)13-60-61		A
613-023-00-1	2-methyl-4-oxo-3-(penta-2,4-dienyl)cyclopent-2-enyl [1R-[1 $\alpha$ [S*(Z)],3 $\beta$ ]]-chrysanthemate; pyrethrin I	204-455-8	121-21-1	Xn; R20/21/22 N; R50-53	Xn; N R: 20/21/22-50/53 S: (2-)13-60-61		
613-024-00-7	2-methyl-4-oxo-3-(penta-2,4-dienyl)cyclopent-2-enyl[1R-[1 $\alpha$ [S*(Z)](3 $\beta$ )]-3-(3-methoxy-2-methyl-3-oxoprop-1-enyl)-2,2-dimethylcyclopropanecarboxylate; pyrethrin II	204-462-6	121-29-9	Xn; R20/21/22 N; R50-53	Xn; N R: 20/21/22-50/53 S: (2-)13-60-61		
613-025-00-2	cinerin I; 3-(but-2-enyl)-2-methyl-4-oxocyclopent-2-enyl 2,2-dimethyl-3-(2-methylprop-1-enyl)cyclopropanecarboxylate	246-948-0	25402-06-6	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
613-026-00-8	cinerin II; 3-(but-2-enyl)-2-methyl-4-oxocyclopent-2-enyl 2,2-dimethyl-3-(3-methoxy-2-methyl-3-oxoprop-1-enyl)cyclopropanecarboxylate	204-454-2	121-20-0	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
613-027-00-3	piperidine	203-813-0	110-89-4	F; R11 T; R23/24 C; R34	F; T R: 11-23/24-34 S: (1/2-)16-26-27-45	T; R23/24: C $\geq$ 5 % Xn; R20/21: 1 % $\leq$ C < 5 % C; R34: C $\geq$ 5 % Xi; R36/38: 1 % $\leq$ C < 5 %	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
613-028-00-9	morpholine	203-815-1	110-91-8	R10 Xn; R20/21/ 22 C; R34	C R: 10-20/21/22-34 S: (1/2-)23-36-45	C; R34: C ≥ 10 % Xi; R36/38: 1 % ≤ C < 10 %	
613-029-00-4	dichloro-1,3,5-triazinetriene; dichloroisocyanuric acid	220-487-5	2782-57-2	O; R8 Xn; R22 R31 Xi; R36/37 N; R50-53	O; Xn; N R: 8-22-31-36/37-50/ 53 S: (2-)8-26-41-60-61		
613-030-00-X	troclosene potassium; [1] troclosene sodium [2]	218-828-8 [1] 220-767-7 [2]	2244-21-5 [1] 2893-78-9 [2]	O; R8 ⊗ Xn; R22 R31 Xi; R36/37 N; R50-53	O; Xn; N R: 8-22-31-36/37-50/ 53 S: (2-)8-26-41-60-61	Xn; R22: C ≥ 10 % Xi; R36/37: C ≥ 10 % R31: C ≥ 10 %	
613-030-01-7	troclosene sodium, dihydrate	220-767-7	51580-86-0	Xn; R22 R31 Xi; R36/37 N; R50-53	Xn; N R: 22-31-36/37-50/ 53 S: (2-)8-26-41-60-61		
613-031-00-5	symclosene; trichloroisocyanuric acid; trichloro-1,3,5-triazinetriene	201-782-8	87-90-1	O; R8 Xn; R22 Xi; R36/37 R31 N; R50-53	O; Xn; N R: 8-22-31-36/37-50/ 53 S: (2-)8-26-41-60-61		
613-032-00-0	methyl-2,3,5,6-tetrachloro-4-pyridylsulphone; 2,3,5,6-tetrachloro-4-(methylsulphonyl)pyridine	236-035-5	13108-52-6	Xn; R21/22 Xi; R36 R43	Xn R: 21/22-36-43 S: (2-)26-28		
613-033-00-6	2-methylaziridine; propyleneimine	200-878-7	75-55-8	F; R11 Carc. Cat. 2; R45 T+; R26/27/ 28 Xi; R41 N; R51-53	F; T+; N R: 45-11-26/27/28- 41-51/53 S: 53-45-61	Carc. Cat. 2; R45: C ≥ 0,01 %	E
613-034-00-1	1,2-dimethylimidazole	217-101-2	1739-84-0	Xn; R22 Xi; R38-41	Xn R: 22-38-41 S: (2-)24-26		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
613-035-00-7	1-methylimidazole	210-484-7	616-47-7	Xn; R21/22 C; R34	C R: 21/22-34 S: (1/2-)26-36-45		
613-036-00-2	2-methylpyridine; 2-picoline	203-643-7	109-06-8	R10 Xn; R20/21/ 22 Xi; R36/37	Xn R: 10-20/21/22-36/ 37 S: (2-)26-36		
613-037-00-8	4-methylpyridine; 4-picoline	203-626-4	108-89-4	R10 T; R24 Xn; R20/22 Xi; R36/37/ 38	T R: 10-20/22-24-36/ 37/38 S: (1/2-)26-36-45		
613-038-00-3	6-phenyl-1,3,5-triazine-2,4-diyl diamine; 6-phenyl-1,3,5-triazine-2,4-diamine; benzoguanamine	202-095-6	91-76-9	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)61		
613-039-00-9	ethylene thiourea; imidazolidine-2-thione; 2-imidazoline-2-thiol	202-506-9	96-45-7	Repr. Cat. 2; R61 Xn; R22	T R: 61-22 S: 53-45		E
613-040-00-4	azaconazole (ISO); 1-[[2-(2,4-dichlorophenyl)-1,3-dioxolan-2-yl]methyl]-1H- 1,2,4-triazole	262-102-3	60207-31-0	Xn; R22	Xn R: 22 S: (2-)46		
613-041-00-X	morpholine-4-carbonyl chloride	239-213-0	15159-40-7	R14 Carc. Cat. 3; R40 Xi; R36/38	Xn R: 14-36/38-40 S: (2-)26-30-36-38		
613-042-00-5	imazalil (ISO); 1-[2-(allyloxy)-2-(2,4-dichlorophenyl)ethyl]-1H-imidazole	252-615-0	35554-44-0	Xn; R20/22 Xi; R41 N; R50-53	Xn; N R: 20/22-41-50/53 S: (2-)26-39-60-61		
613-043-00-0	imazalil sulphate (ISO) powder; 1- [2-(allyloxy)ethyl-2-(2,4-dichlorophenyl)]-1H-imidazolium hydrogen sulphate; [1] (±)-1- [2-(allyloxy)ethyl-2-(2,4-dichlorophenyl)]-1H-imidazo- lium hydrogen sulphate [2]	261-351-5 [1] 281-291-3 [2]	58594-72-2 [1] 83918-57-4 [2]	Xn; R22 R43 N; R50-53	Xn; N R: 22-43-50/53 S: (2-)24/25-37-46- 60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
613-043-01-8	imazalil sulphate (ISO), aqueous solution; 1- [2-(allyloxy)ethyl-2-(2,4-dichlorophenyl)]-1H-imidazolium hydrogen sulphate; [1] (±)-1- [2-(allyloxy)ethyl-2-(2,4-dichlorophenyl)]-1H-imidazo- lium hydrogen sulphate [2]	261-351-5 [1] 281-291-3 [2]	58594-72-2 [1] 83918-57-4 [2]	Xn; R22 C; R34 R43 N; R50-53	C; N R: 22-34-43-50/53 S: (2-)26-36/37/39- 45-60-61	C; R34: C ≥ 50 % Xi; R38: 30 % ≤ C < 50 % Xi; R41: 15 % ≤ C < 50 % Xi; R36: 5 % ≤ C < 15 %	
613-044-00-6	captan (ISO); 1,2,3,6-tetrahydro-N-(trichloromethylthio)phthalimide	205-087-0	133-06-2	Carc. Cat. 3; R40 T; R23 Xi; R41 R43 N; R50	T; N R: 23-40-41-43-50 S: (1/2-)26-29-36/37/ 39-45-61		
613-045-00-1	folpet (ISO); N-(trichloromethylthio)phthalimide	205-088-6	133-07-3	Carc. Cat. 3; R40 Xn; R20 Xi; R36 R43 N; R50	Xn; N R: 20-36-40-43-50 S: (2-)36/37-46-61		
613-046-00-7	captafol (ISO); 1,2,3,6-tetrahydro-N-(1,1,2,2-tetrachloroethylthio)phthali- mide	219-363-3	2425-06-1	Carc. Cat. 2; R45 R43 N; R50-53	T; N R: 45-43-50/53 S: 53-45-60-61		
613-047-00-2	1-dimethylcarbamoyl-5-methylpyrazol-3-yl dimethylcarba- mate; dimetilan (ISO)	211-420-0	644-64-4	T; R25 Xn; R21 N; R50-53	T; N R: 21-25-50/53 S: (1/2-)36/37-45-60- 61		
613-048-00-8	carbendazim (ISO); methyl benzimidazol-2-ylcarbamate	234-232-0	10605-21-7	Muta. Cat. 2; R46 Repr. Cat. 2; R60-61 N; R50-53	T; N R: 46-60-61-50/53 S: 53-45-60-61		
613-049-00-3	benomyl (ISO); methyl 1-(butylcarbamoyl)benzimidazol-2-ylcarbamate	241-775-7	17804-35-2	Muta. Cat. 2; R46 Repr. Cat. 2; R60-61 Xi; R37/38 R43 N; R50-53	T; N R: 46-60-61-37/38- 43-50/53 S: 53-45-60-61	N; R50-53: C ≥ 2,5 % N; R51-53: 0,25 % ≤ C < 2,5 % R52-53: 0,025 % ≤ C < 0,25 %	

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
613-050-00-9	carbadox (INN); methyl 3-(quinoxalin-2-ylmethylene)carbazate 1,4-dioxide; 2-(methoxycarbonylhydrazonomethyl)quinoxaline 1,4-dioxide	229-879-0	6804-07-5	F; R11 Carc. Cat. 2; R45 Xn; R22	F; T R: 45-11-22 S: 53-45		E
613-051-00-4	molinate (ISO); S-ethyl 1-perhydroazepinecarbothioate; S-ethyl perhydroazepine-1-carbothioate	218-661-0	2212-67-1	Carc. Cat. 3; R40 Repr. Cat. 3; R62 Xn; R20/ 2248/22 R43 N; R50-53	Xn; N R: 20/22-40-43-48/ 22-62-50/53 S: (2-)36/37-46-60-61	N; R50-53: C ≥ 0,25 % N; R51-53: 0,025 % ≤ C < 0,25 % R52-53: 0,0025 % ≤ C < 0,025 %	
613-052-00-X	trifenmorph (ISO); 4-tritylmorpholine	215-812-2	1420-06-0	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
613-053-00-5	anilazine (ISO); 2-chloro-N-(4,6-dichloro-1,3,5-triazin-2-yl)aniline	202-910-5	101-05-3	Xi; R36/38 N; R50-53	Xi; N R: 36/38-50/53 S: (2-)22-60-61		
613-054-00-0	thiabendazol (ISO); 2-(thiazole-4-yl)benzimidazole	205-725-8	148-79-8	N; R50-53	N R: 50/53 S: 60-61		
613-056-00-1	1,2-dimethyl-3,5-diphenylpyrazolium methylsulphate; difenzoquat methyl sulfate	256-152-5	43222-48-6	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
613-057-00-7	dodemorph (ISO); 4-cyclododecyl-2,6-dimethylmorpholine	216-474-9	1593-77-7	Xi; R36/37/ 38 N; R51-53	Xi; N R: 36/37/38-51/53 S: (2-)26-61		
613-058-00-2	permethrin (ISO); m-phenoxybenzyl 3-(2,2-dichlorovinyl)-2,2-dimethylcyclopropanecarboxylate	258-067-9	52645-53-1	Xn; R20/22 R43 N; R50-53	Xn; N R: 20/22-43-50/53 S: (2-)13-24-36/37/ 39-60-61	N; R50-53: C ≥ 0,025 % N; R51-53: 0,0025 % ≤ C < 0,025 % R52-53: 0,00025 % ≤ C < 0,0025 %	
613-059-00-8	profluralin (ISO); N-(cyclopropylmethyl)-a,a,a-trifluoro-2,6-dinitro-N-propyl-p-toluidine	247-656-6	26399-36-0	Xi; R36 N; R50-53	Xi; N R: 36-50/53 S: (2-)60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
613-060-00-3	resmethrin (ISO); 5-benzyl-3-furylmethyl (±)-cis-trans-chrysanthemate	233-940-7	10453-86-8	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60/61		
613-061-00-9	6-(1α,5αβ,8αβ,9-pentahydroxy-7β-isopropyl-2β,5β,8β-trimethylperhydro-8ba,9-epoxy-5,8-ethanocyclopenta[1,2-b]indenylo) pyrrole-2-carboxylate; ryania	239-732-2	15662-33-6	Xn; R21/22 N; R50-53	Xn; N R: 21/22-50/53 S: (2-)36/37-60-61		
613-062-00-4	sabadilla (ISO); veratrine	—	8051-02-3	Xi; R36/37/ 38	Xi R: 36/37/38 S: (2-)36/37/39		
613-063-00-X	secbumeton (ISO); 2-sec-butylamino-4-ethylamino-6-methoxy-1,3,5-triazine	247-554-1	26259-45-0	Xn; R22 Xi; R36 N; R50-53	Xn; N R: 22-36-50/53 S: (2-)60-61		
613-064-00-5	5-(3,6,9-trioxa-2-undecyloxy)benzo(d)-1,3-dioxolane; sesamex	—	51-14-9	Xn; R22	Xn R: 22 S: (2-)		
613-065-00-0	simetryn (ISO); 2,4-bis(ethylamino)-6-methylthio-1,3,5-triazine	213-801-7	1014-70-6	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
613-066-00-6	terbumeton (ISO); 2-tert-butylamino-4-ethylamino-6-methoxy-1,3,5-triazine	251-637-8	33693-04-8	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
613-067-00-1	propazine (ISO); 2-chloro-4,6-bis(isopropylamino)-1,3,5-triazine	205-359-9	139-40-2	Carc. Cat. 3; R40 N; R50-53	Xn; N R: 40-50/53 S: (2-)36/37-60-61		
613-068-00-7	atrazine (ISO); 2-chloro-4-ethylamine-6-isopropylamine-1,3,5-triazine	217-617-8	1912-24-9	Xn; R48/22 R43 N; R50-53	Xn; N R: 43-48/22-50/53 S: (2-)36/37-60-61		
613-069-00-2	ε-caprolactam	203-313-2	105-60-2	Xn; R20/22 Xi; R36/37/ 38	Xn R: 20/22-36/37/38 S: (2-)		



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
613-070-00-8	propylenethiourea	—	2122-19-2	Repr. Cat. 3; R63 Xn; R22 R52-53	Xn R: 22-52/53-63 S: (2-)36/37-46-61		
613-071-00-3	2-fluoro-5-trifluoromethylpyridine	400-290-2	69045-82-5	R10 R43 R52-53	Xi R: 10-43-52/53 S: (2-)24-37-61		
613-072-00-9	N,N-bis(2-ethylhexyl)-((1,2,4-triazol-1-yl)methyl)amine	401-280-0	91273-04-0	C; R34 R43 N; R51-53	C; N R: 34-43-51/53 S: (1/2-)26-28-36/37/ 39-45-61		
613-073-00-4	N,N-dimethyl-2-(3-(4-chlorophenyl)-4,5-dihydropyrazol-1-yl)phenylsulphonyl)ethylamine	401-410-6	10357-99-0	Xn; R48/22 R43 N; R51-53	Xn; N R: 43-48/22-51/53 S: (2-)24-37-61		
613-074-00-X	3-(3-methylpent-3-yl)isoxazol-5-ylamine	401-460-9	82560-06-3	T; R23/25 Xi; R41 R52-53	T R: 23/25-41-52/53 S: (1/2-)22-26-36/37/ 39-45-61		
613-075-00-5	1,3-dichloro-5-ethyl-5-methylimidazolidine-2,4-dione	401-570-7	89415-87-2	O; R8 T; R23 C; R34 Xn; R22 R43 N; R50	O; T; N R: 8-22-23-34-43-50 S: (1/2-)8-26-36/37/ 39-45-61		
613-076-00-0	3-chloro-5-trifluoromethyl-2-pyridylamine	401-670-0	79456-26-1	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)61		
613-077-00-6	reaction mass of 5-heptyl-1,2,4-triazol-3-ylamine and 5-nonyl-1,2,4-triazol-3-ylamine	401-940-8	—	Xn; R22 Xi; R36 N; R51-53	Xn; N R: 22-36-51/53 S: (2-)22-26-61		
613-078-00-1	N,N,N,N-tetrakis(4,6-bis(butyl-(N-methyl-2,2,6,6-tetramethylpiperidin-4-yl)amino)triazin-2-yl)-4,7-diazadecane-1,10-diamine	401-990-0	106990-43-6	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)22-24-37-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
613-079-00-7	4-(1(or 4 or 5 or 6)-methyl-8,9,10-trinorborn-5-en-2-yl)pyridine, reaction mass of isomers	402-520-7	—	Xn; R21/22 Xi; R38 R43 N; R50-53	Xn; N R: 21/22-38-43-50/ 53 S: (2-)36/37-60-61		
613-080-00-2	3-(bis(2-ethylhexyl)aminomethyl)benzothiazole-2(3H)-thione	402-540-6	105254-85-1	C; R34 R43 N; R50-53	C; N R: 34-43-50/53 S: (1/2-)26-28-36/37/ 39-45-60-61		
613-081-00-8	1-butyl-2-methylpyridinium bromide	402-680-8	26576-84-1	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)61		
613-082-00-3	2-methyl-1-pentylpyridinium bromide	402-690-2	—	Xn; R21/22 R52-53	Xn R: 21/22-52/53 S: (2-)36/37-61		
613-083-00-9	2-(4-(3-(4-chlorophenyl)-2-pyrazolin-1-yl)phenylsulfonyl)ethyldimethylammonium formate	402-120-2	—	C; R34 Xn; R48/22 R43 N; R50-53	C; N R: 34-43-48/22-50/ 53 S: (1/2-)24-26-28-37/ 39-45-60-61		
613-084-00-4	2-(4-(3-(4-chlorophenyl)-4,5-dihydropyrazolyl)phenylsulphonyl)ethyldimethylammonium hydrogen phosphonate	402-490-5	106359-93-7	Xi; R36 N; R50-53	Xi; N R: 36-50/53 S: (2-)26-60-61		
613-085-00-X	reaction mass of 1,1'-(methylenebis(4,1-phenylene))dipyrrole-2,5-dione and N-(4-(4-(2,5-dioxopyrrol-1-yl)benzyl)phenyl)acetamide and 1-(4-(4-(5-oxo-2H-2-furylidenamino)benzyl)phenyl)pyrrole-2,5-dione	401-970-1	—	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		
613-086-00-5	caffeine	200-362-1	58-08-2	Xn; R22	Xn R: 22 S: (2-)		
613-087-00-0	tetrahydrothiophene	203-728-9	110-01-0	F; R11 Xn; R20/21/ 22 Xi; R36/38 R52-53	F; Xn R: 11-20/21/22-36/ 38-52/53 S: (2-)16-23-36/37-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
613-088-00-6	1,2-benzisothiazol-3(2H)-one; 1,2-benzisothiazolin-3-one	220-120-9	2634-33-5	Xn; R22 Xi; R38-41 R43 N; R50	Xn; N R: 22-38-41-43-50 S: (2-)24-26-37/39-61	R43: C ≥ 0,05 %	
613-089-00-1	diquat dibromide; [1] diquat dichloride; [2] 6,7-dihydrodipyrido[1,2-α:2',1'-c]pyrazinediylum dihydroxide [3]	201-579-4 [1] 223-714-6 [2] 301-467-6 [3]	85-00-7 [1] 4032-26-2 [2] 94021-76-8 [3]	T+; R26 T; R48/25 Xn; R22 Xi; R36/37/38 R43 N; R50-53	T+; N R: 22-26-36/37/38-43-48/25-50/53 S: (1/2-)28-36/37/39-45-60-61		
613-090-00-7	paraquat dichloride; 1,1-dimethyl-4,4'-bipyridinium dichloride; [1] paraquat dimethylsulfate; 1,1-dimethyl-4,4'-bipyridinium dimethyl sulphate [2]	217-615-7 [1] 218-196-3 [2]	1910-42-5 [1] 2074-50-2 [2]	T+; R26 T; R24/25-48/25 Xi; R36/37/38 N; R50-53	T+; N R: 24/25-26-36/37/38-48/25-50/53 S: (1/2-)22-28-36/37/39-45-60-61		
613-091-00-2	morfamquat dichloride; [1] morfamquat sulfate [2]	225-062-8 [1] [2]	4636-83-3 [1] 29873-36-7 [2]	Xn; R22 Xi; R36/37/38 R52-53	Xn R: 22-36/37/38-52/53 S: (2-)22-36-61		
613-092-00-8	1,10-phenanthroline	200-629-2	66-71-7	T; R25 N; R50-53	T; N R: 25-50/53 S: (1/2-)45-60-61		
613-093-00-3	hexasodium 6,13-dichloro-3,10-bis((4-(2,5-disulfonatoanilino)-6-fluoro-1,3,5-triazin-2-ylamino)prop-3-ylamino)-5,12-dioxa-7,14-diazapentacene-4,11-disulfonate	400-050-7	85153-92-0	R42/43	Xn R: 42/43 S: (2-)22-24-37		
613-094-00-9	4-methoxy-N,6-dimethyl-1,3,5-triazin-2-ylamine	401-360-5	5248-39-5	Xn; R22-48/22	Xn R: 22-48/22 S: (2-)22-36		
613-095-00-4	sodium 3-(2H-benzotriazol-2-yl)-5-sec-butyl-4-hydroxybenzenesulfonate	403-080-9	92484-48-5	Xi; R41	Xi R: 41 S: (2-)26-39		
613-096-00-X	2-amino-6-ethoxy-4-methylamino-1,3,5-triazine	403-580-7	62096-63-3	Xn; R22	Xn R: 22 S: (2-)		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
613-097-00-5	7-amino-3-((5-carboxymethyl-4-methyl-1,3-thiazol-2-ylthio)methyl)-8-oxo-5-thia-1-azabicyclo(4.2.0)oct-2-ene-2-carboxylic acid	403-690-5	111298-82-9	R42/43 R52-53	Xn R: 42/43-52/53 S: (2-)22-24-37-61		
613-098-00-0	N-(n-octyl)-2-pyrrolidone	403-700-8	2687-94-7	C; R34 N; R51-53	C; N R: 34-51/53 S: (1/2-)23-26-36/37/39-45		
613-099-00-6	1-dodecyl-2-pyrrolidone	403-730-1	2687-96-9	C; R34 R43 N; R50-53	C; N R: 34-43-50/53 S: (1/2-)26-36/37/39-45-60-61		
613-100-00-X	2,9-bis(3-(diethylamino)propylsulfamoyl)quino(2,3-b)acridine-7,14-dione	404-230-6	—	R43 R53	Xi R: 43-53 S: (2-)24-37-61		
613-101-00-5	N-tert-pentyl-2-benzothiazolesulfenamide	404-380-2	110799-28-5	R43 R52-53	Xi R: 43-52/53 S: (2-)36/37-61		
613-102-00-0	dimethomorph (ISO); 4-(3-(4-chlorophenyl)-3-(3,4-dimethoxyphenyl)acryloyl)morpholine	404-200-2	110488-70-5	N; R51-53	N R: 51/53 S: 61		
613-103-00-6	sodium 5-n-butylbenzotriazole	404-450-2	118685-34-0	Xn; R22 C; R34 R43 N; R51-53	C; N R: 22-34-43-51/53 S: (1/2-)26-36/37/39-45-61		
613-104-00-1	5-tert-butyl-3-isoxazolylamine hydrochloride	404-840-2	—	Xn; R22-48/22 Xi; R41 R52-53	Xn R: 22-41-48/22-52/53 S: (2-)26-36/39-61		
613-105-00-7	hexakis(tetramethylammonium) 4,4'-vinylenebis((3-sulfonato-4,1-phenylene)imino(6-morpholino-1,3,5-triazine-4,2-diyl)imino)bis(5-hydroxy-6-phenylazonaphthalene-2,7-disulfonate)	405-160-9	124537-30-0	T; R25 R43 R52-53	T R: 25-43-52/53 S: (1/2-)24-37-45-61		
613-106-00-2	tetrapotassium 2-(4-(5-(1-(2,5-disulfonatophenyl)-3-ethoxycarbonyl-5-hydroxypyrazol-4-yl)penta-2,4-dienylidene)-3-ethoxycarbonyl-5-oxo-2-pyrazolin-1-yl)benzene-1,4-disulfonate	405-240-3	—	R43	Xi R: 43 S: (2-)24-37		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
613-107-00-8	hexasodium 2,2'-vinylenebis((3-sulfonato-4,1-phenylene)imino(6-(N-cyanoethyl-N-(2-hydroxypropyl)amino)-1,3,5-triazine-4,2-diyl)imino)dibenzene-1,4-disulfonate	405-280-1	76508-02-6	Xi; R36	Xi R: 36 S: (2-)26		
613-108-00-3	benzothiazole-2-thiol	205-736-8	149-30-4	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		
613-109-00-9	bis(piperidinothiocarbonyl) disulphide	202-328-1	94-37-1	Xi; R36/37/ 38 R43	Xi R: 36/37/38-43 S: (2-)24-26-37		
613-110-00-4	dimepiperate (ISO); S-(1-methyl-1-phenylethyl) piperidine-1-carbothioate	262-784-2	61432-55-1	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)61		
613-111-00-X	1,2,4-triazole	206-022-9	288-88-0	Repr. Cat. 3; R63 Xn; R22 Xi; R36	Xn R: 22-36-63 S: (2-)36/37		
613-112-00-5	octhilinone (ISO); 2-octyl-2H-isothiazol-3-one	247-761-7	26530-20-1	T; R23/24 Xn; R22 C; R34 R43 N; R50-53	T; N R: 22-23/24-34-43- 50/53 S: (1/2-)26-36/37/39- 45-60-61	R43: C ≥ 0,05 %	
613-113-00-0	2-(morpholinothio)benzothiazole	203-052-4	102-77-2	Xi; R36/38 R43 N; R51-53	Xi; N R: 36/38-43-51/53 S: (2-)24-26-37-61		
613-114-00-6	2,2',2''-(hexahydro-1,3,5-triazine-1,3,5-triyl)triethanol; 1,3,5-tris(2-hydroxyethyl)hexahydro-1,3,5-triazine	225-208-0	4719-04-4	Xn; R22 R43	Xn R: 22-43 S: (2-)24-37	R43: C ≥ 0,1 %	
613-115-00-1	hymexazol (ISO); 3-hydroxy-5-methylisoxazole	233-000-6	10004-44-1	Xn; R22 Xi; R41 R52-53	Xn R: 22-41-52/53 S: (2-)26-39-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
613-116-00-7	tolyfluanid (ISO); dichloro-N-[(dimethylamino)sulphonyl]fluoro-N-(p-toyl) methanesulphenamide	211-986-9	731-27-1	T; R23 Xn; R48/20 Xi; R36/37/ 38 R43 N; R50-53	T; N R: 23-36/37/38-43- 48/20-50/53 S: (1/2-)24-26-37-38- 45-60-61		
613-117-00-2	diniconazole (ISO); (E)-β-[(2,4-dichlorophenyl)methylene]-α-(1,1-dimethylethyl)- 1H-1,2,4-triazol-1-ethanol; (E)-(RS)-1-(2,4-dichlorophenyl)-4,4-dimethyl-2-(1H-1,2,4- triazol-1-yl)pent-1-en-3-ol	—	76714-88-0	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
613-118-00-8	flubenzimine (ISO); N-[3-phenyl-4,5-bis[(trifluoromethyl)imino]thiazolidin-2-ylidene]aniline;	253-703-1	37893-02-0	Xi; R36 N; R50-53	Xi; N R: 36-50/53 S: (2-)26-60-61		
613-119-00-3	(benzothiazol-2-ylthio)methyl thiocyanate; TCMTB	244-445-0	21564-17-0	T+; R26 Xn; R22 Xi; R36/38 R43 N; R50-53	T+; N R: 22-26-36/38-43- 50/53 S: (1/2-)28-36/37-38- 45-60-61		
613-120-00-9	bioesmethrin; (5-bezylfur-3-yl)methyl(1R)-trans-2,2-dimethyl-3-(2-methyl- propenyl)cyclopropanecarboxylate	249-014-0	28434-01-7	N; R50-53	N R: 50/53 S: 60-61		
613-121-00-4	chlorsulfuron (ISO); 2-chloro-N-[[[(4-methoxy-6-methyl-1,3,5-triazin-2-yl)amino] carbonyl]benzenesulphonamide;	265-268-5	64902-72-3	N; R50-53	N R: 50/53 S: 60-61		
613-122-00-X	diclobutrazole (ISO); (R*, R*)-(±)-β-[(2,4-dichlorophenyl)methyl]-α-(1,1-dimethyle- thyl)-1H-1,2,4-triazole-1-ethanol; (2RS, 3RS)-1-(2,4-dichlorophenyl)-4,4-dimethyl-2-(1H-1,2,4- triazol-1-yl)pentan-3-ol	—	75736-33-3	Xi; R36 N; R51-53	Xi; N R: 36-51/53 S: (2-)26-61		
613-123-00-5	5,6-dihydro-3H-imidazo[2,1-c]-1,2,4-dithiazole-3-thione; etem	251-684-4	33813-20-6	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
613-124-00-0	fenpropimorph (ISO); <i>cis</i> -4-[3-( <i>p</i> - <i>tert</i> -butylphenyl)-2-methylpropyl]-2,6-dimethylmorpholine	266-719-9	67564-91-4	Repr. Cat. 3; R63 Xn; R22 Xi; R38 N; R51-53	Xn; N R: 22-38-63-51/53 S: (2-)36/37-46-61		
613-125-00-6	hexythiazox (ISO); <i>trans</i> -5-(4-chlorophenyl)- <i>N</i> -cyclohexyl-4-methyl-2-oxo-3-thiazolidine-carboxamide	—	78587-05-0	N; R50-53	N R: 50/53 S: 60-61		
613-126-00-1	imazapyr (ISO); 2-[4,5-dihydro-4-methyl-4-(1-methylethyl)-5-oxo-1 <i>H</i> -imidazol-2-yl]-3-pyridine carboxylate	—	81334-34-1	Xi; R36 R52-53	Xi R: 36-52/53 S: (2-)26-61		
613-127-00-7	1,1-dimethylpiperidinium chloride; mepiquat chloride	246-147-6	24307-26-4	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)61		
613-128-00-2	prochloraz (ISO); <i>N</i> -propyl- <i>N</i> -[2-(2,4,6-trichlorophenoxy)ethyl]-1 <i>H</i> -imidazole-1-carboxamide;	266-994-5	67747-09-5	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
613-129-00-8	metamitron (ISO); 4-amino-3-methyl-6-phenyl-1,2,4-triazin-5-one	255-349-3	41394-05-2	Xn; R22 N; R50	Xn; N R: 22-50 S: (2-)61		
613-131-00-9	pyroquilon (ISO); 1,2,5,6-tetrahydropyrrolo[3,2,1- <i>ij</i> ]quinolin-4-one	—	57369-32-1	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)61		
613-132-00-4	hexazinone (ISO); 3-cyclohexyl-6-dimethylamino-1-methyl-1,2,3,4-tetrahydro-1,3,5-triazine-2,4-dione;	257-074-4	51235-04-2	Xn; R22 Xi; R36 N; R50-53	Xn; N R: 22-36-50/53 S: (2-)60-61		
613-133-00-X	etridiazole (ISO); 5-ethoxy-3-trichloromethyl-1,2,4-thiadiazole	219-991-8	2593-15-9	Carc. Cat. 3; R40 T; R23 Xn; R21/22 N; R50-53	T; N R: 21/22-23-40-50/ 53 S: (1/2-)36/37-38-45- 60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
613-134-00-5	myclobutanil (ISO); 2-(4-chlorophenyl)-2-(1 <i>H</i> -1,2,4-triazol-1-ylmethyl)hexanenitrile	—	88671-89-0	Repr. Cat. 3; R63 Xn; R22 Xi; R36 N; R51-53	Xn; N R: 22-36-51/53-63 S: (2-)36/37-46-61		
613-135-00-0	di(benzothiazol-2-yl) disulphide	204-424-9	120-78-5	R31 R43 N; R50-53	Xi; N R: 31-43-50/53 S: (2-)36/37-60-61		
613-136-00-6	N-cyclohexylbenzothiazole-2-sulphenamide	202-411-2	95-33-0	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		
613-137-00-1	methabenzthiazuron (ISO); 1-(1,3-benzothiazol-2-yl)1,3-dimethylurea	242-505-0	18691-97-9	N; R50-53	N R: 50/53 S: 60-61		
613-138-00-7	quinoxyfen (ISO); 5,7-dichloro-4-(4-fluorophenoxy)quinoline	—	124495-18-7	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-46-60-61		
613-139-00-2	metsulfuron-methyl; 2-(4-methoxy-6-methyl-1,3,5-triazin-2-ylcarbamoylsulfamoyl) benzoic acid	—	74223-64-6	N; R50-53	N R: 50/53 S: 60-61		
613-140-00-8	cycloheximide (ISO); 4-((2 <i>R</i> )-2-((1 <i>S</i> ,3 <i>S</i> ,5 <i>S</i> )-3,5-dimethyl-2-oxocyclohexyl)-2-hydroxyethyl)piperidine-2,6-dione	200-636-0	66-81-9	Muta. Cat. 3; R68 Repr. Cat. 2; R61 T+; R28 N; R51-53	T+; N R: 61-28-51/53-68 S: 53-45-61		E
613-141-00-3	1,4-diamino-2-(2-butyltetrazol-5-yl)-3-cyanoanthraquinone	401-470-3	93686-63-6	R53	R: 53 S: 61		
613-142-00-9	<i>trans</i> -N-methyl-2-styryl-[4'-aminomethine-(1-acetyl-1-(2-methoxyphenyl)acetamido)]pyridinium acetate	405-860-4	—	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)22-24-37-61		
613-143-00-4	1-(3-phenylpropyl)-2-methylpyridinium bromide	405-930-4	10551-42-5	Xn; R22 Xi; R36 R52-53	Xn R: 22-36-52/53 S: (2-)26-36/37-61		



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
613-144-00-X	Reaction products of: poly(vinyl acetate), partially hydrolyzed, with (E)-2-(4-formylstyryl)-3,4-dimethylthiazoliummethyl sulfate	406-460-2	125139-08-4	R52-53	R: 52/53 S: 61		
613-145-00-5	(S)-3-benzyloxycarbonyl-1,2,3,4-tetrahydro-isoquinolinium 4-methylbenzenesulfonate	406-960-0	77497-97-3	N; R51-53	N R: 51/53 S: 61		
613-146-00-0	N-ethyl-N-methylpiperidinium iodide	407-780-5	4186-71-4	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)22-61		
613-147-00-6	4-[2-(1-methyl-2-(4-morpholinyl)ethoxy)ethyl]morpholine	407-940-4	111681-72-2	Xi; R41	Xi R: 41 S: (2-)26-39		
613-148-00-1	tetrasodium 1,2-bis(4-fluoro-6-[5-(1-amino-2-sulfonatoanthrachinon-4-ylamino)-2,4,6-trimethyl-3-sulfonatophenylamino]-1,3,5-triazin-2-ylamino)ethane	411-240-4	143683-23-2	R43 R52-53	Xi R: 43-52/53 S: (2-)22-24/25-37-61		
613-149-00-7	pyridaben (ISO); 2-tert-butyl-5-(4-tert-butylbenzylthio)-4-chloropyridazin-3(2H)-one	405-700-3	96489-71-3	T; R23/25 N; R50-53	T; N R: 23/25-50/53 S: (1/2-)36/37-45-60-61		
613-150-00-2	2,2'-[3,3'-(piperazine-1,4-diyl)dipropyl]bis(1H-benzimidazo[2,1-b]benzo[l,m,n][3,8]phenanthroline-1,3,6-trione	406-295-6	—	R53	R: 53 S: 61		
613-151-00-8	1-(3-mesyloxy-5-trityloxymethyl-2-D-threofuryl)thymine	406-360-9	104218-44-2	R53	R: 53 S: 61		
613-152-00-3	phenyl N-(4,6-dimethoxypyrimidin-2-yl)carbamate	406-600-2	89392-03-0	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
613-153-00-9	2,3,5-trichloropyridine	407-270-2	16063-70-0	R52-53	R: 52/53 S: 61		
613-154-00-4	2-amino-4-chloro-6-methoxypyrimidine	410-050-9	5734-64-5	Xn; R22	Xn R: 22 S: (2-)22		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
613-155-00-X	5-chloro-2,3-difluoropyridine	410-090-7	89402-43-7	R10 Xn; R22 R52-53	Xn R: 10-22-52/53 S: (2-)23-36-61		
613-156-00-5	2-butyl-4-chloro-5-formylimidazole	410-260-0	83857-96-9	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
613-157-00-0	2,4-diamino-5-methoxymethylpyrimidine	410-330-0	54236-98-5	Xn; R22-48/ 22 Xi; R36	Xn R: 22-36-48/22 S: (2-)22-26-36		
613-158-00-6	2,3-dichloro-5-trifluoromethyl-pyridine	410-340-5	69045-84-7	Xn; R20/22 Xi; R41 R43 N; R51-53	Xn; N R: 20/22-41-43-51/ 53 S: (2-)24-26-37/39-61		
613-159-00-1	fenazaquin (ISO); 4-[2-[4-(1,1-dimethylethyl)phenyl]-ethoxy]quinazoline	410-580-0	120928-09-8	T; R25 Xn; R20 N; R50-53	T; N R: 20-25-50/53 S: (1/2-)37-45-60-61		
613-160-00-7	(1S)-2-methyl-2,5-diazobicyclo[2.2.1]heptane dihydrobromide	411-000-9	125224-62-6	R43	Xi R: 43 S: (2-)24-37		
613-163-00-3	azimsulfuron (ISO); 1-(4,6-dimethoxypyrimidin-2-yl)-3-[1-methyl-4-(2-methyl-2H-tetrazol-5-yl)pyrazol-5-ylsulfonyl]urea	—	120162-55-2	N; R50-53	N R: 50/53 S: 60-61		
613-164-00-9	flufenacet (ISO); N-(4-fluorophenyl)-N-isopropyl-2-(5-trifluoromethyl-[1,3,4]thiadiazol-2-yloxy)acetamide	—	142459-58-3	Xn; R22-48/ 22 R43 N; R50-53	Xn; N R: 22-43-48/22-50/ 53 S: (2-)13-24-37-60- 61		
613-165-00-4	flupyrsulfuron-methyl-sodium (ISO); methyl 2-[[[(4,6-dimethoxypyrimidin-2-ylcarbamoyl)sulfa- moyl]-6-trifluoromethyl]nicotinate, monosodium salt	—	144740-54-5	N; R50-53	N R: 50/53 S: 60-61		
613-166-00-X	flumioxazin (ISO); N-(7-fluoro-3,4-dihydro-3-oxo-4-prop-2-ynyl-2H-1,4-benzo- xazin-6-yl)cyclohex-1-ene-1,2-dicarboxamide	—	103361-09-7	Repr. Cat. 2; R61 N; R50-53	T; N R: 61-50/53 S: 53-45-60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
613-167-00-5	reaction mass of: 5-chloro-2-methyl-4-isothiazolin-3-one [EC no. 247-500-7] and 2-methyl-2H -isothiazol-3-one [EC no. 220-239-6] (3:1); reaction mass of: 5-chloro-2-methyl-4-isothiazolin-3-one [EC no. 247-500-7] and 2-methyl-4-isothiazolin-3-one [EC no. 220-239-6] (3:1)	—	55965-84-9	T; R23/24/25 C; R34 R43 N; R50-53	T; N R: 23/24/25-34-43-50/53 S: (2-)26-28-36/37/39-45-60-61	C; R34: C ≥ 0,6 % Xi; R36/38: 0,06 % ≤ C < 0,6 % R43: C ≥ 0,0015 %	
613-168-00-0	1-vinyl-2-pyrrolidone	201-800-4	88-12-0	Carc. Cat. 3; R40 Xn; R20/21/ 22-48/20 Xi; R37-41	Xn R: 20/21/22-37-40-41-48/20 S: (2-)26-36/37/39		D
613-169-00-6	9-vinylcarbazole	216-055-0	1484-13-5	Muta. Cat. 3; R68 Xn; R21/22 Xi; R38 R43 N; R50-53	Xn; N R: 21/22-38-43-50/ 53-68 S: 22-23-36/37-60-61		
613-170-00-1	2,2-ethylmethylthiazolidine	404-500-3	694-64-4	Xn; R22 Xi; R41 R43 N; R51-53	Xn; N R: 22-41-43-51/53 S: (2-)24-26-37/39-61		
613-171-00-7	hexaconazole (ISO); (RS)-2-(2,4-dichlorophenyl)-1-(1H-1,2,4-triazol-1-yl)hexan-2-ol	413-050-7	79983-71-4	Xn; R22 R43 N; R51-53	Xn; N R: 22-43-51/53 S: (2-)24-37-61		
613-172-00-2	5-chloro-1,3-dihydro-2H-indol-2-one	412-200-9	17630-75-0	Repr. Cat. 3; R62 Xn; R22 R43 R52-53	Xn R: 22-43-62-52/53 S: (2-)22-36/37-61		
613-173-00-8	fluquinconazole (ISO); 3-(2,4-dichlorophenyl)-6-fluoro-2-(1H-1,2,4-triazol-1-yl)quinazolin-4-(3H)-one	411-960-9	136426-54-5	T; R23/25-48/25 Xn; R21 Xi; R38 N; R50-53	T; N R: 21-23/25-38-48/ 25-50/53 S: (1/2-)36/37/39-38-45-60-61		
613-174-00-3	(±) 2-(2,4-dichlorophenyl)-3-(1H-1,2,4-triazol-1-yl)propyl-1,1,2,2-tetrafluoroether	407-760-6	112281-77-3	Carc. Cat. 3; R40 Xn; R20/22 N; R51-53	Xn; N R: 20/22-40-51/53 S: (2-)36/37-41-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
613-175-00-9	epoxiconazole (ISO); (2RS,3SR)-3-(2-chlorophenyl)-2-(4-fluorophenyl)-[(1H-1,2,4-triazol-1-yl)methyl]oxirane	406-850-2	133855-98-8	Carc. Cat. 3; R40 Repr. Cat. 3; R62 Repr. Cat. 3; R63 N; R51-53	Xn; N R: 40-62-63-51/53 S: (2-)36/37-46-61		
613-176-00-4	2-methyl-2-azabicyclo[2.2.1]heptane	404-810-9	4524-95-2	R10 Xn; R21/22-48/20 C; R34	C R: 10-21/22-34-48/20 S: (1/2-)16-26-36/37/39-45		
613-177-00-X	8-amino-7-methylquinoline	412-760-4	5470-82-6	Xn; R21/22 R43 N; R51-53	Xn; N R: 21/22-43-51/53 S: (2-)36/37-61		
613-178-00-5	4-ethyl-2-methyl-2-isopentyl-1,3-oxazolidine	410-470-2	137796-06-6	C; R34 R43	C R: 34-43 S: (1/2-)7/8-26-36/37/39-45	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	
613-179-00-0	lithium 3-oxo-1,2(2H)-benzisothiazol-2-ide	411-690-1	111337-53-2	Xn; R22 C; R34 R43 N; R51-53	C; N R: 22-34-43-51/53 S: (1/2-)26-36/37/39-45-61		
613-180-00-6	N-(1,1-dimethylethyl)bis(2-benzothiazolesulfen)amide	407-430-1	3741-80-8	N; R50-53	N R: 50/53 S: 60-61		
613-181-00-1	5,5-dimethyl-perhydro-pyrimidin-2-one α-(4-trifluoromethylstyryl)-α-(4-trifluoromethyl)cinnamylidenehydrazone	405-090-9	67485-29-4	T; R48/25 Xn; R22 Xi; R36 N; R50-53	T; N R: 22-36-48/25-50/53 S: (1/2-)22-26-36/37-45-60-61		
613-182-00-7	1-(1-naphthylmethyl)quinolinium chloride	406-220-7	65322-65-8	Carc. Cat. 3; R40 Muta. Cat. 3; R68 Xn; R22 Xi; R38-41 R52-53	Xn R: 22-38-40-41-52/53-68 S: (2-)22-26-36/37/39-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
613-183-00-2	reaction mass of: 5-(N-methylperfluorooctylsulfonamido)methyl-3-octadecyl-1,3-oxazolidin-2-one; 5-(N-methylperfluoroheptylsulfonamido)methyl-3-octadecyl-1,3-oxazolidin-2-one	413-640-4	—	Xn; R48/22 N; R50-53	Xn; N R: 48/22-50/53 S: (2-)36-60-61		
613-184-00-8	nitritotriethyleneammonio propane-2-ol 2-ethylhexanoate	413-670-8	—	Xi; R36 R43	Xi R: 36-43 S: (2-)24-26-37		
613-185-00-3	2,3,5,6-tetrahydro-2-methyl-2H-cyclopenta[d]-1,2-thiazol-3-one	407-630-9	82633-79-2	T; R25 Xi; R41 R43 N; R50-53	T; N R: 25-41-43-50/53 S: (1/2-)22-26-36/37/ 39-45-60-61		
613-186-00-9	(2R,3R)-3-((R)-1-(tert-butyl)dimethylsiloxy)ethyl-4-oxoazetidin-2-yl acetate	408-050-9	76855-69-1	Xi; R36 R43 N; R51-53	Xi; N R: 36-43-51/53 S: (2-)24-26-37-61		
613-188-00-X	1-(3-(4-fluorophenoxy)propyl)-3-methoxy-4-piperidinone	411-500-7	116256-11-2	Xn; R22 Xi; R41 R43 N; R51-53	Xn; N R: 22-41-43-51/53 S: (2-)22-24-26-37/ 39-61		
613-189-00-5	1,4,7,10-tetrakis(p-toluensulfonyl)-1,4,7,10-tetraazacyclododecane	414-030-0	52667-88-6	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		
613-190-00-0	disodium 1-amino-4-(2-(5-chloro-6-fluoro-pyrimidin-4-ylamino-methyl)-4-methyl-6-sulfo-phenylamino)-9,10-dioxo-9,10-dihydro-anthracene-2-sulfonate	414-040-5	149530-93-8	Xn; R22 R43	Xn R: 22-43 S: (2-)22-24-37		
613-191-00-6	3-ethyl-2-methyl-2-(3-methylbutyl)-1,3-oxazolidine	421-150-7	143860-04-2	Repr. Cat. 2; R60 C; R34 N; R50-53	T; N R: 60-34-50/53 S: 53-45-60-61		
613-193-00-7	pentakis[3-(dimethylammonio)propylsulfamoyl]-[(6-hydroxy-4,4,8,8-tetramethyl-4,8-diazoniaundecane-1,11-diyl)disulfamoyl]di[phthalocyaninecopper(II)] heptalactate	414-930-3	—	N; R51-53	N R: 51/53 S: 61		
613-194-00-2	6,13-dichloro-3,10-bis[2-[4-fluoro-6-(2-sulfophenylamino)-1,3,5-triazin-2-ylamino]propylamino]benzo[5,6][1,4]oxazino[2,3-b.]phenoxazine-4,11-disulphonic acid, lithium-, sodium salt	418-000-8	163062-28-0	Xi; R41	Xi R: 41 S: (2-)22-26-39		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
613-195-00-8	2,2-(1,4-phenylene)bis((4 <i>H</i> -3,1-benzoxazine-4-one)	418-280-1	18600-59-4	R43 R53	Xi R: 43-53 S: (2-)24-37-61		
613-196-00-3	5-[[4-chloro-6-[[2-[[4-fluoro-6-[[5-hydroxy-6-[(4-methoxy-2-sulfophenyl)azo]-7-sulfo-2-naphthalenyl]amino]-1,3,5-triazin-2-yl]amino]-1-methylethyl]amino]-1,3,5-triazin-2-yl]amino]-3-[[4-(ethenylsulfonyl)phenyl]azo]-4-hydroxy-naphtalene-2,7-disulfonic acid, sodium salt	418-380-5	168113-78-8	Xi; R41	Xi R: 41 S: (2-)26-39		
613-197-00-9	reaction mass of: 2,4,6-tri(butylcarbamoyl)-1,3,5-triazine; 2,4,6-tri(methylcarbamoyl)-1,3,5-triazine; [(2-butyl-4,6-dimethyl)tricarbamoyl]-1,3,5-triazine; [(2,4-dibutyl-6-methyl)tricarbamoyl]-1,3,5-triazine	420-390-1	187547-46-2	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
613-199-00-X	reaction mass of: 1,3,5-tris(3-aminomethylphenyl)-1,3,5-(1 <i>H</i> ,3 <i>H</i> ,5 <i>H</i> )-triazine-2,4,6-trione; reaction mass of oligomers of 3,5-bis(3-aminomethylphenyl)-1-poly[3,5-bis(3-aminomethylphenyl)-2,4,6-trioxo-1,3,5-(1 <i>H</i> ,3 <i>H</i> ,5 <i>H</i> )-triazin-1-yl]-1,3,5-(1 <i>H</i> ,3 <i>H</i> ,5 <i>H</i> )-triazine-2,4,6-trione	421-550-1	—	Carc. Cat. 2; R45 Repr. Cat. 2; R61 R43 R52-53	T R: 45-61-43-52/53 S: 53-45-61		
613-200-00-3	Reaction product of: copper, (29 <i>H</i> ,31 <i>H</i> -phthalocyaninato(2-)- <i>N</i> 29, <i>N</i> 30, <i>N</i> 31, <i>N</i> 32)-, chlorosulfuric acid and 3-(2-sulfoxyethylsulfonyl)aniline, sodium salts	420-980-7	—	Xi; R41	Xi R: 41 S: (2-)22-26-39		
613-201-00-9	( <i>R</i> )-5-bromo-3-(1-methyl-2-pyrrolidinyl methyl)-1 <i>H</i> -indole	422-390-5	143322-57-0	Repr. Cat. 3; R62 T; R39-48/25 Xn; R20/22 Xi; R41 R43 N; R50-53	T; N R: 20/22-39-41-43-48/25-62-50/53 S: (1/2-)53-45-60-61		
613-202-00-4	pymetrozine (ISO); ( <i>E</i> )-4,5-dihydro-6-methyl-4-(3-pyridylmethyleneamino)-1,2,4-triazin-3(2 <i>H</i> )-one	—	123312-89-0	Carc. Cat. 3; R40 R52-53	Xn R: 40-52/53 S: (2-)36/37-61		
613-203-00-X	pyraflufen-ethyl; [1] pyraflufen [2]	[1] [2]	129630-19-9 [1] 129630-17-7 [2]	N; R50-53	N R: 50/53 S: 60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
613-204-00-5	oxadiargyl (ISO); 3-[2,4-dichloro-5-(2-propynyloxy)phenyl]-5-(1,1-dimethylethyl)-1,3,4-oxadiazol-2(3H)-one; 5- <i>tert</i> -butyl-3-[2,4-dichloro-5-(prop-2-ynyloxy)phenyl]-1,3,4-oxadiazol-2(3H)-one	254-637-6	39807-15-3	Repr. Cat. 3; R63 Xn; R48/22 N; R50-53	Xn; N R: 48/22-63-50/53 S: (2-)36/37-46-60-61		
613-205-00-0	propiconazole (ISO); (±)-1-[2-(2,4-dichlorophenyl)-4-propyl-1,3-dioxolan-2-ylmethyl]-1 <i>H</i> -1,2,4-triazole	262-104-4	60207-90-1	Xn; R22 R43 N; R50-53	Xn; N R: 22-43-50/53 S: (2-)36/37-46-60-61		
613-206-00-6	fenamidone (ISO); ( <i>S</i> )-5-methyl-2-methylthio-5-phenyl-3-phenylamino-3,5-dihydroimidazol-4-one	—	161326-34-7	N; R50-53	N R: 50/53 S: 60-61		
613-208-00-7	imazamox (ISO); ( <i>RS</i> )-2-(4-isopropyl-4-methyl-5-oxo-2-imidazolin-2-yl)-5-methoxymethylnicotinic acid	—	114311-32-9	N; R50-53	N R: 50/53 S: 60-61		
613-209-00-2	<i>cis</i> -1-(3-chloropropyl)-2,6-dimethyl-piperidin hydrochloride	417-430-3	63645-17-0	T; R25 Xn; R48/22 R43 N; R51-53	T; N R: 25-43-48/22-51/53 S: (1/2-)22-36/37-45-61		
613-210-00-8	2-(3-chloropropyl)-2,5,5-trimethyl-1,3-dioxane	417-650-1	88128-57-8	Xn; R48/22 R52-53	Xn R: 48/22-52/53 S: (2-)23-25-36-61		
613-211-00-3	<i>N</i> -methyl-4-( <i>p</i> -formylstyryl)pyridinium methylsulfate	418-240-3	74401-04-0	R43 R52-53	Xi R: 43-52/53 S: (2-)22-24-37-61		
613-212-00-9	4-[4-(2-ethylhexyloxy)phenyl](1,4-thiazinane-1,1-dioxide)	418-320-8	133467-41-1	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)22-60-61		
613-213-00-4	<i>cis</i> -1-benzoyl-4-[(4-methylsulfonyl)oxy]- <i>L</i> -proline	416-040-0	120807-02-5	R52-53	R: 52/53 S: 61		
613-214-00-X	<i>N,N</i> -di- <i>n</i> -butyl-2-(1,2-dihydro-3-hydroxy-6-isopropyl-2-quinolylidene)-1,3-dioxindan-5-carboxamide	416-260-7	147613-95-4	R53	R: 53 S: 61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
613-215-00-5	2-chloromethyl-3,4-dimethoxypyridinium chloride	416-440-5	72830-09-2	Xn; R21/22-48/22 Xi; R38-41 R43 N; R51-53	Xn; N R: 21/22-38-41-43-48/22-51/53 S: (2-)26-36/37/39-61		
613-216-00-0	6- <i>tert</i> -butyl-7-(6-diethylamino-2-methyl-3-pyridylimino)-3-(3-methylphenyl)pyrazolo[3,2-c][1,2,4]triazole	416-490-8	162208-01-7	N; R50-53	N R: 50/53 S: 60-61		
613-217-00-6	4-[3-(3,5-di- <i>tert</i> -butyl-4-hydroxyphenyl)propionyloxy]-1-[2-[3-(3,5-di- <i>tert</i> -butyl-4-hydroxyphenyl)propionyloxy]ethyl]-2,2,6,6-tetramethylpiperidine	416-770-1	73754-27-5	R53	R: 53 S: 61		
613-218-00-1	6-hydroxyindole	417-020-4	2380-86-1	Xn; R22 Xi; R41 R43 N; R51-53	Xn; N R: 22-41-43-51/53 S: (2-)24-26-37/39-61		
613-219-00-7	7a-ethyl-3,5-bis(1-methylethyl)-2,3,4,5-tetrahydrooxazolo[3,4-c]-2,3,4,5-tetrahydrooxazole	417-140-7	79185-77-6	Xi; R38 N; R51-53	Xi; N R: 38-51/53 S: (2-)37-61		
613-220-00-2	trans-(4 <i>S</i> ,6 <i>S</i> )-5,6-dihydro-6-methyl-4 <i>H</i> -thieno[2,3- <i>b</i> ]thiopyran-4-ol, 7,7-dioxide	417-290-3	147086-81-5	Xn; R22	Xn R: 22 S: (2-)36		
613-221-00-8	2-chloro-5-methyl-pyridine	418-050-0	18368-64-4	Xn; R21/22 Xi; R38 R52-53	Xn R: 21/22-38-52/53 S: (2-)23-25-36/37-61		
613-222-00-3	4-(1-oxo-2-propenyl)-morpholine	418-140-1	5117-12-4	Xn; R22-48/22 Xi; R41 R43	Xn R: 22-41-43-48/22 S: (2-)23-26-36/37/39		
613-223-00-9	<i>N</i> -isopropyl-3-(4-fluorophenyl)-1 <i>H</i> -indole	418-790-4	93957-49-4	R53	R: 53 S: 61		
613-224-00-4	2,5-dimercaptomethyl-1,4-dithiane	419-770-8	136122-15-1	Xn; R22 C; R34 R43 N; R50-53	C; N R: 22-34-43-50/53 S: (1/2-)26-36/37/39-45-60-61		



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
613-225-00-X	reaction mass of:[2-(anthraquinon-1-ylamino)-6-[(5-benzoylamino)-anthraquinone-1-ylamino]-4-phenyl]-1,3,5-triazine; 2,6-bis-[(5-benzoylamino)-anthraquinon-1-ylamino]-4-phenyl-1,3,5-triazine.	421-290-9	—	Xn; R48/22 R53	Xn R: 48/22-53 S: (2-)22-36-61		
613-226-00-5	1-(2-(ethyl(4-(4-(4-(4-(ethyl(2-pyridinoethyl)amino)-2-methylphenylazo)benzoylamino)-phenylazo)-3-methylphenyl)amino)ethyl)-pyridinium dichloride	420-950-3	163831-67-2	Xi; R41 N; R50-53	Xi; N R: 41-50/53 S: (2-)26-39-60-61		
613-227-00-0	(±)-[(R*,R*) and (R*,S*)]-6-fluoro-3,4-dihydro-2-oxiranyl-2H-1-benzopyran	419-600-2	99199-90-3	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-28-36/37-61		
613-228-00-6	(±)-(R*,S*)-6-fluoro-3,4-dihydro-2-oxiranyl-2H-1-benzopyran	419-630-6	793669-26-8	N; R51-53	N R: 51/53 S: 24-61		
613-230-00-7	florasulam (ISO); 2',6',8-trifluoro-5-methoxy-5-triazolo[1,5-c]; pyrimidine-2-sulfonilide	—	145701-23-1	N; R50-53	N R: 50/53 S: 60-61		
613-233-00-3	4,4'-(oxy-(bismethylene))-bis-1,3-dioxolane	423-230-7	56552-15-9	Xi; R41	Xi R: 41 S: (2-)26-39		
614-001-00-4	nicotine (ISO); 3-(N-methyl-2-pyrrolidinyl)pyridine	200-193-3	54-11-5	T+; R27 T; R25 N; R51-53	T+; N R: 25-27-51/53 S: (1/2-)36/37-45-61		
614-002-00-X	salts of nicotine	—	—	T+; R26/27/ 28 N; R51-53	T+; N R: 26/27/28-51/53 S: (1/2-)13-28-45-61		A
614-003-00-5	strychnine	200-319-7	57-24-9	T+; R27/28 N; R50-53	T+; N R: 27/28-50/53 S: (1/2-)36/37-45-60-61		
614-004-00-0	salts of strychnine	—	—	T+; R26/28 N; R50-53	T+; N R: 26/28-50/53 S: (1/2-)13-28-45-60-61		A

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
614-005-00-6	colchicine	200-598-5	64-86-8	T+; R26/28	T+ R: 26/28 S: (1/2-)13-45		
614-006-00-1	brucine; 2,3-dimethoxystrychnine	206-614-7	357-57-3	T+; R26/28 R52-53	T+ R: 26/28-52/53 S: (1/2-)13-45-61		
614-007-00-7	brucine sulphate; [1] brucine nitrate; [2] Strychnidin-10-one, 2,3-dimethoxy-, mono[(R)-1-methylheptyl 1,2-benzenedicarboxylate]; [3] Strychnidin-10-one, 2,3-dimethoxy-, compd. with (S)mono(1-methylheptyl)-1,2-benzenedicarboxylate (1:1) [4]	225-432-9 [1] 227-317-9 [2] 269-439-5 [3] 269-710-8 [4]	4845-99-2 [1] 5786-97-0 [2] 68239-26-9 [3] 68310-42-9 [4]	T+; R26/28 R52-53	T+ R: 26/28-52/53 S: (1/2-)13-45-61		A
614-008-00-2	aconitine	206-121-7	302-27-2	T+; R26/28	T+ R: 26/28 S: (1/2-)24-45		
614-009-00-8	salts of aconitine	—	—	T+; R26/28	T+ R: 26/28 S: (1/2-)24-45		A
614-010-00-3	atropine	200-104-8	51-55-8	T+; R26/28	T+ R: 26/28 S: (1/2-)25-45		
614-011-00-9	salts of atropine	—	—	T+; R26/28	T+ R: 26/28 S: (1/2-)25-45		A
614-012-00-4	hyoscyamine	202-933-0	101-31-5	T+; R26/28	T+ R: 26/28 S: (1/2-)24-45		
614-013-00-X	salts of hyoscyamine	—	—	T+; R26/28	T+ R: 26/28 S: (1/2-)24-45		A
614-014-00-5	hyoscine	200-090-3	51-34-3	T+; R26/27/ 28	T+ R: 26/27/28 S: (1/2-)25-45		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
614-015-00-0	salts of hyoscine	—	—	T+; R26/27/28	T+ R: 26/27/28 S: (1/2-)25-45		A
614-016-00-6	pilocarpine	202-128-4	92-13-7	T+; R26/28	T+ R: 26/28 S: (1/2-)25-45		
614-017-00-1	salts of pilocarpine	—	—	T+; R26/28	T+ R: 26/28 S: (1/2-)25-45		A
614-018-00-7	papaverine	200-397-2	58-74-2	Xn; R22	Xn R: 22 S: (2-)22		
614-019-00-2	salts of papaverine	—	—	Xn; R22	Xn R: 22 S: (2-)22		A
614-020-00-8	physostigmine	200-332-8	57-47-6	T+; R26/28	T+ R: 26/28 S: (1/2-)25-45		
614-021-00-3	salts of physostigmine	—	—	T+; R26/28	T+ R: 26/28 S: (1/2-)25-45		A
614-022-00-9	digitoxin	200-760-5	71-63-6	T; R23/25 R33	T R: 23/25-33 S: (1/2-)45		
614-023-00-4	ephedrine	206-080-5	299-42-3	Xn; R22	Xn R: 22 S: (2-)22-25		
614-024-00-X	salts of ephedrine	—	—	Xn; R22	Xn R: 22 S: (2-)22-25		A
614-025-00-5	ouabain	211-139-3	630-60-4	T; R23/25 R33	T R: 23/25-33 S: (1/2-)45		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
614-026-00-0	strophantin-K	234-239-9	11005-63-3	T; R23/25 R33	T R: 23/25-33 S: (1/2-)45		
614-027-00-6	bufa-4,20,22-trienolide, 6-(acetyloxy)-3-(β-D-glucopyranosyloxy)-8,14-dihydroxy-, (3β, 6β)-; red squill; scilliroside	208-077-4	507-60-8	T+; R28	T+ R: 28 S: (1/2-)36/37-45		
614-028-00-1	reaction mass of: 2-ethylhexyl mono-D-glucopyranoside; 2-ethylhexyl di-D-glucopyranoside	414-420-0	—	Xi; R41	Xi R: 41 S: (2-)26-39		
614-029-00-7	constitutional isomers of penta-O-allyl-β-D-fructofuranosyl-α-D-glucopyranoside; constitutional isomers of hexa-O-allyl-β-D-fructofuranosyl-α-D-glucopyranoside; constitutional isomers of hepta-O-allyl-β-D-fructofuranosyl-α-D-glucopyranoside	419-640-0	68784-14-5	Xn; R22	Xn R: 22 S: (2-)		
615-001-00-7	methyl isocyanate	210-866-3	624-83-9	F+; R12 ⊗ Repr. Cat. 3; R63 T+; R26 T; R24/25 R42/43 Xi; R37/38-41	F+; T+ R: 12-24/25-26-37/ 38-41-42/43-63 S: (1/2-)26-27/28-36/ 37/39-45-63		
615-002-00-2	methyl isothiocyanate	209-132-5	556-61-6	T; R23/25 C; R34 R43 N; R50-53	T; N R: 23/25-34-43-50/ 53 S: (1/2-)36/37-38-45-60-61		
615-003-00-8	thiocyanic acid	207-337-4	463-56-9	Xn; R20/21/ 22 R32 R52-53	Xn R: 20/21/22-32-52/ 53 S: (2-)13-61		
615-004-00-3	salts of thiocyanic acid	—	—	Xn; R20/21/ 22 R32 R52-53	Xn R: 20/21/22-32-52/ 53 S: (2-)13-61		A

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
615-005-00-9	4,4'-methylenediphenyl diisocyanate; diphenylmethane-4,4'-diisocyanate; [1] 2,2'-methylenediphenyl diisocyanate; diphenylmethane-2,2'-diisocyanate; [2] <i>o</i> -( <i>p</i> -isocyanatobenzyl)phenyl isocyanate; diphenylmethane-2,4'-diisocyanate; [3] methylenediphenyl diisocyanate [4]	202-966-0 [1] 219-799-4 [2] 227-534-9 [3] 247-714-0 [4]	101-68-8 [1] 2536-05-2 [2] 5873-54-1 [3] 26447-40-5 [4]	Xn; R20 Xi; R36/37/ 38 R42/43	Xn R: 20-36/37/38-42/ 43 S: (1/2-)23-36/37-45	Xi; R36/37/38: C ≥ 5 % R42: C ≥ 0,1 %	C 2
615-006-00-4	2-methyl- <i>m</i> -phenylene diisocyanate; toluene-2,4-di-isocyanate; [1] 4-methyl- <i>m</i> -phenylene diisocyanate; toluene-2,6-di-isocyanate; [2] <i>m</i> -tolylidene diisocyanate; toluene-diisocyanate [3]	202-039-0 [1] 209-544-5 [2] 247-722-4 [3]	91-08-7 [1] 584-84-9 [2] 26471-62-5 [3]	Carc. Cat. 3; R40 T+; R26 Xi; R36/37/ 38 R42/43 R52-53	T+ R: 26-36/37/38-40- 42/43-52/53 S: (1/2-)23-36/37-45- 61	R42: C ≥ 0,1 %	C 2
615-007-00-X	1,5-naphthylene diisocyanate	221-641-4	3173-72-6	Xn; R20 Xi; R36/37/ 38 R42 R52-53	Xn R: 20-36/37/38-42- 52/53 S: (2-)26-28-38-45- 61		
615-008-00-5	3-isocyanatomethyl-3,5,5-trimethylcyclohexyl isocyanate; isophorone di-isocyanate	223-861-6	4098-71-9	T; R23 Xi; R36/37/ 38 R42/43 N; R51-53	T; N R: 23-36/37/38-42/ 43-51/53 S: (1/2-)26-28-38-45- 61	T; R23: C ≥ 2 % Xn; R20: 0,5 % ≤ C < 2 % R42/43: C ≥ 0,5 %	2
615-009-00-0	4,4'-methylenedi(cyclohexyl isocyanate); dicyclohexylmethane-4,4'-di-isocyanate	225-863-2	5124-30-1	T; R23 Xi; R36/37/ 38 R42/43	T R: 23-36/37/38-42/ 43 S: (1/2-)26-28-38-45	T; R23: C ≥ 2 % Xn; R20: 0,5 % ≤ C < 2 % R42/43: C ≥ 0,5 %	2
615-010-00-6	2,2,4-trimethylhexamethylene-1,6-di-isocyanate; [1] 2,4,4-trimethylhexamethylene-1,6-di-isocyanate [2]	241-001-8 [1] 239-714-4 [2]	16938-22-0 [1] 15646-96-5 [2]	T; R23 Xi; R36/37/ 38 R42	T R: 23-36/37/38-42 S: (1/2-)26-28-38-45	T; R23: C ≥ 2 % Xn; R20: 0,5 % ≤ C < 2 % R42: C ≥ 0,5 %	C 2
615-011-00-1	hexamethylene-di-isocyanate	212-485-8	822-06-0	T; R23 Xi; R36/37/ 38 R42/43	T R: 23-36/37/38-42/ 43 S: (1/2-)26-28-38-45	T; R23: C ≥ 2 % Xn; R20: 0,5 % ≤ C < 2 % R42/43: C ≥ 0,5 %	2

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
615-012-00-7	4-isocyanatosulphonyltoluene; tosyl isocyanate	223-810-8	4083-64-1	R14 Xi; R36/37/ 38 R42	Xn R: 14-36/37/38-42 S: (2-)26-28-30	Xi; R36/37/38; C ≥ 5 %	
615-013-00-2	cyanamide; carbanonitril	206-992-3	420-04-2	T; R25 Xn; R21 Xi; R36/38 R43	T R: 21-25-36/38-43 S: (1/2-)3-22-36/37- 45		
615-014-00-8	tris(1-dodecyl-3-methyl-2-phenylbenzimidazolium)hexacya- noferrate	—	7276-58-6	Xn; R22	Xn R: 22 S: (2-)24		
615-015-00-3	1,7,7-trimethylbicyclo(2,2,1)hept-2-yl thiocyanatoacetate; isobornyl thiocyanacetate	204-081-5	115-31-1	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)24/25-60-61		
615-016-00-9	potassium cyanate	209-676-3	590-28-3	Xn; R22	Xn R: 22 S: (2-)24/25		
615-017-00-4	calcium cyanamide	205-861-8	156-62-7	Xn; R22 Xi; R37-41	Xn R: 22-37-41 S: (2-)22-26-36/37/39		
615-018-00-X	2-(2-butoxyethoxy)ethyl thiocyanate	203-985-7	112-56-1	R10 T; R24/25	T R: 10-24/25 S: (1/2-)13-36/37-45		
615-019-00-5	dicyclohexylcarbodiimide	208-704-1	538-75-0	T; R24 Xn; R22 Xi; R41 R43	T R: 22-24-41-43 S: (1/2-)24-26-37/39- 45		
615-020-00-0	methylene dithiocyanate	228-652-3	6317-18-6	T+; R26 T; R25 C; R34 R43 N; R50	T+; N R: 25-26-34-43-50 S: (1/2-)26-28-36/37/ 39-45-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
615-021-00-6	1,3,5-tris(oxiranylmethyl)-1,3,5-triazine-2,4,6(1H,3H,5H)-trione; TGIC	219-514-3	2451-62-9	Muta. Cat. 2; R46 T; R23/25 Xn; R48/22 Xi; R41 R43 R52-53	T R: 46-23/25-41-43-48/22-52/53 S: 53-45-61		E
615-022-00-1	methyl 3-isocyanatosulfonyl-2-thiophene-carboxylate	410-550-7	79277-18-2	E; R2 ⊗ R14 Xn; R48/22 R42/43	E; Xn R: 2-14-42/43-48/22 S: (2-)22-30-35-36/37		
615-023-00-7	2-(isocyanatosulfonylmethyl)benzoic acid methyl ester; (alt.):methyl 2-(isocyanatosulfonylmethyl)benzoate	410-900-9	83056-32-0	R10 R14 Muta. Cat. 3; R68 Xn; R20-48/ 22 Xi; R41 R42	Xn R: 10-14-20-41-42-48/22-68 S: (2-)23-26-36/37/39		
615-024-00-2	2-phenylethylisocyanate	413-080-0	1943-82-4	T; R23 Xn; R22 C; R35 R42/43 N; R51-53	T; C; N R: 22-23-35-42/43-51/53 S: (1/2-)23-26-36/37/ 39-43-45-61		
615-025-00-8	4,4'-ethylenediphenyl dicyanate	405-740-1	47073-92-7	Xn; R20/22-48/22 Xi; R41 N; R50-53	Xn; N R: 20/22-41-48/22-50/53 S: (2-)26-36/37/39-60-61		
615-026-00-3	4,4'-methylenebis(2,6-dimethylphenyl cyanate)	405-790-4	101657-77-6	R43 R52-53	Xi R: 43-52/53 S: (2-)22-24-37-61		
615-028-00-4	ethyl 2-(isocyanatosulfonyl)benzoate	410-220-2	77375-79-2	E; R2 ⊗ R14 Xn; R22-48/ 22 Xi; R41 R42/43	E; Xn R: 2-14-22-41-42/43-48/22 S: (2-)8-23-26-30-35-36/37/39		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
615-029-00-X	2,5-bis-isocyanatomethyl-bicyclo[2.2.1]heptane	411-280-2	—	T+; R26 Xn; R22 C; R34 R42/43 R52-53	T+ R: 22-26-34-42/43-52/53 S: (1/2-)23-26-28-36/37/39-45-61		
615-030-00-5	alkali salts, alkali earth salts and other salts of thiocyanic acid not mentioned elsewhere in this Annex	—	—	Xn; R20/21/22 R32 R52-53	Xn R: 20/21/22-32-52/53 S: (2-)13-61		A
615-031-00-0	thallium salt of thiocyanic acid	222-571-7	3535-84-0	Xn; R20/21/22 R32 N; R51-53	Xn; N R: 20/21/22-32-51/53 S: (2-)13-61		A
615-032-00-6	metal salts of thiocyanic acid not mentioned elsewhere in this Annex	—	—	Xn; R20/21/22 R32 N; R50-53	Xn; N R: 20/21/22-32-50/53 S: (2-)13-60-61		A
616-001-00-X	N,N-dimethylformamide; dimethyl formamide	200-679-5	68-12-2	Repr. Cat. 2; R61 Xn; R20/21 Xi; R36	T R: 61-20/21-36 S: 53-45		E
616-002-00-5	2-fluoroacetamide	211-363-1	640-19-7	T+; R28 T; R24	T+ R: 24-28 S: (1/2-)36/37-45		
616-003-00-0	acrylamide; prop-2-enamide	201-173-7	79-06-1	Carc. Cat. 2; R45 Muta. Cat. 2; R46 Repr. Cat. 3; R62 T; R25-48/ 23/24/25 Xn; R20/21 Xi; R36/38 R43	T R: 45-46-20/21-25-36/38-43-48/23/24/25-62 S: 53-45		DE



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
616-004-00-6	allidochlor (ISO); N,N-diallylchloroacetamide	202-270-7	93-71-0	Xn; R21/22 Xi; R36/38 N; R51-53	Xn; N R: 21/22-36/38-51/ 53 S: (2-)26-28-36/37/ 39-61		
616-005-00-1	chlorthiamid (ISO); 2,6-dichloro (thiobenzamide)	217-637-7	1918-13-4	Xn; R22	Xn R: 22 S: (2-)36		
616-006-00-7	dichlofluamid (ISO); N-dichlorofluoromethylthio-N',N'-dimethyl-N-phenylsulphamide	214-118-7	1085-98-9	Xn; R20 Xi; R36 R43 N; R50-53	Xn; N R: 20-36-43-50/53 S: (2-)24-37-60-61		
616-007-00-2	diphenamid (ISO); N,N-dimethyl-2,2-diphenylacetamide	213-482-4	957-51-7	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)61		
616-008-00-8	propachlor (ISO); 2-chloro-N-isopropylacetanilide; $\alpha$ -chloro-N-isopropylacetanilide	217-638-2	1918-16-7	Xn; R22 Xi; R36 R43 N; R50-53	Xn; N R: 22-36-43-50/53 S: (2-)24-37-60-61		
616-009-00-3	propanil (ISO); 3',4'-dichloropropionanilide	211-914-6	709-98-8	Xn; R22 N; R50	Xn; N R: 22-50 S: (2-)22-61		
616-010-00-9	tosylchloramide sodium	204-854-7	127-65-1	Xn; R22 R31 C; R34 R42	C R: 22-31-34-42 S: (1/2-)7-22-26-36/ 37/39-45		
616-011-00-4	N,N-dimethylacetamide	204-826-4	127-19-5	Repr. Cat. 2; R61 Xn; R20/21	T R: 61-20/21 S: 53-45	Repr. Cat. 2; R61: C $\geq$ 5 %	E
616-012-00-X	N-(dichlorofluoromethylthio)phthalimide; N-(fluorodichloromethylthio)phthalimide	211-952-3	719-96-0	Xi; R38	Xi R: 38 S: (2-)28		
616-013-00-5	butyraldehyde oxime	203-792-8	110-69-0	T; R24 Xn; R22 Xi; R36	T R: 22-24-36 S: (1/2-)23-36-45		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
616-014-00-0	2-butanone oxime; ethyl methyl ketoxime; ethyl methyl ketone oxime	202-496-6	96-29-7	Carc. Cat. 3; R40 Xn; R21 Xi; R41 R43	Xn R: 21-40-41-43 S: (2-)13-23-26-36/ 37/39		
616-015-00-6	alachlor (ISO); 2-chloro-2',6'-diethyl-N-(methoxymethyl)acetanilide	240-110-8	15972-60-8	Carc. Cat. 3; R40 Xn; R22 R43 N; R50-53	Xn; N R: 22-40-43-50/53 S: (2-)36/37-46-60-61	N; R50-53: C ≥ 0,25 % N; R51-53: 0,025 % ≤ C < 0,25 % R52-53: 0,0025 % ≤ C < 0,025 %	
616-016-00-1	1-(3,4-dichlorophenylimino) thiosemicarbazide	—	5836-73-7	T+; R28	T+ R: 28 S: (1/2-)22-36/37-45		
616-017-00-7	cartap hydrochloride	239-309-2	15263-52-2	Xn; R21/22 N; R50-53	Xn; N R: 21/22-50/53 S: (2-)36/37-60-61		
616-018-00-2	N,N-diethyl-m-toluamide; deet	205-149-7	134-62-3	Xn; R22 Xi; R36/38 R52-53	Xn R: 22-36/38-52/53 S: (2-)61		
616-019-00-8	perfluidone (ISO); 1,1,1-trifluoro-N-(4-phenylsulphonyl-o-tolyl)methanesulpho- namide	253-718-3	37924-13-3	Xn; R22 Xi; R36	Xn R: 22-36 S: (2-)		
616-020-00-3	tebuthiuron (ISO); 1-(5-tert-butyl-1,3,4-thiadiazol-2-yl)-1,3-dimethylurea	251-793-7	34014-18-1	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)37-60-61		
616-021-00-9	thiazafluron (ISO); 1,3-dimethyl-1-(5-trifluoromethyl-1,3,4-thiadiazol-2-yl)urea	246-901-4	25366-23-8	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)60-61		
616-022-00-4	acetamide	200-473-5	60-35-5	Carc. Cat. 3; R40	Xn R: 40 S: (2-)36/37		
616-023-00-X	N-hexadecyl(or octadecyl)-N-hexadecyl(or octadecyl)benza- mide	401-980-6	—	Xi; R38 R43	Xi R: 38-43 S: (2-)24-37		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
616-024-00-5	2-(4,4-dimethyl-2,5-dioxooxazolidin-1-yl)-2-chloro-5-(2-(2,4-di- <i>tert</i> -pentylphenoxy)butyramido)-4,4-dimethyl-3-oxovalerani- nilide	402-260-4	54942-74-4	R53	R: 53 S: 61		
616-025-00-0	valinamide	402-840-7	20108-78-5	Repr. Cat. 3; R62 Xi; R36 R43	Xn R: 36-43-62 S: (2-)26-36/37		
616-026-00-6	thioacetamide	200-541-4	62-55-5	Carc. Cat. 2; R45 Xn; R22 Xi; R36/38 R52-53	T R: 45-22-36/38-52/ 53 S: 53-45-61		E
616-027-00-1	tris(2-(2-hydroxyethoxy)ethyl)ammonium 3-acetoacetamido- 4-methoxybenzenesulfonate	403-760-5	—	R43	Xi R: 43 S: (2-)24-37		
616-028-00-7	N-(4-(3-(4-cyanophenyl)ureido)-3-hydroxyphenyl)-2-(2,4-di- <i>tert</i> -pentylphenoxy)octanamide	403-790-9	108673-51-4	R43 R53	Xi R: 43-53 S: (2-)24-37-61		
616-029-00-2	N,N'-ethylenebis(vinylsulfonylacetamide)	404-790-1	66710-66-5	Xi; R41 R43	Xi R: 41-43 S: (2-)24-26-37/39		
616-030-00-8	ethidimuron (ISO); 1-(5-ethylsulphonyl-1,3,4-thiadiazol-2-yl)-1,3-dimethylurea	250-010-6	30043-49-3	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		
616-031-00-3	dimethachlor (ISO); 2-chloro-N-(2,6-dimethylphenyl)-N-(2-methoxyethyl)aceta- mide	256-625-6	50563-36-5	Xn; R22 R43 N; R50-53	Xn; N R: 22-43-50/53 S: (2-)24-37-60-61		
616-032-00-9	diflufenican (ISO); N-(2,4-difluorophenyl)-2-[3-(trifluoromethyl)phenoxy]-3- pyridinecarboxamide	—	83164-33-4	R52-53	R: 52/53 S: 61		
616-033-00-4	cyprofuram (ISO); N-(3-chlorophenyl)-N-(tetrahydro-2-oxo-3-furyl)cyclopropa- necarboxamide	274-050-9	69581-33-5	T; R25 Xn; R21 N; R50-53	T; N R: 21-25-50/53 S: (1/2-)36/37-60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
616-034-00-X	pyracarbolid (ISO); 3,4-dihydro-6-methyl-2H-pyran-5-carboxanilide	246-419-4	24691-76-7	R52-53	R: 52/53 S: 61		
616-035-00-5	cymoxanil (ISO); 2-cyano-N-[(ethylamino)carbonyl]-2-(methoxyimino)aceta- mide	261-043-0	57966-95-7	Xn; R22 R43 N; R50-53	Xn; N R: 22-43-50/53 S: (2-)36/37-60-61		
616-036-00-0	2-chloroacetamide	201-174-2	79-07-2	Repr. Cat. 3; R62 T; R25 R43	T R: 25-43-62 S: (1/2-)22-36/37-45	R43: C ≥ 0,1 %	
616-037-00-6	acetochlor (ISO); 2-chloro-N-(ethoxymethyl)-N-(2-ethyl-6-methylphenyl)aceta- mide	251-899-3	34256-82-1	Xn; R20 Xi; R37/38 R43 N; R50-53	Xn; N R: 20-37/38-43-50/ 53 S: (2-)36/37-60-61		
616-038-00-1	(4-aminophenyl)-N-methylmethyleensulfonamide hydrochloride	406-010-5	88918-84-7	Xi; R41 R43 N; R51-53	Xi; N R: 41-43-51/53 S: (2-)24-26-37/39-61		
616-039-00-7	3',5'-dichloro-4'-ethyl-2'-hydroxypalmitanilide	406-200-8	117827-06-2	R43	Xi R: 43 S: (2-)24-37		
616-040-00-2	potassium N-(4-toluenesulfonyl)-4-toluenesulfonamide	406-650-5	97888-41-0	Xi; R41	Xi R: 41 S: (2-)26-39		
616-041-00-8	3',5'-dichloro-2-(2,4-di- <i>tert</i> -pentylphenoxy)-4'-ethyl-2'-hydro- xyhexaanilide	406-840-8	101664-25-9	R53	R: 53 S: 61		
616-042-00-3	N-(2-(6-ethyl-7-(4-methylphenoxy)-1H-pyrazolo[1,5-b] [1,2,4]triazol-2-yl)propyl)-2-octadecyloxybenzamide	407-070-5	142859-67-4	R43 R53	Xi R: 43-53 S: (2-)22-24-37-61		
616-043-00-9	isoxaben (ISO); N-[3-(1-ethyl-1-methylpropyl)-1,2-oxazol-5-yl]-2,6-dimetho- xybenzamide	407-190-8	82558-50-7	R53	R: 53 S: 61		
616-044-00-4	N-(3,5-dichloro-4-ethyl-2-hydroxyphenyl)-2-(3-pentadecyl- phenoxy)-butanamide	402-510-2	—	N; R51-53	N R: 51/53 S: 61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
616-045-00-X	2'-(4-chloro-3-cyano-5-formyl-2-thienylazo)-5'-diethylamino-2-methoxyacetanilide	405-190-2	122371-93-1	R43 R53	Xi R: 43-53 S: 2-22-24-37-61		
616-046-00-5	N-(2-(6-chloro-7-methylpyrazolo(1,5-b)-1,2,4-triazol-4-yl)propyl)-2-(2,4-di-tert-pentylphenoxy)octanamide	406-390-2	—	N; R50-53	N R: 50/53 S: 60-61		
616-047-00-0	reaction mass of: 2,2',2'',2'''-(ethylenedinitrilotetrakis-N,N-di(C <sub>16</sub> )alkylacetamide; 2,2',2'',2'''-(ethylenedinitrilotetrakis-N,N-di(C <sub>18</sub> )alkylacetamide	406-640-0	—	R43	Xi R: 43 S: (2-)24-37		
616-048-00-6	3'-trifluoromethylisobutyranilide	406-740-4	1939-27-1	Xn; R48/22 N; R51-53	Xn; N R: 48/22-51/53 S: (2-)22-36-61		
616-049-00-1	2-(2,4-bis(1,1-dimethylethyl)phenoxy)-N-(3,5-dichloro-4-ethyl-2-hydroxyphenyl)-hexanamide	408-150-2	99141-89-6	R53	R: 53 S: 61		
616-050-00-7	lufenuron (ISO); N-[2,5-dichloro-4-(1,1,2,3,3,3-hexafluoropropoxy)-phenylaminocarbonyl]-2,6-difluorobenzamide	410-690-9	103055-07-8	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		
616-051-00-2	reaction mass of: 2,4 -bis(N'-(4-methylphenyl)-ureido)-toluene; 2,6 -bis(N'-(4-methylphenyl)-ureido)-toluene	411-070-0	—	R53	R: 53 S: 61		
616-052-00-8	formamide	200-842-0	75-12-7	Repr. Cat. 2; R61	T R: 61 S: 53-45		
616-053-00-3	N-methylacetamide	201-182-6	79-16-3	Repr. Cat. 2; R61	T R: 61 S: 53-45		
616-054-00-9	iprodione (ISO); 3-(3,5-dichlorophenyl)-2,4-dioxo-N-isopropylimidazolidine-1-carboxamide	253-178-9	36734-19-7	Carc. Cat. 3; R40 N; R50-53	Xn; N R: 40-50/53 S: (2-)36/37-60-61		
616-055-00-4	propyzamide (ISO); 3,5-dichloro-N-(1,1-dimethylprop-2-ynyl)benzamide	245-951-4	23950-58-5	Carc. Cat. 3; R40 N; R50-53	Xn; N R: 40-50/53 S: (2-)36/37-60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
616-056-00-X	N-methylformamide	204-624-6	123-39-7	Repr. Cat. 2; R61 Xn; R21	T R: 61-21 S: 53-45		E
616-057-00-5	reaction mass of: N-[3-hydroxy-2-(2-methylacryloylamino-methoxy)propoxymethyl]-2-methylacrylamide; N-[2,3-bis-(2-methylacryloylamino-methoxy)propoxymethyl]-2-methylacrylamide; methacrylamide; 2-methyl-N-(2-methylacryloylamino-methoxymethyl)-acrylamide; N-(2,3-dihydroxypropoxymethyl)-2-methylacrylamide	412-790-8	—	Carc. Cat. 2; R45 Muta. Cat. 3; R68 Xn; R48/22	T R: 45-48/22 S: 53-45		E
616-058-00-0	1,3-bis(3-methyl-2,5-dioxo-1H-pyrrolinylmethyl)benzene	412-570-1	119462-56-5	Xn; R48/22 Xi; R41 R43 N; R50-53	Xn; N R: 41-43-48/22-50/53 S: (2-)26-36/37/39-60-61		
616-059-00-6	4-((4-(diethylamino)-2-ethoxyphenyl)imino)-1,4-dihydro-1-oxo-N-propyl-2-naphthalenecarboxamide	412-650-6	121487-83-0	R53	R: 53 S: 61		
616-060-00-1	Condensation product of: 3-(7-carboxyhept-1-yl)-6-hexyl-4-cyclohexene-1,2-dicarboxylic acid with polyamines (primarily amino-ethyl-piperazine and triethylenetetramine)	413-770-1	—	Xn; R22 C; R34 R43 N; R50-53	C; N R: 22-34-43-50/53 S: (1/2-)26-36/37/39-45-60-61		
616-061-00-7	N,N'-1,6-hexanediylbis(N-(2,2,6,6-tetramethyl-piperidin-4-yl)-formamide	413-610-0	124172-53-8	Xi; R36 R52-53	Xi R: 36-52/53 S: (2-)26-61		
616-062-00-2	N-[3-[(2-acetyloxy)ethyl](phenyl-methyl)amino]-4-methoxyphenylacetamide	411-590-8	70693-57-1	C; R34 R52-53	C R: 34-52/53 S: (1/2-)26-36/37/39-45-61		
616-063-00-8	3-dodecyl-(1-(1,2,2,6,6-pentamethyl-4-piperidin-yl)-2,5-pyrrolidindione	411-920-0	106917-30-0	T; R23 Xn; R22-48/22 C; R35 N; R50-53	T; C; N R: 22-23-35-48/22-50/53 S: (1/2-)26-28-36/37/39-45-60-61		
616-064-00-3	N-tert-butyl-3-methylpicolinamide	406-720-5	32998-95-1	R52-53	R: 52/53 S: 61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
616-065-00-9	3'-(3-acetyl-4-hydroxyphenyl)-1,1-diethylurea	411-970-3	79881-89-3	Xn; R22-48/22	Xn R: 22-48/22 S: (2-)22-36		
616-066-00-4	5,6,12,13-tetrachloroanthra(2,1,9-def:6,5,10-d'ef)diisoquinoline-1,3,8,10(2H,9H)-tetrone	405-100-1	115662-06-1	Repr. Cat. 3; R62	Xn R: 62 S: (2-)22-36/37		
616-067-00-X	dodecyl 3-(2-(3-benzyl-4-ethoxy-2,5-dioximidazolidin-1-yl)-4,4-dimethyl-3-oxovaleramido)-4-chlorobenzoate	407-300-4	92683-20-0	R53	R: 53 S: 61		
616-068-00-5	potassium 4-(11-methacrylamidoundecanamido)benzenesulfonate	406-500-9	174393-75-0	R43	Xi R: 43 S: (2-)22-24-37		
616-069-00-0	1-hydroxy-5-(2-methylpropyloxycarbonylamino)-N-(3-dodecyloxypropyl)-2-naphthoamide	406-210-2	110560-22-0	R53	R: 53 S: 61		
616-070-00-6	reaction mass of: 3,3'-dicyclohexyl-1,1'-methylenebis(4,1-phenylene)diurea; 3-cyclohexyl-1-(4-(4-(3-octadecylureido)benzyl)phenyl)urea; 3,3'-dioctadecyl-1,1'-methylenebis(4,1-phenylene)diurea	406-530-2	—	R53	R: 53 S: 22-61		
616-071-00-1	reaction mass of: bis(N-cyclohexyl-N'-phenyleneureido)methylene; bis(N-octadecyl-N'-phenyleneureido)methylene; bis(N-dicyclohexyl-N'-phenyleneureido)methylene (1:2:1)	406-550-1	—	R43 R53	Xi R: 43-53 S: (2-)22-24-37-61		
616-072-00-7	1-(2-deoxy-5-O-trityl-β-D-threopentofuranosyl)thymine	407-120-6	55612-11-8	R53	R: 53 S: 61		
616-073-00-2	4'-ethoxy-2-benzimidazoleanilide	407-600-5	120187-29-3	Muta. Cat. 3; R68 R53	Xn R: 68-53 S: (2-)22-36/37-61		
616-074-00-8	N-butyl-2-(4-morpholinylcarbonyl)benzamide	407-730-2	104958-67-0	Xi; R36 R43 R52-53	Xi R: 36-43-52/53 S: (2-)24-26-37-61		
616-075-00-3	D,L-(N,N-diethyl-2-hydroxy-2-phenylacetamide)	408-120-9	65197-96-8	Xn; R22 Xi; R41	Xn R: 22-41 S: (2-)26-39-46		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
616-076-00-9	tebufenozide (ISO); N-tert-butyl-N'-(4-ethylbenzoyl)-3,5-dimethylbenzohydrazide	412-850-3	112410-23-8	N; R51-53	N R: 51/53 S: 61		
616-077-00-4	reaction mass of: 2-(9-methyl-1,3,8,10-tetraoxo-2,3,9,10-tetrahydro-(1 <i>H</i> ,8 <i>H</i> )-anthra[2,1,9- <i>def</i> : 6,5,10- <i>d'ef'</i> ]diisoquinolin-2-ylethansulfonic acid; potassium 2-(9-methyl-1,3,8,10-tetraoxo-2,3,9,10-tetrahydro-(1 <i>H</i> ,8 <i>H</i> )-anthra[2,1,9- <i>def</i> : 6,5,10- <i>d'ef'</i> ]diisoquinolin-2-ylethansulfate	411-310-4	—	Xi; R41	Xi R: 41 S: (2-)26-39		
616-078-00-X	2-[2,4-bis(1,1-dimethyl-ethyl)phenoxy]-N-(2-hydroxy-5-methyl-phenyl)hexanamide	411-330-3	104541-33-5	R53	R: 53 S: 61		
616-079-00-5	1,6-hexanediyl-bis(2-(2-(1-ethylpentyl)-3-oxazolidinyl)ethyl) carbamate	411-700-4	140921-24-0	R43	Xi R: 43 S: (2-)24-37		
616-080-00-0	4-(2-((3-ethyl-4-methyl-2-oxo-pyrrolin-1-yl)carboxamido)ethyl)benzenesulfonamide)	411-850-0	119018-29-0	R52-53	R: 52/53 S: 61		
616-081-00-6	5-bromo-8-naphtholactam	413-480-5	24856-00-6	Xn; R22 R43 N; R50-53	Xn; N R: 22-43-50/53 S: (2-)22-24-37-60-61		
616-082-00-1	N-(5-chloro-3-((4-(diethylamino)-2-methylphenyl)imino-4-methyl-6-oxo-1,4-cyclohexadien-1-yl)benzamide	413-200-1	129604-78-0	R43	Xi R: 43 S: (2-)24-37		
616-083-00-7	[2-((4-nitrophenyl)amino)ethyl]urea	410-700-1	27080-42-8	R43 R52-53	Xi R: 43-52/53 S: (2-)24-37-61		
616-084-00-2	2,4-bis[N'-(4-methylphenyl)ureido]toluene	411-790-5	—	N; R50-53	N R: 50/53 S: 60-61		
616-085-00-8	3-(2,4-dichlorophenyl)-6-fluoro-quinazoline-2,4(1 <i>H</i> ,3 <i>H</i> )-dione	412-190-6	168900-02-5	N; R50-53	N R: 50/53 S: 60-61		
616-086-00-3	2-acetyl-amino-6-chloro-4-[(4-diethylamino)2-methylphenyl-imino]-5-methyl-1-oxo-2,5-cyclohexadiene	412-250-1	102387-48-4	R53	R: 53 S: 61		



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
616-087-00-9	reaction mass of: 7,9,9-trimethyl-3,14-dioxa-4,13-dioxo-5,12-diazaheptadecane-1,16-diyl-prop-2-enoate; 7,7,9-trimethyl-3,14-dioxa-4,13-dioxo-5,12-diazaheptadecan-1,16-diyl-prop-2-enoate	412-260-6	52658-19-2	Xi; R36 R43 N; R51-53	Xi; N R: 36-43-51/53 S: (2-)26-36/37-61		
616-088-00-4	2-aminosulfonyl-N,N-dimethylnicotinamide	413-440-7	112006-75-4	R43 R52-53	Xi R: 43-52/53 S: (2-)24-37-61		
616-089-00-X	5-(2,4-dioxo-1,2,3,4-tetrahydropyrimidine)-3-fluoro-2-hydroxymethyltetrahydrofuran	415-360-8	41107-56-6	Muta. Cat. 3; R68	Xn R: 68 S: (2-)22-36/37		
616-090-00-5	1-(1,4-benzodioxan-2-ylcarbonyl)piperazine hydrochloride	415-660-9	70918-74-0	T; R23/24/25 Xn; R48/22 N; R51-53	T; N R: 23/24/25-48/22-51/53 S: 53-45-61		
616-091-00-0	1,3,5-tris-[(2S and 2R)-2,3-epoxypropyl]-1,3,5-triazine-2,4,6-(1H,3H,5H)-trione	423-400-0	59653-74-6	Muta. Cat. 2; R46 T; R23 Xn; R22-48/22 Xi; R41 R43	T R: 46-22-23-41-43-48/22 S: 53-45		E
616-092-00-6	Polymeric reaction product of bicyclo[2.2.1]hepta-2,5-diene, ethene, 1,4-hexadiene, 1-propene with N,N-di-2-propenyl-formamide	404-035-6	—	R43 R53	Xi R: 43-53 S: (2-)24-37-61		
616-093-00-1	Reaction products of: aniline-terephthalaldehyde-o-toluidine condensate with maleic anhydride	406-620-1	129217-90-9	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
616-094-00-7	3,3'-dicyclohexyl-1,1'-methylenebis(4,1-phenylene)diurea	406-370-3	58890-25-8	R43 R53	Xi R: 43-53 S: (2-)24-37-61		
616-095-00-2	3,3'-dioctadecyl-1,1'-methylenebis(4,1-phenylene)diurea	406-690-3	43136-14-7	R53	R: 53 S: 61		
616-096-00-8	N-(3-hexadecyloxy-2-hydroxyprop-1-yl)-N-(2-hydroxyethyl) palmitamide	408-110-4	110483-07-3	R53	R: 53 S: 61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
616-097-00-3	N,N'-1,4-phenylenebis(2-((2-methoxy-4-nitrophenyl)azo)-3-oxobutanamide	411-840-6	83372-55-8	R53	R: 53 S: 61		
616-098-00-9	1-[4-chloro-3-((2,2,3,3,3-pentafluoropropoxy)methyl)phenyl]-5-phenyl-1H-1,2,4-triazole-3-carboxamide	411-750-7	119126-15-7	N; R51-53	N R: 51/53 S: 61		
616-099-00-4	2-[4-[(4-hydroxyphenyl)sulfonyl]phenoxy]-4,4-dimethyl-N-[5-[(methylsulfonyl)amino]-2-[4-(1,1,3,3-tetramethylbutyl)phenoxy]phenyl]-3-oxopentanamide	414-170-2	135937-20-1	R53	R: 53 S: 61		
616-100-00-8	1,3-dimethyl-1,3-bis(trimethylsilyl)urea	414-180-7	10218-17-4	Xn; R22 Xi; R38	Xn R: 22-38 S: (2-)36/37		
616-101-00-3	(S)-N-tert-butyl-1,2,3,4-tetrahydro-3-isoquinolinecarboxamide	414-600-9	149182-72-9	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)61		
616-102-00-9	reaction mass of: α-[3-(3-mercaptopropanoxycarbonylamino)methylphenylaminocarbonyl]-ω-[3-(3-mercaptopropanoxycarbonylamino)methylphenylaminocarbonyloxy]-poly-(oxyethylene-co-oxypropylene); 1,2-(or 1,3-)bis[α-(3-mercaptopropanoxycarbonylamino)methylphenylaminocarbonyl]-ω-oxy-poly(oxyethylene-co-oxypropylene)]-3-(or 2-)propanol; 1,2,3-tris[α-(3-mercaptopropanoxycarbonyl-amino)methylphenylaminocarbonyl]-ω-oxy-poly-(oxyethylene-co-oxypropylene)]propane]	415-870-0	—	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)36/37-61		
616-103-00-4	(S,S)-trans-4-(acetylamino)-5,6-dihydro-6-methyl-7,7-dioxo-4H-thieno[2,3-b]thiopyran-2-sulfonamide	415-030-3	120298-38-6	R43 N; R50-53	Xi; N R: 43-50/53 S: (2-)24-37-60-61		
616-104-00-X	benalaxyl (ISO); methyl N-(2,6-dimethylphenyl)-N-(phenylacetyl)-DL-alaninate	275-728-7	71626-11-4	N; R50-53	N R: 50/53 S: 60-61		
616-105-00-5	chlorotoluron (ISO); 3-(3-chloro-p-tolyl)-1,1-dimethylurea	239-592-2	15545-48-9	Carc. Cat. 3; R40 Repr. Cat. 3; R63 N; R50-53	Xn; N R: 40-63-50/53 S: (2-)26-36/37-46-60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
616-106-00-0	phenmedipham (ISO); methyl 3-(3-methylcarbaniloyloxy)carbanilate	237-199-0	13684-63-4	N; R50-53	N R: 50/53 S: 60-61		
616-108-00-1	iodosulfuron-methyl-sodium; sodium ([[5-iodo-2-(methoxycarbonyl)phenyl]sulfonyl]carbamoyl)(4-methoxy-6-methyl-1,3,5-triazin-2-yl)azanide	—	144550-36-7	N; R50-53	N R: 50/53 S: 60-61		
616-109-00-7	sulfosulfuron (ISO); 1-(4,6-dimethoxypyrimidin-2-yl)-3-(2-ethylsulfonylimidazo [1,2-a]pyridin-3-yl)sulfonylurea	—	141776-32-1	N; R50-53	N R: 50/53 S: 60-61		
616-110-00-2	cyclanilide (ISO); 1-(2,4-dichloroanilino-carbonyl)cyclopropanecarboxylic acid	419-150-7	113136-77-9	Xn; R22 N; R51-53	Xn; N R: 22-51/53 S: (2-)61		
616-111-00-8	fenhexamid (ISO); N-(2,3-dichlor-4-hydroxyphenyl)-1-methylcyclohexancarboxamid	422-530-5	126833-17-8	N; R51-53	N R: 51/53 S: 61		
616-112-00-3	oxasulfuron (ISO); oxetan-3-yl 2-[(4,6-dimethylpyrimidin-2-yl)-carbamoylsulfa-moyl]benzoate	—	144651-06-9	Xn; R48/22 N; R50-53	Xn; N R: 48/22-50/53 S: (2-)46-60-61		
616-113-00-9	desmedipham (ISO); ethyl 3-phenylcarbamoyloxyphenylcarbamate	237-198-5	13684-56-5	N; R50-53	N R: 50/53 S: 60-61	N; R50-53: C ≥ 2,5 % N; R51-53: 0,25 % ≤ C < 2,5 % R52-53: 0,025 % ≤ C < 0,25 %	
616-114-00-4	dodecanamide, N,N'-(9,9',10,10'-tetrahydro-9,9',10,10'-tetraoxo(1,1'-bianthracene)-4,4'-diyl)bis-	418-010-2	136897-58-0	R53	R: 53 S: 22-61		
616-115-00-X	N-(3-acetyl-2-hydroxyphenyl)-4-(4-phenylbutoxy)benzamide	416-150-9	136450-06-1	R53	R: 53 S: 61		
616-116-00-5	N-(4-dimethylaminopyridinium)-3-methoxy-4-(1-methyl-5-nitroindol-3-ylmethyl)-N-(o-tolylsulfonyl)benzamidate	416-790-9	143052-96-4	R53	R: 53 S: 61		
616-117-00-0	N-[2-(3-acetyl-5-nitrothiophen-2-ylazo)-5-diethylaminophenyl]acetamide	416-860-9	777891-21-1	Repr. Cat. 3; R62 R43 N; R50-53	Xn; N R: 43-62-50/53 S: (2-)22-36/37-60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
616-118-00-6	N-(2',6'-dimethylphenyl)-2-piperidinecarboxamide hydrochloride	417-950-0	65797-42-4	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)22-61		
616-119-00-1	2-(1-butyl-3,5-dioxo-2-phenyl-(1,2,4)-triazolidin-4-yl)-4,4-dimethyl-3-oxo-N-(2-methoxy-5-(2-(dodecyl-1-sulfonyl))propionylamino)-phenyl)-pentanamide	418-060-5	118020-93-2	R53	R: 53 S: 61		
616-120-00-7	reaction mass of: N-(3-dimethylamino-4-methyl-phenyl)-benzamide; N-(3-dimethylamino-2-methyl-phenyl)-benzamide; N-(3-dimethylamino-3-methyl-phenyl)-benzamide	420-600-1	—	Xn; R48/22 N; R51-53	Xn; N R: 48/22-51/53 S: (2-)36/37-61		
616-121-00-2	2,4-dihydroxy-N-(2-methoxyphenyl)benzamide	419-090-1	129205-19-2	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
616-123-00-3	N-[3-[[4-(diethylamino)-2-methylphenyl]imino]-6-oxo-1,4-cyclohexadienyl]acetamide	414-740-0	96141-86-5	N; R50-53	N R: 50/53 S: 60-61		
616-124-00-9	lithium bis(trifluoromethylsulfonyl)imide	415-300-0	90076-65-6	T; R24/25 C; R34 R52-53	T R: 24/25-34-52/53 S: (1/2-)22-26-36/37/ 39-45-61		
616-125-00-4	3-cyano-N-(1,1-dimethylethyl)androsta-3,5-diene-17-β-carboxamide	415-730-9	151338-11-3	N; R50-53	N R: 50/53 S: 60-61		
616-127-00-5	reaction mass of: N,N'-Ethane-1,2-diylbis(decanamide); 12-Hydroxy-N-[2-[1-oxydecyl]amino]ethyl]octadecanamide; N,N'-Ethane-1,2-diylbis(12-hydroxyoctadecanamide)	430-050-2	—	R43 N; R51-53	Xi; N R: 43-51/53 S: (2-)24-37-61		
616-128-00-0	N-(2-(1-allyl-4,5-dicyanoimidazol-2-ylazo)-5-(dipropylamino)phenyl)-acetamide	417-530-7	123590-00-1	R53	R: 53 S: 61		
616-129-00-6	N,N'-bis(2,2,6,6-tetramethyl-4-piperidyl)isophthalamide	419-710-0	42774-15-2	Xn; R22 Xi; R36	Xn R: 22-36 S: (2-)22-25-26		
616-130-00-1	N-(3-(2-(4,4-dimethyl-2,5-dioxo-imidazolin-1-yl)-4,4-dimethyl-3-oxo-pentanoylamino)-4-methoxy-phenyl)-octadecanamide	421-780-2	150919-56-5	R53	R: 53 S: 61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
616-132-00-2	N-[4-(4-cyano-2-furfurylidene-2,5-dihydro-5-oxo-3-furyl)phenyl]butane-1-sulfonamide	423-250-6	130016-98-7	N; R50-53	N R: 50/53 S: 60-61		
616-133-00-8	N-cyclohexyl-S,S-dioxobenzo[b]tiophene-2-carboxamide	423-990-1	149118-66-1	Xn; R22 Xi; R41 N; R50-53	Xn; N R: 22-41-50/53 S: (2-)22-26-39-60-61		
616-134-00-3	3,3'-bis(dioctyloxyphosphinothioylthio)-N,N'-oxybis(methylene)dipropionamide	401-820-5	793710-14-2	R52-53	R: 52/53 S: 61		
616-135-00-9	(3S,4aS,8aS)-2-[(2R,3S)-3-amino-2-hydroxy-4-phenylbutyl]-N-tert-butyldecahydroisoquinoline-3-carboxamide	430-230-0	136522-17-3	Xn; R22 R52-53	Xn R: 22-52/53 S: (2-)22-61		
616-142-00-7	1,3-Bis(vinylsulfonylacetamido)propane	428-350-3	93629-90-4	Muta. Cat. 3; R68 Xi; R41 R43 R52-53	Xn R: 41-43-68-52/53 S: (2-)22-26-36/37/39-61		
616-143-00-2	N,N'-dihexadecyl-N,N'-bis(2-hydroxyethyl)propanediamide	422-560-9	149591-38-8	Repr. Cat. 3; R62 Xi; R36 R53	Xn R: 36-62-53 S: (2-)26-36/37-61		
617-001-00-2	di-tert-butyl peroxide	203-733-6	110-05-4	O; R7 F; R11	O; F R: 7-11 S: (2-)3/7-14-16-36/37/39		
617-002-00-8	$\alpha,\alpha$ -dimethylbenzyl hydroperoxide; cumene hydroperoxide	201-254-7	80-15-9	O; R7 T; R23 Xn; R21/22-48/20/22 C; R34 N; R51-53	O; T; N R: 7-21/22-23-34-48/20/22-51/53 S: (1/2-)3/7-14-36/37/39-45-50-61	C; R34: C $\geq$ 10 % Xi; R37/38-41: 3 % $\leq$ C < 10 % Xi; R36/37: 1 % $\leq$ C < 3 %	
617-003-00-3	dilauroyl peroxide	203-326-3	105-74-8	O; R7	O R: 7 S: (2-)3/7-14-36/37/39		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
617-004-00-9	1,2,3,4-tetrahydro-1-naphthyl hydroperoxide	212-230-0	771-29-9	O; R7 Xn; R22 C; R34 N; R50-53	O; C; N R: 7-22-34-50/53 S: (1/2-)3/7-14-26-36/37/39-45-60-61	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	
617-006-00-X	bis(α,α-dimethylbenzyl) peroxide	201-279-3	80-43-3	O; R7 Xi; R36/38 N; R51-53	O; Xi; N R: 7-36/38-51/53 S: (2-)3/7-14-36/37/39-61		
617-007-00-5	tert-butyl α,α-dimethylbenzyl peroxide	222-389-8	3457-61-2	O; R7 Xi; R38 N; R51-53	O; Xi; N R: 7-38-51/53 S: (2-)3/7-14-36/37/39-61		
617-008-00-0	dibenzoyl peroxide; benzoyl peroxide	202-327-6	94-36-0	E; R2 ⊗ Xi; R36 R43	E; Xi R: 2-36-43 S: (2-)3/7-14-36/37/39		
617-010-00-1	1-hydroperoxycyclohexyl 1-hydroxycyclohexyl peroxide; [1] 1,1'-dioxibiscyclohexan-1-ol; [2] cyclohexylidene hydroperoxide; [3] cyclohexanone, peroxide [4]	201-091-1 [1] 219-306-2 [2] 220-279-4 [3] 235-527-7 [4]	78-18-2 [1] 2407-94-5 [2] 2699-11-8 [3] 12262-58-7 [4]	E; R2 ⊗ Xn; R22 C; R34	E; C R: 2-22-34 S: (1/2-)3/7-14-36/37/39-45	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	C
617-012-00-2	8-p-menthyl hydroperoxide; p-menthane hydroperoxide	201-281-4	80-47-7	O; R7 C; R34 Xn; R20	O; C R: 7-20-34 S: (1/2-)3/7-14-36/37/39-45	C; R34: C ≥ 10 % Xi; R36/37/38: 5 % ≤ C < 10 %	
617-013-00-8	O,O-tert-butyl O-docosyl monoperoxyoxalate	404-300-6	116753-76-5	O; R7 N; R50-53	O; N R: 7-50/53 S: (2-)7-14-36/37/39-47-60-61		
617-014-00-3	6-(nonylamino)-6-oxo-peroxyhexanoic acid	406-680-9	104788-63-8	O; R7 Xi; R41 R43 N; R50	O; Xi; N R: 7-41-43-50 S: (2-)3/7-14-26-36/37/39-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
617-015-00-9	bis(4-methylbenzoyl)peroxide	407-950-9	895-85-2	E; R2 O; R7 N; R50-53	E; N R: 2-7-50/53 S: (2-)7-14-36/37/39-47-60-61		
617-016-00-4	3-hydroxy-1,1-dimethylbutyl 2-ethyl-2-methylheptaneperoxoate	413-910-1	—	O; R7 R10 Xi; R38 N; R50-53	O; Xi; N R: 7-10-38-50/53 S: (2-)7/47-14-36/37/39-60-61		
617-017-00-X	reaction mass of: 2,2'-bis( <i>tert</i> -pentylperoxy)- <i>p</i> -diisopropylbenzene; 2,2'-bis( <i>tert</i> -pentylperoxy)- <i>m</i> -diisopropylbenzene	412-140-3	32144-25-5	O; R7 ⊗ R53	O R: 7-53 S: (2-)3/7-14-36/37/39-61		
617-018-00-5	reaction mass of: 1-methyl-1-(3-(1-methylethyl)phenyl)ethyl-1-methyl-1-phenylethylperoxide, 63 % by weight; 1-methyl-1-(4-(1-methylethyl)phenyl)ethyl-1-methyl-1-phenylethylperoxide, 31 % by weight	410-840-3	71566-50-2	O; R7 N; R51-53	O; N R: 7-51/53 S: (2-)3/7-14-36/37/39-61		
617-019-00-0	6-(phthalimido)peroxyhexanoic acid	410-850-8	128275-31-0	O; R7 Xi; R41 N; R50	O; Xi; N R: 7-41-50 S: (2-)3/7-14-26-36/37/39-61		
617-020-00-6	1,3-di(prop-2,2-diy)benzene bis(neodecanoylperoxide)	420-060-5	117663-11-3	R10 O; R7 N; R51-53	O; N R: 7-10-51/53 S: (2-)7-14-36/37/39-47-61		
647-001-00-8	glucosidase, β-	232-589-7	9001-22-3	R42	Xn R: 42 S: (2-)22-24-36/37		
647-002-00-3	cellulase	232-734-4	9012-54-8	R42	Xn R: 42 S: (2-)22-24-36/37		
647-003-00-9	cellobiohydrolase, exo-	253-465-9	37329-65-0	R42	Xn R: 42 S: (2-)22-24-36/37		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
647-004-00-4	cellulases with the exception of those specified elsewhere in this Annex	—	—	R42	Xn R: 42 S: (2-)22-24-36/37		A
647-005-00-X	bromelain, juice	232-572-4	9001-00-7	Xi; R36/37/38 R42	Xn R: 36/37/38-42 S: (2-)22-24-26-36/37		
647-006-00-5	ficin	232-599-1	9001-33-6	Xi; R36/37/38 R42	Xn R: 36/37/38-42 S: (2-)22-24-26-36/37		
647-007-00-0	papain	232-627-2	9001-73-4	Xi; R36/37/38 R42	Xn R: 36/37/38-42 S: (2-)22-24-26-36/37		
647-008-00-6	pepsin A	232-629-3	9001-75-6	Xi; R36/37/38 R42	Xn R: 36/37/38-42 S: (2-)22-24-26-36/37		
647-009-00-1	rennin	232-645-0	9001-98-3	Xi; R36/37/38 R42	Xn R: 36/37/38-42 S: (2-)22-24-26-36/37		
647-010-00-7	trypsin	232-650-8	9002-07-7	Xi; R36/37/38 R42	Xn R: 36/37/38-42 S: (2-)22-24-26-36/37		
647-011-00-2	chymotrypsin	232-671-2	9004-07-3	Xi; R36/37/38 R42	Xn R: 36/37/38-42 S: (2-)22-24-26-36/37		
647-012-00-8	subtilisin	232-752-2	9014-01-1	Xi; R37/38-41 R42	Xn R: 37/38-41-42 S: (2-)22-24-26-36/37/39		
647-013-00-3	proteïnase, microbial neutral	232-966-6	9068-59-1	Xi; R36/37/38 R42	Xn R: 36/37/38-42 S: (2-)22-24-26-36/37		



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
647-014-00-9	proteases with the exception of those specified elsewhere in this Annex	—	—	Xi; R36/37/38 R42	Xn R: 36/37/38-42 S: (2-)22-24-26-36/37		
647-015-00-4	amylase, $\alpha$ -	232-565-6	9000-90-2	R42	Xn R: 42 S: (2-)22-24-36/37		
647-016-00-X	amylases with the exception of those specified elsewhere in this Annex	—	—	R42	Xn R: 42 S: (2-)22-24-36/37		
648-001-00-0	Distillates (coal tar), benzole fraction; Light Oil; [A complex combination of hydrocarbons obtained by the distillation of coal tar. It consists of hydrocarbons having carbon numbers primarily in the range of C <sub>4</sub> to C <sub>10</sub> and distilling in the approximate range of 80 °C to 160 °C (175°F to 320°F).]	283-482-7	84650-02-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
648-002-00-6	Tar oils, brown-coal; Light Oil; [The distillate from lignite tar boiling in the range of approximately 80 °C to 250 °C (176°F to 482°F). Composed primarily of aliphatic and aromatic hydrocarbons and monobasic phenols.]	302-674-4	94114-40-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-003-00-1	Benzol forerunnings (coal); Light Oil Redistillate, low boiling; [The distillate from coke oven light oil having an approximate distillation range below 100 °C (212°F). Composed primarily of C <sub>4</sub> to C <sub>6</sub> aliphatic hydrocarbons.]	266-023-5	65996-88-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-004-00-7	Distillates (coal tar), benzole fraction, BTX-rich; Light Oil Redistillate, low boiling; [A residue from the distillation of crude benzole to remove benzole fronts. Composed primarily of benzene, toluene and xylenes boiling in the range of approximately 75 °C to 200 °C (167°F to 392°F).]	309-984-9	101896-26-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-005-00-2	Aromatic hydrocarbons, C <sub>6-10</sub> , C <sub>8</sub> -rich; Light Oil Redistillate, low boiling	292-697-5	90989-41-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
648-006-00-8	Solvent naphtha (coal), light; Light Oil Redistillate, low boiling	287-498-5	85536-17-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-007-00-3	Solvent naphtha (coal), xylene-styrene cut; Light Oil Redistillate, intermediate boiling	287-502-5	85536-20-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-008-00-9	Solvent naphtha (coal), coumarone-styrene contg.; Light Oil Redistillate, intermediate boiling	287-500-4	85536-19-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-009-00-4	Naphtha (coal), distn. residues; Light Oil Redistillate, high boiling; [The residue remaining from the distillation of recovered naphtha. Composed primarily of naphthalene and condensation products of indene and styrene.]	292-636-2	90641-12-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-010-00-X	Aromatic hydrocarbons, C <sub>8</sub> ; Light Oil Redistillate, high boiling	292-694-9	90989-38-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-012-00-0	Aromatic hydrocarbons, C <sub>8-9</sub> , hydrocarbon resin polymn. by-product; Light Oil Redistillate, high boiling; [A complex combination of hydrocarbons obtained from the evaporation of solvent under vacuum from polymerized hydrocarbon resin. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>8</sub> through C <sub>9</sub> and boiling in the range of approximately 120 °C to 215 °C (248°F to 419°F).]	295-281-1	91995-20-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-013-00-6	Aromatic hydrocarbons, C <sub>9-12</sub> , benzene distn.; Light Oil Redistillate, high boiling	295-551-9	92062-36-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-014-00-1	Extract residues (coal), benzole fraction alk., acid ext.; Light Oil Extract Residues, low boiling; [The redistillate from the distillate, freed of tar acids and tar bases, from bituminous coal high temperature tar boiling in the approximate range of 90 °C to 160 °C (194°F to 320°F). It consists predominantly of benzene, toluene and xylenes.]	295-323-9	91995-61-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
648-015-00-7	Extract residues (coal tar), benzole fraction alk., acid ext.; Light Oil Extract Residues, low boiling; [A complex combination of hydrocarbons obtained by the redistillation of the distillate of high temperature coal tar (tar acid and tar base free). It consists predominantly of unsubstituted and substituted mononuclear aromatic hydrocarbons boiling in the range of 85 °C-195 °C (185°F-383°F).]	309-868-8	101316-63-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-016-00-2	Extract residues (coal), benzole fraction acid; Light Oil Extract Residues, low boiling; [An acid sludge by-product of the sulphuric acid refining of crude high temperature coal. Composed primarily of sulfuric acid and organic compounds.]	298-725-2	93821-38-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-017-00-8	Extract residues (coal), light oil alk., distn. overheads; Light Oil Extract Residues, low boiling; [The first fraction from the distillation of aromatic hydrocarbons, coumarone, naphthalene and indene rich prefractionator bottoms or washed carbolic oil boiling substantially below 145 °C (293°F). Composed primarily of C <sub>7</sub> and C <sub>8</sub> aliphatic and aromatic hydrocarbons.]	292-625-2	90641-02-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-018-00-3	Extract residues (coal), light oil alk., acid ext., indene fraction; Light Oil Extract Residues, intermediate boiling	309-867-2	101316-62-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-019-00-9	Extract residues (coal), light oil alk., indene naphtha fraction; Light Oil Extract Residues, high boiling; [The distillate from aromatic hydrocarbons, coumarone, naphthalene and indene rich prefractionator bottoms or washed carbolic oils, having an approximate boiling range of 155 °C to 180 °C (311°F to 356°F). Composed primarily of indene, indan and trimethylbenzenes.]	292-626-8	90641-03-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-020-00-4	Solvent naphtha (coal); Light Oil Extract Residues, high boiling; [The distillate from either high temperature coal tar, coke oven light oil, or coal tar oil alkaline extract residue having an approximate distillation range of 130 °C to 210 °C (266°F to 410°F) Composed primarily of indene and other polycyclic ring systems containing a single aromatic ring. May contain phenolic compounds and aromatic nitrogen bases.]	266-013-0	65996-79-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
648-021-00-X	Distillates (coal tar), light oils, neutral fraction; Light Oil Extract Residues, high boiling; [A distillate from the fractional distillation of high temperature coal tar. Composed primarily of alkyl-substituted one ring aromatic hydrocarbons boiling in the range of approximately 135 °C to 210 °C (275°F to 410°F). May also include unsaturated hydrocarbons such as indene and coumarone.]	309-971-8	101794-90-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-022-00-5	Distillates (coal tar), light oils, acid exts.; Light Oil Extract Residues, high boiling; [This oil is a complex mixture of aromatic hydrocarbons, primarily indene, naphthalene, coumarone, phenol, and <i>o</i> -, <i>m</i> - and <i>p</i> -cresol and boiling in the range of 140 °C to 215 °C (284°F to 419°F).]	292-609-5	90640-87-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-023-00-0	Distillates (coal tar), light oils; Carbolic Oil; [A complex combination of hydrocarbons obtained by distillation of coal tar. It consists of aromatic and other hydrocarbons, phenolic compounds and aromatic nitrogen compounds and distills at the approximate range of 150 °C to 210 °C (302°F to 410°F).]	283-483-2	84650-03-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-024-00-6	Tar oils, coal; Carbolic Oil; [The distillate from high temperature coal tar having an approximate distillation range of 130 °C to 250 °C (266°F to 410°F). Composed primarily of naphthalene, alkylnaphthalenes, phenolic compounds, and aromatic nitrogen bases.]	266-016-7	65996-82-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-026-00-7	Extract residues (coal), light oil alk., acid ext.; Carbolic Oil Extract Residue; [The oil resulting from the acid washing of alkali-washed carbolic oil to remove the minor amounts of basic compounds (tar bases). Composed primarily of indene, indan and alkybenzenes.]	292-624-7	90641-01-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-027-00-2	Extract residues (coal), tar oil alk.; Carbolic Oil Extract Residue; [The residue obtained from coal tar oil by an alkaline wash such as aqueous sodium hydroxide after the removal of crude coal tar acids. Composed primarily of naphthalenes and aromatic nitrogen bases.]	266-021-4	65996-87-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
648-028-00-8	Extract oils (coal), light oil; Acid Extract; [The aqueous extract produced by an acidic wash of alkali-washed carbolic oil. Composed primarily of acid salts of various aromatic nitrogen bases including pyridine, quinoline and their alkyl derivatives.]	292-622-6	90640-99-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-029-00-3	Pyridine, alkyl derivs.; Crude Tar Bases; [The complex combination of polyalkylated pyridines derived from coal tar distillation or as high-boiling distillates approximately above 150 °C (302°F) from the reaction of ammonia with acetaldehyde, formaldehyde or paraformaldehyde.]	269-929-9	68391-11-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-030-00-9	Tar bases, coal, picoline fraction; Distillate Bases; [Pyridine bases boiling in the range of approximately 125 °C to 160 °C (257°F 320°F) obtained by distillation of neutralized acid extract of the base-containing tar fraction obtained by the distillation of bituminous coal tars. Composed chiefly of lutidines and picolines.]	295-548-2	92062-33-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-031-00-4	Tar bases, coal, lutidine fraction; Distillate Bases	293-766-2	91082-52-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-032-00-X	Extract oils (coal), tar base, collidine fraction; Distillate Bases; [The extract produced by the acidic extraction of bases from crude coal tar aromatic oils, neutralization, and distillation of the bases. Composed primarily of collidines, aniline, toluidines, lutidines, xyloidines.]	273-077-3	68937-63-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-033-00-5	Tar bases, coal, collidine fraction; Distillate Bases; [The distillation fraction boiling in the range of approximately 181 °C to 186 °C (356°F to 367°F) from the crude bases obtained from the neutralized, acid-extracted base-containing tar fractions obtained by the distillation of bituminous coal tar. It contains chiefly aniline and collidines.]	295-543-5	92062-28-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
648-034-00-0	Tar bases, coal, aniline fraction; Distillate Bases; [The distillation fraction boiling in the range of approximately 180 °C to 200 °C (356°F to 392°F) from the crude bases obtained by dephenolating and debasing the carbolated oil from the distillation of coal tar. It contains chiefly aniline, collidines, lutidines and toluidines.]	295-541-4	92062-27-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-035-00-6	Tar bases, coal, toluidine fraction; Distillate Bases	293-767-8	91082-53-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-036-00-1	Distillates (petroleum), alkene-alkyne manuf. pyrolysis oil, mixed with high-temp. coal tar, indene fraction; Redistillates; [A complex combination of hydrocarbons obtained as a redistillate from the fractional distillation of bituminous coal high temperature tar and residual oils that are obtained by the pyrolytic production of alkenes and alkynes from petroleum products or natural gas. It consists predominantly of indene and boils in a range of approximately 160 °C to 190 °C (320°F to 374°F).]	295-292-1	91995-31-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-037-00-7	Distillates (coal), coal tar-residual pyrolysis oils, naphthalene oils; Redistillates; [The redistillate obtained from the fractional distillation of bituminous coal high temperature tar and pyrolysis residual oils and boiling in the range of approximately 190 °C to 270 °C (374°F to 518°F). Composed primarily of substituted dinuclear aromatics.]	295-295-8	91995-35-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-038-00-2	Extract oils (coal), coal tar-residual pyrolysis oils, naphthalene oil, redistillate; Redistillates; [The redistillate from the fractional distillation of dephenolated and debased methylnaphthalene oil obtained from bituminous coal high temperature tar and pyrolysis residual oils boiling in the approximate range of 220 °C to 230 °C (428°F to 446°F). It consists predominantly of unsubstituted and substituted dinuclear aromatic hydrocarbons.]	295-329-1	91995-66-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
648-039-00-8	Extract oils (coal), coal tar-residual pyrolysis oils, naphthalene oils; Redistillates; [A neutral oil obtained by debasing and dephenolating the oil obtained from the distillation of high temperature tar and pyrolysis residual oils which has a boiling range of 225 °C to 255 °C (437°F to 491°F). Composed primarily of substituted dinuclear aromatic hydrocarbons.]	310-170-0	122070-79-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-040-00-3	Extract oils (coal), coal tar residual pyrolysis oils, naphthalene oil, distn. residues; Redistillates; [Residue from the distillation of dephenolated and debased methylnaphthalene oil (from bituminous coal tar and pyrolysis residual oils) with a boiling range of 240 °C to 260 °C (464°F to 500°F). Composed primarily of substituted dinuclear aromatic and heterocyclic hydrocarbons.]	310-171-6	122070-80-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-041-00-9	Absorption oils, bicyclo arom. and heterocyclic hydrocarbon fraction; Wash Oil Redistillate; [A complex combination of hydrocarbons obtained as a redistillate from the distillation of wash oil. It consists predominantly of 2-ringed aromatic and heterocyclic hydrocarbons boiling in the range of approximately 260 °C to 290 °C (500°F to 554°F).]	309-851-5	101316-45-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-042-00-4	Distillates (coal tar), upper, fluorene-rich; Wash Oil Redistillate; [A complex combination of hydrocarbons obtained by the crystallization of tar oil. It consists of aromatic and polycyclic hydrocarbons primarily fluorene and some acenaphthene.]	284-900-0	84989-11-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-043-00-X	Creosote oil, acenaphthene fraction, acenaphthene-free; Wash Oil Redistillate; [The oil remaining after removal by a crystallization process of acenaphthene from acenaphthene oil from coal tar. Composed primarily of naphthalene and alkylnaphthalenes.]	292-606-9	90640-85-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
648-044-00-5	Distillates (coal tar), heavy oils; Heavy Anthracene Oil; [Distillate from the fractional distillation of coal tar of bituminous coal, with boiling range of 240 °C to 400 °C (464°F to 752°F). Composed primarily of tri- and polynuclear hydrocarbons and heterocyclic compounds.]	292-607-4	90640-86-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
648-045-00-0	Distillates (coal tar), upper; Heavy Anthracene Oil; [The distillate from coal tar having an approximate distillation range of 220 °C to 450 °C (428°F to 842°F). Composed primarily of three to four membered condensed ring aromatic hydrocarbons and other hydrocarbons.]	266-026-1	65996-91-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-046-00-6	Anthracene oil, acid ext.; Anthracene Oil Extract Residue; [A complex combination of hydrocarbons from the base-freed fraction obtained from the distillation of coal tar and boiling in the range of approximately 325 °C to 365 °C (617°F to 689°F). It contains predominantly anthracene and phenanthrene and their alkyl derivatives.]	295-274-3	91995-14-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-047-00-1	Distillates (coal tar); Heavy Anthracene Oil; [The distillate from coal tar having an approximate distillation range of 100 °C to 450 °C (212°F to 842°F). Composed primarily of two to four membered condensed ring aromatic hydrocarbons, phenolic compounds, and aromatic nitrogen bases.]	266-027-7	65996-92-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-048-00-7	Distillates (coal tar), pitch, heavy oils; Heavy Anthracene Oil; [The distillate from the distillation of the pitch obtained from bituminous high temperature tar. Composed primarily of tri- and polynuclear aromatic hydrocarbons and boiling in the range of approximately 300 °C to 470 °C (572°F to 878°F). The product may also contain heteroatoms.]	295-312-9	91995-51-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-049-00-2	Distillates (coal tar), pitch; Heavy Anthracene Oil; [The oil obtained from condensation of the vapors from the heat treatment of pitch. Composed primarily of two- to four-ring aromatic compounds boiling in the range of 200 °C to greater than 400 °C (392°F to greater than 752°F).]	309-855-7	101316-49-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-050-00-8	Distillates (coal tar), heavy oils, pyrene fraction; Heavy Anthracene Oil Redistillate; [The redistillate obtained from the fractional distillation of pitch distillate boiling in the range of approximately 350 °C to 400 °C (662°F to 752°F). Consists predominantly of tri- and polynuclear aromatics and heterocyclic hydrocarbons.]	295-304-5	91995-42-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
648-051-00-3	Distillates (coal tar), pitch, pyrene fraction; Heavy Anthracene Oil Redistillate; [The redistillate obtained from the fractional distillation of pitch distillate and boiling in the range of approximately 380 °C to 410 °C (7160 to 770°F). Composed primarily of tri- and polynuclear aromatic hydrocarbons and heterocyclic compounds.]	295-313-4	91995-52-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-052-00-9	Paraffin waxes (coal), brown-coal high-temp. tar, carbon-treated; Coal Tar Extract; [A complete combination of hydrocarbons obtained by the treatment of lignite carbonization tar with activated carbon for removal of trace constituents and impurities. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C <sub>12</sub> .]	308-296-6	97926-76-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-053-00-4	Paraffin waxes (coal), brown-coal high-temp tar, clay-treated; Coal Tar Extract; [A complex combination of hydrocarbons obtained by the treatment of lignite carbonization tar with bentonite for removal of trace constituents and impurities. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C <sub>12</sub> .]	308-297-1	97926-77-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-054-00-X	Pitch; Pitch	263-072-4	61789-60-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-055-00-5	Pitch, coal tar, high-temp.; Pitch; [The residue from the distillation of high temperature coal tar. A black solid with an approximate softening point from 30 °C to 180 °C (86°F to 356°F). Composed primarily of a complex mixture of three or more membered condensed ring aromatic hydrocarbons.]	266-028-2	65996-93-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
648-056-00-0	Pitch, coal tar, high-temp., heat-treated; Pitch; [The heat treated residue from the distillation of high temperature coal tar. A black solid with an approximate softening point from 80 °C to 180 °C (176°F to 356°F). Composed primarily of a complex mixture of three or more membered condensed ring aromatic hydrocarbons.]	310-162-7	121575-60-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
648-057-00-6	Pitch, coal tar, high-temp., secondary; Pitch Redistillate; [The residue obtained during the distillation of high boiling fractions from bituminous coal high temperature tar and/or pitch coke oil, with a softening point of 140 °C to 170 °C (284°F to 392°F) according to DIN 52025. Composed primarily of tri- and polynuclear aromatic compounds which also contain heteroatoms.]	302-650-3	94114-13-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-058-00-1	Residues (coal tar), pitch distn.; Pitch Redistillate; [Residue from the fractional distillation of pitch distillate boiling in the range of approximately 400 °C to 470 °C (752°F to 846°F). Composed primarily of polynuclear aromatic hydrocarbons, and heterocyclic compounds.]	295-507-9	92061-94-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-059-00-7	Tar, coal, high-temp., distn. and storage residues; Coal Tar Solids Residue; [Coke- and ash-containing solid residues that separate on distillation and thermal treatment of bituminous coal high temperature tar in distillation installations and storage vessels. Consists predominantly of carbon and contains a small quantity of hetero compounds as well as ash components.]	295-535-1	92062-20-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-060-00-2	Tar, coal, storage residues; Coal Tar Solids Residue; [The deposit removed from crude coal tar storages. Composed primarily of coal tar and carbonaceous particulate matter.]	293-764-1	91082-50-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-061-00-8	Tar, coal, high-temp., residues; Coal Tar Solids Residue; [Solids formed during the coking of bituminous coal to produce crude bituminous coal high temperature tar. Composed primarily of coke and coal particles, highly aromatized compounds and mineral substances.]	309-726-5	100684-51-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-062-00-3	Tar, coal, high-temp., high-solids; Coal Tar Solids Residue; [The condensation product obtained by cooling, to approximately ambient temperature, the gas evolved in the high temperature (greater than 700 °C (1292°F)) destructive distillation of coal. Composed primarily of a complex mixture of condensed ring aromatic hydrocarbons with a high solid content of coal-type materials.]	273-615-7	68990-61-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
648-063-00-9	Waste solids, coal-tar pitch coking; Coal Tar Solids Residue; [The combination of wastes formed by the coking of bituminous coal tar pitch. It consists predominantly of carbon.]	295-549-8	92062-34-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-064-00-4	Extract residues (coal), brown; Coal Tar Extract; [The residue from extraction of dried coal.]	294-285-0	91697-23-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-065-00-X	Paraffin waxes (coal), brown-coal-high-temp. tar; Coal Tar Extract; [A complex combination of hydrocarbons obtained from lignite carbonization tar by solvent crystallisation (solvent deoiling), by sweating or an adducting process. It consists predominantly of straight and branched chain saturated hydrocarbons having carbon numbers predominantly greater than C <sub>12</sub> .]	295-454-1	92045-71-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-066-00-5	Paraffin waxes (coal), brown-coal-high-temp. tar, hydrotreated; Coal Tar Extract; [A complex combination of hydrocarbons obtained from lignite carbonization tar by solvent crystallisation (solvent deoiling), by sweating or an adducting process treated with hydrogen in the presence of a catalyst. It consists predominantly of straight and branched chain saturated hydrocarbons having carbon numbers predominantly greater than C <sub>12</sub> .]	295-455-7	92045-72-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-067-00-0	Paraffin waxes (coal), brown-coal high-temp tar, silicic acid-treated; Coal Tar Extract; [A complex combination of hydrocarbons obtained by the treatment of lignite carbonization tar with silicic acid for removal of trace constituents and impurities. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C <sub>12</sub> .]	308-298-7	97926-78-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-068-00-6	Tar, coal, low-temp., distn. residues; Tar Oil, intermediate boiling; [Residues from fractional distillation of low temperature coal tar to remove oils that boil in a range up to approximately 300 °C (572°F). Composed primarily of aromatic compounds.]	309-887-1	101316-85-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
648-069-00-1	Pitch, coal tar, low-temp; Pitch Residue; [A complex black solid or semi-solid obtained from the distillation of a low temperature coal tar. It has a softening point within the approximate range of 40 °C to 180 °C (104°F to 356°F). Composed primarily of a complex mixture of hydrocarbons.]	292-651-4	90669-57-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-070-00-7	Pitch, coal tar, low-temp., oxidized; Pitch Residue, oxidised; [The product obtained by air-blowing, at elevated temperature, low-temperature coal tar pitch. It has a softening-point within the approximate range of 70 °C to 180 °C (158°F to 356°F). Composed primarily of a complex mixture of hydrocarbons.]	292-654-0	90669-59-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-071-00-2	Pitch, coal tar, low-temp., heat-treated; Pitch Residue, oxidised; Pitch Residue, heat-treated; [A complex black solid obtained by the heat treatment of low temperature coal tar pitch. It has a softening point within the approximate range of 50 °C to 140 °C (122°F to 284°F). Composed primarily of a complex mixture of aromatic compounds.]	292-653-5	90669-58-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-072-00-8	Distillates (coal-petroleum), condensed-ring arom; Distillates; [The distillate from a mixture of coal and tar and aromatic petroleum streams having an approximate distillation range of 220 °C to 450 °C (428°F to 842°F). Composed primarily of 3- to 4-membered condensed ring aromatic hydrocarbons.]	269-159-3	68188-48-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-073-00-3	Aromatic hydrocarbons, C <sub>20-28</sub> , polycyclic, mixed coal-tar pitch-polyethylene-polypropylene pyrolysis-derived; Pyrolysis Products; [A complex combination hydrocarbons obtained from mixed coal tar pitch-polyethylene-polypropylene pyrolysis. Composed primarily of polycyclic aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>28</sub> and having a softening point of 100 °C to 220 °C (212°F to 428°F) according to DIN 52025.]	309-956-6	101794-74-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
648-074-00-9	Aromatic hydrocarbons, C <sub>20-28</sub> , polycyclic, mixed coal-tar pitch-polyethylene pyrolysis-derived; Pyrolysis Products; [A complex combination of hydrocarbons obtained from mixed coal tar pitch-polyethylene pyrolysis. Composed primarily of polycyclic aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>28</sub> and having a softening point of 100 °C to 220 °C (212°F to 428°F) according to DIN 52025.]	309-957-1	101794-75-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-075-00-4	Aromatic hydrocarbons, C <sub>20-28</sub> , polycyclic, mixed coal-tar pitch-polystyrene pyrolysis-derived; Pyrolysis Products; [A complex combination of hydrocarbons obtained from mixed coal tar pitch-polystyrene pyrolysis. Composed primarily of polycyclic aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>28</sub> and having a softening point of 100 °C to 220 °C (212°F to 428°F) according to DIN 52025.]	309-958-7	101794-76-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-076-00-X	Pitch, coal tar-petroleum; Pitch Residues; [The residue from the distillation of a mixture of coal tar and aromatic petroleum streams. A solid with a softening point from 40 °C to 180 °C (140°F to 356°F). Composed primarily of a complex combination of three or more membered condensed ring aromatic hydrocarbons.]	269-109-0	68187-57-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-077-00-5	Phenanthrene, distn. residues; Heavy Anthracene Oil Redistillate; [Residue from the distillation of crude phenanthrene boiling in the approximate range of 340 °C to 420 °C (644°F to 788°F). It consists predominantly of phenanthrene, anthracene and carbazole.]	310-169-5	122070-78-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-078-00-0	Distillates (coal tar), upper, fluorene-free; Wash Oil Redistillate; [A complex combination of hydrocarbons obtained by the crystallization of tar oil. It consists of aromatic polycyclic hydrocarbons, primarily diphenyl, dibenzofuran and acenaphthene.]	284-899-7	84989-10-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-079-00-6	Anthracene oil; Anthracene oil; [A complex combination of polycyclic aromatic hydrocarbons obtained from coal tar having an approximate distillation range of 300 °C to 400 °C (572°F to 752°F). Composed primarily of phenanthrene, anthracene and carbazole.]	292-602-7	90640-80-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
648-080-00-1	Residues (coal tar), creosote oil distn.; Wash Oil Redistillate; [The residue from the fractional distillation of wash oil boiling in the approximate range of 270 °C to 330 °C (518°F to 626°F). It consists predominantly of dinuclear aromatic and heterocyclic hydrocarbons.]	295-506-3	92061-93-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
648-081-00-7	Tar, coal; Coal tar; [The by-product from the destructive distillation of coal. Almost black semisolid. A complex combination of aromatic hydro-carbons, phenolic compounds, nitrogen bases and thiophene.]	232-361-7	8007-45-2	Carc. Cat. 1; R45	T R: 45 S: 53-45		H
648-082-00-2	Tar, coal, high-temp.; Coal tar; [The condensation product obtained by cooling, to approximately ambient temperature, the gas evolved in the high temperature (greater than 700 °C (1292°F)) destructive distillation of coal. A black viscous liquid denser than water. Composed primarily of a complex mixture of condensed ring aromatic hydrocarbons. May contain minor amounts of phenolic compounds and aromatic nitrogen bases.]	266-024-0	65996-89-6	Carc. Cat. 1; R45	T R: 45 S: 53-45		H
648-083-00-8	Tar, coal, low-temp.; Coal oil; [The condensation product obtained by cooling, to approximately ambient temperature, the gas evolved in low temperature (less than 700 °C (1292°F)) destructive distillation of coal. A black viscous liquid denser than water. Composed primarily of condensed ring aromatic hydrocarbons, phenolic compounds, aromatic nitrogen bases, and their alkyl derivatives.]	266-025-6	65996-90-9	Carc. Cat. 1; R45	T R: 45 S: 53-45		H
648-084-00-3	Distillates (coal), coke-oven light oil, naphthalene cut; Naphthalene Oil; [The complex combination of hydrocarbons obtained from prefractionation (continuous distillation) of coke oven light oil. It consists predominantly of naphthalene, coumarone and indene and boils above 148 °C (298°F).]	285-076-5	85029-51-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-085-00-9	Distillates (coal tar), naphthalene oils; Naphthalene Oil; [A complex combination of hydrocarbons obtained by the distillation of coal tar. It consists primarily of aromatic and other hydrocarbons, phenolic compounds and aromatic nitrogen compounds and distills in the approximate range of 200 °C to 250 °C (392°F to 482°F).]	283-484-8	84650-04-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
648-086-00-4	Distillates (coal tar), naphthalene oils, naphthalene-low; Naphthalene Oil Redistillate; [A complex combination of hydrocarbons obtained by crystallization of naphthalene oil. Composed primarily of naphthalene, alkyl naphthalenes and phenolic compounds.]	284-898-1	84989-09-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-087-00-X	Distillates (coal tar), naphthalene oil crystn. mother liquor; Naphthalene Oil Redistillate; [A complex combination of organic compounds obtained as a filtrate from the crystallization of the naphthalene fraction from coal tar and boiling in the range of approximately 200 °C to 230 °C (392°F to 446°F). Contains chiefly naphthalene, thionaphthene and alkyl naphthalenes.]	295-310-8	91995-49-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-088-00-5	Extract residues (coal), naphthalene oil, alk.; Naphthalene Oil Extract Residue; [A complex combination of hydrocarbons obtained from the alkali washing of naphthalene oil to remove phenolic compounds (tar acids). It is composed of naphthalene and alkyl naphthalenes.]	310-166-9	121620-47-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-089-00-0	Extract residues (coal), naphthalene oil, alk., naphthalene-low; Naphthalene Oil Extract Residue; [A complex combination of hydrocarbons remaining after the removal of naphthalene from alkali-washed naphthalene oil by a crystallization process. It is composed primarily of naphthalene and alkyl naphthalenes.]	310-167-4	121620-48-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-090-00-6	Distillates (coal tar), naphthalene oils, naphthalene-free, alk. exts.; Naphthalene Oil Extract Residue; [The oil remaining after the removal of phenolic compounds (tar acids) from drained naphthalene oil by an alkali wash. Composed primarily of naphthalene and alkyl naphthalenes.]	292-612-1	90640-90-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-091-00-1	Extract residues (coal), naphthalene oil alk., distn. overheads; Naphthalene Oil Extract Residue; [The distillation from alkali-washed naphthalene oil having an approximate distillation range of 180 °C to 220 °C (356°F to 428°F). Composed primarily of naphthalene, alkylbenzenes, indene and indan.]	292-627-3	90641-04-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
648-092-00-7	Distillates (coal tar), naphthalene oils, methylnaphthalene fraction; Methylnaphthalene Oil; [A distillate from the fractional distillation of high temperature coal tar. Composed primarily of substituted two ring aromatic hydrocarbons and aromatic nitrogen bases boiling in the range of approximately 225 °C to 255 °C (437°F to 491°F).]	309-985-4	101896-27-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-093-00-2	Distillates (coal tar), naphthalene oils, indole-methylnaphthalene fraction; Methylnaphthalene Oil; [A distillate from the fractional distillation of high temperature coal tar. Composed primarily of indole and methylnaphthalene boiling in the range of approximately 235 °C to 255 °C (455°F to 491°F).]	309-972-3	101794-91-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-094-00-8	Distillates (coal tar), naphthalene oils, acid exts.; Methylnaphthalene Oil Extract Residue; [A complex combination of hydrocarbons obtained by debasing the methylnaphthalene fraction obtained by the distillation of coal tar and boiling in the range of approximately 230 °C to 255 °C (446°F to 491°F). Contains chiefly 1(2)-methylnaphthalene, naphthalene, dimethylnaphthalene and biphenyl.]	295-309-2	91995-48-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-095-00-3	Extract residues (coal), naphthalene oil alk., distn. residues; Methylnaphthalene Oil Extract Residue; [The residue from the distillation of alkali-washed naphthalene oil having an approximate distillation range of 220 °C to 300 °C (428°F to 572°F). Composed primarily of naphthalene, alkylnaphthalenes and aromatic nitrogen bases.]	292-628-9	90641-05-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-096-00-9	Extract oils (coal), acidic, tar-base free; Methylnaphthalene Oil Extract Residue; [The extract oil boiling in the range of approximately 220 °C to 265 °C (428°F to 509°F) from coal tar alkaline extract residue produced by an acidic wash such as aqueous sulfuric acid after distillation to remove tar bases. Composed primarily of alkylnaphthalenes.]	284-901-6	84989-12-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-097-00-4	Distillates (coal tar), benzole fraction, distn. residues; Wash Oil; [A complex combination of hydrocarbons obtained from the distillation of crude benzole (high temperature coal tar). It may be a liquid with the approximate distillation range of 150 °C to 300 °C (302°F to 572°F) or a semi-solid or solid with a melting point up to 70 °C (158°F). It is composed primarily of naphthalene and alkyl naphthalenes.]	310-165-3	121620-46-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
648-098-00-X	Creosote oil, acenaphthene fraction; Wash Oil; [A complex combination of hydrocarbons produced by the distillation of coal tar and boiling in the range of approximately 240 °C to 280 °C (464°F to 536°F). Composed primarily of acenaphthene, naphthalene and alkyl naphthalene.]	292-605-3	90640-84-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
648-099-00-5	Creosote oil; [A complex combination of hydrocarbons obtained by the distillation of coal tar. It consists primarily of aromatic hydrocarbons and may contain appreciable quantities of tar acids and tar bases. It distills at the approximate range of 200 °C to 325 °C (392°F to 617°F).]	263-047-8	61789-28-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
648-100-00-9	Creosote oil, high-boiling distillate; Wash Oil; [The high-boiling distillation fraction obtained from the high temperature carbonization of bituminous coal which is further refined to remove excess crystalline salts. It consists primarily of creosote oil with some of the normal polynuclear aromatic salts, which are components of coal tar distillates, removed. It is crystal free at approximately 5 °C (41°F).]	274-565-9	70321-79-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
648-101-00-4	Creosote; [The distillate of coal tar produced by the high temperature carbonization of bituminous coal. It consists primarily of aromatic hydrocarbons, tar acids and tar bases.]	232-287-5	8001-58-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
648-102-00-X	Extract residues (coal), creosote oil acid; Wash Oil Extract Residue; [A complex combination of hydrocarbons from the base-free fraction from the distillation of coal tar, boiling in the range of approximately 250 °C to 280 °C (482°F to 536°F). It consists predominantly of biphenyl and isomeric diphenylnaphthalenes.]	310-189-4	122384-77-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
648-103-00-5	Anthracene oil, anthracene paste; Anthracene Oil Fraction; [The anthracene-rich solid obtained by the crystallization and centrifuging of anthracene oil. It is composed primarily of anthracene, carbazole and phenanthrene.]	292-603-2	90640-81-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-104-00-0	Anthracene oil, anthracene-low; Anthracene Oil Fraction; [The oil remaining after the removal, by a crystallization process, of an anthracene-rich solid (anthracene paste) from anthracene oil. It is composed primarily of two, three and four membered aromatic compounds.]	292-604-8	90640-82-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
648-105-00-6	Residues (coal tar), anthracene oil distn.; Anthracene Oil Fraction; [The residue from the fraction distillation of crude anthracene boiling in the approximate range of 340 °C to 400 °C (644°F to 752°F). It consists predominantly of tri- and polynuclear aromatic and heterocyclic hydrocarbons.]	295-505-8	92061-92-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-106-00-1	Anthracene oil, anthracene paste, anthracene fraction; Anthracene Oil Fraction; [A complex combination of hydrocarbons from the distillation of anthracene obtained by the crystallization of anthracene oil from bituminous high temperature tar and boiling in the range of 330 °C to 350 °C (626°F to 662°F). It contains chiefly anthracene, carbazole and phenanthrene.]	295-275-9	91995-15-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-107-00-7	Anthracene oil, anthracene paste, carbazole fraction; Anthracene Oil Fraction; [A complex combination of hydrocarbons from the distillation of anthracene obtained by crystallization of anthracene oil from bituminous coal high temperature tar and boiling in the approximate range of 350 °C to 360 °C (662°F to 680°F). It contains chiefly anthracene, carbazole and phenanthrene.]	295-276-4	91995-16-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-108-00-2	Anthracene oil, anthracene paste, distn. lights; Anthracene Oil Fraction; [A complex combination of hydrocarbons from the distillation of anthracene obtained by crystallization of anthracene oil from bituminous light temperature tar and boiling in the range of approximately 290 °C to 340 °C (554°F to 644°F). It contains chiefly trinuclear aromatics and their dihydro derivatives.]	295-278-5	91995-17-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-109-00-8	Tar oils, coal, low-temp.; Tar Oil, high boiling; [A distillate from low-temperature coal tar. Composed primarily of hydrocarbons, phenolic compounds and aromatic nitrogen bases boiling in the range of approximately 160 °C to 340 °C (320°F to 644°F).]	309-889-2	101316-87-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-110-00-3	Extract residues (coal), low temp. coal atar alk.; [The residue from low temperature coal tar oils after an alkaline wash, such as aqueous sodium hydroxide, to remove crude coal tar acids. Composed primarily of hydrocarbons and aromatic nitrogen bases.]	310-191-5	122384-78-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
648-111-00-9	Phenols, ammonia liquor ext.; Alkaline Extract; [The combination of phenols extracted, using isobutyl acetate, from the ammonia liquor condensed from the gas evolved in low-temperature (less than 700 °C (1292°F)) destructive distillation of coal. It consists predominantly of a mixture of monohydric and dihydric phenols.]	284-881-9	84988-93-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-112-00-4	Distillates (coal tar), light oils, alk. exts.; Alkaline Extract; [The aqueous extract from carbolic oil produced by an alkaline wash such as aqueous sodium hydroxide. Composed primarily of the alkali salts of various phenolic compounds.]	292-610-0	90640-88-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-113-00-X	Extracts, coal tar oil alk.; Alkaline Extract; [The extract from coal tar oil produced by an alkaline wash such as aqueous sodium hydroxide. Composed primarily of the alkali salts of various phenolic compounds.]	266-017-2	65996-83-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-114-00-5	Distillates (coal tar), naphthalene oils, alk. exts.; Alkaline Extract; [The aqueous extract from naphthalene oil produced by an alkaline wash such as aqueous sodium hydroxid. Composed primarily of the alkali salts of various phenolic compounds.]	292-611-6	90640-89-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-115-00-0	Extract residues (coal), tar oil alk., carbonated, limed; Crude Phenols; [The product obtained by treatment of coal tar oil alkaline extract with CO <sub>2</sub> and CaO. Composed primarily of CaCO <sub>3</sub> , Ca(OH) <sub>2</sub> , Na <sub>2</sub> CO <sub>3</sub> and other organic and inorganic impurities.]	292-629-4	90641-06-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-116-00-6	Tar acids, coal, crude; Crude Phenols; [The reaction product obtained by neutralizing coal tar oil alkaline extract with an acidic solution, such as aqueous sulfuric acid, or gaseous carbon dioxide, to obtain the free acids. Composed primarily of tar acids such as phenol, cresols, and xylenols.]	266-019-3	65996-85-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-117-00-1	Tar acids, brown-coal, crude; Crude Phenols; [An acidified alkaline extract of brown coal tar distillate. Composed primarily of phenol and phenol homologs.]	309-888-7	101316-86-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
648-118-00-7	Tar acids, brown-coal gasification; Crude Phenols; [A complex combination of organic compounds obtained from brown coal gasification. Composed primarily of C <sub>6-10</sub> hydroxy aromatic phenols and their homologs.]	295-536-7	92062-22-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-119-00-2	Tar acids, distn. residues; Distillate Phenols; [A residue from the distillation of crude phenol from coal. It consists predominantly of phenols having carbon numbers in the range of C <sub>8</sub> through C <sub>10</sub> with a softening point of 60 °C to 80 °C (140°F to 176°F).]	306-251-5	96690-55-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-120-00-8	Tar acids, methylphenol fraction; Distillate Phenols; [The fraction of tar acid rich in 3- and 4-methylphenol, recovered by distillation of low-temperature coal tar crude tar acids.]	284-892-9	84989-04-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-121-00-3	Tar acids, polyalkylphenol fraction; Distillate Phenols; [The fraction of tar acids, recovered by distillation of low-temperature coal tar crude tar acids, having an approximate boiling range of 225 °C to 320 °C (437°F to 608°F). Composed primarily of polyalkylphenols.]	284-893-4	84989-05-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-122-00-9	Tar acids, xylenol fraction; Distillate Phenols; [The fraction of tar acids, rich in 2,4- and 2,5-dimethylphenol, recovered by distillation of low-temperature coal tar crude tar acids.]	284-895-5	84989-06-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-123-00-4	Tar acids, ethylphenol fraction; Distillate Phenols; [The fraction of tar acids, rich in 3- and 4-ethylphenol, recovered by distillation of low-temperature coal tar crude tar acids.]	284-891-3	84989-03-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-124-00-X	Tar acids, 3,5-xylenol fraction; Distillate Phenols; [The fraction of tar acids, rich in 3,5-dimethylphenol, recovered by distillation of low-temperature coal tar acids.]	284-896-0	84989-07-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-125-00-5	Tar acids, residues, distillates, first-cut; Distillate Phenols; [The residue from the distillation in the range of 235 °C to 355 °C (481°F to 697°F) of light carbolic oil.]	270-713-1	68477-23-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
648-126-00-0	Tar acids, cresylic, residues; Distillate Phenols; [The residue from crude coal tar acids after removal of phenol, cresols, xylenols and any higher boiling phenols. A black solid with a melting point approximately 80 °C (176°F). Composed primarily of polyalkylphenols, resin gums, and inorganic salts.]	271-418-0	68555-24-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-127-00-6	Phenols, C <sub>9-11</sub> ; Distillate Phenols	293-435-2	91079-47-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-128-00-1	Tar acids, cresylic; Distillate Phenols; [A complex combination of organic compounds obtained from brown coal and boiling in the range of approximately 200 °C to 230 °C (392°F to 446°F). It contains chiefly phenols and pyridine bases.]	295-540-9	92062-26-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-129-00-7	Tar acids, brown-coal, C <sub>2</sub> -alkylphenol fraction; Distillate Phenols; [The distillate from the acidification of alkaline washed lignite tar distillate boiling in the range of approximately 200 °C to 230 °C (392°F to 446°F). Composed primarily of m- <i>ITA</i> and p- <i>ITA</i> ethylphenol as well as cresols and xylenols.]	302-662-9	94114-29-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-130-00-2	Extract oils (coal), naphthalene oils; Acid Extract; [The aqueous extract produced by an acidic wash of alkali-washed naphthalene oil. Composed primarily of acid salts of various aromatic nitrogen bases including pyridine, quinoline and their alkyl derivatives.]	292-623-1	90641-00-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-131-00-8	Tar bases, quinoline derivs.; Distillate Bases	271-020-7	68513-87-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-132-00-3	Tar bases, coal, quinoline derivs. fraction; Distillate Bases	274-560-1	70321-67-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
648-133-00-9	Tar bases, coal, distn. residues; Distillate Bases; [The distillation residue remaining after the distillation of the neutralized, acid-extracted base-containing tar fractions obtained by the distillation of coal tars. It contains chiefly aniline, collidines, quinoline and quinoline derivatives and toluidines.]	295-544-0	92062-29-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-134-00-4	Hydrocarbon oils, arom., mixed with polyethylene and polypropylene, pyrolyzed, light oil fraction; Heat Treatment Products; [The oil obtained from the heat treatment of a polyethylene/polypropylene mixture with coal tar pitch or aromatic oils. It consists predominantly of benzene and its homologs boiling in a range of approximately 70 °C to 120 °C (158°F to 248°F).]	309-745-9	100801-63-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-135-00-X	Hydrocarbon oils, arom., mixed with polyethylene, pyrolyzed, light oil fraction; Heat Treatment Products; [The oil obtained from the heat treatment of polyethylene with coal tar pitch or aromatic oils. It consists predominantly of benzene and its homologs boiling in a range of 70 °C to 120 °C (158°F to 248°F).]	309-748-5	100801-65-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-136-00-5	Hydrocarbon oils, arom., mixed with polystyrene, pyrolyzed, light oil fraction; Heat Treatment Products; [The oil obtained from the heat treatment of polystyrene with coal tar pitch or aromatic oils. It consists predominantly of benzene and its homologs boiling in a range of approximately 70 °C to 210 °C (158°F to 410°F).]	309-749-0	100801-66-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-137-00-0	Extract residues (coal), tar oil alk., naphthalene distn. residues; Naphthalene Oil Extract Residue; [The residue obtained from chemical oil extracted after the removal of naphthalene by distillation composed primarily of two to four membered condensed ring aromatic hydrocarbons and aromatic nitrogen bases.]	277-567-8	73665-18-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-138-00-6	Creosote oil, low-boiling distillate; Wash Oil; [The low-boiling distillation fraction obtained from the high temperature carbonization of bituminous coal, which is further refined to remove excess crystalline salts. It consists primarily of creosote oil with some of the normal polynuclear aromatic salts, which are components of coal tar distillate, removed. It is crystal free at approximately 38 °C (100°F).]	274-566-4	70321-80-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
648-139-00-1	Tar acids, cresylic, sodium salts, caustic solns.; Alkaline Extract	272-361-4	68815-21-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-140-00-7	Extract oils (coal), tar base; Acid Extract; [The extract from coal tar oil alkaline extract residue produced by an acidic wash such as aqueous sulfuric acid after distillation to remove naphthalene. Composed primarily of the acid salts of various aromatic nitrogen bases including pyridine, quinoline, and their alkyl derivatives.]	266-020-9	65996-86-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-141-00-2	Tar bases, coal, crude; Crude Tar Bases; [The reaction product obtained by neutralizing coal tar base extract oil with an alkaline solution, such as aqueous sodium hydroxide, to obtain the free bases. Composed primarily of such organic bases as acridine, phenanthridine, pyridine, quinoline and their alkyl derivatives.]	266-018-8	65996-84-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		HJM
648-142-00-8	Residues (coal), liq. solvent extrn.; [A cohesive powder composed of coal mineral matter and undissolved coal remaining after extraction of coal by a liquid solvent.]	302-681-2	94114-46-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-143-00-3	Coal liquids, liq. solvent extrn. soln.; [The product obtained by filtration of coal mineral matter and undissolved coal from coal extract solution produced by digesting coal in a liquid solvent. A black, viscous, highly complex liquid combination composed primarily of aromatic and partly hydro-genated aromatic hydrocarbons, aromatic nitrogen compounds, aromatic sulfur compounds, phenolic and other aromatic oxygen compounds and their alkyl derivatives.]	302-682-8	94114-47-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M
648-144-00-9	Coal liquids, liq. solvent extrn.; [The substantially solvent-free product obtained by the distillation of the solvent from filtered coal extract solution produced by digesting coal in a liquid solvent. A black semi-solid, composed primarily of a complex combination of condensed-ring aromatic hydrocarbons, aromatic nitrogen compounds, aromatic sulfur compounds, phenolic compounds and other aromatic oxygen compounds, and their alkyl derivatives.]	302-683-3	94114-48-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H M

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
648-145-00-4	Tar brown-coal; [An oil distilled from brown-coal tar. Composed primarily of aliphatic, naphthenic and one- to three-ring aromatic hydrocarbons, their alkyl derivatives, heteroaromatics and one- and two-ring phenols boiling in the range of approximately 150 °C to 360 °C (302°F to 680°F).]	309-885-0	101316-83-0	Carc. Cat. 1; R45	T R: 45 S: 53-45		H
648-146-00-X	Tar, brown-coal, low-temp.; [A tar obtained from low temperature carbonization and low temperature gasification of brown coal. Composed primarily of aliphatic, naphthenic and cyclic aromatic hydrocarbons, heteroaromatic hydrocarbons and cyclic phenols.]	309-886-6	101316-84-1	Carc. Cat. 1; R45	T R: 45 S: 53-45		H
648-147-00-5	Light oil (coal), coke-oven; Crude benzole; [The volatile organic liquid extracted from the gas evolved in the high temperature (greater than 700 °C (1292°F)) destructive distillation of coal. Composed primarily of benzene, toluene, and xylenes. May contain other minor hydrocarbon constituents.]	266-012-5	65996-78-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-148-00-0	Distillates (coal), liq. solvent extn., primary; [The liquid product of condensation of vapors emitted during the digestion of coal in a liquid solvent and boiling in the range of approximately 30 °C to 300 °C (86°F to 572°F). Composed primarily of partly hydrogenated condensed-ring aromatic hydrocarbons, aromatic compounds containing nitrogen, oxygen and sulfur, and their alkyl derivatives having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>14</sub> .]	302-688-0	94114-52-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-149-00-6	Distillates (coal), solvent extn., hydrocracked; [Distillate obtained by hydrocracking of coal extract or solution produced by the liquid solvent extraction or supercritical gas extraction process and boiling in the range of approximately 30 °C to 300 °C (86°F to 572°F). Composed primarily of aromatic, hydrogenated aromatic and naphthenic compounds, their alkyl derivatives and alkanes with carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>14</sub> . Nitrogen, sulfur and oxygen-containing aromatic and hydrogenated aromatic compounds are also present.]	302-689-6	94114-53-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
648-150-00-1	Naphtha (coal), solvent extn., hydrocracked; [Fraction of the distillate obtained by hydrocracking of coal extract or solution produced by the liquid solvent extraction or supercritical gas extraction processes and boiling in the range of approximately 30 °C to 180 °C (86°F to 356°F). Composed primarily of aromatic, hydrogenated aromatic and naphthenic compounds, their alkyl derivatives and alkanes with carbon numbers predominantly in the range of C <sub>4</sub> to C <sub>9</sub> . Nitrogen, sulfur and oxygen-containing aromatic and hydrogenated aromatic compounds are also present.]	302-690-1	94114-54-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-151-00-7	Gasoline, coal solvent extn., hydrocracked naphtha; [Motor fuel produced by the reforming of the refined naphtha fraction of the products of hydrocracking of coal extract or solution produced by the liquid solvent extraction or supercritical gas extraction processes and boiling in the range of approximately 30 °C to 180 °C (86°F to 356°F). Composed primarily of aromatic and naphthenic hydrocarbons, their alkyl derivatives and alkyl hydrocarbons having carbon numbers in the range of C <sub>4</sub> through C <sub>9</sub> .]	302-691-7	94114-55-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
648-152-00-2	Distillates (coal), solvent extn., hydrocracked middle; [Distillate obtained from the hydrocracking of coal extract or solution produced by the liquid solvent extraction or supercritical gas extraction processes and boiling in the range of approximately 180 °C to 300 °C (356°F to 572°F). Composed primarily of two-ring aromatic, hydrogenated aromatic and naphthenic compounds, their alkyl derivatives and alkanes having carbon numbers predominantly in the range of C <sub>9</sub> through C <sub>14</sub> . Nitrogen, sulfur and oxygen-containing compounds are also present.]	302-692-2	94114-56-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
648-153-00-8	Distillates (coal), solvent extn., hydrocracked hydrogenated middle; [Distillate from the hydrogenation of hydrocracked middle distillate from coal extract or solution produced by the liquid solvent extraction or supercritical gas extraction processes and boiling in the range of approximately 180 °C to 280 °C (356°F to 536°F). Composed primarily of hydrogenated two-ring carbon compounds and their alkyl derivatives having carbon numbers predominantly in the range of C <sub>9</sub> through C <sub>14</sub> .]	302-693-8	94114-57-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
648-154-00-3	Fuels, jet aircraft, coal solvent extn., hydrocracked hydrogenated; [Jet engine fuel produced by hydrogenation of the middle distillate fraction of the products of hydrocracking of coal extract or solution produced by the liquid solvent extraction or supercritical gas extraction processes and boiling in the range of approximately 180 °C to 225 °C (356°F to 473°F). Composed primarily of hydrogenated two-ring hydrocarbons and their alkyl derivatives having carbon numbers predominantly in the range of C <sub>10</sub> through C <sub>12</sub> .]	302-694-3	94114-58-6	Carc. Cat. 3; R40	Xn R: 40 S: (2-)36/37		H
648-155-00-9	Fuels, diesel, coal solvent extn., hydrocracked hydrogenated; [Diesel engine fuel produced by the hydrogenation of the middle distillate fraction of the products of hydrocracking of coal extract or solution produced by the liquid solvent extraction or supercritical gas extraction processes and boiling in the range of approximately 200 °C to 280 °C (392°F to 536°F). Composed primarily of hydrogenated two-ring hydrocarbons and their alkyl derivatives having carbon numbers predominantly in the range of C <sub>11</sub> through C <sub>14</sub> .]	302-695-9	94114-59-7	Carc. Cat. 3; R40	Xn R: 40 S: (2-)36/37		H
648-156-00-4	Light oil (coal), semi-coking process; Fresh oil; [The volatile organic liquid condensed from the gas evolved in the low temperature (less than 700 °C (1292°F) destructive distillation of coal. Composed primarily of C <sub>6-10</sub> hydrocarbons.]	292-635-7	90641-11-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H J
649-001-00-3	Extracts (petroleum), light naphthenic distillate solvent	265-102-1	64742-03-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-002-00-9	Extracts (petroleum), heavy paraffinic distillate solvent	265-103-7	64742-04-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-003-00-4	Extracts (petroleum), light paraffinic distillate solvent	265-104-2	64742-05-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-004-00-X	Extracts (petroleum), heavy naphthenic distillate solvent	265-111-0	64742-11-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-005-00-5	Extracts (petroleum), light vacuum gas oil solvent	295-341-7	91995-78-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-006-00-0	hydrocarbons C <sub>26-55</sub> , arom-rich	307-753-7	97722-04-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-007-00-6	fatty acids, tall-oil, reaction products with iminodiethanol and boric acid	400-160-5	—	Xi; R38 N; R51-53	Xi; N R: 38-51/53 S: (2-)28-37-61		
649-008-00-1	Residues (petroleum), atm. tower; Heavy Fuel oil; [A complex residuum from the atmospheric distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly greater than C <sub>20</sub> and boiling above approximately 350 °C (662°F). This stream is likely to contain 5 wt. % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	265-045-2	64741-45-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-009-00-7	Gas oils (petroleum), heavy vacuum; Heavy Fuel oil; [A complex combination of hydrocarbons produced by the vacuum distillation of the residuum from atmospheric distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and boiling in the range of approximately 350 °C to 600 °C (662°F to 1112°F). This stream is likely to contain 5 wt. % or more of 4-to 6-membered condensed ring aromatic hydrocarbons.]	265-058-3	64741-57-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-010-00-2	Distillates (petroleum), heavy catalytic cracked; Heavy Fuel oil; [A complex combination of hydrocarbons produced by the distillation of products from a catalytic cracking process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>35</sub> and boiling in the range of approximately 260 °C to 500 °C (500°F to 932°F). This stream is likely to contain 5 wt. % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	265-063-0	64741-61-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-011-00-8	Clarified oils (petroleum), catalytic cracked; Heavy Fuel oil; [A complex combination of hydrocarbons produced as the residual fraction from distillation of the products from a catalytic cracking process. It consists of hydrocarbons having carbon numbers predominantly greater than C <sub>20</sub> and boiling above approximately 350 °C (662°F). This stream is likely to contain 5 wt. % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	265-064-6	64741-62-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-012-00-3	Residues (petroleum), hydrocracked; Heavy Fuel oil; [A complex combination of hydrocarbons produced as the residual fraction from distillation of the products of a hydrocracking process. It consists of hydrocarbons having carbon numbers predominantly greater than C <sub>20</sub> and boiling above approximately 350 °C (662°F).]	265-076-1	64741-75-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-013-00-9	Residues (petroleum), thermal cracked; Heavy Fuel oil; [A complex combination of hydrocarbons produced as the residual fraction from distillation of the product from a thermal cracking process. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly greater than C <sub>20</sub> and boiling above approximately 350 °C (662°F). This stream is likely to contain 5 wt. % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	265-081-9	64741-80-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-014-00-4	Distillates (petroleum), heavy thermal cracked; Heavy Fuel oil; [A complex combination of hydrocarbons from the distillation of the products from a thermal cracking process. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>36</sub> and boiling in the range of approximately 260 °C to 480 °C (500°F to 896°F). This stream is likely to contain 5 wt. % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	265-082-4	64741-81-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-015-00-X	Gas oils (petroleum), hydrotreated vacuum; Heavy Fuel oil; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>13</sub> through C <sub>50</sub> and boiling in the range of approximately 230 °C to 600 °C (446°F to 1112°F). This stream is likely to contain 5 wt.% or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	265-162-9	64742-59-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-016-00-5	Residues (petroleum), hydrodesulfurized atmospheric tower; Heavy Fuel oil; [A complex combination of hydrocarbons obtained by treating an atmospheric tower residuum with hydrogen in the presence of a catalyst under conditions primarily to remove organic sulfur compounds. It consists of hydrocarbons having carbon numbers predominantly greater than C <sub>20</sub> and boiling above approximately 350 °C (662°F). This stream is likely to contain 5 wt. % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	265-181-2	64742-78-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-017-00-0	Gas oils (petroleum), hydrodesulfurized heavy vacuum; Heavy Fuel oil; [A complex combination of hydrocarbons obtained from a catalytic hydrodesulfurization process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and boiling in the range of approximately 350 °C to 600 °C (662°F to 1112 °C). This stream is likely to contain 5 wt. % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	265-189-6	64742-86-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-018-00-6	Residues (petroleum), steam-cracked; Heavy Fuel oil; [A complex combination of hydrocarbons obtained as the residual fraction from the distillation of the products of a steam cracking process (including steam cracking to produce ethylene). It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly greater than C <sub>14</sub> and boiling above approximately 260 °C (500°F). This stream is likely to contain 5 wt. % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	265-193-8	64742-90-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-019-00-1	Residues (petroleum), atmospheric; Heavy Fuel oil; [A complex residuum from atmospheric distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly greater than C <sub>11</sub> and boiling above approximately 200 °C (392°F). This stream is likely to contain 5 wt. % or more of 4-to 6-membered condensed ring aromatic hydrocarbons.]	269-777-3	68333-22-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-020-00-7	Clarified oils (petroleum), hydrodesulfurized catalytic cracked; Heavy Fuel oil; [A complex combination of hydrocarbons obtained by treating catalytic cracked clarified oil with hydrogen to convert organic sulfur to hydrogen sulfide which is removed. It consists of hydrocarbons having carbon numbers predominantly greater than C <sub>20</sub> and boiling above approximately 350 °C (662°F). This stream is likely to contain 5 wt. % or more of 4-to 6-membered condensed ring aromatic hydrocarbons.]	269-782-0	68333-26-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-021-00-2	Distillates (petroleum), hydrodesulfurized intermediate catalytic cracked; Heavy Fuel oil; [A complex combination of hydrocarbons obtained by treating intermediate catalytic cracked distillates with hydrogen to convert organic sulfur to hydrogen sulfide which is removed. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>11</sub> through C <sub>30</sub> and boiling in the range of approximately 205 °C to 450 °C (401°F to 842°F). It contains a relatively large proportion of tricyclic aromatic hydrocarbons.]	269-783-6	68333-27-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-022-00-8	Distillates (petroleum), hydrodesulfurized heavy catalytic cracked; Heavy Fuel oil; [A complex combination of hydrocarbons obtained by treatment of heavy catalytic cracked distillates with hydrogen to convert organic sulfur to hydrogen sulfide which is removed. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>35</sub> and boiling in the range of approximately 260 °C to 500 °C (500°F to 932°F). This stream is likely to contain 5 wt. % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	269-784-1	68333-28-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-023-00-3	Fuel oil, residues-straight-run gas oils, high-sulfur; Heavy Fuel oil	270-674-0	68476-32-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-024-00-9	Fuel oil, residual; Heavy Fuel oil; [The liquid product from various refinery streams, usually residues. The composition is complex and varies with the source of the crude oil.]	270-675-6	68476-33-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-025-00-4	Residues (petroleum), catalytic reformer fractionator residue distn.; Heavy Fuel oil; [A complex residuum from the distillation of catalytic reformer fractionator residue. It boils approximately above 399 °C (750°F).]	270-792-2	68478-13-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-026-00-X	Residues (petroleum), heavy coker gas oil and vacuum gas oil; Heavy Fuel oil; [A complex combination of hydrocarbons produced as the residual fraction from the distillation of heavy coker gas oil and vacuum gas oil. It predominantly consists of hydrocarbons having carbon numbers predominantly greater than C <sub>13</sub> and boiling above approximately 230 °C (446°F).]	270-796-4	68478-17-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-027-00-5	Residues (petroleum), heavy coker and light vacuum; Heavy Fuel oil; [A complex combination of hydrocarbons produced as the residual fraction from the distillation of heavy coker gas oil and light vacuum gas oil. It consists predominantly of hydrocarbons having carbon numbers predominantly greater than C <sub>13</sub> and boiling above approximately 230 °C (446°F).]	270-983-0	68512-61-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-028-00-0	Residues (petroleum), light vacuum; Heavy Fuel oil; [A complex residuum from the vacuum distillation of the residuum from the atmospheric distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly greater than C <sub>13</sub> and boiling above approximately 230 °C (446°F).]	270-984-6	68512-62-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-029-00-6	Residues (petroleum), steam-cracked light; Heavy Fuel oil; [A complex residuum from the distillation of the products from a steam-cracking process. It consists predominantly of aromatic and unsaturated hydrocarbons having carbon numbers greater than C <sub>7</sub> and boiling in the range of approximately 101 °C to 555 °C (214°F to 1030°F).]	271-013-9	68513-69-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-030-00-1	Fuel oil, No 6; Heavy Fuel oil; [A distillate oil having a minimum viscosity of 900 SUS at 37.7 °C (100°F) to a maximum of 9000 SUS at 37.7 °C (100°F).]	271-384-7	68553-00-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-031-00-7	Residues (petroleum), topping plant, low-sulfur; Heavy Fuel oil; [A low-sulfur complex combination of hydrocarbons produced as the residual fraction from the topping plant distillation of crude oil. It is the residuum after the straight-run gasoline cut, kerosene cut and gas oil cut have been removed.]	271-763-7	68607-30-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-032-00-2	Gas oils (petroleum), heavy atmospheric; Heavy Fuel oil; [A complex combination of hydrocarbons obtained by the distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>7</sub> through C <sub>35</sub> and boiling in the range of approximately 121 °C to 510 °C (250°F to 950°F).]	272-184-2	68783-08-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-033-00-8	Residues (petroleum), coker scrubber, Condensed-ring-arom.-contg.; Heavy Fuel oil; [A very complex combination of hydrocarbons produced as the residual fraction from the distillation of vacuum residuum and the products from a thermal cracking process. It consists predominantly of hydrocarbons having carbon numbers predominantly greater than C <sub>20</sub> and boiling above approximately 350 °C (662°F). This stream is likely to contain 5 wt.% or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	272-187-9	68783-13-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-034-00-3	Distillates (petroleum), petroleum residues vacuum; Heavy Fuel oil; [A complex combination of hydrocarbons produced by the vacuum distillation of the residuum from the atmospheric distillation of crude oil.]	273-263-4	68955-27-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-035-00-9	Residues (petroleum), steam-cracked, resinous; Heavy Fuel oil; [A complex residuum from the distillation of steam-cracked petroleum residues.]	273-272-3	68955-36-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-036-00-4	Distillates (petroleum), intermediate vacuum; Heavy Fuel oil; [A complex combination of hydrocarbons produced by the vacuum, distillation of the residuum from atmospheric distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>14</sub> through C <sub>42</sub> and boiling in the range of approximately 250 °C to 545 °C (482°F to 1013°F). This stream is likely to contain 5 wt. % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	274-683-0	70592-76-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-037-00-X	Distillates (petroleum), light vacuum; Heavy Fuel oil; [A complex combination of hydrocarbons produced by the vacuum distillation of the residuum from atmospheric distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>11</sub> through C <sub>35</sub> and boiling in the range of approximately 250 °C to 545 °C (482°F to 1013°F).]	274-684-6	70592-77-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-038-00-5	Distillates (petroleum), vacuum; Heavy Fuel oil; [A complex combination of hydrocarbons produced by the vacuum distillation of the residuum from atmospheric distillation of crude oil. It consists of hydrocarbons having numbers predominantly in the range of C <sub>15</sub> through C <sub>50</sub> and boiling in the range of approximately 270 °C to 600 °C (518°F to 1112°F). This stream is likely to contain 5 wt.% or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	274-685-1	70592-78-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-039-00-0	Gas oils (petroleum), hydrodesulfurized coker heavy vacuum; Heavy Fuel oil; [A complex combination of hydrocarbons obtained by hydrodesulfurization of heavy coker distillate stocks. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range C <sub>18</sub> to C <sub>44</sub> and boiling in the range of approximately 304 °C to 548 °C (579°F to 1018°F). Likely to contain 5 % or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	285-555-9	85117-03-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-040-00-6	Residues (petroleum), steam-cracked, distillates; Heavy Fuel oil; [A complex combination of hydrocarbons obtained during the production of refined petroleum tar by the distillation of steam cracked tar. It consists predominantly of aromatic and other hydrocarbons and organic sulfur compounds.]	292-657-7	90669-75-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-041-00-1	Residues (petroleum), vacuum, light; Heavy Fuel oil; [A complex residuum from the vacuum distillation of the residuum from atmospheric distillation of crude oil. It consists predominantly of hydrocarbons having carbon numbers predominantly greater than C <sub>24</sub> and boiling above approximately 390 °C (734°F).]	292-658-2	90669-76-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-042-00-7	Fuel oil, heavy, high-sulfur; Heavy Fuel oil; [A complex combination of hydrocarbons obtained by the distillation of crude petroleum. It consists predominantly of aliphatic, aromatic and cycloaliphatic hydrocarbons having carbon numbers predominantly higher than C <sub>25</sub> and boiling above approximately 400 °C (752°F).]	295-396-7	92045-14-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-043-00-2	Residues (petroleum), catalytic cracking; Heavy Fuel oil; [A complex combination of hydrocarbons produced as the residual fraction from the distillation of the products from a catalytic cracking process. It consists predominantly of hydrocarbons having carbon numbers predominantly greater than C <sub>11</sub> and boiling above approximately 200 °C (392°F).]	295-511-0	92061-97-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-044-00-8	Distillates (petroleum), intermediate catalytic cracked, thermally degraded; Heavy Fuel oil; [A complex combination of hydrocarbons produced by the distillation of products from a catalytic cracking process which has been used as a heat transfer fluid. It consists predominantly of hydrocarbons boiling in the range of approximately 220 °C to 450 °C (428°F to 842°F). This stream is likely to contain organic sulfur compounds.]	295-990-6	92201-59-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-045-00-3	Residual oils (petroleum); Heavy Fuel oil; [A complex combination of hydrocarbons, sulfur compounds and metal-containing organic compounds obtained as the residue from refinery fractionation cracking processes. It produces a finished oil with a viscosity above 2cSt. at 100 °C.]	298-754-0	93821-66-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-046-00-9	Residues, steam cracked, thermally treated; Heavy Fuel oil; [A complex combination of hydrocarbons obtained by the treatment and distillation of raw steam-cracked naphtha. It consists predominantly of unsaturated hydrocarbons boiling in the range above approximately 180 °C (356°F).]	308-733-0	98219-64-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-047-00-4	Distillates (petroleum), hydrodesulfurized full-range middle; Heavy Fuel oil; [A complex combination of hydrocarbons obtained by treating a petroleum stock with hydrogen. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>9</sub> through C <sub>25</sub> and boiling in the range of approximately 150 °C to 400 °C (302°F to 752°F).]	309-863-0	101316-57-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-048-00-X	Residues (petroleum), catalytic reformer fractionator; Heavy Fuel oil; [A complex combination of hydrocarbons produced as the residual fraction from distillation of the product from a catalytic reforming process. It consists of predominantly aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>10</sub> through C <sub>25</sub> and boiling in the range of approximately 160 °C to 400 °C (320°F to 725°F). This stream is likely to contain 5 wt. % or more of 4- or 6-membered condensed ring aromatic hydrocarbons.]	265-069-3	64741-67-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-049-00-5	Petroleum; Crude oil; [A complex combination of hydrocarbons, It consists predominantly of aliphatic, alicyclic and aromatic hydrocarbons. It may also contain small amounts of nitrogen, oxygen and sulfur compounds. This category encompasses light, medium, and heavy petroleums, as well as the oils extended from tar sands. Hydrocarbonaceous materials requiring major chemical changes for their recovery or conversion to petroleum refinery feedstocks such as crude shale oils; upgraded shale oils and liquid coal fuels are not included in this definition.]	232-298-5	8002-05-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-050-00-0	Distillates (petroleum), light paraffinic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons produced by vacuum distillation of the residuum from atmospheric distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>30</sub> and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C). It contains a relatively large proportion of saturated aliphatic hydrocarbons normally present in this distillation range of crude oil.]	265-051-5	64741-50-0	Carc. Cat. 1; R45	T R: 45 S: 53-45		H
649-051-00-6	Distillates (petroleum), heavy paraffinic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons produced by vacuum distillation of the residuum from atmospheric distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C). It contains a relatively large proportion of saturated aliphatic hydrocarbons.]	265-052-0	64741-51-1	Carc. Cat. 1; R45	T R: 45 S: 53-45		H
649-052-00-1	Distillates (petroleum), light naphthenic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons produced by vacuum distillation of the residuum from atmospheric distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>30</sub> and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-053-6	64741-52-2	Carc. Cat. 1; R45	T R: 45 S: 53-45		H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-053-00-7	Distillates (petroleum), heavy naphthenic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons produced by vacuum distillation of the residuum from atmospheric distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-054-1	64741-53-3	Carc. Cat. 1; R45	T R: 45 S: 53-45		H
649-054-00-2	Distillates (petroleum), acid-treated heavy naphthenic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons obtained as a raffinate from a sulfuric acid treating process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-117-3	64742-18-3	Carc. Cat. 1; R45	T R: 45 S: 53-45		H
649-055-00-8	Distillates (petroleum), acid-treated light naphthenic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons obtained as a raffinate from a sulfuric acid treating process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>30</sub> and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-118-9	64742-19-4	Carc. Cat. 1; R45	T R: 45 S: 53-45		H
649-056-00-3	Distillates (petroleum), acid-treated heavy paraffinic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons obtained as a raffinate from a sulfuric acid process. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and produces a finished oil having a viscosity of a least 100 SUS at 100°F (19cSt at 40 °C).]	265-119-4	64742-20-7	Carc. Cat. 1; R45	T R: 45 S: 53-45		H
649-057-00-9	Distillates (petroleum), acid-treated light paraffinic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons obtained as a raffinate from a sulfuric acid treating process. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>30</sub> and produces a finished oil having a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C).]	265-121-5	64742-21-8	Carc. Cat. 1; R45	T R: 45 S: 53-45		H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-058-00-4	Distillates (petroleum), chemically neutralized heavy paraffinic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons obtained from a treating process to remove acidic materials. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C). It contains a relatively large proportion of aliphatic hydrocarbons.]	265-127-8	64742-27-4	Carc. Cat. 1; R45	T R: 45 S: 53-45		H
649-059-00-X	Distillates (petroleum), chemically neutralized light paraffinic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons produced by a treating process to remove acidic materials. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>30</sub> and produces a finished oil with a viscosity less than 100 SUS at 100°F (19cSt at 40 °C).]	265-128-3	64742-28-5	Carc. Cat. 1; R45	T R: 45 S: 53-45		H
649-060-00-5	Distillates (petroleum), chemically neutralized heavy naphthenic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons produced by a treating process to remove acidic materials. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-135-1	64742-34-3	Carc. Cat. 1; R45	T R: 45 S: 53-45		H
649-061-00-0	Distillates (petroleum), chemically neutralized light naphthenic; Unrefined or mildly refined baseoil; [A complex combination of hydrocarbons produced by a treating process to remove acidic materials. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>30</sub> and produces a finished oil with a viscosity of less than 100 SUS a 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-136-7	64742-35-4	Carc. Cat. 1; R45	T R: 45 S: 53-45		H
649-062-00-6	Gases (petroleum), catalytic cracked naphtha depropanizer overhead, C <sub>3</sub> -rich acid-free; Petroleum gas; [A complex combination of hydrocarbons obtained from fractionation of catalytic cracked hydrocarbons and treated to remove acidic impurities. It consists of hydrocarbons having carbon numbers in the range of C <sub>2</sub> through C <sub>4</sub> , predominantly C <sub>3</sub> .]	270-755-0	68477-73-6	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-063-00-1	Gases (petroleum), catalytic cracker; Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of the products from a catalytic cracking process. It consists predominantly of aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>6</sub> .]	270-756-6	68477-74-7	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-064-00-7	Gases (petroleum), catalytic cracker, C <sub>1,5</sub> -rich; Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of products from a catalytic cracking process. It consists of aliphatic hydrocarbons having carbon numbers in the range of C <sub>1</sub> through C <sub>6</sub> , predominantly C <sub>1</sub> through C <sub>5</sub> .]	270-757-1	68477-75-8	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-065-00-2	Gases (petroleum), catalytic polymd. naphtha stabilizer overhead, C <sub>2,4</sub> -rich; Petroleum gas; [A complex combination of hydrocarbons obtained from the fractionation stabilization of catalytic polymerized naphtha. It consists of aliphatic hydrocarbons having carbon numbers in the range of C <sub>2</sub> through C <sub>6</sub> , predominantly C <sub>2</sub> through C <sub>4</sub> .]	270-758-7	68477-76-9	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-066-00-8	Gases (petroleum), catalytic reformer, C <sub>1,4</sub> -rich; Petroleum gas; [A complex combination of hydrocarbons produced by distillation of products from a catalytic reforming process. It consists of hydrocarbons having carbon numbers in the range of C <sub>1</sub> through C <sub>6</sub> , predominantly C <sub>1</sub> through C <sub>4</sub> .]	270-760-8	68477-79-2	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-067-00-3	Gases (petroleum), C <sub>3,5</sub> olefinic-paraffinic alkylation feed; Petroleum gas; [A complex combination of olefinic and paraffinic hydrocarbons having carbon numbers in the range of C <sub>3</sub> through C <sub>5</sub> which are used as alkylation feed. Ambient temperatures normally exceed the critical temperature of these combinations.]	270-765-5	68477-83-8	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-068-00-9	Gases (petroleum), C <sub>4</sub> -rich; Petroleum gas; [A complex combination of hydrocarbons produced by distillation of products from a catalytic fractionation process. It consists of aliphatic hydrocarbons having carbon numbers in the range of C <sub>3</sub> through C <sub>5</sub> , predominantly C <sub>4</sub> .]	270-767-6	68477-85-0	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-069-00-4	Gases (petroleum), deethanizer overheads; Petroleum gas; [A complex combination of hydrocarbons produced from distillation of the gas and gasoline fractions from the catalytic cracking process. It contains predominantly ethane and ethylene.]	270-768-1	68477-86-1	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-070-00-X	Gases (petroleum), deisobutanizer tower overheads; Petroleum gas; [A complex combination of hydrocarbons produced by the atmospheric distillation of a butane-butylene stream. It consists of aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>3</sub> through C <sub>4</sub> .]	270-769-7	68477-87-2	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-071-00-5	Gases (petroleum), depropanizer dry, propene-rich; Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of products from the gas and gasoline fractions of a catalytic cracking process. It consists predominantly of propylene with some ethane and propane.]	270-772-3	68477-90-7	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-072-00-0	Gases (petroleum), depropanizer overheads; Petroleum gas; [A complex combination of hydrocarbons produced by distillation of products from the gas and gasoline fractions of a catalytic cracking process. It consists of aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>2</sub> through C <sub>4</sub> .]	270-773-9	68477-91-8	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-073-00-6	Gases (petroleum), gas recovery plant depropanizer overheads; Petroleum gas; [A complex combination of hydrocarbons obtained by fractionation of miscellaneous hydrocarbon streams. It consists predominantly of hydrocarbons having carbon numbers in the range of C <sub>1</sub> through C <sub>4</sub> , predominantly propane.]	270-777-0	68477-94-1	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-074-00-1	Gases (petroleum), Girbatol unit feed; Petroleum gas; [A complex combination of hydrocarbons that is used as the feed into the Girbatol unit to remove hydrogen sulfide. It consists of aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>2</sub> through C <sub>4</sub> .]	270-778-6	68477-95-2	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-075-00-7	Gases (petroleum), isomerized naphtha fractionator, C <sub>4</sub> -rich, hydrogen sulfide-free; Petroleum gas	270-782-8	68477-99-6	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-076-00-2	Tail gas (petroleum), catalytic cracked clarified oil and thermal cracked vacuum residue fractionation reflux drum; Petroleum gas; [A complex combination of hydrocarbons obtained from fractionation of catalytic cracked clarified oil and thermal cracked vacuum residue. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>6</sub> .]	270-802-5	68478-21-7	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-077-00-8	Tail gas (petroleum), catalytic cracked naphtha stabilization absorber; Petroleum gas; [A complex combination of hydrocarbons obtained from the stabilization of catalytic cracked naphtha. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>6</sub> .]	270-803-0	68478-22-8	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-078-00-3	Tail gas (petroleum), catalytic cracker, catalytic reformer and hydrodesulfurizer combined fractionator; Petroleum gas; [A complex combination of hydrocarbons obtained from the fractionation of products from catalytic cracking, catalytic reforming and hydrodesulfurizing processes treated to remove acidic impurities. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	270-804-6	68478-24-0	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-079-00-9	Tail gas (petroleum), catalytic reformed naphtha fractionation stabilizer; Petroleum gas; [A complex combination of hydrocarbons obtained from the fractionation stabilization of catalytic reformed naphtha. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>4</sub> .]	270-806-7	68478-26-2	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-080-00-4	Tail gas (petroleum), saturate gas plant mixed stream, C <sub>4</sub> -rich; Petroleum gas; [A complex combination of hydrocarbons obtained from the fractionation stabilization of straight-run naphtha, distillation tail gas and catalytic reformed naphtha stabilizer tail gas. It consists of hydrocarbons having carbon numbers in the range of C <sub>3</sub> through C <sub>6</sub> , predominantly butane and isobutane.]	270-813-5	68478-32-0	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-081-00-X	Tail gas (petroleum), saturate gas recovery plant, C <sub>1-2</sub> -rich; Petroleum gas; [A complex combination of hydrocarbons obtained from fractionation of distillate tail gas, straight-run naphtha, catalytic reformed naphtha stabilizer tail gas. It consists predominantly of hydrocarbons having carbon numbers in the range of C <sub>1</sub> through C <sub>5</sub> , predominantly methane and ethane.]	270-814-0	68478-33-1	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-082-00-5	Tail gas (petroleum), vacuum residues thermal cracker; Petroleum gas; [A complex combination of hydrocarbons obtained from the thermal cracking of vacuum residues. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	270-815-6	68478-34-2	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-083-00-0	Hydrocarbons, C <sub>3,4</sub> -rich, petroleum distillate; Petroleum gas; [A complex combination of hydrocarbons produced by distillation and condensation of crude oil. It consists of hydrocarbons having carbon numbers in the range of C <sub>3</sub> through C <sub>5</sub> , predominantly C <sub>3</sub> through C <sub>4</sub> .]	270-990-9	68512-91-4	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-084-00-6	Gases (petroleum), full-range straight-run naphtha dehexanizer off; petroleum gas; [A complex combination of hydrocarbons obtained by the fractionation of the full-range straight-run naphtha. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>2</sub> through C <sub>6</sub> .]	271-000-8	68513-15-5	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-085-00-1	Gases (petroleum), hydrocracking depropanizer off, hydrocarbon-rich; Petroleum gas; [A complex combination of hydrocarbon produced by the distillation of products from a hydrocracking process. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>4</sub> . It may also contain small amounts of hydrogen and hydrogen sulfide.]	271-001-3	68513-16-6	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-086-00-7	Gases (petroleum), light straight-run naphtha stabilizer off; Petroleum gas; [A complex combination of hydrocarbons obtained by the stabilization of light straight-run naphtha. It consists of saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>2</sub> through C <sub>6</sub> .]	271-002-9	68513-17-7	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-087-00-2	Residues (petroleum), alkylation splitter, C <sub>4</sub> -rich; Petroleum gas; [A complex residuum from the distillation of streams various refinery operations. It consists of hydrocarbons having carbon numbers in the range of C <sub>4</sub> through C <sub>5</sub> , predominantly butane and boiling in the range of approximately - 11.7 °C to 27.8 °C (11°F to 82°F).]	271-010-2	68513-66-6	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-088-00-8	Hydrocarbons, C <sub>1-4</sub> ; Petroleum gas; [A complex combination of hydrocarbons provided by thermal cracking and absorber operations and by distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>4</sub> and boiling in the range of approximately minus 164 °C to minus 0.5 °C (-263°F to 31°F).]	271-032-2	68514-31-8	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-089-00-3	Hydrocarbons, C <sub>1-4</sub> , sweetened; Petroleum gas; [A complex combination of hydrocarbons obtained by subjecting hydrocarbon gases to a sweetening process to convert mercaptans or to remove acidic impurities. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>4</sub> and boiling in the range of approximately - 164 °C to - 0.5 °C (-263°F to 31°F).]	271-038-5	68514-36-3	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-090-00-9	Hydrocarbons, C <sub>1-3</sub> ; Petroleum gas; [A complex combination of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>3</sub> and boiling in the range of approximately minus 164 °C to minus 42 °C (-263°F to - 44°F).]	271-259-7	68527-16-2	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-091-00-4	Hydrocarbons, C <sub>1-4</sub> , debutanizer fraction; Petroleum gas	271-261-8	68527-19-5	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-092-00-X	Gases (petroleum), C <sub>1-5</sub> , wet; Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of crude oil and/or the cracking of tower gas oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	271-624-0	68602-83-5	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-093-00-5	Hydrocarbons, C <sub>2-4</sub> ; Petroleum gas	271-734-9	68606-25-7	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-094-00-0	Hydrocarbons, C <sub>3</sub> ; Petroleum gas	271-735-4	68606-26-8	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-095-00-6	Gases (petroleum), alkylation feed; Petroleum gas; [A complex combination of hydrocarbons produced by the catalytic cracking of gas oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>3</sub> through C <sub>4</sub> .]	271-737-5	68606-27-9	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-096-00-1	Gases (petroleum), depropanizer bottoms fractionation off; Petroleum gas; [A complex combination of hydrocarbons obtained from the fractionation of depropanizer bottoms. It consists predominantly of butane, isobutane and butadiene.]	271-742-2	68606-34-8	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-097-00-7	Gases (petroleum), refinery blend; Petroleum gas; [A complex combination obtained from various processes. It consists of hydrogen, hydrogen sulfide and hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	272-183-7	68783-07-3	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-098-00-2	Gases (petroleum), catalytic cracking; Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of the products from a catalytic cracking process. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>3</sub> through C <sub>5</sub> .]	272-203-4	68783-64-2	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-099-00-8	Gases (petroleum), C <sub>2-4</sub> , sweetened; Petroleum gas; [A complex combination of hydrocarbons obtained by subjecting a petroleum distillate to a sweetening process to convert mercaptans or to remove acidic impurities. It consists predominantly of saturated and unsaturated hydrocarbons having carbon numbers predominantly in the range of C <sub>2</sub> through C <sub>4</sub> and boiling in the range of approximately - 51 °C to - 34 °C (-60°F to - 30°F).]	272-205-5	68783-65-3	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-100-00-1	Gases (petroleum), crude oil fractionation off; Petroleum gas; [A complex combination of hydrocarbons produced by the fractionation of crude oil. It consists of saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	272-871-7	68918-99-0	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-101-00-7	Gases (petroleum), dehexanizer off; Petroleum gas; [A complex combination of hydrocarbons obtained by the fractionation of combined naphtha streams. It consists of saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	272-872-2	68919-00-6	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-102-00-2	Gases (petroleum), light straight run gasoline fractionation stabilizer off; Petroleum gas; [A complex combination of hydrocarbons obtained by the fractionation of light straight-run gasoline. It consists of saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	272-878-5	68919-05-1	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-103-00-8	Gases (petroleum), naphtha unifier desulfurization stripper off; Petroleum gas; [A complex combination of hydrocarbons produced by a naphtha unifier desulfurization process and stripped from the naphtha product. It consists of saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>4</sub> .]	272-879-0	68919-06-2	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-104-00-3	Gases (petroleum), straight-run naphtha catalytic reforming off; Petroleum gas; [A complex combination of hydrocarbons obtained by the catalytic reforming of straight-run naphtha and fractionation of the total effluent. It consists of methane, ethane, and propane.]	272-882-7	68919-09-5	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-105-00-9	Gases (petroleum), fluidized catalytic cracker splitter overheads; Petroleum gas; [A complex combination of hydrocarbons produced by the fractionation of the charge to the C <sub>3</sub> -C <sub>4</sub> splitter. It consists predominantly of C <sub>3</sub> hydrocarbons.]	272-893-7	68919-20-0	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-106-00-4	Gases (petroleum), straight-run stabilizer off; Petroleum gas; [A complex combination of hydrocarbons obtained from the fractionation of the liquid from the first tower used in the distillation of crude oil. It consists of saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>4</sub> .]	272-883-2	68919-10-8	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45 S: 53-45		H K

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-107-00-X	Gases (petroleum), catalytic cracked naphtha debutanizer; Petroleum gas; [A complex combination of hydrocarbons obtained from fractionation of catalytic cracked naphtha. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>4</sub> .]	273-169-3	68952-76-1	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-108-00-5	Tail gas (petroleum), catalytic cracked distillate and naphtha stabilizer; Petroleum gas; [A complex combination of hydrocarbons obtained by the fractionation of catalytic cracked naphtha and distillate. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>4</sub> .]	273-170-9	68952-77-2	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-109-00-0	Tail gas (petroleum), thermal-cracked distillate, gas oil and naphtha absorber; petroleum gas; [A complex combination of hydrocarbons obtained from the separation of thermal-cracked distillates, naphtha and gas oil. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>6</sub> .]	273-175-6	68952-81-8	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-110-00-6	Tail gas (petroleum), thermal cracked hydrocarbon fractionation stabilizer, petroleum coking; Petroleum gas; [A complex combination of hydrocarbons obtained from the fractionation stabilization of thermal cracked hydrocarbons from petroleum coking process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>6</sub> .]	273-176-1	68952-82-9	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-111-00-1	Gases (petroleum, light steam-cracked, butadiene conc.); Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of products from a thermal cracking process. It consists of hydrocarbons having a carbon number predominantly of C <sub>4</sub> .]	273-265-5	68955-28-2	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-112-00-7	Gases (petroleum), straight-run naphtha catalytic reformer stabilizer overhead; Petroleum gas; [A complex combination of hydrocarbons obtained by the catalytic reforming of straight-run naphtha and the fractionation of the total effluent. It consists of saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>2</sub> through C <sub>4</sub> .]	273-270-2	68955-34-0	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-113-00-2	Hydrocarbons, C <sub>4</sub> ; Petroleum gas	289-339-5	87741-01-3	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-114-00-8	Alkanes, C <sub>1-4</sub> , C <sub>3</sub> -rich; Petroleum gas	292-456-4	90622-55-2	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-115-00-3	Gases (petroleum), steam-cracker C <sub>3</sub> -rich; Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of products from a steam cracking process. It consists predominantly of propylene with some propane and boils in the range of approximately - 70 °C to 0 °C (-94°F to 32°F).]	295-404-9	92045-22-2	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-116-00-9	Hydrocarbons, C <sub>4</sub> , steam-cracker distillate; Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of the products of a steam cracking process. It consists predominantly of hydrocarbons having a carbon number of C <sub>4</sub> , predominantly 1-butene and 2-butene, containing also butane and isobutene and boiling in the range of approximately minus 12 °C to 5 °C (10.4°F to 41°F).]	295-405-4	92045-23-3	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-117-00-4	Petroleum gases, liquefied, sweetened, C <sub>4</sub> fraction; Petroleum gas; [A complex combination of hydrocarbons obtained by subjecting a liquified petroleum gas mix to a sweetening process to oxidize mercaptans or to remove acidic impurities. It consists predominantly of C <sub>4</sub> saturated and unsaturated hydrocarbons.]	295-463-0	92045-80-2	F+; R12 Carc. Cat. 1; R45 Muta. Cat. 2; R46	F+; T R: 12-45-46 S: 53-45		HKS
649-118-00-X	Hydrocarbons, C <sub>4</sub> , 1,3-butadiene- and isobutene-free; Petroleum gas	306-004-1	95465-89-7	⊗ Carc. Cat. 2; R45	T R: 45 S: 53-45		H K
649-119-00-5	Raffinates (petroleum), steam-cracked C <sub>4</sub> fraction cuprous ammonium acetate extrn., C <sub>3,5</sub> and C <sub>3,5</sub> unsatd., butadiene-free; Petroleum gas	307-769-4	97722-19-5	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-120-00-0	Gases (petroleum), amine system feed; Refinery gas; [The feed gas to the amine system for removal of hydrogen sulfide. It consists of hydrogen, carbon monoxide, carbon dioxide, hydrogen sulfide and aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> may also be present.]	270-746-1	68477-65-6	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-121-00-6	Gases (petroleum), benzene unit hydrodesulfurizer off; Refinery gas; [Off gases produced by the benzene unit. It consists primarily of hydrogen, carbon monoxide and hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>6</sub> , including benzene, may also be present.]	270-747-7	68477-66-7	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-122-00-1	Gases (petroleum), benzene unit recycle, hydrogen-rich; Refinery gas; [A complex combination of hydrocarbons obtained by recycling the gases of the benzene unit. It consists primarily of hydrogen with various small amounts of carbon monoxide and hydrocarbons having carbon numbers in the range of C <sub>1</sub> through C <sub>6</sub> .]	270-748-2	68477-67-8	Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-123-00-7	Gases (petroleum), blend oil, hydrogen-nitrogen-rich; Refinery gas; [A complex combination of hydrocarbons obtained by distillation of a blend oil. It consists primarily of hydrogen and nitrogen with various small amounts of carbon monoxide, carbon dioxide, and aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	270-749-8	68477-68-9	§ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-124-00-2	Gases (petroleum), catalytic reformed naphtha stripper overheads; Refinery gas; [A complex combination of hydrocarbons obtained from stabilization of catalytic reformed naphtha. Its consists of hydrogen and saturated hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>4</sub> .]	270-759-2	68477-77-0	§ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-125-00-8	Gases (petroleum), C <sub>6-8</sub> catalytic reformer recycle; Refinery gas; [A complex combination of hydrocarbons produced by distillation of products from catalytic reforming of C <sub>6</sub> -C <sub>8</sub> feed and recycled to conserve hydrogen. It consists primarily of hydrogen. It may also contain various small amounts of carbon monoxide, carbon dioxide, nitrogen, and hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>6</sub> .]	270-761-3	68477-80-5	§ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-126-00-3	Gases (petroleum), C <sub>6-8</sub> catalytic reformer; Refinery gas; [A complex combination of hydrocarbons produced by distillation of products from catalytic reforming of C <sub>6</sub> -C <sub>8</sub> feed. It consists of hydrocarbons having carbon numbers in the range of C <sub>1</sub> through C <sub>5</sub> and hydrogen.]	270-762-9	68477-81-6	§ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-127-00-9	Gases (petroleum), C <sub>6-8</sub> catalytic reformer recycle, hydrogen-rich; Refinery gas	270-763-4	68477-82-7	§ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-128-00-4	Gases (petroleum), C <sub>2</sub> -return stream; Refinery gas; [A complex combination of hydrocarbons obtained by the extraction of hydrogen from a gas stream which consists primarily of hydrogen with small amounts of nitrogen, carbon monoxide, methane, ethane, and ethylene. It contains predominantly hydrocarbons such as methane, ethane, and ethylene with small amounts of hydrogen, nitrogen and carbon monoxide.]	270-766-0	68477-84-9	§ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-129-00-X	Gases (petroleum), dry sour, gas-concn.-unit-off; Refinery gas; [The complex combination of dry gases from a gas concentration unit. It consists of hydrogen, hydrogen sulfide and hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>3</sub> .]	270-774-4	68477-92-9	§ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-130-00-5	Gases (petroleum), gas concn. reabsorber distn.; Refinery gas; [A complex combination of hydrocarbons produced by distillation of products from combined gas ⊗ streams in a gas concentration reabsorber. It consists predominantly of hydrogen, carbon monoxide, carbon dioxide, nitrogen, hydrogen sulfide and hydrocarbons having carbon numbers in the range of C <sub>1</sub> through C <sub>3</sub> .]	270-776-5	68477-93-0	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-131-00-0	Gases (petroleum), hydrogen absorber off; Refinery gas; [A complex combination obtained by absorbing hydrogen from a hydrogen rich stream. It consists of hydrogen, carbon monoxide, nitrogen, and methane with small amounts of C <sub>2</sub> hydrocarbons.]	270-779-1	68477-96-3	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-132-00-6	Gases (petroleum), hydrogen-rich; Refinery gas; [A complex combination separated as a gas from hydrocarbon gases by chilling. It consists primarily of hydrogen with various small amounts of carbon monoxide, nitrogen, methane, and C <sub>2</sub> hydrocarbons.]	270-780-7	68477-97-4	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-133-00-1	Gases (petroleum), hydrotreater blend oil recycle, hydrogen-nitrogen-rich; Refinery gas; [A complex combination obtained from recycled hydrotreated blend oil. It consists primarily of hydrogen and nitrogen with various small amounts of carbon monoxide, carbon dioxide and hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	270-781-2	68477-98-5	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-134-00-7	Gases (petroleum), recycle, hydrogen-rich; Refinery gas; [A complex combination obtained from recycled reactor gases. It consists primarily of hydrogen with various small amounts of carbon monoxide, carbon dioxide, nitrogen, hydrogen sulfide, and saturated aliphatic hydrocarbons having carbon numbers in the range of C <sub>1</sub> through C <sub>5</sub> .]	270-783-3	68478-00-2	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-135-00-2	Gases (petroleum), reformer make-up, hydrogen-rich; Refinery gas; [A complex combination obtained from the reformers. It consists primarily of hydrogen with various small amounts of carbon monoxide and aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	270-784-9	68478-01-3	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-136-00-8	Gases (petroleum), reforming hydrotreater; Refinery gas; [A complex combination obtained from the reforming hydrotreating process. It consists primarily of hydrogen, methane, and ethane with various small amounts of hydrogen sulfide and aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>3</sub> through C <sub>5</sub> .]	270-785-4	68478-02-4	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-137-00-3	Gases (petroleum), reforming hydrotreater, hydrogen-methane-rich; Refinery gas; [A complex combination obtained from the reforming hydrotreating process. It consists primarily of hydrogen and methane with various small amounts of carbon monoxide, carbon dioxide, nitrogen and saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>2</sub> through C <sub>5</sub> .]	270-787-5	68478-03-5	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-138-00-9	Gases (petroleum), reforming hydrotreater make-up, hydrogen-rich; Refinery gas; [A complex combination obtained from the reforming hydrotreating process. It consists primarily of hydrogen with various small amounts of carbon monoxide and aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	270-788-0	68478-04-6	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-139-00-4	Gases (petroleum), thermal cracking distn.; Refinery gas; [A complex combination produced by distillation of products from a thermal cracking process. It consists of hydrogen, hydrogen sulfide, carbon monoxide, carbon dioxide and hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>6</sub> .]	270-789-6	68478-05-7	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-140-00-X	Tail gas (petroleum), catalytic cracker refractionation absorber; Refinery gas; [A complex combination of hydrocarbons obtained from refractionation of products from a catalytic cracking process. It consists of hydrogen and hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>3</sub> .]	270-805-1	68478-25-1	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-141-00-5	Tail gas (petroleum), catalytic reformed naphtha separator; Refinery gas; [A complex combination of hydrocarbons obtained from the catalytic reforming of straight run naphtha. It consists of hydrogen and hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>6</sub> .]	270-807-2	68478-27-3	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-142-00-0	Tail gas (petroleum), catalytic reformed naphtha stabilizer; Refinery gas; [A complex combination of hydrocarbons obtained from the stabilization of catalytic reformed naphtha. It consists of hydrogen and hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>6</sub> .]	270-808-8	68478-28-4	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-143-00-6	Tail gas (petroleum), cracked distillate hydrotreater separator; Refinery gas; [A complex combination of hydrocarbons obtained by treating cracked distillates with hydrogen in the presence of a catalyst. It consists of hydrogen and saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	270-809-3	68478-29-5	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-144-00-1	Tail gas (petroleum), hydrodesulfurized straight-run naphtha separator; Refinery gas; [A complex combination of hydrocarbons obtained from hydrodesulfurization of straight-run naphtha. It consists of hydrogen and saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>6</sub> .]	270-810-9	68478-30-8	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-145-00-7	Gases (petroleum), catalytic reformed straight-run naphtha stabilizer overheads; Refinery gas; [A complex combination of hydrocarbons obtained from the catalytic reforming of straight-run naphtha followed by fractionation of the total effluent. It consists of hydrogen, methane, ethane and propane.]	270-999-8	68513-14-4	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-146-00-2	Gases (petroleum), reformer effluent high-pressure flash drum off; Refinery gas; [A complex combination produced by the high-pressure flashing of the effluent from the reforming reactor. It consists primarily of hydrogen with various small amounts of methane, ethane, and propane.]	271-003-4	68513-18-8	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-147-00-8	Gases (petroleum), reformer effluent low-pressure flash drum off; Refinery gas; [A complex combination produced by low-pressure flashing of the effluent from the reforming reactor. It consists primarily of hydrogen with various small amounts of methane, ethane, and propane.]	271-005-5	68513-19-9	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-148-00-3	Gases (petroleum), oil refinery gas distn. off; Refinery gas; [A complex combination separated by distillation of a gas stream containing hydrogen, carbon monoxide, carbon dioxide and hydrocarbons having carbon numbers in the range of C <sub>1</sub> through C <sub>6</sub> or obtained by cracking ethane and propane. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>2</sub> , hydrogen, nitrogen, and carbon monoxide.]	271-258-1	68527-15-1	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-149-00-9	Gases (petroleum), benzene unit hydrotreater depentanizer overheads; Refinery gas; [A complex combination produced by treating the feed from the benzene unit with hydrogen in the presence of a catalyst followed by depentanizing. It consists primarily of hydrogen, ethane and propane with various small amounts of nitrogen, carbon monoxide, carbon dioxide and hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>6</sub> . It may contain trace amounts of benzene.]	271-623-5	68602-82-4	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-150-00-4	Gases (petroleum), secondary absorber off, fluidized catalytic cracker overheads fractionator; Refinery gas; [A complex combination produced by the fractionation of the overhead products from the catalytic cracking process in the fluidized catalytic cracker. It consists of hydrogen, nitrogen, and hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>3</sub> .]	271-625-6	68602-84-6	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-151-00-X	Petroleum products, refinery gases; Refinery gas; [A complex combination which consists primarily of hydrogen with various small amounts of methane, ethane, and propane.]	271-750-6	68607-11-4	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-152-00-5	Gases (petroleum), hydrocracking low-pressure separator; Refinery gas; [A complex combination obtained by the liquid-vapor separation of the hydrocracking process reactor effluent. It consists predominantly of hydrogen and saturated hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>3</sub> .]	272-182-1	68783-06-2	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-153-00-0	Gases (petroleum), refinery; Refinery gas; [A complex combination obtained from various petroleum refining operations. It consists of hydrogen and hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>3</sub> .]	272-338-9	68814-67-5	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-154-00-6	Gases (petroleum), platformer products separator off; Refinery gas; [A complex combination obtained from the chemical reforming of naphthenes to aromatics. It consists of hydrogen and saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>2</sub> through C <sub>4</sub> .]	272-343-6	68814-90-4	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-155-00-1	Gases (petroleum), hydrotreated sour kerosine depentanizer stabilizer off; Refinery gas; [The complex combination obtained from the depentanizer stabilization of hydrotreated kerosine. It consists primarily of hydrogen, methane, ethane, and propane with various small amounts of nitrogen, hydrogen sulfide, carbon monoxide and hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>5</sub> .]	272-775-5	68911-58-0	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-156-00-7	Gases (petroleum), hydrotreated sour kerosine flash drum; Refinery gas; [A complex combination obtained from the flash drum of the unit treating sour kerosine with hydrogen in the presence of a catalyst. It consists primarily of hydrogen and methane with various small amounts of nitrogen, carbon monoxide, and hydro-carbons having carbon numbers predominantly in the range of C <sub>2</sub> through C <sub>5</sub> .]	272-776-0	68911-59-1	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-157-00-2	Gases (petroleum), distillate unifier desulfurization stripper off; Refinery gas; [A complex combination stripped from the liquid product of the unifier desulfurization process. It consists of hydrogen sulfide, methane, ethane, and propane.]	272-873-8	68919-01-7	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-158-00-8	Gases (petroleum), fluidized catalytic cracker fractionation off; Refinery gas; [A complex combination produced by the fractionation of the overhead product of the fluidized catalytic cracking process. It consists of hydrogen, hydrogen sulfide, nitrogen, and hydro-carbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	272-874-3	68919-02-8	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-159-00-3	Gases (petroleum), fluidized catalytic cracker scrubbing secondary absorber off; Refinery gas; [A complex combination produced by scrubbing the overhead gas from the fluidized catalytic cracker. It consists of hydrogen, nitrogen, methane, ethane and propane.]	272-875-9	68919-03-9	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-160-00-9	Gases (petroleum), heavy distillate hydrotreater desulfurization stripper off; Refinery gas; [A complex combination stripped from the liquid product of the heavy distillate hydrotreater desulfurization process. It consists of hydrogen, hydrogen sulfide, and saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	272-876-4	68919-04-0	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-161-00-4	Gases (petroleum), platformer stabilizer off, light ends fractionation; Refinery gas; [A complex combination obtained by the fractionation of the light ends of the platinum reactors of the platformer unit. It consists of hydrogen, methane, ethane and propane.]	272-880-6	68919-07-3	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-162-00-X	Gases (petroleum), preflash tower off, crude distn.; Refinery gas; [A complex combination produced from the first tower used in the distillation of crude oil. It consists of nitrogen and saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	272-881-1	68919-08-4	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-163-00-5	Gases (petroleum), tar stripper off; Refinery gas; [A complex combination obtained by the fractionation of reduced crude oil. It consists of hydrogen and hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>4</sub> .]	272-884-8	68919-11-9	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-164-00-0	Gases (petroleum), unifiner stripper off; Refinery gas; [A combination of hydrogen and methane obtained by fractionation of the products from the unifiner unit.]	272-885-3	68919-12-0	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-165-00-6	Tail gas (petroleum), catalytic hydrodesulfurized naphtha separator; Refinery gas; [A complex combination of hydrocarbons obtained from the hydrodesulfurization of naphtha. It consists of hydrogen, methane, ethane, and propane.]	273-173-5	68952-79-4	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-166-00-1	Tail gas (petroleum), straight-run naphtha hydrodesulfurizer; Refinery gas; [A complex combination obtained from the hydrodesulfurization of straight-run naphtha. It consists of hydrogen and hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	273-174-0	68952-80-7	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-167-00-7	Gases (petroleum), sponge absorber off, fluidized catalytic cracker and gas oil desulfurizer overhead fractionation; Refinery gas; [A complex combination obtained by the fractionation of products from the fluidized catalytic cracker and gas oil desulfurizer. It consists of hydrogen and hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>4</sub> .]	273-269-7	68955-33-9	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-168-00-2	Gases (petroleum), crude distn. and catalytic cracking; Refinery gas; [A complex combination produced by crude distillation and catalytic cracking processes. It consists of hydrogen, hydrogen sulfide, nitrogen, carbon monoxide and paraffinic and olefinic hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>6</sub> .]	273-563-5	68989-88-8	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-169-00-8	Gases (petroleum), gas oil diethanolamine scrubber off; Refinery gas; [A complex combination produced by desulfurization of gas oils with diethanolamine. It consists predominantly of hydrogen sulfide, hydrogen and aliphatic hydrocarbons having carbon numbers in the range of C <sub>1</sub> through C <sub>5</sub> .]	295-397-2	92045-15-3	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-170-00-3	Gases (petroleum), gas oil hydrodesulfurization effluent; Refinery gas; [A complex combination obtained by separation of the liquid phase from the effluent from the hydrogenation reaction. It consists predominantly of hydrogen, hydrogen sulfide and aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>3</sub> .]	295-398-8	92045-16-4	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-171-00-9	Gases (petroleum), gas oil hydrodesulfurization purge; Refinery gas; [A complex combination of gases obtained from the reformer and from the purges from the hydrogenation reactor. It consists predominantly of hydrogen and aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>4</sub> .]	295-399-3	92045-17-5	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-172-00-4	Gases (petroleum), hydrogenator effluent flash drum off; Refinery gas; [A complex combination of gases obtained from flash of the effluents after the hydrogenation reaction. It consists predominantly of hydrogen and aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>6</sub> .]	295-400-7	92045-18-6	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-173-00-X	Gases (petroleum), naphtha steam cracking high-pressure residual; Refinery gas; [A complex combination obtained as a mixture of the non-condensable portions from the product of a naphtha steam cracking process as well as residual gases obtained during the preparation of subsequent products. It consists predominantly of hydrogen and paraffinic and olefinic hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> with which natural gas may also be mixed.]	295-401-2	92045-19-7	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-174-00-5	Gases (petroleum), residue visbaking off; Refinery gas; A complex combination obtained from viscosity reduction of residues in a furnace. It consists predominantly of hydrogen sulfide and paraffinic and olefinic hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	295-402-8	92045-20-0	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-175-00-0	Foot's oil (petroleum), acid-treated; Foot's oil; [A complex combination of hydrocarbons obtained by treatment of Foot's oil with sulfuric acid. It consists predominantly of branched-chain hydrocarbons with carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> .]	300-225-7	93924-31-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-176-00-6	Foot's oil (petroleum), clay-treated; Foot's oil; [A complex combination of hydrocarbons obtained by treatment of Foot's oil with natural or modified clay in either a contacting or percolation process to remove the trace amounts of polar compounds and impurities present. It consists predominantly of branched chain hydrocarbons with carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> .]	300-226-2	93924-32-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-177-00-1	Gases (petroleum), C <sub>3-4</sub> ; Petroleum gas; [A complex combination of hydrocarbons produced by distillation of products from the cracking of crude oil. It consists of hydrocarbons having carbon numbers in the range of C <sub>3</sub> through C <sub>4</sub> , predominantly of propane and propylene, and boiling in the range of approximately - 51 °C to - 1 °C (- 60°F to 30°F.)]	268-629-5	68131-75-9	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-178-00-7	Tail gas (petroleum), catalytic cracked distillate and catalytic cracked naphtha fractionation absorber; Petroleum gas; [The complex combination of hydrocarbons from the distillation of the products from catalytic cracked distillates and catalytic cracked naphtha. It consists predominantly of hydrocarbons having carbon numbers in the range of C <sub>1</sub> through C <sub>4</sub> .]	269-617-2	68307-98-2	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-179-00-2	Tail gas (petroleum), catalytic polymn. naphtha fractionation stabilizer; Petroleum gas; [A complex combination of hydrocarbons from the fractionation stabilization products from polymerization of naphtha. It consists predominantly of hydrocarbons having carbon numbers in the range of C <sub>1</sub> through C <sub>4</sub> .]	269-618-8	68307-99-3	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-180-00-8	Tail gas (petroleum), catalytic reformed naphtha fractionation stabilizer, hydrogen sulfide-free; Petroleum gas; [A complex combination of hydrocarbons obtained from fractionation stabilization of catalytic reformed naphtha and from which hydrogen sulfide has been removed by amine treatment. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>4</sub> .]	269-619-3	68308-00-9	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-181-00-3	Tail gas (petroleum), cracked distillate hydrotreater stripper; Petroleum gas; [A complex combination of hydrocarbons obtained by treating thermal cracked distillates with hydrogen in the presence of a catalyst. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>6</sub> .]	269-620-9	68308-01-0	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-182-00-9	Tail gas (petroleum), straight-run distillate hydrodesulfurizer, hydrogen sulfide-free; Petroleum gas; [A complex combination of hydrocarbons obtained from catalytic hydrodesulfurization of straight run distillates and from which hydrogen sulfide has been removed by amine treatment. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>4</sub> .]	269-630-3	68308-10-1	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-183-00-4	Tail gas (petroleum), gas oil catalytic cracking absorber; Petroleum gas; [A complex combination of hydrocarbons obtained from the distillation of products from the catalytic cracking of gas oil. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	269-623-5	68308-03-2	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-184-00-X	Tail gas (petroleum), gas recovery plant; Petroleum gas; [A complex combination of hydrocarbons from the distillation of products from miscellaneous hydrocarbon streams. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	269-624-0	68308-04-3	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-185-00-5	Tail gas (petroleum), gas recovery plant deethanizer; Petroleum gas; [A complex combination of hydrocarbons from the distillation of products from miscellaneous hydrocarbon streams. It consists of hydrocarbon having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>4</sub> .]	269-625-6	68308-05-4	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-186-00-0	Tail gas (petroleum), hydrodesulfurized distillate and hydrodesulfurized naphtha fractionator, acid-free; Petroleum gas; [A complex combination of hydrocarbons obtained from fractionation of hydrodesulfurized naphtha and distillate hydrocarbon streams and treated to remove acidic impurities. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	269-626-1	68308-06-5	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-187-00-6	Tail gas (petroleum), hydrodesulfurized vacuum gas oil stripper, hydrogen sulfide-free; Petroleum gas; [A complex combination of hydrocarbons obtained from stripping stabilization of catalytic hydrodesulfurized vacuum gas oil and from which hydrogen sulfide has been removed by amine treatment. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>6</sub> .]	269-627-7	68308-07-6	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-188-00-1	Tail gas (petroleum), light straight-run naphtha stabilizer, hydrogen sulfide-free; Petroleum gas; [A complex combination of hydrocarbons obtained from fractionation stabilization of light straight run naphtha and from which hydrogen sulfide has been removed by amine treatment. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	269-629-8	68308-09-8	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-189-00-7	Tail gas (petroleum), propane-propylene alkylation feed prep deethanizer; Petroleum gas; [A complex combination of hydrocarbons obtained from the distillation of the reaction products of propane with propylene. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>4</sub> .]	269-631-9	68308-11-2	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-190-00-2	Tail gas (petroleum), vacuum gas oil hydrodesulfurizer, hydrogen sulfide-free; Petroleum gas; [A complex combination of hydrocarbons obtained from catalytic hydrodesulfurization of vacuum gas oil and from which hydrogen sulfide has been removed by amine treatment. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>6</sub> .]	269-632-4	68308-12-3	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-191-00-8	Gases (petroleum), catalytic cracked overheads; Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of products from the catalytic cracking process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>3</sub> through C <sub>5</sub> and boiling in the range of approximately - 48 °C to 32 °C (-54°F to 90°F).]	270-071-2	68409-99-4	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-193-00-9	Alkanes, C <sub>1-2</sub> ; Petroleum gas	270-651-5	68475-57-0	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-194-00-4	Alkanes, C <sub>2-3</sub> ; Petroleum gas	270-652-0	68475-58-1	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-195-00-X	Alkanes, C <sub>3-4</sub> ; Petroleum gas	270-653-6	68475-59-2	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-196-00-5	Alkanes, C <sub>4-5</sub> ; Petroleum gas	270-654-1	68475-60-5	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-197-00-0	Fuel gases; Petroleum gas; [A combination of light gases. It consists predominantly of hydrogen and/or low molecular weight hydrocarbons.]	270-667-2	68476-26-6	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-198-00-6	Fuel gases, crude oil of distillates; Petroleum gas; [A complex combination of light gases produced by distillation of crude oil and by catalytic reforming of naphtha. It consists of hydrogen and hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>4</sub> and boiling in the range of approximately - 217 °C to - 12 °C (- 423°F to 10°F).]	270-670-9	68476-29-9	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-199-00-1	Hydrocarbons, C <sub>3-4</sub> ; Petroleum gas	270-681-9	68476-40-4	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-200-00-5	Hydrocarbons, C <sub>4-5</sub> ; Petroleum gas	270-682-4	68476-42-6	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-201-00-0	Hydrocarbons, C <sub>2-4</sub> , C <sub>3</sub> -rich; Petroleum gas	270-689-2	68476-49-3	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-202-00-6	Petroleum gases, liquefied; Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>3</sub> through C <sub>7</sub> and boiling in the range of approximately - 40 °C to 80 °C (- 40 °F to 176 °F).]	270-704-2	68476-85-7	F+; R12 Carc. Cat. 1; R45 Muta. Cat. 2; R46	F+; T R: 12-45-46 S: 53-45		HKS
649-203-00-1	Petroleum gases, liquefied, sweetened; Petroleum gas; [A complex combination of hydrocarbons obtained by subjecting liquefied petroleum gas mix to a sweetening process to convert mercaptans or to remove acidic impurities. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>3</sub> through C <sub>7</sub> and boiling in the range of approximately - 40 °C to 80 °C (-40 °F to 176 °F).]	270-705-8	68476-86-8	F+; R12 Carc. Cat. 1; R45 Muta. Cat. 2; R46	F+; T R: 12-45-46 S: 45-53		HKS
649-204-00-7	Gases (petroleum), C <sub>3-4</sub> , isobutane-rich; Petroleum gas; [A complex combination of hydrocarbons from the distillation of saturated and unsaturated hydrocarbons usually ranging in carbon numbers from C <sub>3</sub> through C <sub>6</sub> , predominantly butane and isobutane. It consists of saturated and unsaturated hydrocarbons having carbon numbers in the range of C <sub>3</sub> through C <sub>4</sub> , predominantly isobutane.]	270-724-1	68477-33-8	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-205-00-2	Distillates (petroleum), C <sub>3-6</sub> , piperylene-rich; Petroleum gas; [A complex combination of hydrocarbons from the distillation of saturated and unsaturated aliphatic hydrocarbons usually ranging in the carbon numbers C <sub>3</sub> through C <sub>6</sub> . It consists of saturated and unsaturated hydrocarbons having carbon numbers in the range of C <sub>3</sub> through C <sub>6</sub> , predominantly piperylenes.]	270-726-2	68477-35-0	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-206-00-8	Gases (petroleum), butane splitter overheads; Petroleum gas; [A complex combination of hydrocarbons obtained from the distillation of the butane stream. It consists of aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>3</sub> through C <sub>4</sub> .]	270-750-3	68477-69-0	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-207-00-3	Gases (petroleum), C <sub>2</sub> ; Petroleum gas; [A complex combination of hydrocarbons produced by the distillation of products from a catalytic fractionation process. It contains predominantly ethane, ethylene, propane, and propylene.]	270-751-9	68477-70-3	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-208-00-9	Gases (petroleum), catalytic-cracked gas oil depropanizer bottoms, C <sub>4</sub> -rich acid-free; Petroleum gas; [A complex combination of hydrocarbons obtained from fractionation of catalytic cracked gas oil hydrocarbon stream and treated to remove hydrogen sulfide and other acidic components. It consists of hydrocarbons having carbon numbers in the range of C <sub>3</sub> through C <sub>5</sub> , predominantly C <sub>4</sub> .]	270-752-4	68477-71-4	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-209-00-4	Gases (petroleum), catalytic-cracked naphtha debutanizer bottoms, C <sub>3-5</sub> -rich; Petroleum gas; [A complex combination of hydrocarbons obtained from the stabilization of catalytic cracked naphtha. It consists of aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>3</sub> through C <sub>5</sub> .]	270-754-5	68477-72-5	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K
649-210-00-X	Tail gas (petroleum), isomerized naphtha fractionation stabilizer; Petroleum gas; [A complex combination of hydrocarbons obtained from the fractionation stabilization products from isomerized naphtha. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>4</sub> .]	269-628-2	68308-08-7	⊗ Carc. Cat. 1; R45 Muta. Cat. 2; R46	T R: 45-46 S: 53-45		H K

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-211-00-5	Foots oil (petroleum), carbon-treated; Foots oil; [A complex combination of hydrocarbons obtained by the treatment of Foots oil with activated carbon for the removal of trace constituents and impurities. It consists predominantly of saturated straight chain hydrocarbons having carbon numbers predominantly greater than C <sub>12</sub> .]	308-126-0	97862-76-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-212-00-0	Distillates (petroleum), sweetened middle; Gasoil — unspecified; [A complex combination of hydrocarbons obtained by subjecting a petroleum distillate to a sweetening process to convert mercaptans or to remove acidic impurities. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>9</sub> through C <sub>20</sub> and boiling in the range of approximately 150 °C to 345 °C (302°F to 653°F).]	265-088-7	64741-86-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-213-00-6	Gas oils (petroleum), solvent-refined; Gasoil — unspecified; [A complex combination of hydrocarbons obtained as the raffinate from a solvent extraction process. It consists predominantly of aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>11</sub> through C <sub>25</sub> and boiling in the range of approximately 205 °C to 400 °C (401°F to 752°F).]	265-092-9	64741-90-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-214-00-1	Distillates (petroleum), solvent-refined middle; Gasoil — unspecified; [A complex combination of hydrocarbons obtained as the raffinate from a solvent extraction process. It consists predominantly of aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>9</sub> through C <sub>20</sub> and boiling in the range of approximately 150 °C to 345 °C (302°F to 653°F).]	265-093-4	64741-91-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-215-00-7	Gas oils (petroleum), acid-treated; Gasoil — unspecified; [A complex combination of hydrocarbons obtained as a raffinate from a sulfuric acid treating process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>13</sub> through C <sub>25</sub> and boiling in the range of approximately 230 °C to 400 °C (446°F to 752°F).]	265-112-6	64742-12-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-216-00-2	Distillates (petroleum), acid-treated middle; Gasoil — unspecified; [A complex combination of hydrocarbons obtained as a raffinate from a sulfuric acid treating process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>11</sub> through C <sub>20</sub> and boiling in the range of approximately 205 °C to 345 °C (401°F to 653°F).]	265-113-1	64742-13-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-217-00-8	Distillates (petroleum), acid-treated light; Gasoil — unspecified; [A complex combination of hydrocarbons obtained as a raffinate from a sulfuric acid treating process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>9</sub> through C <sub>16</sub> and boiling in the range of approximately 150 °C to 290 °C (302°F to 554°F).]	265-114-7	64742-14-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-218-00-3	Gas oils (petroleum), chemically neutralized; Gasoil — unspecified; [A complex combination of hydrocarbons produced by a treating process to remove acidic materials. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>13</sub> through C <sub>25</sub> and boiling in the range of approximately 230 °C to 400 °C (446°F to 752°F).]	265-129-9	64742-29-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-219-00-9	Distillates (petroleum), chemically neutralized middle; Gasoil — unspecified; [A complex combination of hydrocarbons produced by a treating process to remove acidic materials. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>11</sub> through C <sub>20</sub> and boiling in the range of approximately 205 °C to 345 °C (401°F to 653°F).]	265-130-4	64742-30-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-220-00-4	Distillates (petroleum), clay-treated middle; Gasoil — unspecified; [A complex combination of hydrocarbons resulting from treatment of a petroleum fraction with natural or modified clay, usually in a percolation process to remove the trace amounts of polar compounds and impurities present. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>9</sub> through C <sub>20</sub> and boiling in the range of approximately 150 °C to 345 °C (302°F to 653°F).]	265-139-3	64742-38-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-221-00-X	Distillates (petroleum), hydrotreated middle; Gasoil — unspecified; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>11</sub> through C <sub>25</sub> and boiling in the range of approximately 205 °C to 400 °C (401°F to 752°F).]	265-148-2	64742-46-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-222-00-5	Gas oils (petroleum), hydrodesulfurized; Gasoil — unspecified; [A complex combination of hydrocarbons obtained from a petroleum stock by treating with hydrogen to convert organic sulfur to hydrogen sulfide which is removed. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>13</sub> through C <sub>25</sub> and boiling in the range of approximately 230 °C to 400 °C (446°F to 752°F).]	265-182-8	64742-79-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-223-00-0	Distillates (petroleum), hydrodesulfurized middle; Gasoil — unspecified; [A complex combination of hydrocarbons obtained from a petroleum stock by treating with hydrogen to convert organic sulfur to hydrogen sulfide which is removed. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>11</sub> through C <sub>25</sub> and boiling in the range of approximately 205 °C to 400 °C (401°F to 752°F).]	265-183-3	64742-80-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-224-00-6	Fuels, diesel; Gasoil — unspecified; [A complex combination of hydrocarbons produced by the distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>9</sub> through C <sub>20</sub> and boiling in the range of approximately 163 °C to 357 °C (325°F to 675°F).]	269-822-7	68334-30-5	Carc. Cat. 3; R40	Xn R: 40 S: (2-)36/37		H N
649-225-00-1	Fuel oil, No 2; Gasoil — unspecified; [A distillate oil having a minimum viscosity of 32,6 SUS at 37,7 °C (100°F) to a maximum of 37,9 SUS at 37,7 °C (100°F).]	270-671-4	68476-30-2	Carc. Cat. 3; R40	Xn R: 40 S: (2-)36/37		H
649-226-00-7	Fuel oil, No 4; Gasoil — unspecified; [A distillate oil having a minimum viscosity of 45 SUS at 37,7 °C (100°F) to a maximum of 125 SUS at 37,7 °C (100°F).]	270-673-5	68476-31-3	Carc. Cat. 3; R40	Xn R: 40 S: (2-)36/37		H



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-227-00-2	Fuels, diesel, No 2; Gasoil — unspecified; [A distillate oil having a minimum viscosity of 32,6 SUS at 37,7 °C (100°F).]	270-676-1	68476-34-6	Carc. Cat. 3; R40	Xn R: 40 S: (2-)36/37		H
649-228-00-8	Distillates (petroleum), catalytic reformer fractionator residue, high-boiling; Gasoil — unspecified; [A complex combination of hydrocarbons from the distillation of catalytic reformer fractionator residue. It boils in the range of approximately 343 °C to 399 °C (650°F to 750°F).]	270-719-4	68477-29-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-229-00-3	Distillates (petroleum), catalytic reformer fractionator residue, intermediate-boiling; Gasoil — unspecified; [A complex combination of hydrocarbons from the distillation of catalytic reformer fractionator residue. It boils in the range of approximately 288 °C to 371 °C (550°F to 700°F).]	270-721-5	68477-30-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-230-00-9	Distillates (petroleum), catalytic reformer fractionator residue, low-boiling; Gasoil — unspecified; [The complex combination of hydrocarbons from the distillation of catalytic reformer fractionator residue. It boils approximately below 288 °C (550°F).]	270-722-0	68477-31-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-231-00-4	Distillates (petroleum), highly refined middle; Gasoil — unspecified; [A complex combination of hydrocarbons obtained by the subjection of a petroleum fraction to several of the following steps: filtration, centrifugation, atmospheric distillation, vacuum distillation, acidification, neutralization and clay treatment. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>10</sub> through C <sub>20</sub> .]	292-615-8	90640-93-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-232-00-X	Distillates (petroleum) catalytic reformer, heavy arom. conc.; Gasoil — unspecified; [A complex combination of hydrocarbons obtained from the distillation of a catalytically reformed petroleum cut. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>10</sub> through C <sub>16</sub> and boiling in the range of approximately 200 °C to 300 °C (392°F to 572°F).]	295-294-2	91995-34-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-233-00-5	Gas oils, paraffinic; Gasoil — unspecified; [A distillate obtained from the redistillation of a complex combination of hydrocarbons obtained by the distillation of the effluents from a severe catalytic hydrotreatment of paraffins. It boils in the range of approximately 190 °C to 330 °C (374°F to 594°F).]	300-227-8	93924-33-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-234-00-0	Naphtha (petroleum), solvent-refined hydrodesulfurized heavy; Gasoil — unspecified	307-035-3	97488-96-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-235-00-6	Hydrocarbons, C <sub>16-20</sub> , hydrotreated middle distillate, distn. lights; Gasoil — unspecified; [A complex combination of hydrocarbons obtained as first runnings from the vacuum distillation of effluents from the treatment of a middle distillate with hydrogen. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>16</sub> through C <sub>20</sub> and boiling in the range of approximately 290 °C to 350 °C (554°F to 662°F). It produces a finished oil having a viscosity of 2cSt at 100 °C (212°F).]	307-659-6	97675-85-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-236-00-1	Hydrocarbons, C <sub>12-20</sub> , hydrotreated paraffinic, distn. lights; Gasoil — unspecified; [A complex combination of hydrocarbons obtained as first runnings from the vacuum distillation of effluents from the treatment of heavy paraffins with hydrogen in the presence of a catalyst. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>12</sub> through C <sub>20</sub> and boiling in the range of approximately 230 °C to 350 °C (446°F to 662°F). It produces a finished oil having a viscosity of 2cSt at 100 °C (212°F).]	307-660-1	97675-86-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-237-00-7	Hydrocarbons, C <sub>11-17</sub> , solvent-extd. light naphthenic; Gasoil — unspecified; [A complex combination of hydrocarbons obtained by extraction of the aromatics from a light naphthenic distillate having a viscosity of 2.2 cSt at 40 °C (104°F). It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>11</sub> through C <sub>17</sub> and boiling in the range of approximately 200 °C to 300 °C (392°F to 572°F).]	307-757-9	97722-08-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-238-00-2	Gas oils, hydrotreated; Gasoil — unspecified; [A complex combination of hydrocarbons obtained from the redistillation of the effluents from the treatment of paraffins with hydrogen in the presence of a catalyst. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>17</sub> through C <sub>27</sub> and boiling in the range of approximately 330 °C to 340 °C (626°F to 644°F).]	308-128-1	97862-78-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-239-00-8	Distillates (petroleum), carbon-treated light paraffinic; Gasoil — unspecified; [A complex combination of hydrocarbons obtained by the treatment of a petroleum oil fraction with activated charcoal for the removal of traces of polar constituents and impurities. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>12</sub> through C <sub>28</sub> .]	309-667-5	100683-97-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-240-00-3	Distillates (petroleum), intermediate paraffinic, carbon-treated; Gasoil — unspecified; [A complex combination of hydrocarbons obtained by the treatment of petroleum with activated charcoal for the removal of trace polar constituents and impurities. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>16</sub> through C <sub>36</sub> .]	309-668-0	100683-98-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-241-00-9	Distillates (petroleum), intermediate paraffinic, clay-treated; Gasoil — unspecified; [A complex combination of hydrocarbons obtained by the treatment of petroleum with bleaching earth for the removal of trace polar constituents and impurities. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>16</sub> through C <sub>36</sub> .]	309-669-6	100683-99-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-242-00-4	Alkanes, C <sub>12-26</sub> -branched and linear	292-454-3	90622-53-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-243-00-X	Lubricating greases; Grease; [A complex combination of hydrocarbons having carbon numbers predominantly in the range of C <sub>12</sub> through C <sub>50</sub> . May contain organic salts of alkali metals, alkaline earth metals, and/or aluminium compounds.]	278-011-7	74869-21-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-244-00-5	Slack wax (petroleum); Slack wax; [A complex combination of hydrocarbons obtained from a petroleum fraction by solvent crystallization (solvent dewaxing) or as a distillation fraction from a very waxy crude. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C <sub>20</sub> .]	265-165-5	64742-61-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-245-00-0	Slack wax (petroleum), acid-treated; Slack wax; [A complex combination of hydrocarbons obtained as a raffinate by treatment of a petroleum slack wax fraction with sulfuric acid treating process. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C <sub>20</sub> .]	292-659-8	90669-77-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-246-00-6	Slack wax (petroleum), clay-treated; Slack wax; [A complex combination of hydrocarbons obtained by treatment of a petroleum slack wax fraction with natural or modified clay in either a contacting or percolation process. It consists predominantly of saturated straight and branched hydrocarbons having carbon numbers predominantly greater than C <sub>20</sub> .]	292-660-3	90669-78-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-247-00-1	Slack wax (petroleum), hydrotreated; Slack wax; [A complex combination of hydrocarbons obtained by treating slack wax with hydrogen in the presence of a catalyst. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C <sub>20</sub> .]	295-523-6	92062-09-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-248-00-7	Slack wax (petroleum), low-melting; Slack wax; [A complex combination of hydrocarbons obtained from a petroleum fraction by solvent deparaffination. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C <sub>12</sub> .]	295-524-1	92062-10-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-249-00-2	Slack wax (petroleum), low-melting, hydrotreated; Slack wax; [A complex combination of hydrocarbons obtained by treatment of low-melting petroleum slack wax with hydrogen in the presence of a catalyst. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C <sub>12</sub> .]	295-525-7	92062-11-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-250-00-8	Slack wax (petroleum), low-melting, carbon-treated; Slack wax; [A complex combination of hydrocarbons obtained by the treatment of low-melting slack wax with activated carbon for the removal of trace polar constituents and impurities. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C <sub>12</sub> .]	308-155-9	97863-04-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-251-00-3	Slack wax (petroleum), low-melting, clay-treated; Slack wax; [A complex combination of hydrocarbons obtained by the treatment of low-melting petroleum slack wax with bentonite for removal of trace polar constituents and impurities. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C <sub>12</sub> .]	308-156-4	97863-05-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-252-00-9	Slack wax (petroleum), low-melting, silicic acid-treated; Slack wax; [A complex combination of hydrocarbons obtained by the treatment of low-melting petroleum slack wax with silicic acid for the removal of trace polar constituents and impurities. It consists predominantly of saturated straight and branched chain hydrocarbons having carbon numbers predominantly greater than C <sub>12</sub> .]	308-158-5	97863-06-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-253-00-4	Slack wax (petroleum), carbon-treated; Slack wax; [A complex combination of hydrocarbons obtained by treatment of petroleum slack wax with activated charcoal for the removal of trace polar constituents and impurities.]	309-723-9	100684-49-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-254-00-X	Petrolatum; Petrolatum; [A complex combination of hydrocarbons obtained as a semi-solid from dewaxing paraffinic residual oil. It consists predominantly of saturated crystalline and liquid hydrocarbons having carbon numbers predominantly greater than C <sub>25</sub> .]	232-373-2	8009-03-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-255-00-5	Petrolatum (petroleum), oxidized; Petrolatum; [A complex combination of organic compounds, predominantly high molecular weight carboxylic acids, obtained by the air oxidation of petrolatum.]	265-206-7	64743-01-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-256-00-0	Petrolatum (petroleum), alumina-treated; Petrolatum; [A complex combination of hydrocarbons obtained when petrolatum is treated with Al <sub>2</sub> O <sub>3</sub> to remove polar components and impurities. It consists predominantly of saturated, crystalline, and liquid hydrocarbons having carbon numbers predominantly greater than C <sub>25</sub> .]	285-098-5	85029-74-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-257-00-6	Petrolatum (petroleum), hydrotreated; Petrolatum; [A complex combination of hydrocarbons obtained as a semi-solid from dewaxed paraffinic residual oil treated with hydrogen in the presence of a catalyst. It consists predominantly of saturated microcrystalline and liquid hydrocarbons having carbon numbers predominantly greater than C <sub>20</sub> .]	295-459-9	92045-77-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-258-00-1	Petrolatum (petroleum), carbon-treated; Petrolatum; [A complex combination of hydrocarbons obtained by the treatment of petroleum petrolatum with activated carbon for the removal of trace polar constituents and impurities. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly greater than C <sub>20</sub> .]	308-149-6	97862-97-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-259-00-7	Petrolatum (petroleum), silicic acid-treated; Petrolatum; [A complex combination of hydrocarbons obtained by the treatment of petroleum petrolatum with silicic acid for the removal of trace polar constituents and impurities. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly greater than C <sub>20</sub> .]	308-150-1	97862-98-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-260-00-2	Petrolatum (petroleum), clay-treated; Petrolatum; [A complex combination of hydrocarbons obtained by treatment of petrolatum with bleaching earth for the removal of traces of polar constituents and impurities. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of greater than C <sub>25</sub> .]	309-706-6	100684-33-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H N
649-261-00-8	Gasoline, natural; Low boiling point naphtha; [A complex combination of hydrocarbons separated from natural gas by processes such as refrigeration or absorption. It consists predominantly of saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>8</sub> and boiling in the range of approximately minus 20 °C to 120 °C (-4°F to 248°F).]	232-349-1	8006-61-9	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-262-00-3	Naphtha; Low boiling point naphtha; [Refined, partly refined, or unrefined petroleum products by the distillation of natural gas. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>5</sub> through C <sub>6</sub> and boiling in the range of approximately 100 °C to 200 °C (212°F to 392°F).]	232-443-2	8030-30-6	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-263-00-9	Ligroïne; Low boiling point naphtha; [A complex combination of hydrocarbons obtained by the fractional distillation of petroleum. This fraction boils in a range of approximately 20 °C to 135 °C (58°F to 275°F).]	232-453-7	8032-32-4	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-264-00-4	Naphtha (petroleum), heavy straight-run; Low boiling point naphtha; [A complex combination of hydrocarbons produced by distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>6</sub> through C <sub>12</sub> and boiling in the range of approximately 65 °C to 230 °C (149°F to 446°F).]	265-041-0	64741-41-9	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-265-00-X	Naphtha (petroleum), full-range straight-run; Low boiling point naphtha; [A complex combination of hydrocarbons produced by distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>11</sub> and boiling in the range of approximately minus 20 °C to 220 °C (-4°F to 428°F).]	265-042-6	64741-42-0	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-266-00-5	Naphtha (petroleum), light straight-run; Low boiling point naphtha; [A complex combination of hydrocarbons produced by distillation of crude oil. It consists predominantly of aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>10</sub> and boiling in the range of approximately minus 20 °C to 180 °C (-4°F to 356°F).]	265-046-8	64741-46-4	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-267-00-0	Solvent naphtha (petroleum), light aliph.; Low boiling point naphtha; [A complex combination of hydrocarbons obtained from the distillation of crude oil or natural gasoline. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C <sub>5</sub> through C <sub>10</sub> and boiling in the range of approximately 35 °C to 160 °C (95°F to 320°F).]	265-192-2	64742-89-8	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-268-00-6	Distillates (petroleum), straight-run light; Low boiling point naphtha; [A complex combination of hydrocarbons produced by the distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>2</sub> through C <sub>7</sub> and boiling in the range of approximately - 88 °C to 99 °C (- 127°F to 210°F).]	270-077-5	68410-05-9	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-269-00-1	Gasoline, vapor-recovery; Low boiling point naphtha; [A complex combination of hydrocarbons separated from the gases from vapor recovery systems by cooling. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>11</sub> and boiling in the range of approximately - 20 °C to 196 °C (-4°F to 384°F).]	271-025-4	68514-15-8	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-270-00-7	Gasoline, straight-run, topping-plant; Low boiling point naphtha; [A complex combination of hydrocarbons produced from the topping plant by the distillation of crude oil. It boils in the range of approximately 36,1 °C to 193,3 °C (97°F to 380°F).]	271-727-0	68606-11-1	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-271-00-2	Naphtha (petroleum), unsweetened; Low boiling point naphtha; [A complex combination of hydrocarbons produced from the distillation of naphtha streams from various refinery processes. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>5</sub> through C <sub>12</sub> and boiling in the range of approximately 0 °C to 230 °C (25°F to 446°F).]	272-186-3	68783-12-0	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-272-00-8	Distillates (petroleum), light straight-run gasoline fractionation stabilizer overheads; Low boiling point naphtha; [A complex combination of hydrocarbons having carbon numbers predominantly in the range of C <sub>3</sub> through C <sub>6</sub> .]	272-931-2	68921-08-4	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-273-00-3	Naphtha (petroleum), heavy straight run, arom.-contg.; Low boiling point naphtha; [A complex combination of hydrocarbons obtained from a distillation process of crude petroleum. It consists predominantly of hydrocarbons having carbon numbers in the range of C <sub>8</sub> through C <sub>12</sub> and boiling in the range of approximately 130 °C to 210 °C (266°F to 410°F).]	309-945-6	101631-20-3	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-274-00-9	Naphtha (petroleum), full-range alkylate; Low boiling point modified naphtha; [A complex combination of hydrocarbons produced by distillation of the reaction products of isobutane with monoolefinic hydrocarbons usually ranging in carbon numbers from C <sub>3</sub> through C <sub>5</sub> . It consist of predominantly branched chain saturated hydro-carbons having carbon numbers predominantly in the range of C <sub>7</sub> through C <sub>12</sub> and boiling in the range of approximately 90 °C to 220 °C (194°F to 428°F).]	265-066-7	64741-64-6	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-275-00-4	Naphtha (petroleum), heavy alkylate; Low boiling point modified naphtha; [A complex combination of hydrocarbons produced by distillation of the reaction products of isobutane with monoolefinic hydrocarbons usually ranging in carbon numbers from C <sub>3</sub> to C <sub>5</sub> . It consists of predominantly branched chain saturated hydrocarbons having carbon numbers predominantly in the range of C <sub>9</sub> through C <sub>12</sub> and boiling in the range of approximately 150 °C to 220 °C (302°F to 428°F).]	265-067-2	64741-65-7	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-276-00-X	Naphtha (petroleum), light alkylate; Low boiling point modified naphtha; [A complex combination of hydrocarbons produced by distillation of the reaction products of isobutane with monoolefinic hydrocarbons usually ranging in carbon numbers from C <sub>3</sub> through C <sub>5</sub> . It consists of predominantly branched chain saturated hydro-carbons having carbon numbers predominantly in the range of C <sub>7</sub> through C <sub>10</sub> and boiling in the range of aproximately 90 °C to 160 °C (194°F to 320°F).]	265-068-8	64741-66-8	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-277-00-5	Naphtha (petroleum), isomerization; Low boiling point modified naphtha; [A complex combination of hydrocarbons obtained from catalytic isomerization of straight chain paraffinic C <sub>4</sub> through C <sub>6</sub> hydrocarbons. It consists predominantly of saturated hydrocarbons such as isobutane, isopentane, 2,2-dimethylbutane, 2-methylpentane, and 3-methylpentane.]	265-073-5	64741-70-4	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-278-00-0	Naphtha (petroleum), solvent-refined light; Low boiling point modified naphtha; [A complex combination of hydrocarbons obtained as the raffinate from a solvent extraction process. It consists predominantly of aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>5</sub> through C <sub>11</sub> and boiling in the range of approximately 35 °C to 190 °C (95°F to 374°F).]	265-086-6	64741-84-0	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-279-00-6	Naphtha (petroleum), solvent-refined heavy; Low boiling point modified naphtha; [A complex combination of hydrocarbons obtained as the raffinate from a solvent extraction process. It consists predominantly of aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>7</sub> through C <sub>12</sub> and boiling in the range of approximately 90 °C to 230 °C (194°F to 446°F).]	265-095-5	64741-92-0	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-280-00-1	Raffinates (petroleum), catalytic reformer ethylene glycol-water countercurrent exts.; Low boiling point modified naphtha; [A complex combination of hydrocarbons obtained as the raffinate from the UDEX extraction process on the catalytic reformer stream. It consists of saturated hydrocarbons having carbon numbers predominantly in the range of C <sub>6</sub> through C <sub>9</sub> .]	270-088-5	68410-71-9	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-281-00-7	Raffinates (petroleum), reformer, Lurgi unit-sepd.; Low boiling point modified naphtha; [The complex combination of hydrocarbons obtained as a raffinate from a Lurgi separation unit. It consists predominantly of non-aromatic hydrocarbons with various small amounts of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>6</sub> through C <sub>8</sub> .]	270-349-3	68425-35-4	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-282-00-2	Naphtha (petroleum), full-range alkylate, butane-contg.; Low boiling point modified naphtha; [A complex combination of hydrocarbons produced by the distillation of the reaction products of isobutane with monoolefinic hydrocarbons usually ranging in carbon numbers from C <sub>3</sub> through C <sub>5</sub> . It consists of predominantly branched chain saturated hydrocarbons having carbon numbers predominantly in the range of C <sub>7</sub> through C <sub>12</sub> with some butanes and boiling in the range of approximately 35 °C to 200 °C (95°F to 428°F).]	271-267-0	68527-27-5	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-283-00-8	Distillates (petroleum), naphtha steam cracking-derived, solvent-refined light hydrotreated; Low boiling point modified naphtha; [A complex combination of hydrocarbons obtained as the raffinates from a solvent extraction process of hydrotreated light distillate from steam-cracked naphtha.]	295-315-5	91995-53-8	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-284-00-3	Naphtha (petroleum), C <sub>4-12</sub> butane-alkylate, isooctane-rich; Low boiling point modified naphtha; [A complex combination of hydrocarbons obtained by alkylation of butanes. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>12</sub> , rich in isooctane, and boiling in the range of approximately 35 °C to 210 °C (95°F to 410°F).]	295-430-0	92045-49-3	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-285-00-9	Hydrocarbons, hydrotreated light naphtha distillates, solvent-refined; Low boiling point modified naphtha; [A combination of hydrocarbons obtained from the distillation of hydrotreated naphtha followed by a solvent extraction and distillation process. It consists predominantly of saturated hydrocarbons boiling in the range of approximately 94 °C to 99 °C (201°F to 210°F).]	295-436-3	92045-55-1	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-286-00-4	Naphtha (petroleum), isomerization, C <sub>6</sub> -fraction; Low boiling point modified naphtha; [A complex combination of hydrocarbons obtained by distillation of a gasoline which has been catalytically isomerized. It consists predominantly of hexane isomers boiling in the range of approximately 60 °C to 66 °C (140°F to 151°F).]	295-440-5	92045-58-4	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-287-00-X	Hydrocarbons, C <sub>6-7</sub> , naphtha-cracking, solvent-refined; Low boiling point modified naphtha; [A complex combination of hydrocarbons obtained by the sorption of benzene from a catalytically fully hydrogenated benzene-rich hydrocarbon cut that was distillatively obtained from prehydrogenated cracked naphtha. It consists predominantly of paraffinic and naphthenic hydrocarbons having carbon numbers predominantly in the range of C <sub>6</sub> through C <sub>7</sub> and boiling in the range of approximately 70 °C to 100 °C (158°F to 212°F).]	295-446-8	92045-64-2	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-288-00-5	Hydrocarbons, C <sub>6</sub> -rich, hydrotreated light naphtha distillates, solvent-refined; Low boiling point modified naphtha; [A complex combination of hydrocarbons obtained by distillation of hydrotreated naphtha followed by solvent extraction. It consists predominantly of saturated hydrocarbons and boiling in the range of approximately 65 °C to 70 °C (149°F to 158°F).]	309-871-4	101316-67-0	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-289-00-0	Naphtha (petroleum), heavy catalytic cracked; Low boiling point cat-cracked naphtha; [A complex combination of hydrocarbons produced by a distillation of products from a catalytic cracking process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>6</sub> through C <sub>12</sub> and boiling in the range of approximately 65 °C to 230 °C (148°F to 446°F). It contains a relatively large proportion of unsaturated hydrocarbons.]	265-055-7	64741-54-4	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-290-00-6	Naphtha (petroleum), light catalytic cracked; Low boiling point cat-cracked naphtha; [A complex combination of hydrocarbons produced by the distillation of products from a catalytic cracking process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>11</sub> and boiling in the range of approximately minus 20 °C to 190 °C (-4°F to 374°F). It contains a relatively large proportion of unsaturated hydrocarbons.]	265-056-2	64741-55-5	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-291-00-1	Hydrocarbons, C <sub>3-11</sub> , catalytic cracker distillates; Low boiling point cat-cracked naphtha; [A complex combination of hydrocarbons produced by the distillations of products from a catalytic cracking process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>3</sub> through C <sub>11</sub> and boiling in a range approximately up to 204 °C (400°F).]	270-686-6	68476-46-0	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-292-00-7	Naphtha (petroleum), catalytic cracked light distd.; Low boiling point cat-cracked naphtha; [A complex combination of hydrocarbons produced by the distillation of products from a catalytic cracking process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>1</sub> through C <sub>5</sub> .]	272-185-8	68783-09-5	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-293-00-2	Distillates (petroleum), naphtha steam cracking-derived, hydrotreated light arom.; Low boiling point cat-cracked naphtha; [A complex combination of hydrocarbons obtained by treating a light distillate from steam-cracked naphtha. It consists predom-inantly of aromatic hydrocarbons.]	295-311-3	91995-50-5	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-294-00-8	Naphtha (petroleum), heavy catalytic cracked, sweetened; Low boiling point cat-cracked naphtha; [A complex combination of hydrocarbons obtained by subjecting a catalytic cracked petroleum distillate to a sweetening process to convert mercaptans or to remove acidic impurities. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>6</sub> through C <sub>12</sub> and boiling in the range of approximately 60 °C to 200 °C (140°F to 392°F).]	295-431-6	92045-50-6	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-295-00-3	Naphtha (petroleum), light catalytic cracked sweetened; Low boiling point cat-cracked naphtha; [A complex combination of hydrocarbons obtained by subjecting naphtha from a catalytic cracking process to a sweetening process to convert mercaptans or to remove acidic impurities. It consists predominantly of hydrocarbons boiling in a range of approximately 35 °C to 210 °C (95°F to 410°F).]	295-441-0	92045-59-5	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-296-00-9	Hydrocarbons, C <sub>8-12</sub> , catalytic-cracking, chem. neutralized; Low boiling point cat-cracked naphtha; [A complex combination of hydrocarbons produced by the distillation of a cut from the catalytic cracking process, having undergone an alkaline washing. It consists predominantly of hydrocarbons having carbon numbers in the range of C <sub>8</sub> through C <sub>12</sub> and boiling in the range of approximately 130 °C to 210 °C (266°F to 410°F).]	295-794-0	92128-94-4	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-297-00-4	Hydrocarbons, C <sub>8-12</sub> , catalytic cracker distillates; Low boiling point cat-cracked naphtha; [A complex combination of hydrocarbons obtained by distillation of products from a catalytic cracking process. It consists pre-dominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>8</sub> through C <sub>12</sub> and boiling in the range of approximately 140 °C to 210 °C (284°F to 410°F).]	309-974-4	101794-97-2	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-298-00-X	Hydrocarbons, C <sub>8-12</sub> , catalytic cracking, chem. neutralized, sweetened; Low boiling point cat-cracked naphtha	309-987-5	101896-28-0	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-299-00-5	Naphtha (petroleum), light catalytic reformed; Low boiling point cat-reformed naphtha; [A complex combination of hydrocarbons produced from the distillation of products from a catalytic reforming process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>5</sub> through C <sub>11</sub> and boiling in the range of approximately 35 °C to 190 °C (95°F to 374°F). It contains a relatively large proportion of aromatic and branched chain hydrocarbons. This stream may contain 10 vol. % or more benzene.]	265-065-1	64741-63-5	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-300-00-9	Naphtha (petroleum), heavy catalytic reformed; Low boiling point cat-reformed naphtha; [A complex combination of hydrocarbons produced from the distillation of products from a catalytic reforming process. It consists of predominantly aromatic hydrocarbons having numbers predominantly in the range of C <sub>7</sub> through C <sub>12</sub> and boiling in the range of approximately 90 °C to 230 °C (194°F to 446°F).]	265-070-9	64741-68-0	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-301-00-4	Distillates (petroleum), catalytic reformed depentanizer; Low boiling point cat-reformed naphtha; [A complex combination of hydrocarbons from the distillation of products from a catalytic reforming process. It consists predominantly of aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>3</sub> through C <sub>6</sub> and boiling in the range of approximately - 49 °C to 63 °C - 57°F to 145°F.)]	270-660-4	68475-79-6	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-302-00-X	Hydrocarbons, C <sub>2-6</sub> , C <sub>6-8</sub> catalytic reformer; Low boiling point cat-reformed naphtha	270-687-1	68476-47-1	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-303-00-5	Residues (petroleum), C <sub>6-8</sub> catalytic reformer; Low boiling point cat-reformed naphtha; [A complex residuum from the catalytic reforming of C <sub>6-8</sub> feed. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>2</sub> through C <sub>6</sub> .]	270-794-3	68478-15-9	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-304-00-0	Naphtha (petroleum), light catalytic reformed, arom.-free; Low boiling point cat-reformed naphtha; [A complex combination of hydrocarbons obtained from distillation of products from a catalytic reforming process. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>5</sub> through C <sub>8</sub> and boiling in the range of approximately 35 °C to 120 °C (95°F to 248°F). It contains a relatively large proportion of branched chain hydrocarbons with the aromatic components removed.]	270-993-5	68513-03-1	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-305-00-6	Distillates (petroleum), catalytic reformed straight-run naphtha overheads; Low boiling point cat-reformed naphtha; [A complex combination of hydrocarbons obtained by the catalytic reforming of straight-run naphtha followed by the fractionation of the total effluent. It consists of saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>2</sub> through C <sub>6</sub> .]	271-008-1	68513-63-3	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-306-00-1	Petroleum products, hydrofiner-powerformer reformates; Low boiling point cat-reformed naphtha; [The complex combination of hydrocarbons obtained in a hydrofiner-powerformer process and boiling in a range of approximately 27 °C to 210 °C (80°F to 410°F).]	271-058-4	68514-79-4	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-307-00-7	Naphtha (petroleum, full-range reformed); Low boiling point cat-reformed naphtha; [A complex combination of hydrocarbons produced by the distillation of the products from a catalytic reforming process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>5</sub> through C <sub>12</sub> and boiling in the range of approximately 35 °C to 230 °C (95°F to 446°F).]	272-895-8	68919-37-9	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-308-00-2	Naphtha (petroleum), catalytic reformed; Low boiling point cat-reformed naphtha; [A complex combination of hydrocarbons produced by the distillation of products from a catalytic reforming process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>12</sub> and boiling in the range of approximately 30 °C to 220 °C (90°F to 430°F). It contains a relatively large proportion of aromatic and branched chain hydrocarbons. This stream may contain 10 vol.% or more benzene.]	273-271-8	68955-35-1	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-309-00-8	Distillates (petroleum), catalytic reformed hydrotreated light, C <sub>8-12</sub> arom. fraction; Low boiling point cat-reformed naphtha; [A complex combination of alkylbenzenes obtained by the catalytic reforming of petroleum naphtha. It consists predominantly of alkylbenzenes having carbon numbers predominantly in the range of C <sub>8</sub> through C <sub>10</sub> and boiling in the range of approximately 160 °C to 180 °C (320°F to 356°F).]	285-509-8	85116-58-1	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-310-00-3	Aromatic hydrocarbons, C <sub>8</sub> , catalytic reforming-derived; Low boiling point cat-reformed naphtha	295-279-0	91995-18-5	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-311-00-9	Aromatic hydrocarbons, C <sub>7-12</sub> , C <sub>8</sub> -rich; Low boiling point cat-reformed naphtha; [A complex combination of hydrocarbons obtained by separation from the platformate-containing fraction. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>7</sub> through C <sub>12</sub> (primarily C <sub>8</sub> ) and can contain nonaromatic hydrocarbons, both boiling in the range of approximately 130 °C to 200 °C (266°F to 392°F).]	297-401-8	93571-75-6	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-312-00-4	Gasoline, C <sub>5-11</sub> , high-octane stabilized reformed; Low boiling point cat-reformed naphtha; [A complex high octane combination of hydrocarbons obtained by the catalytic dehydrogenation of a predominantly naphthenic naphtha. It consists predominantly of aromatics and non-aromatics having carbon numbers predominantly in the range of C <sub>5</sub> through C <sub>11</sub> and boiling in the range of approximately 45 °C to 185 °C (113°F to 365°F).]	297-458-9	93572-29-3	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-313-00-X	Hydrocarbons, C <sub>7-12</sub> , C <sub>&gt;9</sub> -arom.-rich, reforming heavy fraction; Low boiling point cat-reformed naphtha; [A complex combination of hydrocarbons obtained by separation from the platformate-containing fraction. It consists predominantly of nonaromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>7</sub> through C <sub>12</sub> and boiling in the range of approximately 120 °C to 210 °C (248°F to 380°F) and C <sub>9</sub> and higher aromatic hydrocarbons.]	297-465-7	93572-35-1	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-314-00-5	Hydrocarbons, C <sub>5-11</sub> , nonaroms.-rich, reforming light fraction; Low boiling point cat-reformed naphtha; [A complex combination of hydrocarbons obtained by separation from the platformate-containing fraction. It consists predominantly of nonaromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>5</sub> to C <sub>11</sub> and boiling in the range of approximately 35 °C to 125 °C (94°F to 257°F), benzene and toluene.]	297-466-2	93572-36-2	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-315-00-0	Foots oil (petroleum), silicic acid-treated; Foots oil; [A complex combination of hydrocarbons obtained by the treatment of Foots oil with silicic acid for removal of trace constituents and impurities. It consists predominantly of straight chain hydrocarbons having carbon numbers predominantly greater than C <sub>12</sub> .]	308-127-6	97862-77-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-316-00-6	Naphtha (petroleum), light thermal cracked; Low boiling point thermally cracked naphtha; [A complex combination of hydrocarbons from distillation of products from a thermal cracking process. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>8</sub> and boiling in the range of approximately minus 10 °C to 130 °C (14°F to 266°F).]	265-075-6	64741-74-8	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-317-00-1	Naphtha (petroleum), heavy thermal cracked; Low boiling point thermally cracked naphtha; [A complex combination of hydrocarbons from distillation of the products from a thermal cracking process. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly in the range of C <sub>6</sub> through C <sub>12</sub> and boiling in the range of approximately 65 °C to 220 °C (148°F to 428°F).]	265-085-0	64741-83-9	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-318-00-7	Distillates (petroleum), heavy arom.; Low boiling point thermally cracked naphtha; [The complex combination of hydrocarbons from the distillation of the products from the thermal cracking of ethane and propane. This higher boiling fraction consists predominantly of C <sub>5</sub> -C <sub>7</sub> aromatic hydrocarbons with some unsaturated aliphatic hydrocarbons having carbon number predominantly of C <sub>5</sub> . This stream may contain benzene.]	267-563-4	67891-79-6	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-319-00-2	Distillates (petroleum), light arom.; Low boiling point thermally cracked naphtha; [The complex combination of hydrocarbons from the distillation of the products from the thermal cracking of ethane and propane. This lower boiling fraction consists predominantly of C <sub>5</sub> -C <sub>7</sub> aromatic hydrocarbons with some unsaturated aliphatic hydrocarbons having a carbon number predominantly of C <sub>5</sub> . This stream may contain benzene.]	267-565-5	67891-80-9	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-320-00-8	Distillates (petroleum), naphtha-raffinate pyrolyzate-derived, gasoline-blending; Low boiling point thermally cracked naphtha; [The complex combination of hydrocarbons obtained by the pyrolysis fractionation at 816 °C (1500°F) of naphtha and raffinate. It consists predominantly of hydrocarbons having a carbon number of C <sub>9</sub> and boiling at approximately 204 °C (400°F).]	270-344-6	68425-29-6	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-321-00-3	Aromatic hydrocarbons, C <sub>6-8</sub> , naphtha-raffinate pyrolyzate-derived; Low boiling point thermally cracked naphtha; A complex combination of hydrocarbons obtained by the fractionation pyrolysis at 816 °C (1500°F) of naphtha and raffinate. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>6</sub> through C <sub>8</sub> , including benzene.]	270-658-3	68475-70-7	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-322-00-9	Distillates (petroleum), thermal cracked naphtha and gas oil; Low boiling point thermally cracked naphtha; [A complex combination of hydrocarbons produced by distillation of thermally cracked naphtha and/or gas oil. It consists predominantly of olefinic hydrocarbons having a carbon number of C <sub>5</sub> and boiling in the range of approximately 33 °C to 60 °C (91°F to 140°F).]	271-631-9	68603-00-9	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-323-00-4	Distillates (petroleum), thermal cracked naphtha and gas oil, C <sub>5</sub> -dimer-contg.; Low boiling point thermally cracked naphtha; [A complex combination of hydrocarbons produced by the extractive distillation of thermal cracked naphtha and/or gas oil. It consists predominantly of hydrocarbons having a carbon number of C <sub>5</sub> with some dimerized C <sub>5</sub> olefins and boiling in the range of approximately 33 °C to 184 °C (91°F to 363°F).]	271-632-4	68603-01-0	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-324-00-X	Distillates (petroleum), thermal cracked naphtha and gas oil, extractive; Low boiling point thermally cracked naphtha; [A complex combination of hydrocarbons produced by the extractive distillation of thermal cracked naphtha and/or gas oil. It consists of paraffinic and olefinic hydrocarbons, predominantly isoamylenes such as 2-methyl-1-butene and 2-methyl-2-butene and boiling in the range of approximately 31 °C to 40 °C (88°F to 104°F).]	271-634-5	68603-03-2	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-325-00-5	Distillates (petroleum), light thermal cracked, debutanized arom.; Low boiling point thermally cracked naphtha; [A complex combination of hydrocarbons produced by the distillation of products from a thermal cracking process. It consists predominantly of aromatic hydrocarbons, primarily benzene.]	273-266-0	68955-29-3	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-326-00-0	Naphtha (petroleum), light thermal cracked, sweetened; Low boiling point thermally cracked naphtha; [A complex combination of hydrocarbons obtained by subjecting a petroleum distillate from the high temperature thermal cracking of heavy oil fractions to a sweetening process to convert mercaptans. It consists predominantly of aromatics, olefins and saturated hydrocarbons boiling in the range of approximately 20 °C to 100 °C (68°F to 212°F).]	295-447-3	92045-65-3	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-327-00-6	Naphtha (petroleum), hydrotreated heavy; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>6</sub> through C <sub>13</sub> and boiling in the range of approximately 65 °C to 230 °C (149°F to 446°F).]	265-150-3	64742-48-9	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-328-00-1	Naphtha (petroleum), hydrotreated light; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>11</sub> and boiling in the range of approximately minus 20 °C to 190 °C (-4°F to 374°F).]	265-151-9	64742-49-0	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-329-00-7	Naphtha (petroleum), hydrodesulfurized light; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained from a catalytic hydrodesulfurization process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>11</sub> and boiling in the range of approximately minus 20 °C to 190 °C (-4°F to 374°F).]	265-178-6	64742-73-0	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-330-00-2	Naphtha (petroleum), hydrodesulfurized heavy; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained from a catalytic hydrodesulfurization process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>7</sub> through C <sub>12</sub> and boiling in the range of approximately 90 °C to 230 °C (194°F to 446°F).]	265-185-4	64742-82-1	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-331-00-8	Distillates (petroleum), hydrotreated middle, intermediate boiling; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained by the distillation of products from a middle distillate hydrotreating process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>5</sub> through C <sub>10</sub> and boiling in the range of approximately 127 °C to 188 °C (262°F to 370°F).]	270-092-7	68410-96-8	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-332-00-3	Distillates (petroleum), light distillate hydrotreating process, low-boiling; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained by the distillation of products from the light distillate hydrotreating process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>6</sub> through C <sub>9</sub> and boiling in the range of approximately 3 °C to 194 °C (37°F to 382°F).]	270-093-2	68410-97-9	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-333-00-9	Distillates (petroleum), hydrotreated heavy naphtha, deisohexanizer overheads; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained by distillation of the products from a heavy naphtha hydrotreating process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>3</sub> through C <sub>6</sub> and boiling in the range of approximately - 49 °C to 68 °C (-57°F to 155°F).]	270-094-8	68410-98-0	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-334-00-4	Solvent naphtha (petroleum), light arom., hydrotreated; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>8</sub> through C <sub>10</sub> and boiling in the range of approximately 135 °C to 210 °C (275°F to 410°F).]	270-988-8	68512-78-7	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-335-00-X	Naphtha (petroleum), hydrodesulfurized thermal cracked light; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained by fractionation of hydrodesulfurized thermal cracker distillate. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>5</sub> to C <sub>11</sub> and boiling in the range of approximately 23 °C to 195 °C (73°F to 383°F).]	285-511-9	85116-60-5	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-336-00-5	Naphtha (petroleum), hydrotreated light, cycloalkane-contg.; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained from the distillation of a petroleum fraction. It consists predominantly of alkanes and cycloalkanes boiling in the range of approximately minus 20 °C to 190 °C (-4°F to 374°F).]	285-512-4	85116-61-6	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-337-00-0	Naphtha (petroleum), heavy steam-cracked, hydrogenated; Low boiling point hydrogen treated naphtha	295-432-1	92045-51-7	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-338-00-6	Naphtha (petroleum), hydrodesulfurized full-range; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained from a catalytic hydrodesulfurization process. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>11</sub> and boiling in the range of approximately 30 °C to 250 °C (86°F to 482°F).]	295-433-7	92045-52-8	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-339-00-1	Naphtha (petroleum), hydrotreated light steam-cracked; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained by treating a petroleum fraction, derived from a pyrolysis process, with hydrogen in the presence of a catalyst. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly in the range of C <sub>5</sub> through C <sub>11</sub> and boiling in the range of approximately 35 °C to 190 °C (95°F to 374°F).]	295-438-4	92045-57-3	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-340-00-7	Hydrocarbons, C <sub>4-12</sub> , naphtha-cracking, hydrotreated; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained by distillation from the product of a naphtha steam cracking process and subsequent catalytic selective hydrogenation of gum formers. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>12</sub> and boiling in the range of approximately 30 °C to 230 °C (86°F to 446°F).]	295-443-1	92045-61-9	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-341-00-2	Solvent naphtha (petroleum), hydrotreated light naphthenic; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists predominantly of cycloparaffinic hydrocarbons having carbon numbers predominantly in the range of C <sub>6</sub> through C <sub>7</sub> and boiling in the range of approximately 73 °C to 85 °C (163°F to 185°F).]	295-529-9	92062-15-2	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-342-00-8	Naphtha (petroleum), light steam-cracked, hydrogenated; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons produced from the separation and subsequent hydrogenation of the products of a steam-cracking process to produce ethylene. It consists predominantly of saturated and unsaturated paraffins, cyclic paraffins and cyclic aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>10</sub> and boiling in the range of approximately 50 °C to 200 °C (122°F to 392°F). The proportion of benzene hydrocarbons may vary up to 30 wt. % and the stream may also contain small amounts of sulphur and oxygenated compounds.]	296-942-7	93165-55-0	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-343-00-3	Hydrocarbons, C <sub>6-11</sub> , hydrotreated, dearomatized; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained as solvents which have been subjected to hydrotreatment in order to convert aromatics to naphthenes by catalytic hydrogenation.]	297-852-0	93763-33-8	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-344-00-9	Hydrocarbons, C <sub>9-12</sub> , hydrotreated, dearomatized; Low boiling point hydrogen treated naphtha; [A complex combination of hydrocarbons obtained as solvents which have been subjected to hydrotreatment in order to convert aromatics to naphthenes by catalytic hydrogenation.]	297-853-6	93763-34-9	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-345-00-4	Stoddard solvent; Low boiling point naphtha — unspecified; [A colourless, refined petroleum distillate that is free from rancid or objectionable odors and that boils in a range of approximately 300°F to 400°F.]	232-489-3	8052-41-3	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-346-00-X	Natural gas condensates (petroleum); Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons separated as a liquid from natural gas in a surface separator by retrograde condensation. It consists mainly of hydrocarbons having carbon numbers predominantly in the range of C <sub>2</sub> to C <sub>20</sub> . It is a liquid at atmospheric temperature and pressure.]	265-047-3	64741-47-5	Carc. Cat. 2; R4 Xn; R65	T R: 45-65 S: 53-45		H P
649-347-00-5	Natural gas (petroleum), raw liq. mix; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons separated as a liquid from natural gas in a gas recycling plant by processes such as refrigeration or absorption. It consists mainly of saturated aliphatic hydrocarbons having carbon numbers in the range of C <sub>2</sub> through C <sub>8</sub> .]	265-048-9	64741-48-6	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-348-00-0	Naphtha (petroleum), light hydrocracked; Low boiling naphtha — unspecified; [A complex combination of hydrocarbons from distillation of the products from a hydrocracking process. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>10</sub> , and boiling in the range of approximately minus 20 °C to 180 °C (-4°F to 356°F).]	265-071-4	64741-69-1	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-349-00-6	Naphtha (petroleum), heavy hydrocracked; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons from distillation of the products from a hydrocracking process. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C <sub>6</sub> through C <sub>12</sub> , and boiling in the range of approximately 65 °C to 230 °C (148°F to 446°F).]	265-079-8	64741-78-2	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-350-00-1	Naphtha (petroleum), sweetened; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained by subjecting a petroleum naphtha to a sweetening process to convert mercaptans or to remove acidic impurities. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>12</sub> and boiling in the range of approximately minus 10 °C to 230 °C (14°F to 446°F).]	265-089-2	64741-87-3	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-351-00-7	Naphtha (petroleum), acid-treated; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained as a raffinate from a sulfuric acid treating process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>7</sub> through C <sub>12</sub> and boiling in the range of approximately 90 °C to 230 °C (194°F to 446°F).]	265-115-2	64742-15-0	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-352-00-2	Naphtha (petroleum), chemically neutralized heavy; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons produced by a treating process to remove acidic materials. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>6</sub> through C <sub>12</sub> and boiling in the range of approximately 65 °C to 230 °C (149°F to 446°F).]	265-122-0	64742-22-9	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-353-00-8	Naphtha (petroleum), chemically neutralized light; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons produced by a treating process to remove acidic materials. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>11</sub> and boiling in the range of approximately minus 20 °C to 190 °C (-4°F to 374°F).]	265-123-6	64742-23-0	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-354-00-3	Naphtha (petroleum), catalytic dewaxed; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained from the catalytic dewaxing of a petroleum fraction. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>5</sub> through C <sub>12</sub> and boiling in the range of approximately 35 °C to 230 °C (95°F to 446°F).]	265-170-2	64742-66-1	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-355-00-9	Naphtha (petroleum), light steam-cracked; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained by the distillation of the products from a steam cracking process. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>11</sub> and boiling in the range of approximately minus 20 °C to 190 °C (-4°F to 374°F). This stream is likely to contain 10 vol. % or more benzene.]	265-187-5	64742-83-2	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-356-00-4	Solvent naphtha (petroleum), light arom.; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained from distillation of aromatic streams. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>8</sub> through C <sub>10</sub> and boiling in the range of approximately 135 °C to 210 °C (275°F to 410°F).]	265-199-0	64742-95-6	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-357-00-X	Aromatic hydrocarbons, C <sub>6-10</sub> , acid-treated, neutralized; Low boiling point naphtha — unspecified	268-618-5	68131-49-7	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-358-00-5	Distillates (petroleum), C <sub>3-5</sub> , 2-methyl-2-butene-rich; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons from the distillation of hydrocarbons usually ranging in carbon numbers from C <sub>3</sub> through C <sub>5</sub> , predominantly isopentane and 3-methyl-1-butene. It consists of saturated and unsaturated hydrocarbons having carbon numbers in the range of C <sub>3</sub> through C <sub>5</sub> , predominantly 2-methyl-2-butene.]	270-725-7	68477-34-9	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-359-00-0	Distillates (petroleum), polymd. steam-cracked petroleum distillates, C <sub>5-12</sub> fraction; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained from the distillation of polymerized steam-cracked petroleum distillate. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>5</sub> through C <sub>12</sub> .]	270-735-1	68477-50-9	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-360-00-6	Distillates (petroleum), steam-cracked, C <sub>5-12</sub> fraction; Low boiling point naphtha — unspecified; [A complex combination of organic compounds obtained by the distillation of products from a steam cracking process. It consists of unsaturated hydrocarbons having carbon numbers predominantly in the range of C <sub>5</sub> through C <sub>12</sub> .]	270-736-7	68477-53-2	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-361-00-1	Distillates (petroleum), steam-cracked, C <sub>5-10</sub> fraction, mixed with light steam-cracked petroleum naphtha C <sub>5</sub> fraction; Low boiling point naphtha — unspecified	270-738-8	68477-55-4	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-362-00-7	Extracts (petroleum), cold-acid, C <sub>4-6</sub> ; Low boiling point naphtha — unspecified; [A complex combination of organic compounds produced by cold acid unit extraction of saturated and unsaturated aliphatic hydrocarbons usually ranging in carbon numbers from C <sub>3</sub> through C <sub>6</sub> , predominantly pentanes and amylenes. It consists predominantly of saturated and unsaturated hydrocarbons having carbon numbers in the range of C <sub>4</sub> through C <sub>6</sub> , predominantly C <sub>5</sub> .]	270-741-4	68477-61-2	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-363-00-2	Distillates (petroleum), depentanizer overheads; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained from a catalytic cracked gas stream. It consists of aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>6</sub> .]	270-771-8	68477-89-4	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-364-00-8	Residues (petroleum), butane splitter bottoms; Low boiling point naphtha — unspecified; [A complex residuum from the distillation of butane stream. It consists of aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>6</sub> .]	270-791-7	68478-12-6	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-365-00-3	Residual oils (petroleum), deisobutanizer tower; Low boiling point naphtha — unspecified; [A complex residuum from the atmospheric distillation of the butane-butylene stream. It consists of aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>6</sub> .]	270-795-9	68478-16-0	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-366-00-9	Naphtha (petroleum), full-range coker; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons produced by the distillation of products from a fluid coker. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>15</sub> and boiling in the range of approximately 43 °C to 250 °C (110°F to 500°F).]	270-991-4	68513-02-0	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-367-00-4	Naphtha (petroleum), steam-cracked middle arom.; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons produced by the distillation of products from a steam-cracking process. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>7</sub> through C <sub>12</sub> and boiling in the range of approximately 130 °C to 220 °C (266°F to 428°F).]	271-138-9	68516-20-1	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-368-00-X	Naphtha (petroleum), clay-treated full-range straight-run; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons resulting from treatment of full-range straight-run naphtha with natural or modified clay, usually in a percolation process to remove the trace amounts of polar compounds and impurities present. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>11</sub> and boiling in the range of approximately - 20 °C to 220 °C (-4°F to 429°F).]	271-262-3	68527-21-9	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-369-00-5	Naphtha (petroleum), clay-treated light straight-run; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons resulting from treatment of light straight-run naphtha with a natural or modified clay, usually in a percolation process to remove the trace amounts of polar compounds and impurities, present. It consists of hydro-carbons having carbon numbers predominantly in the range of C <sub>7</sub> through C <sub>10</sub> and boiling in the range of approximately 93 °C to 180 °C (200°F to 356°F).]	271-263-9	68527-22-0	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-370-00-0	Naphtha (petroleum), light steam-cracked arom.; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons produced by distillation of products from a steam-cracking process. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>7</sub> through C <sub>9</sub> and boiling in the range of approximately 110 °C to 165 °C (230°F to 329°F).]	271-264-4	68527-23-1	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-371-00-6	Naphtha (petroleum), light steam-cracked, debenzenized; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons produced by distillation of products from a steam-cracking process. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>12</sub> and boiling in the range of approximately 80 °C to 218 °C (176°F to 424°F).]	271-266-5	68527-26-4	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-372-00-1	Naphtha (petroleum), arom.-contg.; Low boiling point naphtha — unspecified	271-635-0	68603-08-7	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-373-00-7	Gasoline, pyrolysis, debutanizer bottoms; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained from the fractionation of depropanizer bottoms. It consists of hydrocarbons having carbon numbers predominantly greater than C <sub>5</sub> .]	271-726-5	68606-10-0	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-374-00-2	Naphtha (petroleum), light, sweetened; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained by subjecting a petroleum distillate to a sweetening process to convert mercaptans or to remove acidic impurities. It consists predominantly of saturated and unsaturated hydrocarbons having carbon numbers predominantly in the range of C <sub>3</sub> through C <sub>6</sub> and boiling in the range of approximately - 20 °C to 100 °C (-4°F to 212°F).]	272-206-0	68783-66-4	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-375-00-8	Natural gas condensates; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons separated and/or condensed from natural gas during transportation and collected at the wellhead and/or from the production, gathering, transmission, and distribution pipelines in deeps, scrubbers, etc. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>2</sub> through C <sub>8</sub> .]	272-896-3	68919-39-1	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H J
649-376-00-3	Distillates (petroleum), naphtha unifiner stripper; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons produced by stripping the products from the naphtha unifiner. It consists of saturated aliphatic hydrocarbons having carbon numbers predominantly in the range of C <sub>2</sub> through C <sub>6</sub> .]	272-932-8	68921-09-5	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-377-00-9	Naphtha (petroleum), catalytic reformed light, arom.-free fraction; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons remaining after removal of aromatic compounds from catalytic reformed light naphtha in a selective absorption process. It consists predominantly of paraffinic and cyclic compounds having carbon numbers predominantly in the range of C <sub>5</sub> to C <sub>8</sub> and boiling in the range of approximately 66 °C to 121 °C (151°F to 250°F).]	285-510-3	85116-59-2	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-378-00-4	Gasoline; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons consisting primarily of paraffins, cycloparaffins, aromatic and olefinic hydrocarbons having carbon numbers predominantly greater than C <sub>3</sub> and boiling in the range of 30 °C to 260 °C (86°F to 500°F).]	289-220-8	86290-81-5	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-379-00-X	Aromatic hydrocarbons, C <sub>7-8</sub> , dealkylation products, distn. residues; Low boiling point naphtha — unspecified	292-698-0	90989-42-7	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-380-00-5	Hydrocarbons, C <sub>4-6</sub> , depentanizer lights, arom. hydrotreater; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained as first runnings from the depentanizer column before hydrotreatment of the aromatic charges. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>6</sub> , predominantly pentanes and pentenes, and boiling in the range of approximately 25 °C to 40 °C (77°F to 104°F).]	295-298-4	91995-38-9	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-381-00-0	Distillates (petroleum), heat-soaked steam-cracked naphtha, C <sub>5</sub> -rich; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained by distillation of heat-soaked steam-cracked naphtha. It consists predominantly of hydrocarbons having carbon numbers in the range of C <sub>4</sub> through C <sub>6</sub> , predominantly C <sub>5</sub> .]	295-302-4	91995-41-4	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-382-00-6	Extracts (petroleum), catalytic reformed light naphtha solvent; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained as the extract from the solvent extraction of a catalytically reformed petroleum cut. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>7</sub> through C <sub>8</sub> and boiling in the range of approximately 100 °C to 200 °C (212°F to 392°F).]	295-331-2	91995-68-5	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-383-00-1	Naphtha (petroleum), hydrodesulfurized light, dearomatized; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained by distillation of hydrodesulfurized and dearomatized light petroleum fractions. It consists predominantly of C <sub>7</sub> paraffins and cycloparaffins boiling in a range of approximately 90 °C to 100 °C (194°F to 212°F).]	295-434-2	92045-53-9	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-384-00-7	Naphtha (petroleum), light, C <sub>5</sub> -rich, sweetened; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained by subjecting a petroleum naphtha to a sweetening process to convert mercaptans or to remove acidic impurities. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>5</sub> , predominantly C <sub>5</sub> , and boiling in the range of approximately minus 10 °C to 35 °C (14°F to 95°F).]	295-442-6	92045-60-8	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-385-00-2	Hydrocarbons, C <sub>8-11</sub> , naphtha-cracking, toluene cut; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained by distillation from prehydrogenated cracked naphtha. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>8</sub> through C <sub>11</sub> and boiling in the range of approximately 130 °C to 205 °C (266°F to 401°F).]	295-444-7	92045-62-0	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-386-00-8	Hydrocarbons, C <sub>4-11</sub> , naphtha-cracking, arom.-free; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained from prehydrogenated cracked naphtha after distillative separation of benzene- and toluene-containing hydrocarbon cuts and a higher boiling fraction. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range C <sub>4</sub> through C <sub>11</sub> and boiling in the range of approximately 30 °C to 205 °C (86°F to 401°F).]	295-445-2	92045-63-1	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-387-00-3	Naphtha (petroleum), light heat-soaked, steam-cracked; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained by the fractionation of steam cracked naphtha after recovery from a heat soaking process. It consists predominantly of hydrocarbons having a carbon numbers predominantly in the range of C <sub>4</sub> through C <sub>6</sub> and boiling in the range of approximately 0 °C to 80 °C (32°F to 176°F).]	296-028-8	92201-97-3	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-388-00-9	Distillates (petroleum), C <sub>6</sub> -rich; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained from the distillation of a petroleum feedstock. It consists predominantly of hydrocarbons having carbon numbers of C <sub>5</sub> through C <sub>7</sub> , rich in C <sub>6</sub> , and boiling in the range of approximately 60 °C to 70 °C (140°F to 158°F).]	296-903-4	93165-19-6	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-389-00-4	Gasoline, pyrolysis, hydrogenated; Low boiling point naphtha-unspecified; [A distillation fraction from the hydrogenation of pyrolysis gasoline boiling in the range of approximately 20 °C to 200 °C (68°F to 392°F).]	302-639-3	94114-03-1	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-390-00-X	Distillates (petroleum), steam-cracked, C <sub>8-12</sub> fraction, polymd., distn. lights; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained by distillation of the polymerized C <sub>8</sub> through C <sub>12</sub> fraction from steam-cracked petroleum distillates. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>8</sub> through C <sub>12</sub> .]	305-750-5	95009-23-7	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-391-00-5	Extracts (petroleum) heavy naphtha solvent, clay-treated; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained by the treatment of heavy naphthic solvent petroleum extract with bleaching earth. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>6</sub> through C <sub>18</sub> and boiling in the range of approximately 80 °C to 180 °C (175°F to 356°F).]	308-261-5	97926-43-7	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-392-00-0	Naphtha (petroleum), light steam-cracked, debenzenized, thermally treated; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained by the treatment and distillation of debenzenized light steam-cracked petroleum naphtha. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>7</sub> through C <sub>12</sub> and boiling in the range of approximately 95 °C to 200 °C (203°F to 392°F).]	308-713-1	98219-46-6	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-393-00-6	Naphtha (petroleum), light steam-cracked, thermally treated; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained by the treatment and distillation of light steam-cracked petroleum naphtha. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>5</sub> through C <sub>6</sub> and boiling in the range of approximately 35 °C to 80 °C (95°F to 176°F).]	308-714-7	98219-47-7	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-394-00-1	Distillates (petroleum), C <sub>7-9</sub> , C <sub>8</sub> -rich, hydrodesulfurized dearomatized; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained by the distillation of petroleum light fraction, hydrodesulfurized and dearomatized. It consists predominantly of hydrocarbons having carbon numbers in the range of C <sub>7</sub> through C <sub>9</sub> , predominantly C <sub>8</sub> paraffins and cycloparaffins, boiling in the range of approximately 120 °C to 130 °C (248°F to 266°F).]	309-862-5	101316-56-7	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-395-00-7	Hydrocarbons, C <sub>6-8</sub> , hydrogenated sorption-dearomatized, toluene raffination; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained during the sorptions of toluene from a hydrocarbon fraction from cracked gasoline treated with hydrogen in the presence of a catalyst. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>6</sub> through C <sub>8</sub> and boiling in the range of approximately 80 °C to 135 °C (176°F to 275°F).]	309-870-9	101316-66-9	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-396-00-2	Naphtha (petroleum), hydrodesulfurized full-range coker; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained by fractionation from hydrodesulfurized coker distillate. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>5</sub> to C <sub>11</sub> and boiling in the range of approximately 23 °C to 196 °C (73°F to 385°F).]	309-879-8	101316-76-1	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-397-00-8	Naphtha (petroleum), sweetened light; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained by subjecting a petroleum naphtha to a sweetening process to convert mercaptans or to remove acidic impurities. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>5</sub> through C <sub>8</sub> and boiling in the range of approximately 20 °C to 130 °C (68°F to 266°F).]	309-976-5	101795-01-1	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-398-00-3	Hydrocarbons, C <sub>3-6</sub> , C <sub>5</sub> -rich, steam-cracked naphtha; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained by distillation of steam-cracked naphtha. It consists predominantly of hydrocarbons having carbon numbers in the range of C <sub>3</sub> through C <sub>6</sub> , predominantly C <sub>5</sub> .]	310-012-0	102110-14-5	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-399-00-9	Hydrocarbons, C <sub>5</sub> -rich, dicyclopentadiene-contg.; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained by distillation of the products from a steam-cracking process. It consists predominantly of hydrocarbons having carbon numbers of C <sub>5</sub> and dicyclopentadiene and boiling in the range of approximately 30 °C to 170 °C (86°F to 338°F).]	310-013-6	102110-15-6	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-400-00-2	Residues (petroleum), steam-cracked light, arom.; Low boiling point naphtha — unspecified; [A complex combination of hydrocarbons obtained by the distillation of the products of steam cracking or similar processes after taking off the very light products resulting in a residue starting with hydrocarbons having carbon numbers greater than C <sub>5</sub> . It consists predominantly of aromatic hydrocarbons having carbon numbers greater than C <sub>5</sub> and boiling above approximately 40 °C (104°F).]	310-057-6	102110-55-4	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-401-00-8	Hydrocarbons, C ≥ 5, C <sub>5-6</sub> -rich; Low boiling point naphtha — unspecified	270-690-8	68476-50-6	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-402-00-3	Hydrocarbons, C <sub>5</sub> -rich; Low boiling point naphtha — unspecified	270-695-5	68476-55-1	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-403-00-9	Aromatic hydrocarbons, C <sub>8-10</sub> ; Low boiling point naphtha — unspecified	292-695-4	90989-39-2	Carc. Cat. 2; R45 Xn; R65	T R: 45-65 S: 53-45		H P
649-404-00-4	Kerosine (petroleum); Straight run kerosine; [A complex combination of hydrocarbons produced by the distillation of crude oil. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>9</sub> through C <sub>16</sub> and boiling in the range of approximately 150 °C to 290 °C (320°F to 554°F).]	232-366-4	8008-20-6	Xn; R65	Xn R: 65 S: (2-)23-24-62		H



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-405-00-X	Solvent naphtha (petroleum), medium aliph.; Straight run kerosine; [A complex combination of hydrocarbons obtained from the distillation of crude oil or natural gasoline. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C <sub>9</sub> through C <sub>12</sub> and boiling in the range of approximately 140 °C to 220 °C (284°F to 428°F).]	265-191-7	64742-88-7	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-406-00-5	Solvent naphtha (petroleum) heavy aliph.; Straight run kerosine; [A complex combination of hydrocarbons obtained from the distillation of crude oil or natural gasoline. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C <sub>11</sub> through C <sub>16</sub> and boiling in the range of approximately 190 °C to 290 °C (374°F to 554°F).]	265-200-4	64742-96-7	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-407-00-0	Kerosine (petroleum), straight-run wide-cut; Straight run kerosine; [A complex combination of hydrocarbons obtained as a wide cut hydrocarbon fuel cut from atmospheric distillation and boiling in the range of approximately 70 °C to 220 °C (158°F to 428°F).]	295-418-5	92045-37-9	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-408-00-6	Distillates (petroleum), steam-cracked; Cracked kerosine; [A complex combination of hydrocarbons obtained by the distillation of the products from a steam cracking process. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly in the range of C <sub>7</sub> through C <sub>16</sub> and boiling in the range of approximately 90 °C to 290 °C (190°F to 554°F).]	265-194-3	64742-91-2	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-409-00-1	Distillates (petroleum), cracked stripped steam-cracked petroleum distillates, C <sub>8-10</sub> fraction; Cracked kerosine; [A complex combination of hydrocarbons obtained by distilling cracked stripped steam-cracked distillates. It consists of hydro-carbons having carbon numbers in the range of C <sub>8</sub> through C <sub>10</sub> and boiling in the range of approximately 129 °C to 194 °C (264°F to 382°F).]	270-728-3	68477-39-4	Xn; R65	Xn R: 65 S: (2-)23-24-62		H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-410-00-7	Distillates (petroleum), cracked stripped steam-cracked petroleum distillates, C <sub>10-12</sub> fraction; Cracked kerosine; [A complex combination of hydrocarbons obtained by distilling cracked stripped steam-cracked distillates. It consists predominantly of aromatic hydrocarbons having carbon numbers in the range of C <sub>10</sub> through C <sub>12</sub> .]	270-729-9	68477-40-7	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-411-00-2	Distillates (petroleum), steam-cracked, C <sub>8-12</sub> fraction; Cracked kerosine; [A complex combination of organic compounds obtained by the distillation of products from a steam cracking process. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly in the range of C <sub>8</sub> through C <sub>12</sub> .]	270-737-2	68477-54-3	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-412-00-8	Kerosine (petroleum), hydrodesulfurized thermal cracked; Cracked kerosine; [A complex combination of hydrocarbons obtained by fractionation from hydrodesulfurized thermal cracker distillate. It consists predominantly of hydrocarbons predominantly in the range of C <sub>8</sub> to C <sub>16</sub> and boiling in the range of approximately 120 °C to 283 °C (284°F to 541°F).]	285-507-7	85116-55-8	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-413-00-3	Aromatic hydrocarbons, C <sub>≥10</sub> , steam-cracking, hydrotreated; Cracked kerosine; [A complex combination of hydrocarbons produced by the distillation of the products from a steam cracking process treated with hydrogen in the presence of a catalyst. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly greater than C <sub>10</sub> and boiling in the range of approximately 150 °C to 320 °C (302°F to 608°F).]	292-621-0	90640-98-5	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-414-00-9	Naphtha (petroleum), steam-cracked, hydrotreated, C <sub>9-10</sub> -arom.-rich; Cracked kerosine; [A complex combination of hydrocarbons produced by the distillation of the products from a steam cracking process thereafter treated with hydrogen in the presence of a catalyst. It consists predominantly of aromatic hydrocarbons having carbon numbers in the range of C <sub>9</sub> through C <sub>10</sub> and boiling in the range of approximately 140 °C to 200 °C (284°F to 392°F).]	292-637-8	90641-13-7	Xn; R65	Xn R: 65 S: (2-)23-24-62		H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-415-00-4	Distillates (petroleum), thermal-cracked, alkylarom. hydrocarbon-rich; Cracked kerosine; [A complex combination of hydrocarbons obtained by distillation of thermal-cracking heavy tars. It consists predominantly of highly alkylated aromatic hydrocarbons boiling in the range of approximately 100 °C to 250 °C (212°F to 482°F).]	309-866-7	101316-61-4	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-416-00-X	Distillates (petroleum), catalytic cracked heavy tar light; Cracked kerosine; [A complex combination of hydrocarbons obtained by distillation of catalytic cracking heavy tars. It consists predominantly of highly alkylated aromatic hydrocarbons boiling in the range of approximately 100 °C to 250 °C (212°F to 482°F).]	309-938-8	101631-13-4	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-417-00-5	Solvent naphtha (petroleum), hydrocracked heavy arom.; Cracked kerosine; [A complex combination of hydrocarbons obtained by the distillation of hydrocracked petroleum distillate. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>9</sub> through C <sub>16</sub> and boiling in the range of approximately 235 °C to 290 °C (455°F to 554°F).]	309-881-9	101316-80-7	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-418-00-0	Distillates (petroleum), steam-cracked heavy tar light; Cracked kerosine; [A complex combination of hydrocarbons obtained by distillation of steam cracking heavy tars. It consists predominantly of highly alkylated aromatic hydrocarbons boiling in the range of approximately 100 °C to 250 °C (212°F to 482°F).]	309-940-9	101631-15-6	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-419-00-6	Distillates (petroleum), alkylate; Kerosine — unspecified; [A complex combination of hydrocarbons produced by distillation of the reaction products of isobutane with monoolefinic hydrocarbons usually ranging in carbon numbers from C <sub>3</sub> through C <sub>5</sub> . It consists of predominantly branched chain saturated hydrocarbons having carbon numbers predominantly in the range of C <sub>11</sub> through C <sub>17</sub> and boiling in the range of approximately 205 °C to 320 °C (401°F to 608°F).]	265-074-0	64741-73-7	Xn; R65	Xn R: 65 S: (2-)23-24-62		H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-420-00-1	Extracts (petroleum), heavy naphtha solvent; Kerosine — unspecified; [A complex combination of hydrocarbons obtained as the extract from a solvent extraction process. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>7</sub> through C <sub>12</sub> and boiling in the range of approximately 90 °C to 220 °C (194°F to 428°F).]	265-099-7	64741-98-6	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-421-00-7	Distillates (petroleum), chemically neutralized light; Kerosine — unspecified; [A complex combination of hydrocarbons produced by a treating process to remove acidic materials. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>9</sub> through C <sub>16</sub> and boiling in the range of approximately 150 °C to 290 °C (302°F to 554°F).]	265-132-5	64742-31-0	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-422-00-2	Distillates (petroleum), hydrotreated light; Kerosine — unspecified; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>9</sub> through C <sub>16</sub> and boiling in the range of approximately 150 °C to 290 °C (302°F to 554°F).]	265-149-8	64742-47-8	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-423-00-8	Kerosine (petroleum), hydrodesulfurized; Kerosine — unspecified; [A complex combination of hydrocarbons obtained from a petroleum stock by treating with hydrogen to convert organic sulfur to hydrogen sulfide which is removed. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>9</sub> through C <sub>16</sub> and boiling in the range of approximately 150 °C to 290 °C (302°F to 554°F).]	265-184-9	64742-81-0	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-424-00-3	Solvent naphtha (petroleum), heavy arom.; Kerosine — unspecified; [A complex combination of hydrocarbons obtained from distillation of aromatic streams. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>9</sub> through C <sub>16</sub> and boiling in the range of approximately 165 °C to 290 °C (330°F to 554°F).]	265-198-5	64742-94-5	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-425-00-9	Naphtha (petroleum), heavy coker; Kerosine — unspecified; [A complex combination of hydrocarbons from the distillation of products from a fluid coker. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly in the range of C <sub>6</sub> through C <sub>15</sub> and boiling in the range of approximately 157 °C to 288 °C (315°F to 550°F).]	269-778-9	68333-23-3	Xn; R65	Xn R: 65 S: (2-)23-24-62		H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-426-00-4	Naphtha (petroleum), catalytic reformed hydrodesulfurized heavy, arom. fraction; Kerosine — unspecified; [A complex combination of hydrocarbons produced by fractionation from catalytically reformed hydrodesulfurized naphtha. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>7</sub> to C <sub>13</sub> and boiling in the range of approximately 98 °C to 218 °C (208°F to 424°F).]	285-508-2	85116-57-0	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-427-00-X	Kerosine (petroleum), sweetened; Kerosine — unspecified; [A complex combination of hydrocarbons obtained by subjecting a petroleum distillate to a sweetening process to convert mercaptans or to remove acidic impurities. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>9</sub> through C <sub>16</sub> and boiling in the range of 130 °C to 290 °C (266°F to 554°F).]	294-799-5	91770-15-9	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-428-00-5	Kerosine (petroleum), solvent-refined sweetened; Kerosine — unspecified; [A complex combination of hydrocarbons obtained from a petroleum stock by solvent refining and sweetening and boiling in the range of approximately 150 °C to 260 °C (302°F to 500°F).]	295-416-4	92045-36-8	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-429-00-0	Hydrocarbons, C <sub>9-16</sub> , hydrotreated, dearomatized; Kerosine — unspecified; [A complex combination of hydrocarbons obtained as solvents which have been subjected to hydrotreatment in order to convert aromatics to naphthenes by catalytic hydrogenation.]	297-854-1	93763-35-0	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-430-00-6	Kerosine (petroleum), solvent-refined hydrodesulfurized; Kerosine — unspecified	307-033-2	97488-94-3	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-431-00-1	Distillates (petroleum), hydrodesulfurized full-range middle coker; Kerosine — unspecified; [A complex combination of hydrocarbons obtained by fractionation from hydrodesulfurized coker distillate. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>8</sub> through C <sub>16</sub> and boiling in the range of approximately 120 °C to 283 °C (248°F to 541°F).]	309-864-6	101316-58-9	Xn; R65	Xn R: 65 S: (2-)23-24-62		H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-432-00-7	Solvent naphtha (petroleum), hydrodesulfurized heavy arom.; Kerosine — unspecified; [A complex combination of hydrocarbons obtained by the catalytic hydrodesulfurization of a petroleum fraction. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>10</sub> through C <sub>13</sub> and boiling in the range of approximately 180 °C to 240 °C (356°F to 464°F).]	309-882-4	101316-81-8	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-433-00-2	Solvent naphtha (petroleum), hydrodesulfurized medium; Kerosine — unspecified; [A complex combination of hydrocarbons obtained by the catalytic hydrodesulfurization of a petroleum fraction. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>10</sub> through C <sub>13</sub> and boiling in the range of approximately 175 °C to 220 °C (347°F to 428°F).]	309-884-5	101316-82-9	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-434-00-8	Kerosine (petroleum), hydrotreated; Kerosine — unspecified; [A complex combination of hydrocarbons obtained from the distillation of petroleum and subsequent hydrotreatment. It consists predominantly of alkanes, cycloalkanes and alkylbenzenes having carbon numbers predominantly in the range of C <sub>12</sub> through C <sub>16</sub> and boiling in the range of approximately 230 °C to 270 °C (446°F to 518°F).]	309-944-0	101631-19-0	Xn; R65	Xn R: 65 S: (2-)23-24-62		H
649-435-00-3	Distillates (petroleum), light catalytic cracked; Cracked gasoil; [A complex combination of hydrocarbons produced by the distillation of products from a catalytic cracking process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>9</sub> through C <sub>25</sub> and boiling in the range of approximately 150 °C to 400 °C (302°F to 752°F). It contains a relatively large proportion of bicyclic aromatic hydrocarbons.]	265-060-4	64741-59-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-436-00-9	Distillates (petroleum), intermediate catalytic cracked; Cracked gasoil; [A complex combination of hydrocarbons produced by the distillation of products from a catalytic cracking process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>11</sub> through C <sub>30</sub> and boiling in the range of approximately 205 °C to 450 °C (401°F to 842°F). It contains a relatively large proportion of tricyclic aromatic hydrocarbons.]	265-062-5	64741-60-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-437-00-4	Distillates (petroleum), light hydrocracked; Cracked gasoil; [A complex combination of hydrocarbons from distillation of the products from a hydrocracking process. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C <sub>10</sub> through C <sub>18</sub> and boiling in the range of approximately 160 °C to 320 °C (320°F to 608°F).]	265-078-2	64741-77-1	Carc. Cat. 3; R40	Xn R: 40 S: (2-)36/37		H
649-438-00-X	Distillates (petroleum), light thermal cracked; Cracked gasoil; [A complex combination of hydrocarbons from the distillation of the products from a thermal cracking process. It consists predominantly of unsaturated hydrocarbons having carbon numbers predominantly in the range of C <sub>10</sub> through C <sub>22</sub> and boiling in the range of approximately 160 °C to 370 °C (320°F to 698°F).]	265-084-5	64741-82-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-439-00-5	Distillates (petroleum), hydrodesulfurized light catalytic cracked; Cracked gasoil; [A complex combination of hydrocarbons obtained by treating light catalytic cracked distillates with hydrogen to convert organic sulfur to hydrogen sulfide which is removed. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>9</sub> through C <sub>25</sub> and boiling in the range of approximately 150 °C to 400 °C (302°F to 752°F). It contains a relatively large proportion of bicyclic aromatic hydrocarbons.]	269-781-5	68333-25-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-440-00-0	Distillates (petroleum), light steam-cracked naphtha; Cracked gasoil; [A complex combination of hydrocarbons from the multiple distillation of products from a steam cracking process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>10</sub> through C <sub>18</sub> .]	270-662-5	68475-80-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-441-00-6	Distillates (petroleum), cracked steam-cracked petroleum distillates; Cracked gasoil; [A complex combination of hydrocarbons produced by distilling cracked steam cracked distillate and/or its fractionation products. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>10</sub> to low molecular weight polymers.]	270-727-8	68477-38-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-442-00-1	Gas oils (petroleum), steam-cracked; Cracked gasoil; [A complex combination of hydrocarbons produced by distillation of the products from a steam cracking process. It consists of hydrocarbons having carbon numbers predominantly greater than C <sub>9</sub> and boiling in the range of from approximately 205 °C to 400 °C (400°F to 752°F).]	271-260-2	68527-18-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-443-00-7	Distillates (petroleum), hydrodesulfurized thermal cracked middle; Cracked gasoil; [A complex combination of hydrocarbons obtained by fractionation from hydrodesulfurized thermal cracker distillate stocks. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>11</sub> to C <sub>25</sub> and boiling in the range of approximately 205 °C to 400 °C (401°F to 752°F).]	285-505-6	85116-53-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-444-00-2	Gas oils (petroleum), thermal-cracked, hydrodesulfurized; Cracked gasoil	295-411-7	92045-29-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-445-00-8	Residues (petroleum), hydrogenated steam-cracked naphtha; Cracked gasoil; [A complex combination of hydrocarbons obtained as a residual fraction from the distillation of hydrotreated steam-cracked naphtha. It consists predominantly of hydrocarbons boiling in the range of approximately 200 °C to 350 °C (32°F to 662°F).]	295-514-7	92062-00-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-446-00-3	Residues (petroleum), steam-cracked naphtha distn.; Cracked gasoil; [A complex combination of hydrocarbons obtained as a column bottom from the separation of effluents from steam cracking naphtha at a high temperature. It boils in the range of approximately 147 °C to 300 °C (297°F to 572°F) and produces a finished oil having a viscosity of 18cSt at 50 °C.]	295-517-3	92062-04-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-447-00-9	Distillates (petroleum), light catalytic cracked, thermally degraded; Cracked gasoil; [A complex combination of hydrocarbons produced by the distillation of products from a catalytic cracking process which has been used as a heat transfer fluid. It consists predominantly of hydrocarbons boiling in the range of approximately 190 °C to 340 °C (374°F to 644°F). This stream is likely to contain organic sulfur compounds.]	295-991-1	92201-60-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-448-00-4	Residues (petroleum), steam-cracked heat-soaked naphtha; Cracked gasoil; [A complex combination of hydrocarbons obtained as residue from the distillation of steam cracked heat soaked naphtha and boiling in the range of approximately 150 °C to 350 °C (302°F to 662°F).]	297-905-8	93763-85-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-449-00-X	Hydrocarbons, C <sub>16-20</sub> , solvent-dewaxed hydrocracked paraffinic distn. residue; Cracked gasoil; [A complex combination of hydrocarbons obtained by solvent dewaxing of a distillation residue from a hydrocracked paraffinic distillate. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>16</sub> through C <sub>20</sub> and boiling in the range of approximately 360 °C to 500 °C (680 °F to 932 °F). It produces a finished oil having a viscosity of 4,5 cSt at approximately 100 °C (212 °F).]	307-662-2	97675-88-2	Carc. Cat. 3; R40	Xn R: 40 S: (2-)36/37		H
649-450-00-5	Gas oils (petroleum), light vacuum, thermal-cracked hydrodesulfurized; Cracked gasoil; [A complex combination of hydrocarbons obtained by catalytic dehydrosulfurization of thermal-cracked light vacuum petroleum. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>14</sub> through C <sub>20</sub> and boiling in the range of approximately 270 °C to 370 °C (518°F to 698°F).]	308-278-8	97926-59-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-451-00-0	Distillates (petroleum), hydrodesulfurized middle coker; Cracked gasoil; [A complex combination of hydrocarbons by fractionation from hydrodesulfurised coker distillate stocks. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>12</sub> through C <sub>21</sub> and boiling in the range of approximately 200 °C to 360 °C (392°F to 680°F).]	309-865-1	101316-59-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H
649-452-00-6	Distillates (petroleum), heavy steam-cracked; Cracked gasoil; [A complex combination of hydrocarbons obtained by distillation of steam cracking heavy residues. It consists predominantly of highly alkylated heavy aromatic hydrocarbons boiling in the range of approximately 250 °C to 400 °C (482°F to 752°F).]	309-939-3	101631-14-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-453-00-1	Distillates (petroleum), heavy hydrocracked; Baseoil — unspecified; [A complex combination of hydrocarbons from the distillation of the products from a hydrocracking process. It consists predominantly of saturated hydrocarbons having carbon numbers in the range of C <sub>15</sub> -C <sub>39</sub> and boiling in the range of approximately 260 °C to 600 °C (500°F to 1112°F).]	265-077-7	64741-76-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-454-00-7	Distillates (petroleum), solvent-refined heavy paraffinic; Baseoil — unspecified; [A complex combination of hydrocarbons obtained as the raffinate from a solvent extraction process. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C).]	265-090-8	64741-88-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-455-00-2	Distillates (petroleum), solvent-refined light paraffinic; Baseoil — unspecified; [A complex combination of hydrocarbons obtained as the raffinate from a solvent extraction process. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>30</sub> and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C).]	265-091-3	64741-89-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-456-00-8	Residual oils (petroleum), solvent deasphalted; Baseoil — unspecified; [A complex combination of hydrocarbons obtained as the solvent soluble fraction from C <sub>3</sub> -C <sub>4</sub> solvent deasphalting of a residuum. It consists of hydrocarbons having carbon numbers predominantly higher than C <sub>25</sub> and boiling above approximately 400 °C (752°F).]	265-096-0	64741-95-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-457-00-3	Distillates (petroleum), solvent-refined heavy naphthenic; Baseoil — unspecified; [A complex combination of hydrocarbons obtained as the raffinate from a solvent extraction process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt a 40 °C). It contains relatively few normal paraffins.]	265-097-6	64741-96-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-458-00-9	Distillates (petroleum), solvent-refined light naphthenic; Baseoil — unspecified; [A complex combination of hydrocarbons obtained as the raffinate from a solvent extraction process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>30</sub> and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-098-1	64741-97-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-459-00-4	Residual oils (petroleum,) solvent-refined; Baseoil — unspecified; [A complex combination by hydrocarbons obtained as the solvent insoluble fraction from solvent refining of a residuum using a polar organic solvent such as phenol or furfural. It consists of hydrocarbons having carbon numbers predominantly higher than C <sub>25</sub> and boiling above approximately 400 °C (752°F).]	265-101-6	64742-01-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-460-00-X	Distillates (petroleum), clay-treated paraffinic; Baseoil — unspecified; [A complex combination of hydrocarbons resulting from treatment of a petroleum fraction with natural or modified clay in either a contacting or percolation process to remove the trace amounts of polar compounds and impurities present. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C). It contains a relatively large proportion of saturated hydrocarbons.]	265-137-2	64742-36-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-461-00-5	Distillates (petroleum), clay-treated light paraffinic; Baseoil — unspecified; [A complex combination of hydrocarbons resulting from treatment of a petroleum fraction with natural or modified clay in either a contacting or percolation process to remove the trace amounts of polar compounds and impurities present. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>30</sub> and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C). It contains a relatively large proportion of saturated hydrocarbons.]	265-138-8	64742-37-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-462-00-0	Residual oils (petroleum), clay-treated; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by treatment of a residual oil with a natural or modified clay in either a contacting or percolation process to remove the trace amounts of polar compounds and impurities present. It consists of hydro-carbons having carbon numbers predominantly higher than C <sub>25</sub> and boiling above approximately 400 °C (752°F).]	265-143-5	64742-41-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-463-00-6	Distillates (petroleum), clay-treated heavy naphthenic; Baseoil — unspecified; [A complex combination of hydrocarbons resulting from treatment of a petroleum fraction with natural or modified clay in either a contacting or percolation process to remove the trace amounts of polar compounds and impurities present. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-146-1	64742-44-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-464-00-1	Distillates (petroleum), clay-treated light naphthenic; Baseoil — unspecified; [A complex combination of hydrocarbons resulting from treatment of a petroleum fraction with natural or modified clay in either a contacting or percolation process to remove the trace amounts of polar compounds and impurities present. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>30</sub> and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-147-7	64742-45-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-465-00-7	Distillates (petroleum), hydrotreated heavy naphthenic; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and produces a finished oil of at least 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-155-0	64742-52-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-466-00-2	Distillates (petroleum), hydrotreated light naphthenic; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>30</sub> and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-156-6	64742-53-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-467-00-8	Distillates (petroleum), hydrotreated heavy paraffinic; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and produces a finished oil of at least 100 SUS at 100°F (19cSt at 40 °C). It contains a relatively large proportion of saturated hydrocarbons.]	265-157-1	64742-54-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-468-00-3	Distillates (petroleum), hydrotreated light paraffinic; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>30</sub> and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C). It contains a relatively large proportion of saturated hydrocarbons.]	265-158-7	64742-55-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-469-00-9	Distillates (petroleum), solvent-dewaxed light paraffinic; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by removal of normal paraffins from a petroleum fraction by solvent crystallization. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>30</sub> and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C).]	265-159-2	64742-56-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-470-00-4	Residual oils (petroleum), hydrotreated; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst. It consists of hydrocarbons having carbon numbers predominantly greater than C <sub>25</sub> and boiling above approximately 400 °C (752°F).]	265-160-8	64742-57-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-471-00-X	Residual oils (petroleum), solvent-dewaxed; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by removal of long, branched chain hydrocarbons from a residual oil by solvent crystallization. It consists of hydrocarbons having carbon numbers predominantly greater than C <sub>25</sub> and boiling above approximately 400 °C (752°F).]	265-166-0	64742-62-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-472-00-5	Distillates (petroleum), solvent-dewaxed heavy naphthenic; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by removal of normal paraffins from a petroleum fraction by solvent crystallization. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and produces a finished oil of not less than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-167-6	64742-63-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-473-00-0	Distillates (petroleum), solvent-dewaxed light naphthenic; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by removal of normal paraffins from a petroleum fraction by solvent crystallization. It consists of hydrocarbons having carbon numbers predominantly in the range C <sub>15</sub> through C <sub>30</sub> and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-168-1	64742-64-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-474-00-6	Distillates (petroleum), solvent-dewaxed heavy paraffinic; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by removal of normal paraffins from a petroleum fraction by solvent crystallization. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and produces a finished oil with a viscosity not less than 100 SUS at 100°F (19cSt at 40 °C).]	265-169-7	64742-65-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-475-00-1	Naphthenic oils (petroleum), catalytic dewaxed heavy; Baseoil — unspecified; [A complex combination of hydrocarbons obtained from a catalytic dewaxing process. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-172-3	64742-68-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-476-00-7	Naphthenic oils (petroleum), catalytic dewaxed light; Baseoil — unspecified; [A complex combination of hydrocarbons obtained from a catalytic dewaxing process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>30</sub> and produces a finished oil with a viscosity less than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-173-9	64742-69-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-477-00-2	Paraffin oils (petroleum), catalytic dewaxed heavy; Baseoil — unspecified; [A complex combination of hydrocarbons obtained from a catalytic dewaxing process. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and produces a finished oil with a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C).]	265-174-4	64742-70-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-478-00-8	Paraffin oils (petroleum), catalytic dewaxed light; Baseoil — unspecified; [A complex combination of hydrocarbons obtained from a catalytic dewaxing process. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>30</sub> and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C).]	265-176-5	64742-71-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-479-00-3	Naphthenic oils (petroleum), complex dewaxed heavy; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by removing straight chain paraffin hydrocarbons as a solid by treatment with an agent such as urea. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and produces a finished oil having a viscosity of at least 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-179-1	64742-75-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-480-00-9	Naphthenic oils (petroleum), complex dewaxed light; Baseoil — unspecified; [A complex combination of hydrocarbons obtained from a catalytic dewaxing process. It consists of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>30</sub> and produces a finished oil having a viscosity less than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	265-180-7	64742-76-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-481-00-4	Lubricating oils (petroleum), C <sub>20-50</sub> , hydrotreated neutral oil-based, high-viscosity; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by treating light vacuum gas oil, heavy vacuum gas oil, and solvent deasphalted residual oil with hydrogen in the presence of a catalyst in a two stage process with dewaxing being carried out between the two stages. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and produces a finished oil having a viscosity of approximately 112cSt at 40 °C. It contains a relatively large proportion of saturated hydrocarbons.]	276-736-3	72623-85-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-482-00-X	Lubricating oils (petroleum), C <sub>15-30</sub> , hydrotreated neutral oil-based; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by treating light vacuum gas oil and heavy vacuum gas oil with hydrogen in the presence of a catalyst in a two stage process with dewaxing being carried out between the two stages. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>30</sub> and produces a finished oil having a viscosity of approximately 15cSt at 40 °C. It contains a relatively large proportion of saturated hydrocarbons.]	276-737-9	72623-86-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-483-00-5	Lubricating oils (petroleum), C <sub>20-50</sub> , hydrotreated neutral oil-based; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by treating light vacuum gas oil, heavy vacuum gas oil and solvent deasphalted residual oil with hydrogen in the presence of a catalyst in a two stage process with dewaxing being carried out between the two stages. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and produces a finished oil with a viscosity of approximately 32cSt at 40 °C. It contains a relatively large proportion of saturated hydrocarbons.]	276-738-4	72623-87-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-484-00-0	Lubricating oils; Baseoil — unspecified; [A complex combination of hydrocarbons obtained from solvent extraction and dewaxing processes. It consists predominantly of saturated hydrocarbons having carbon numbers in the range C <sub>15</sub> through C <sub>50</sub> .]	278-012-2	74869-22-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-485-00-6	Distillates (petroleum), complex dewaxed heavy paraffinic; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by dewaxing heavy paraffinic distillate. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and produces a finished oil with a viscosity of equal to or greater than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	292-613-7	90640-91-8	Carc. Cat. 2; R45	T R: 4 S: 53-45		H L
649-486-00-1	Distillates (petroleum), complex dewaxed light paraffinic; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by dewaxing light paraffinic distillate. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>12</sub> through C <sub>30</sub> and produces a finished oil with a viscosity of less than 100 SUS at 100°F (19cSt at 40 °C). It contains relatively few normal paraffins.]	292-614-2	90640-92-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-487-00-7	Distillates (petroleum), solvent dewaxed heavy paraffinic, clay-treated; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by treating dewaxed heavy paraffinic distillate with neutral or modified clay in either a contacting or percolation process. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> .]	292-616-3	90640-94-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-488-00-2	Hydrocarbons, C <sub>20-50</sub> , solvent dewaxed heavy paraffinic, hydrotreated; Baseoil — unspecified; [A complex combination of hydrocarbons produced by treating dewaxed heavy paraffinic distillate with hydrogen in the presence of a catalyst. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> .]	292-617-9	90640-95-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-489-00-8	Distillates (petroleum), solvent dewaxed light paraffinic, clay-treated; Baseoil — unspecified; [A complex combination of hydrocarbons resulting from treatment of dewaxed light paraffinic distillate with natural or modified clay in either a contacting or percolation process. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>30</sub> .]	292-618-4	90640-96-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-490-00-3	Distillates (petroleum), solvent dewaxed light paraffinic, hydrotreated; Baseoil — unspecified; [A complex combination of hydrocarbons produced by treating a dewaxed light paraffinic distillate with hydrogen in the presence of a catalyst. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>30</sub> .]	292-620-5	90640-97-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-491-00-9	Residual oils (petroleum), hydrotreated solvent dewaxed; Baseoil — unspecified	292-656-1	90669-74-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-492-00-4	Residual oils (petroleum), catalytic dewaxed; Baseoil — unspecified	294-843-3	91770-57-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-493-00-X	Distillates (petroleum), dewaxed heavy paraffinic, hydro-treated; Baseoil — unspecified; [A complex combination of hydrocarbons obtained from an intensive treatment of dewaxed distillate by hydrogenation in the presence of a catalyst. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C <sub>25</sub> through C <sub>39</sub> and produces a finished oil with a viscosity of approximately 44 cSt at 50 °C.]	295-300-3	91995-39-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-494-00-5	Distillates (petroleum), dewaxed light paraffinic, hydrotreated; Baseoil — unspecified; [A complex combination of hydrocarbons obtained from an intensive treatment of dewaxed distillate by hydrogenation in the presence of a catalyst. It consists predominantly of saturated hydrocarbons having carbon numbers predominantly in the range of C <sub>21</sub> through C <sub>29</sub> and produces a finished oil with a viscosity of approximately 13 cSt at 50 °C.]	295-301-9	91995-40-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-495-00-0	Distillates (petroleum), hydrocracked solvent-refined, dewaxed; Baseoil — unspecified; [A complex combination of liquid hydrocarbons obtained by recrystallization of dewaxed hydrocracked solvent-refined petroleum distillates.]	295-306-6	91995-45-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-496-00-6	Distillates (petroleum), solvent-refined light naphthenic, hydrotreated; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by treating a petroleum fraction with hydrogen in the presence of a catalyst and removing the aromatic hydrocarbons by solvent extraction. It consists predominantly of naphthenic hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>30</sub> and produces a finished oil with a viscosity of between 13-15cSt at 40 °C.]	295-316-0	91995-54-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-497-00-1	Lubricating oils (petroleum), C <sub>17-35</sub> , solvent-extd., dewaxed, hydrotreated; Baseoil — unspecified	295-423-2	92045-42-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-498-00-7	Lubricating oils (petroleum), hydrocracked nonarom. solvent-deparaffined; Baseoil — unspecified	295-424-8	92045-43-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-499-00-2	Residual oils (petroleum), hydrocracked acid-treated solvent-dewaxed; Baseoil — unspecified; [A complex combination of hydrocarbons produced by solvent removal of paraffins from the residue of the distillation of acid-treated, hydrocracked heavy paraffins and boiling approximately above 380 °C (716°F).]	295-499-7	92061-86-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-500-00-6	Paraffin oils (petroleum), solvent-refined dewaxed heavy; Baseoil — unspecified; [A complex combination of hydrocarbons obtained from sulfur-containing paraffinic crude oil. It consists predominantly of a solvent refined deparaffinated lubricating oil with a viscosity of 65cSt at 50 °C.]	295-810-6	92129-09-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-501-00-1	Lubricating oils (petroleum), base oils, paraffinic; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by refining of crude oil. It consists predominantly of aromatics, naphthenics and paraffinics and produces a finished oil with a viscosity of 120 SUS at 100°F (23cSt at 40 °C).]	297-474-6	93572-43-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-502-00-7	Hydrocarbons, hydrocracked paraffinic distn. residues, solvent-dewaxed; Baseoil — unspecified	297-857-8	93763-38-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-503-00-2	Hydrocarbons, C <sub>20-50</sub> , residual oil hydrogenation vacuum distillate; Baseoil — unspecified	300-257-1	93924-61-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-504-00-8	Distillates (petroleum), solvent-refined hydrotreated heavy, hydrogenated; Baseoil — unspecified	305-588-5	94733-08-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-505-00-3	Distillates (petroleum), solvent-refined hydrocracked light; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by solvent dearomatization of the residue of hydrocracked petroleum. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>18</sub> through C <sub>27</sub> and boiling in the range of approximately 370 °C to 450 °C (698°F to 842°F).]	305-589-0	94733-09-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-506-00-9	Lubricating oils (petroleum), C <sub>18-40</sub> , solvent-dewaxed hydrocracked distillate-based; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by solvent deparaffination of the distillation residue from hydrocracked petroleum. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>18</sub> through C <sub>40</sub> and boiling in the range of approximately 370 °C to 550 °C (698°F to 1022°F).]	305-594-8	94733-15-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-507-00-4	Lubricating oils (petroleum), C <sub>18-40</sub> , solvent-dewaxed hydrogenated raffinate-based; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by solvent deparaffination of the hydrogenated raffinate obtained by solvent extraction of a hydrotreated petroleum distillate. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>18</sub> through C <sub>40</sub> and boiling in the range of approximately 370 °C to 550 °C (698°F to 1022°F).]	305-595-3	94733-16-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-508-00-X	Hydrocarbons, C <sub>13-30</sub> , arom.-rich, solvent-extd. naphthenic distillate; Baseoil — unspecified	305-971-7	95371-04-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-509-00-5	Hydrocarbons, C <sub>16-32</sub> , arom. rich, solvent-extd. naphthenic distillate; Baseoil — unspecified	305-972-2	95371-05-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-510-00-0	Hydrocarbons, C <sub>37-68</sub> , dewaxed deasphalted hydrotreated vacuum distn. residues; Baseoil — unspecified	305-974-3	95371-07-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-511-00-6	Hydrocarbons, C <sub>37-65</sub> , hydrotreated deasphalted vacuum distn. residues; Baseoil — unspecified	305-975-9	95371-08-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-512-00-1	Distillates (petroleum), hydrocracked solvent-refined light; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by the solvent treatment of a distillate from hydrocracked petroleum distillates. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>18</sub> through C <sub>27</sub> and boiling in the range of approximately 370 °C to 450 °C (698°F to 842°F).]	307-010-7	97488-73-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-513-00-7	Distillates (petroleum), solvent-refined hydrogenated heavy; Baseoil — unspecified; [A complex combination of hydrocarbons, obtained by the treatment of a hydrogenated petroleum distillate with a solvent. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>19</sub> through C <sub>40</sub> and boiling in the range of approximately 390 °C to 550 °C (734°F to 1022°F).]	307-011-2	97488-74-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-514-00-2	Lubricating oils (petroleum), C <sub>18-27</sub> , hydrocracked solvent-dewaxed; Baseoil — unspecified	307-034-8	97488-95-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-515-00-8	Hydrocarbons, C <sub>17-30</sub> , hydrotreated solvent-deasphalted atm. distn. residue, distn. lights; Baseoil — unspecified; [A complex combination of hydrocarbons obtained as first runnings from the vacuum distillation of effluents from the treatment of a solvent deasphalted short residue with hydrogen in the presence of a catalyst. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>17</sub> through C <sub>30</sub> and boiling in the range of approximately 300 °C to 400 °C (572°F to 752°F). It produces a finished oil having a viscosity of 4cSt at approximately 100 °C (212°F).]	307-661-7	97675-87-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-516-00-3	Hydrocarbons, C <sub>17-40</sub> , hydrotreated solvent-deasphalted distn. residue, vacuum distn. lights; Baseoil — unspecified; [A complex combination of hydrocarbons obtained as first runnings from the vacuum distillation of effluents from the catalytic hydrotreatment of a solvent deasphalted short residue having a viscosity of 8cSt at approximately 100 °C (212°F). It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>17</sub> through C <sub>40</sub> and boiling in the range of approximately 300 °C to 500 °C (592°F to 932°F).]	307-755-8	97722-06-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-517-00-9	Hydrocarbons, C <sub>13-27</sub> , solvent-extd. light naphthenic; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by extraction of the aromatics from a light naphthenic distillate having a viscosity of 9.5cSt at 40 °C (104°F). It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>13</sub> through C <sub>27</sub> and boiling in the range of approximately 240 °C to 400 °C (464°F to 752°F).]	307-758-4	97722-09-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-518-00-4	Hydrocarbons, C <sub>14-29</sub> , solvent-extd. light naphthenic; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by extraction of the aromatics from a light naphthenic distillate having a viscosity of 16cSt at 40 °C (104°F). It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>14</sub> through C <sub>29</sub> and boiling in the range of approximately 250 °C to 425 °C (482°F to 797°F).]	307-760-5	97722-10-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-519-00-X	Hydrocarbons, C <sub>27-42</sub> , dearomatized; Baseoil — unspecified	308-131-8	97862-81-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-520-00-5	Hydrocarbons, C <sub>17-30</sub> , hydrotreated distillates, distn. lights; Baseoil — unspecified	308-132-3	97862-82-3	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-521-00-0	Hydrocarbons, C <sub>27-45</sub> , naphthenic vacuum distn.; Baseoil — unspecified	308-133-9	97862-83-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-522-00-6	Hydrocarbons, C <sub>27-45</sub> , dearomatized; Baseoil — unspecified	308-287-7	97926-68-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-523-00-1	Hydrocarbons, C <sub>20-58</sub> , hydrotreated; Baseoil — unspecified	308-289-8	97926-70-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-524-00-7	Hydrocarbons, C <sub>27-42</sub> , naphthenic; Baseoil — unspecified	308-290-3	97926-71-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-525-00-2	Residual oils (petroleum), carbon-treated solvent-dewaxed; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by the treatment of solvent-dewaxed petroleum residual oils with activated charcoal for the removal of trace polar constituents and impurities.]	309-710-8	100684-37-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-526-00-8	Residual oils (petroleum), clay-treated solvent-dewaxed; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by treatment of solvent-dewaxed petroleum residual oils with bleaching earth for the removal of trace polar constituents and impurities.]	309-711-3	100684-38-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-527-00-3	Lubricating oils (petroleum), C <sub>&gt;25</sub> , solvent-extd., deasphalted, dewaxed, hydrogenated; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by solvent extraction and hydrogenation of vacuum distillation residues. It consists predominantly of hydrocarbons having carbon numbers predominantly greater than C <sub>25</sub> and produces a finished oil with a viscosity in the order of 32cSt to 37cSt at 100 °C (212°F).]	309-874-0	101316-69-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-528-00-9	Lubricating oils (petroleum), C <sub>17-32</sub> , solvent-extd., dewaxed, hydrogenated; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by solvent extraction and hydrogenation of atmospheric distillation residues. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>17</sub> through C <sub>32</sub> and produced a finished oil with a viscosity in the order of 17cSt to 23cSt at 40 °C (104°F).]	309-875-6	101316-70-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-529-00-4	Lubricating oils (petroleum), C <sub>20-35</sub> , solvent-extd., dewaxed, hydrogenated; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by solvent extraction and hydrogenation of atmospheric distillation residues. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>35</sub> and produces a finished oil with a viscosity in the order of 37cSt to 44cSt at 40 °C (104°F).]	309-876-1	101316-71-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-530-00-X	Lubricating oils (petroleum), C <sub>24-50</sub> , solvent-extd., dewaxed, hydrogenated; Baseoil — unspecified; [A complex combination of hydrocarbons obtained by solvent extraction and hydrogenation of atmospheric distillation residues. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>24</sub> through C <sub>50</sub> and produces a finished oil with a viscosity in the order of 16cSt to 75cSt at 40 °C (104°F).]	309-877-7	101316-72-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-531-00-5	Extracts (petroleum), heavy naphthenic distillate solvent, arom. conc.; Distillate aromatic extract (treated); [An aromatic concentrate produced by adding water to heavy naphthenic distillate solvent extract and extraction solvent.]	272-175-3	68783-00-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-532-00-0	Extracts (petroleum), solvent-refined heavy paraffinic distillate solvent; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained as the extract from the re-extraction of solvent-refined heavy paraffinic distillate. It consists of saturated and aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> .]	272-180-0	68783-04-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-533-00-6	Extracts (petroleum), heavy paraffinic distillates, solvent-deasphalted; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained as the extract from a solvent extraction of heavy paraffinic distillate.]	272-342-0	68814-89-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-534-00-1	Extracts (petroleum), heavy naphthenic distillate solvent, hydrotreated; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained by treating a heavy naphthenic distillate solvent extract with hydrogen in the presence of a catalyst. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> and produces a finished oil of at least 19cSt at 40 °C (100 SUS at 100°F).]	292-631-5	90641-07-9	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-535-00-7	Extracts (petroleum), heavy paraffinic distillate solvent, hydrotreated; Distillate aromatic extract (treated); [A complex combination of hydrocarbons produced by treating a heavy paraffinic distillate solvent extract with hydrogen in the presence of a catalyst. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>21</sub> through C <sub>33</sub> and boiling in the range of approximately 350 °C to 480 °C (662°F to 896°F).]	292-632-0	90641-08-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L



Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-536-00-2	Extracts (petroleum), light paraffinic distillate solvent, hydro-treated; Distillate aromatic extract (treated); [A complex combination of hydrocarbons produced by treating a light paraffinic distillate solvent extract with hydrogen in the presence of a catalyst. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>17</sub> through C <sub>26</sub> and boiling in the range of approximately 280 °C to 400 °C (536°F to 752°F).]	292-633-6	90641-09-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-537-00-8	Extracts (petroleum), hydrotreated light paraffinic distillate solvent; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained as the extract from solvent extraction of intermediate paraffinic top solvent distillate that is treated with hydrogen in the presence of a catalyst. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>16</sub> through C <sub>36</sub> .]	295-335-4	91995-73-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-538-00-3	Extracts (petroleum), light naphthenic distillate solvent, hydrodesulfurized; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained by treating the extract, obtained from a solvent extraction process, with hydrogen in the presence of a catalyst under conditions primarily to remove sulfur compounds. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>30</sub> . This stream is likely to contain 5 wt.% or more of 4- to 6-membered condensed ring aromatic hydrocarbons.]	295-338-0	91995-75-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-539-00-9	Extracts (petroleum), light paraffinic distillate solvent, acid-treated; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained as a fraction of the distillation of an extract from the solvent extraction of light paraffinic top petroleum distillates that is subjected to a sulfuric acid refining. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>16</sub> through C <sub>32</sub> .]	295-339-6	91995-76-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-540-00-4	Extracts (petroleum), light paraffinic distillate solvent, hydrodesulfurized; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained by solvent extraction of a light paraffin distillate and treated with hydrogen to convert the organic sulfur to hydrogen sulfide which is eliminated. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>40</sub> and produces a finished oil with a viscosity of greater than 10cSt at 40 °C.]	295-340-1	91995-77-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-541-00-X	Extracts (petroleum), light vacuum gas oil solvent, hydro-treated; Distillate aromatic extract (treated); [A complex combination of hydrocarbons, obtained by solvent extraction from light vacuum petroleum gas oils and treated with hydrogen in the presence of a catalyst. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>13</sub> through C <sub>30</sub> .]	295-342-2	91995-79-8	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-542-00-5	Extracts (petroleum), heavy paraffinic distillate solvent, clay-treated; Distillate aromatic extract (treated); [A complex combination of hydrocarbons resulting from treatment of a petroleum fraction with natural or modified clay in either a contact or percolation process to remove the trace amounts of polar compounds and impurities present. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> . This stream is likely to contain 5 wt.% or more 4-6 membered ring aromatic hydrocarbons.]	296-437-1	92704-08-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-543-00-0	Extracts (petroleum), heavy naphthenic distillate solvent, hydrodesulfurized; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained from a petroleum stock by treating with hydrogen to convert organic sulfur to hydrogen sulfide which is removed. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>50</sub> and produces a finished oil with a viscosity of greater than 19cSt at 40 °C.]	297-827-4	93763-10-1	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-544-00-6	Extracts (petroleum), solvent-dewaxed heavy paraffinic distillate solvent, hydrodesulfurized; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained from a solvent dewaxed petroleum stock by treating with hydrogen to convert organic sulfur to hydrogen sulfide which is removed. It consists predominantly of hydrocarbons having carbon numbers predominantly in the range of C <sub>15</sub> through C <sub>50</sub> and produces a finished oil with a viscosity of greater than 19cSt at 40 °C.]	297-829-5	93763-11-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-545-00-1	Extracts (petroleum), light paraffinic distillate solvent, carbon-treated; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained as a fraction from distillation of an extract recovered by solvent extraction of light paraffinic top petroleum distillate treated with activated charcoal to remove traces of polar constituents and impurities. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>16</sub> through C <sub>32</sub> .]	309-672-2	100684-02-4	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-546-00-7	Extracts (petroleum), light paraffinic distillate solvent, clay-treated; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained as a fraction from distillation of an extract recovered by solvent extraction of light paraffinic top petroleum distillates treated with bleaching earth to remove traces of polar constituents and impurities. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>16</sub> through C <sub>32</sub> .]	309-673-8	100684-03-5	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-547-00-2	Extracts (petroleum), light vacuum, gas oil solvent, carbon-treated; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained by solvent extraction of light vacuum petroleum gas oil treated with activated charcoal for the removal of trace polar constituents and impurities. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>13</sub> through C <sub>30</sub> .]	309-674-3	100684-04-6	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-548-00-8	Extracts (petroleum), light vacuum gas oil solvent, clay-treated; Distillate aromatic extract (treated); [A complex combination of hydrocarbons obtained by solvent extraction of light vacuum petroleum gas oils treated with bleaching earth for removal of trace polar constituents and impurities. It consists predominantly of aromatic hydrocarbons having carbon numbers predominantly in the range of C <sub>13</sub> through C <sub>30</sub> .]	309-675-9	100684-05-7	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
649-549-00-3	Foots oil (petroleum); Foots oil; [A complex combination of hydrocarbons obtained as the oil fraction from a solvent deoiling or a wax sweating process. It consists predominantly of branched chain hydrocarbons having carbon numbers predominantly in the range of C <sub>20</sub> through C <sub>50</sub> .]	265-171-8	64742-67-2	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
649-550-00-9	Foots oil (petroleum), hydrotreated; Foots oil	295-394-6	92045-12-0	Carc. Cat. 2; R45	T R: 45 S: 53-45		H L
650-002-00-6	turpentine, oil	232-350-7	8006-64-2	R10 Xn; R20/21/ 22-65 Xi; R36/38 R43 N; R51-53	Xn; N R: 10-20/21/22-36/ 38-43-51/53-65 S: (2-)36/37-46-61-62		
650-003-00-1	fenson (ISO); 4-chlorophenyl benzenesulphonate;	201-274-6	80-38-6	Xn; R22 Xi; R36 N; R51-53	Xn; N R: 22-36-51/53 S: (2-)24-26-61		
650-004-00-7	norbormide (ISO); 5-( $\alpha$ -hydroxy- $\alpha$ -2-pyridylbenzyl)-7-( $\alpha$ -2-pyridylbenzylidene) bicyclo [2.2.1] hept-5-ene-2,3-dicarboximide	213-589-6	991-42-4	Xn; R22	Xn R: 22 S: (2-)		
650-005-00-2	(2R,6aS,12aS)-1,2,6,6a,12,12a-hexahydro-2-isopropenyl-8,9-dimethoxychromeno[3,4-b]furo[2,3-h]chromen-6-one, rotenone	201-501-9	83-79-4	T; R25 Xi; R36/37/ 38 N; R50-53	T; N R: 25-36/37/38-50/ 53 S: (1/2-)22-24/25-36- 45-60-61		
650-006-00-8	benquinox (ISO); <i>p</i> -benzoquinone 1-benzoylhydrazone 4-oxime	207-807-9	495-73-8	T; R25 Xn; R21	T R: 21-25 S: (1/2-)36/37-45		
650-007-00-3	chlordimeform (ISO); N <sub>2</sub> -(4-chloro- <i>o</i> -tolyl)-N <sub>1</sub> ,N <sub>1</sub> -dimethylformamidine	228-200-5	6164-98-3	Carc. Cat. 3; R40 Xn; R21/22 N; R50-53	Xn; N R: 21/22-40-50/53 S: (2-)22-36/37-60-61		
650-008-00-9	drazoxolon (ISO); 4-(2-chlorophenylhydrazone)-3-methyl-5-isoxazolone	227-197-8	5707-69-7	T; R25 N; R50-53	T; N R: 25-50/53 S: (1/2-)22-24-36/37- 45-60-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
650-009-00-4	chlordimeform hydrochloride; N <sup>1</sup> -(4-chloro- <i>o</i> -tolyl)-N,N-dimethylformamide monohydrochloride; N <sup>2</sup> -(4-chloro- <i>o</i> -tolyl)-N <sup>1</sup> ,N <sup>1</sup> -dimethylformamide hydrochloride	243-269-1	19750-95-9	Carc. Cat. 3; R40 Xn; R22 N; R50-53	Xn; N R: 22-40-50/53 S: (2-)22-36/37-60-61		
650-010-00-X	benzyl violet 4B; α-[4-(4-dimethylamino-α-[4-[ethyl(3-sodiumsulphonatobenzyl)amino] phenyl]benzylidene)cyclohexa-2,5-dienylidene(ethyl)ammonio]toluene-3-sulphonate	216-901-9	1694-09-3	Carc. Cat. 3; R40	Xn R: 40 S: (2-)36/37		
650-012-00-0	erionite	—	12510-42-8	Carc. Cat. 1; R45	T R: 45 S: 53-45		
650-013-00-6	asbestos	— — — — — — —	12001-28-4 132207-32-0 12172-73-5 77536-66-4 77536-68-6 77536-67-5 12001-29-5	Carc. Cat. 1; R45 T; R48/23	T R: 45-48/23 S: 53-45		E
650-014-00-1	diethyl 2,4-dihydroxycyclodisiloxane-2,4-diybis(trimethylene)diphosphonate, tetrasodium salt, reaction products with disodium metasilicate	401-770-4	—	C; R34 Xn; R22	C R: 22-34 S: (1/2-)26-36/37/39-45		
650-015-00-7	rosin; colophony	232-475-7 232-484-6 277-299-1	8050-09-7 8052-10-6 73138-82-6	R43	Xi R: 43 S: (2-)24-37		
650-016-00-2	Mineral wool, with the exception of those specified elsewhere in this Annex; [Man-made vitreous (silicate) fibres with random orientation with alkaline oxide and alkali earth oxide (Na <sub>2</sub> O+K <sub>2</sub> O+CaO+MgO+BaO) content greater than 18 % by weight]	—	—	Carc. Cat. 3; R40 Xi; R38	Xn R: 38-40 S: (2-)36/37		AQR
650-017-00-8	Refractory Ceramic Fibres; Special Purpose Fibres, with the exception of those specified elsewhere in this Annex; [Man-made vitreous (silicate) fibres with random orientation with alkaline oxide and alkali earth oxide (Na <sub>2</sub> O+K <sub>2</sub> O+CaO+MgO+BaO) content less or equal to 18 % by weight]	—	—	Carc. Cat. 2; R49 Xi; R38	T R: 49-38 S: 53-45		A R

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
650-018-00-3	reaction product of: acetophenone, formaldehyde, cyclohexylamine, methanol and acetic acid	406-230-1	—	R10 Carc. Cat. 3; R40 C; R34 Xn; R20 R43 N; R50-53	C; N R: 10-20-34-40-43-50/53 S: (1/2-)26-36/37/39-45-60-61		
650-031-00-4	bis(4-hydroxy-N-methylanilinium) sulphate	200-237-1	55-55-0	Xn; R22-48/22 R43 N; R50-53	Xn; N R: 22-43-48/22-50/53 S: (2-)36/37-46-60-61		
650-032-00-X	cyproconazole (ISO); (2RS,3RS;2RS,3SR)-2-(4-chlorophenyl)-3-cyclopropyl-1-(1H—1,2,4-triazol-1-yl)butan-2-ol	—	94361-06-5	Repr. Cat. 3; R63 Xn; R22 N; R50-53	Xn; N R: 22-50/53-63 S: (2-)36/37-60-61		
650-033-00-5	(S)- $\alpha$ -cyano-3-phenoxybenzyl-(S)-2-(4-chlorophenyl)-3-methylbutyrate; esfenvalerate	—	66230-04-4	T; R23/25 R43 N; R50-53	T; N R: 23/25-43-50/53 S: (1/2-)24-36/37/39-45-60-61		
650-041-00-9	triasulfuron (ISO); 1-[2-(2-chloroethoxy)phenylsulfonyl]-3-(4-methoxy-6-methyl-1,3,5-triazin-2-yl)urea	—	82097-50-5	N; R50-53	N R: 50/53 S: 60-61		
650-042-00-4	reaction product of: polyethylene-polyamine-(C <sub>16</sub> -C <sub>18</sub> )-alkylamides with monothio-(C <sub>2</sub> )-alkyl phosphonates	417-450-2	—	Xi; R36/38 R43 R52-53	Xi R: 36/38-43-52/53 S: (2-)24-26-37-61		
650-043-00-X	reaction product of: 3,5-bis- <i>tert</i> -butylsalicylic acid and aluminiumsulfate	420-310-3	—	Xn; R22 N; R50-53	Xn; N R: 22-50/53 S: (2-)22-56-60-61		
650-044-00-5	mixed linear and branched C <sub>14-15</sub> alcohols ethoxylated, reaction product with epichlorohydrin	420-480-9	158570-99-1	Xi; R38 R43 N; R50-53	Xi; N R: 38-43-50/53 S: (2-)24-37-60-61		
650-045-00-0	reaction product of: 1,2,3-propanetricarboxylic acid, 2-hydroxy, diethyl ester, 1-propanol and zirconium tetra-n-propanolate	417-110-3	—	F; R11 Xi; R38-41 N; R51-53	F; Xi; N R: 11-38-41-51/53 S: (2-)9-16-26-37/39-61		

Catalogusnummer	Internationale chemische identificatie	EG Nr.	CAS Nr.	Indeling	Etikettering	Concentratiegrenzen	Opmerkingen
650-046-00-6	di(tetramethylammonium)(29H,31H-phthalocyanin-N29, N30,N31,N32)disulfonamide disulfonate, cuprate(2-)complex, derivatives	416-180-2	12222-04-7	Xn; R22-48/22 N; R51-53	Xn; N R: 22-48/22-51/53 S: (2-)22-36-61		
650-047-00-1	dibenzylphenylsulfonium hexafluoroantimonate	417-760-8	134164-24-2	T; R48/25 Xn; R22 Xi; R41 R43 N; R51-53	T; N R: 22-41-43-48/25-51/53 S: (1/2-)22-26-36/37/39-45-61		
650-048-00-7	reaction product of: borax, hydrogen peroxide, acetic acid anhydride and acetic acid	420-070-1	—	O; R7 Xn; R20/21/22 C; R35 N; R50	O; C; N R: 7-20/21/22-35-50 S: (1/2-)3/7-14-26-36/37/39-45-61		
650-049-00-2	2-alkoxyloxyethyl hydrogen maleate, where alkoyl represents (by weight) 70 to 85 % unsaturated octadecoyl, 0.5 to 10 % saturated octadecoyl, and 2 to 18 % saturated hexadecoyl	417-960-5	—	Xi; R38-41 R43 N; R50-53	Xi; N R: 38-41-43-50/53 S: (2-)24-26-37/39-60-61		
650-050-00-8	reaction mass of: 1-methyl-3-hydroxypropyl 3,5-[1,1-dimethylethyl]-4-hydroxydihydro-cinnamate and/or 3-hydroxybutyl 3,5-[1,1-dimethylethyl]-4-hydroxydihydrocinnamate; 1,3-butanediol bis[3-(3'-(1,1-dimethylethyl)-4'-hydroxyphenyl)propionate] isomers; 1,3-butanediol bis[3-(3',5'-(1,1-dimethylethyl)-4'-hydroxyphenyl)propionate] isomers	423-600-8	—	N; R51-53	N R: 51/53 S: 61		
650-055-00-5	silver sodium zirconium hydrogenphosphate	422-570-3	155925-27-2	N; R50-53	N R: 50/53 S: 60-61		

## BIJLAGE VII

**Tabel voor het omzetten van de indeling volgens Richtlijn 67/548/EEG naar de indeling van deze verordening**

Deze bijlage bevat een tabel om de indeling van een stof of mengsel respectievelijk volgens Richtlijn 67/548/EEG of Richtlijn 1999/45/EG om te zetten in de indeling van deze verordening. Als gegevens voor de stof of het mengsel beschikbaar zijn, wordt een beoordeling en indeling gemaakt overeenkomstig de artikelen 9-13.

**1. Omzettingstabel**

Voor de gebruikte codes zie tabel 1.1 en afdeling 1.1.2.2 van bijlage VI.

Tabel 1.1

**Omzetting van de indeling overeenkomstig Richtlijn 67/548/EEG naar deze verordening**

Indeling volgens Richtlijn 67/548/EEG	Fysische toestand van de stof, indien relevant	Indeling overeenkomstig deze verordening		Noot
		Gevarenklasse en gevarencategorie	Gevarenaanduiding	
E; R2		Geen directe omzetting mogelijk		
E; R3		Geen directe omzetting mogelijk		
O; R7		Org. Perox. CD	H242	
		Org. Perox. EF	H242	
O; R8	gas	Ox. Gas 1	H270	
O; R8	vloeistof/vaste stof	Geen directe omzetting mogelijk		
O; R9	vloeistof	Ox. vlst. 1	H271	
O; R9	vaste stof	Ox. vs. 1	H271	
R10	vloeistof	Geen directe omzetting mogelijk. Juiste omzetting van R10, vloeistof is: — Ontvl. vlst. 1, H224 als vlampunt < 23 °C en beginkookpunt ≤ 35 °C — Ontvl. vlst. 2, H225 als vlampunt < 23 °C en beginkookpunt > 35 °C — Ontvl. vlst. 3, H226 als vlampunt ≥ 23 °C		
F; R11	vloeistof	Geen directe omzetting mogelijk. Juiste omzetting van F; R11, vloeistof is: — Ontvl. vlst. 1, H224 als beginkookpunt ≤ 35 °C — Ontvl. vlst. 2, H225 als beginkookpunt > 35 °C		
F; R11	vaste stof	Geen directe omzetting mogelijk		
F+; R12	gas	Geen directe omzetting mogelijk. Juiste omzetting van F+; R12, gas is ofwel Ontvl. gas 1, H220 of Ontvl. gas 2, H221.		
F+; R12	vloeistof	Ontvl. vlst. 1	H224	
F+; R12	vloeistof	Zelfontl. CD	H242	
		Zelfontl. EF	H242	
		Zelfontl. G	geen	
F; R15		Geen omzetting mogelijk		
F; R17	vloeistof	Pyr. vlst. 1	H250	
F; R17	vaste stof	Pyr. vs. 1	H250	



Indeling volgens Richtlijn 67/548/EEG	Fysische toestand van de stof, indien relevant	Indeling overeenkomstig deze verordening		Noot
		Gevarenklasse en gevarencategorie	Gevarenaanduiding	
Xn; R20	gas	Acute tox. 4	H332	(1)
Xn; R20	damp	Acute tox. 4	H332	(1)
Xn; R20	stof/nevel	Acute tox. 4	H332	
Xn; R21		Acute tox. 4	H312	(1)
Xn; R22		Acute tox. 4	H302	(1)
T; R23	gas	Acute tox. 3	H331	(1)
T; R23	damp	Acute tox. 2	H330	
T; R23	stof/nevel	Acute tox. 3	H331	(1)
T; R24		Acute tox. 3	H311	(1)
T; R25		Acute tox. 3	H301	(1)
T+; R26	gas	Acute tox. 2	H330	(1)
T+; R26	damp	Acute tox. 1	H330	
T+; R26	stof/nevel	Acute tox. 2	H330	(1)
T+; R27		Acute tox. 1	H310	
T+; R28		Acute tox. 2	H300	(1)
R33		STOT herh. 2	H373	(3)
C; R34		Huidcorr. 1B	H314	(2)
C; R35		Huidcorr. 1A	H314	
Xi; R36		Oogirrit. 2	H319	
Xi; R37		STOT eenm. 3	H335	
Xi; R38		Huidirrit. 2	H315	
T; R39/23		STOT eenm. 1	H370	(3)
T; R39/24		STOT eenm. 1	H370	(3)
T; R39/25		STOT eenm. 1	H370	(3)
T+; R39/26		STOT eenm. 1	H370	(3)
T+; R39/27		STOT eenm. 1	H370	(3)
T+; R39/28		STOT eenm. 1	H370	(3)
Xi; R41		Ooglet. 1	H318	
R42		Sens. luchtw. 1	H334	
R43		Sens. huid 1	H317	
Xn; R48/20		STOT herh. 2	H373	(3)
Xn; R48/21		STOT herh. 2	H373	(3)
Xn; R48/22		STOT herh. 2	H373	(3)
T; R48/23		STOT herh. 1	H372	(3)
T; R48/24		STOT herh. 1	H372	(3)
T; R48/25		STOT herh. 1	H372	(3)

Indeling volgens Richtlijn 67/548/EEG	Fysische toestand van de stof, indien relevant	Indeling overeenkomstig deze verordening		Noot
		Gevarenklasse en gevarencategorie	Gevarenaanduiding	
R64		Lact.	H362	
Xn; R65		Asp. Tox. 1	H304	
R67		STOT eenm. 3	H336	
Xn; R68/20		STOT eenm. 2	H371	(3)
Xn; R68/21		STOT eenm. 2	H371	(3)
Xn; R68/22		STOT eenm. 2	H371	(3)
Kank. Cat. 1; R45		Kank. 1A	H350	
Kank. Cat. 2; R45		Kank. 1B	H350	
Kank. Cat. 1; R49		Kank. 1A	H350i	
Kank. Cat. 2; R49		Kank. 1B	H350i	
Kank. Cat. 3; R40		Kank. 2	H351	
Muta. Cat. 2; R46		Muta. 1B	H340	
Muta. Cat. 3; R68		Muta. 2	H341	
Voortpl. Cat. 1; R60		Voortpl. 1A	H360F	(4)
Voortpl. Cat. 2; R60		Voortpl. 1B	H360F	(4)
Voortpl. Cat. 1; R61		Voortpl. 1A	H360D	(4)
Voortpl. Cat. 2; R61		Voortpl. 1B	H360D	(4)
Voortpl. Cat. 3; R62		Voortpl. 2	H361f	(4)
Voortpl. Cat. 3; R63		Voortpl. 2	H361d	(4)
Voortpl. Cat. 1; R60-61		Voortpl. 1A	H360FD	
Voortpl. Cat. 1; R60 Repr. Cat. 2; R61		Voortpl. 1A	H360FD	
Voortpl. Cat. 2; R60 Repr. Cat. 1; R61		Voortpl. 1A	H360FD	
Voortpl. Cat. 2; R60-61		Voortpl. 1B	H360FD	
Voortpl. Cat. 3; R62-63		Voortpl. 2	H361fd	
Voortpl. Cat. 1; R60 Repr. Cat. 3; R63		Voortpl. 1A	H360Fd	
Voortpl. Cat. 2; R60 Repr. Cat. 3; R63		Voortpl. 1B	H360Fd	
Voortpl. Cat. 1; R61 Repr. Cat. 3; R62		Voortpl. 1A	H360Df	
Voortpl. Cat. 2; R61 Repr. Cat. 3; R62		Voortpl. 1B	H360Df	
N; R50		Aquat. acuut	H400	
N; R50-53		Aquat. acuut 1 Aquat. chron. 1	H400 H410	
N; R51-53		Aquat. chron. 2	H411	
R52-53		Aquat. chron. 3	H412	

Indeling volgens Richtlijn 67/548/EEG	Fysische toestand van de stof, indien relevant	Indeling overeenkomstig deze verordening		Noot
		Gevarenklasse en gevarencategorie	Gevarenaanduiding	
R53		Aquat. chron. 4	H413	
N; R59		Ozon	EUH059	

**Noot 1**

Voor deze klassen kan de aanbevolen minimumindeling als omschreven in bijlage VI, afdeling 1.2.1.1, worden gebruikt. Gegevens of andere informatie kunnen beschikbaar zijn om aan te geven dat een nieuwe indeling in een strengere categorie wenselijk is.

**Noot 2**

Aanbevolen wordt om categorie 1B te gebruiken, ook al is in bepaalde gevallen categorie 1C mogelijk. Op grond van de oorspronkelijke gegevens is het wellicht niet mogelijk onderscheid te maken tussen categorie 1B en 1C, aangezien de blootstellingsduur volgens Verordening (EG) nr. 440/2008 in de regel maximaal 4 uur was. In de toekomst echter, wanneer de gegevens afkomstig zijn van tests met een sequentiële benadering, zoals in Verordening (EG) nr. ... van de Commissie is bepaald, moet categorie 1C als mogelijkheid worden overwogen.

**Noot 3**

De blootstellingsroute kan aan de gevarenaanduiding worden toegevoegd, indien afdoende bewezen is dat het gevaar bij andere blootstellingsroutes niet aanwezig is.

**Noot 4**

De gevarenaanduidingen H360 en H361 duiden op een algemeen risico voor beide reproductietoxische eigenschappen met betrekking tot de vruchtbaarheid en ontwikkelingseffecten: „Kan de vruchtbaarheid of het ongeboren kind schaden” en „Wordt ervan verdacht de vruchtbaarheid of het ongeboren kind te schaden”. Volgens de indelingscriteria (bijlage I, afdeling 3.7) kan de algemene gevarenaanduiding worden vervangen door een gevarenaanduiding die alleen de betrokken eigenschap aangeeft, indien blijkt dat de andere eigenschap niet relevant is.

Tabel 1.2

**Omzetting van de waarschuwingzinnen van Richtlijn 67/548/EEG naar de aanvullende etiketteringsvoorschriften van deze verordening**

Richtlijn 67/548/EEG	Deze verordening
R1	EUH001
R6	EUH006
R14	EUH014
R18	EUH018
R19	EUH019
R44	EUH044
R29	EUH029
R31	EUH031
R32	EUH032
R66	EUH066
R39-41	EUH070